



VARIANT FCC TEST REPORT (PART 27)

REPORT NO.: RF111221C21A-6

MODEL NO.: PJ53100

FCC ID: NM8PJ53100

RECEIVED: Feb. 01, 2012

TESTED: Feb. 23, 2012

ISSUED: Mar. 08, 2012

APPLICANT: HTC Corporation

ADDRESS: 23, Xinghua Rd., Taoyuan 330, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan (R.O.C)

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 21 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product, certification, approval or endorsement by TAF or any government agency. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 CERTIFICATION	4
2 SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4 DESCRIPTION OF SUPPORT UNITS	10
4 TEST TYPES AND RESULTS	11
4.1 OUTPUT POWER MEASUREMENT	11
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	11
4.1.2 TEST INSTRUMENTS	12
4.1.3 TEST PROCEDURES	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	16
4.2.2 TEST INSTRUMENTS	16
4.2.3 TEST PROCEDURES	16
4.2.4 DEVIATION FROM TEST STANDARD	16
4.2.5 TEST SETUP	17
4.2.6 EUT OPERATING CONDITIONS	17
4.2.7 TEST RESULTS	18
5 INFORMATION ON THE TESTING LABORATORIES	20
6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	21



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF111221C21A-6	Original release	Mar. 08, 2012



1 CERTIFICATION

PRODUCT: Smart Phone
MODEL NO.: PJ53100
BRAND: HTC
APPLICANT: HTC Corporation
TESTED: Feb. 23, 2012
TEST SAMPLE: Production Unit
TEST STANDARDS: **FCC Part 27, Subpart C, L**
FCC Part 2
ANSI C63.4-2003

This report is issued as a supplementary report of RF111221C21-7. This report shall be used by combining with its original report.

PREPARED BY : Ivonne Wu , DATE: Mar. 08, 2012
Ivonne Wu / Senior Specialist

APPROVED BY : Gary Chang , DATE: Mar. 08, 2012
Gary Chang / Technical Manager

NOTE: The radiated emission tests and e.r.p. peak power were performed for the addendum. Refer to original report for the other test data.

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

OPERATING BAND: 776-788 MHz			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 27.50(C)(10)	Maximum Peak Output Power Limit: max. 3 watts e.r.p peak power	PASS	Meet the requirement of limit. Minimum passing margin is 23.54dBm at 782MHz.
2.1055 27.54	Frequency Stability	NA	Refer to Note
2.1049 27.53(g)	Occupied Bandwidth	NA	Refer to Note
27.50(d)(5)	Peak to average ratio	NA	Refer to Note
27.53(g)	Band Edge Measurements	NA	Refer to Note
2.1051 27.53(g)	Conducted Spurious Emissions	NA	Refer to Note
2.1053 27.53(g)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -5.34dB at 1573.00MHz.

NOTE: The radiated emission tests and e.r.p. peak power were performed for the addendum. Refer to original report for the other test data.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Smart Phone	
MODEL NO.	PJ53100	
FCC ID	NM8PJ53100	
POWER SUPPLY	5.0Vdc (adapter or host equipment) 3.7Vdc or 3.8Vdc (Li-ion battery)	
OPERATION TEMPERATURE RANGE	-10°C ~ 55°C	
MODULATION TECHNOLOGY	LTE Band 13	QPSK, 16QAM
FREQUENCY RANGE	LTE Band 13 Channel Bandwidth: 5MHz	779.5 ~784.5MHz
	LTE Band 13 Channel Bandwidth: 10MHz	782MHz
MAX. ERP POWER (W)	LTE Band 13	0.23W
CATEGORY	LTE: 3	
ANTENNA TYPE	Internal monopole antenna	
DATA CABLE	Refer to users' manual	
I/O PORTS	Refer to Note as below	
ACCESSORY DEVICES	Refer to Note as below	

NOTE:

1. This report is prepared for FCC class II permissive change. This report is issued as a supplementary report of BV ADT report No.: RF111221C21-7. The difference compared with the original report is adding an inductive cover. Therefore, radiated emission tests and e.r.p. peak power were performed and presented in the test report.
2. The EUT's accessories list refers to Ext Pho_NM8PJ53100.
3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

LTE Band 13:


Three channels had been tested for each channel bandwidth.

5MHz	
Channel	Frequency(MHz)
23205	779.5
23230	782.0
23255	784.5


10MHz	
Channel	Frequency(MHz)
23230	782.0

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

<For Radiated Emission Test>

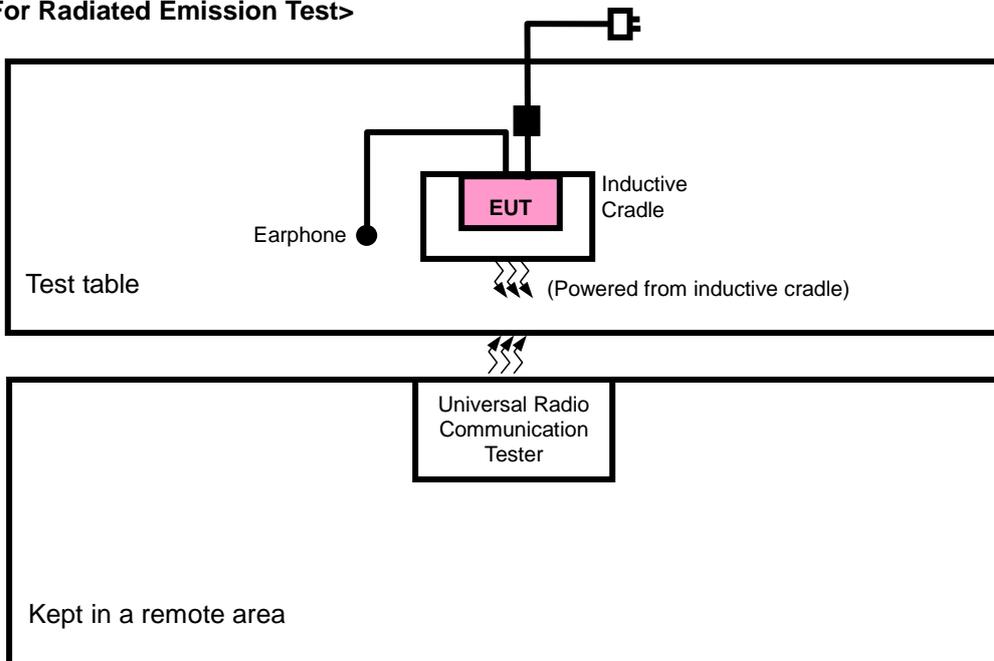

<For Output Power Test>

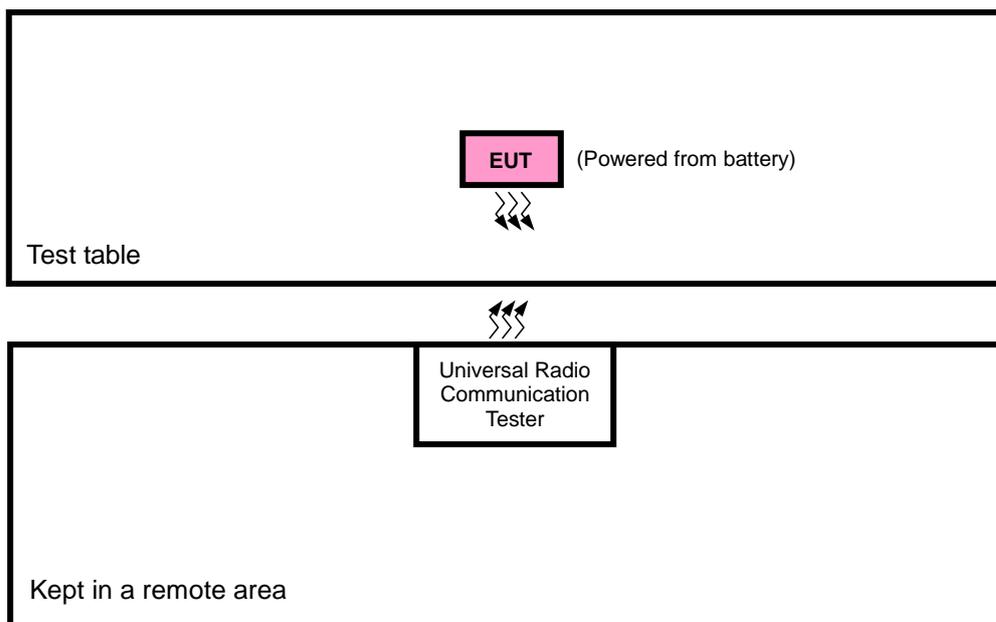

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO		DESCRIPTION
	OP	RE	
-	V	V	-

Where OP: Output power

RE: Radiated emission

OUTPUT POWER MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION TECHNOLOGY	AXIS
-	23205~ 23255	23205, 23230, 23255	5MHz	QPSK	X
-	23230	23230	10MHz	QPSK	X

RADIATED EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION TECHNOLOGY
-	23230	23230	10MHz	QPSK

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
OP	25deg. C, 65%RH	3.8Vdc	Phoenix Chen
RE	25deg. C, 65%RH	120Vac, 60Hz	Kay Wu

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

ANSI C63.4-2003

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Universal Radio Communication Tester	R&S	CMU200	104484	NA
2	Radio Communication Analyzer	Anritsu	MT8820C	6201010284	NA
3	Inductive Cradle	Energizer	IC2B	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	NA

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 1-3 acted as a communication partners to transfer data.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Portable stations (hand-held devices) operating in the 779-793 MHz band are limited to 3 watts ERP

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver Agilent	N9038A	MY51210203	Dec. 22, 2011	Dec. 21, 2012
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 21, 2011	Dec. 20, 2012
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 20, 2011	Dec. 19, 2012
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Dec. 20, 2011	Dec. 19, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 20, 2011	Dec. 19, 2012
Preamplifier EMCI	EMC 012645	980115	Dec. 30, 2011	Dec. 29, 2012
Preamplifier EMCI	EMC 330H	980112	Dec. 30, 2011	Dec. 29, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4	Oct. 21, 2011	Oct. 20, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Jan. 02, 2012	Jan. 01, 2013
RF signal cable Worken	RG-213	NA	Jan. 02, 2012	Jan. 01, 2013
Software	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 460141.
 5. The IC Site Registration No. is IC 7450F-4.


4.1.3 TEST PROCEDURES

EIRP / ERP MEASUREMENT:

- a. The EUT was set up for the maximum power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high operational frequency range). RWB and VBW is 10MHz for LTE.
- b. E.I.R.P power measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$
- e. $E.R.P = E.I.R.P - 2.15 \text{ dB}$

4.1.4 TEST SETUP

EIRP / ERP MEASUREMENT:

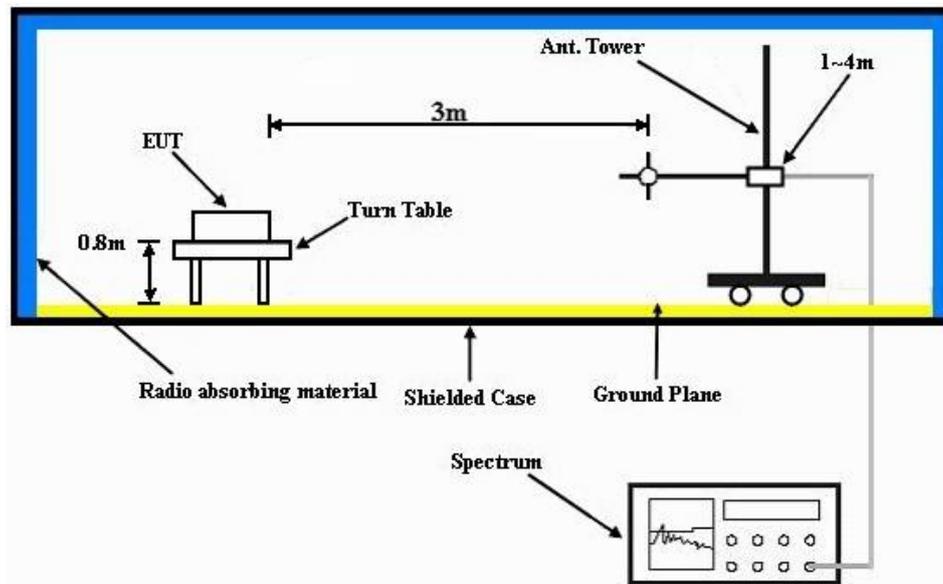

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.5 EUT OPERATING CONDITIONS

- a. The EUT makes a call to the communication simulator.
- b. The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.

4.1.6 TEST RESULTS

ERP (dBm)

CHANNEL BANDWIDTH: 5MHz

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(W)	Polarization (H/V)
X	23205	779.5	-10.12	35.43	23.16	0.21	H
	23230	782.0	-11.22	35.4	22.03	0.16	
	23255	784.5	-12.47	35.3	20.68	0.12	
	23205	779.5	-20.55	38.53	15.83	0.04	V
	23230	782.0	-20.83	38.23	15.25	0.03	
	23255	784.5	-21.14	37.91	14.62	0.03	

CHANNEL BANDWIDTH: 10MHz

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(W)	Polarization (H/V)
X	23230	782	-9.71	35.40	23.54	0.23	H
	23230	782	-20.09	38.23	15.99	0.04	V

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

4.2.2 TEST INSTRUMENTS

Same as 4.1.2.

4.2.3 TEST PROCEDURES


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the receiving antenna, which was mounted on antenna tower and its position at 0.8 m above the ground.
- c. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading and recorded the value.
- d. Repeat step a ~ c for horizontal polarization.

NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

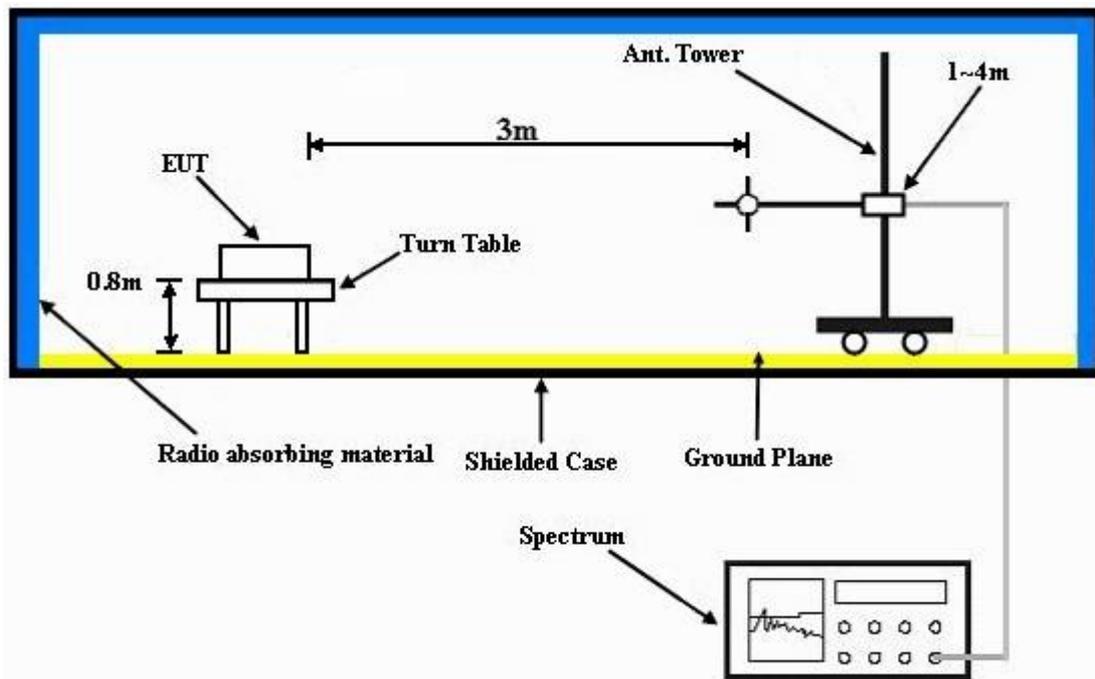

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- a. The EUT makes a call to the communication simulator.
- b. The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.

4.2.7 TEST RESULTS


CHANNEL BANDWIDTH: 10MHz / QPSK / 1RB / 49 Offset



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

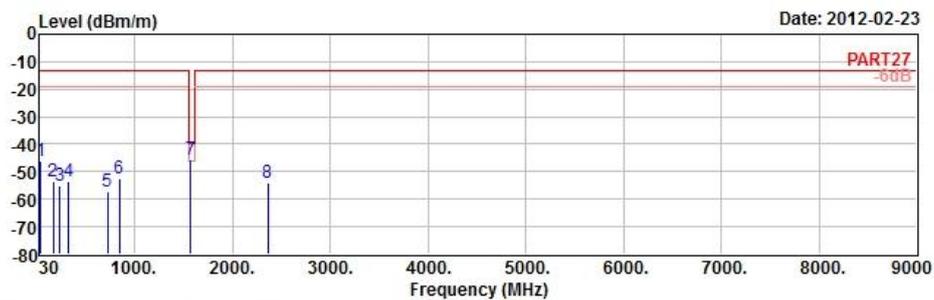

Site : 966 Chamber 5
 Condition : PART27 3m EIRP_RSE_1G~19G HORIZONTAL
 Brand/Model : PJ53100
 Remark : LTE Band13 Link
 Tested by : Kay Wu
 Temperature : 25°C
 Humidity : 65%
 Plane : X(無線充電)

	Freq	Level	Read	Limit	Over	Factor	Remark
			Level	Line	Limit		
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	39.45	-46.10	-44.57	-13.00	-33.10	-1.53	Peak
2	171.21	-53.55	-46.82	-13.00	-40.55	-6.73	Peak
3	234.93	-54.99	-48.61	-13.00	-41.99	-6.38	Peak
4	325.90	-53.58	-47.39	-13.00	-40.58	-6.19	Peak
5	722.10	-57.32	-58.92	-13.00	-44.32	1.60	Peak
6	841.80	-52.51	-54.88	-13.00	-39.51	2.37	Peak
7 pp	1573.00	-45.34	-31.43	-40.00	-5.34	-13.91	Peak
8	2359.00	-54.11	-43.88	-13.00	-41.11	-10.23	Peak



A D T




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2012-02-23

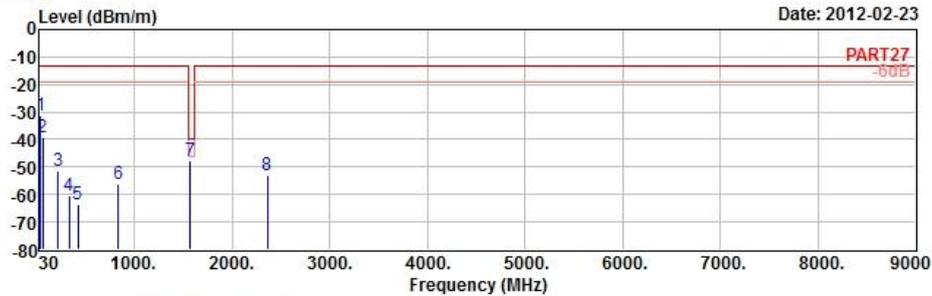

Site : 966 Chamber 5
 Condition : PART27 3m EIRP_RSE_1G~19G VERTICAL
 Brand/Model: PJ53100
 Remark : LTE Band13 Link
 Tested by : Kay Wu
 Temperature : 25°C
 Humidity : 65%
 Plane : X(無線充電)

	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	39.99	-31.23	-29.70	-13.00	-18.23	-1.53 Peak
2	63.48	-39.12	-31.72	-13.00	-26.12	-7.40 Peak
3	222.24	-51.24	-44.29	-13.00	-38.24	-6.95 Peak
4	332.20	-60.50	-54.36	-13.00	-47.50	-6.14 Peak
5	423.90	-63.33	-58.30	-13.00	-50.33	-5.03 Peak
6	836.20	-55.91	-58.24	-13.00	-42.91	2.33 Peak
7 pp	1573.00	-47.73	-33.82	-40.00	-7.73	-13.91 Peak
8	2359.00	-53.15	-42.92	-13.00	-40.15	-10.23 Peak



5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5.phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Email: service.adt@tw.bureauveritas.com
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---