




A D T

FCC SAR Test Report

Report No. : SA120117C24
Applicant : HTC Corporation
Address : 23, XINGHUA RD., TAOYUAN 330, TAIWAN, R.O.C.
Product : Smartphone
FCC ID : NM8PJ75100
Brand : HTC
Model No. : PJ75100
Standards : FCC 47 CFR Part 2 (2.1093) / IEEE C95.1:1991 / IEEE 1528:2003
FCC OET Bulletin 65 Supplement C (Edition 01-01)
KDB 248227 D01 v01r02 / KDB 648474 D01 v01r05 / KDB 941225 D01 v02
KDB 941225 D05 v01 / KDB 941225 D06 v01
Date of Testing : Jan. 22, 2012 ~ Feb. 23, 2012

CERTIFICATION: The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch - Taiwan HwaYa Lab**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report.

This test report consists of 45 pages in total except Appendix. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agency. The test results in the report only apply to the tested sample.

Prepared By : 
Pettie Chen / Specialist


Approved By : 
Roy Wu / Manager





Table of Contents

- Release Control Record 3
- 1. Summary of Maximum SAR Value 4
- 2. Description of Equipment Under Test 5
- 3. SAR Measurement System 9
 - 3.1 Definition of Specific Absorption Rate (SAR)..... 9
 - 3.2 SPEAG DASY System 9
 - 3.2.1 Robot..... 10
 - 3.2.2 Probes..... 11
 - 3.2.3 Data Acquisition Electronics (DAE) 11
 - 3.2.4 Phantoms 12
 - 3.2.5 Device Holder..... 13
 - 3.2.6 System Validation Dipoles 13
 - 3.2.7 Tissue Simulating Liquids..... 14
 - 3.3 SAR System Verification 16
 - 3.4 SAR Measurement Procedure 17
 - 3.4.1 Area & Zoom Scan Procedure 17
 - 3.4.2 Volume Scan Procedure..... 17
 - 3.4.3 Power Drift Monitoring..... 17
 - 3.4.4 Spatial Peak SAR Evaluation 18
 - 3.4.5 SAR Averaged Methods 18
- 4. SAR Measurement Evaluation 19
 - 4.1 EUT Configuration and Setting..... 19
 - 4.2 EUT Testing Position 20
 - 4.3 Tissue Verification 23
 - 4.4 System Verification..... 24
 - 4.5 Conducted Power Results..... 25
 - 4.6 SAR Testing Results..... 28
 - 4.6.1 SAR Results for Head 28
 - 4.6.2 SAR Results for Body..... 31
 - 4.6.3 Simultaneous Multi-band Transmission Evaluation 36
- 5. Calibration of Test Equipment..... 42
- 6. Measurement Uncertainty 43
- 7. Information on the Testing Laboratories 45

Appendix A. SAR Plots of System Verification
 Appendix B. SAR Plots of SAR Measurement
 Appendix C. Calibration Certificate for Probe and Dipole
 Appendix D. Photographs of EUT and Setup



Release Control Record

Issue No.	Reason for Change	Date Issued
R01	Original release	Feb. 22, 2012



1. Summary of Maximum SAR Value

Mode / Band	Test Position	SAR-1g (W/kg)
CDMA2000 1xRTT BC0	Head	0.434
	Hotspot Mode (1 cm Gap)	0.977
	Body Worn (1 cm Gap)	0.977
CDMA2000 1xRTT BC1	Head	0.724
	Hotspot Mode (1 cm Gap)	1.29
	Body Worn (1 cm Gap)	1.29
CDMA2000 1xRTT BC10	Head	0.361
	Hotspot Mode (1 cm Gap)	0.901
	Body Worn (1 cm Gap)	0.901
CDMA2000 1xEVDO BC0	Head	0.33
	Hotspot Mode (1 cm Gap)	0.389
	Body Worn (1 cm Gap)	0.352
CDMA2000 1xEVDO BC1	Head	0.497
	Hotspot Mode (1 cm Gap)	0.329
	Body Worn (1 cm Gap)	0.329
CDMA2000 1xEVDO BC10	Head	0.416
	Hotspot Mode (1 cm Gap)	0.354
	Body Worn (1 cm Gap)	0.325
LTE Band 25	Head	0.292
	Hotspot Mode (1 cm Gap)	0.253
	Body Worn (1 cm Gap)	0.253
WLAN 2.4GHz	Head	0.205
	Hotspot Mode (1 cm Gap)	0.182
	Body Worn (1 cm Gap)	0.182
WLAN 5GHz	Head	0.234
	Hotspot Mode (1 cm Gap)	0.28
	Body Worn (1 cm Gap)	0.201
Bluetooth	Head	N/A
	Hotspot Mode (1 cm Gap)	N/A
	Body Worn (1 cm Gap)	N/A

Note:

The SAR limit (**1.6 W/kg**) for general population/uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1991.

2. Description of Equipment Under Test

EUT Type	Smartphone
FCC ID	NM8PJ75100
Brand Name	HTC
Model Name	PJ75100
Tx Frequency Bands (Unit: MHz)	CDMA BC0 : 824.7 ~ 848.31 CDMA BC1 : 1851.25 ~ 1908.75 CDMA BC10 : 817.9 ~ 822.75 LTE Band 25 : 1852.5 ~ 1912.5 WLAN : 2412 ~ 2462, 5180 ~ 5320, 5500 ~ 5700, 5745 ~ 5825 Bluetooth : 2402 ~ 2480
Uplink Modulations	CDMA : QPSK LTE : QPSK, 16QAM 802.11b : DSSS 802.11a/g/n : OFDM Bluetooth : GFSK
Maximum AVG Conducted Power (Unit: dBm)	CDMA2000 1xRTT BC0 : 24.90 CDMA2000 1xRTT BC1 : 24.83 CDMA2000 1xRTT BC10 : 25.04 CDMA2000 1xEVDO BC0 : 23.95 CDMA2000 1xEVDO BC1 : 23.89 CDMA2000 1xEVDO BC10 : 24.06 LTE Band 25 : 23.99 802.11b : 18.19 802.11g : 13.36 802.11n HT20 (2.4GHz) : 12.25 802.11a : 13.36 802.11n HT20 (5GHz) : 10.36 802.11n HT40 (5GHz) : 10.56
Antenna Type	Fixed Internal Antenna
EUT Stage	Production Unit

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.
2. The EUT's accessories list refers to Ext Pho_NM8PJ75100.pdf.


FCC SAR Test Report

This device supports voice/data wireless communication technologies included CDMA2000 1xRTT/1xEVDO, LTE, WLAN and Bluetooth. The data mode of 1xEVDO, LTE and WLAN support VOIP capability through 3rd party apps software. The details are listed as below.

Table 2.1 EUT Technology Support

Mode	WWAN Technology	Frequency Band
Voice	CDMA2000 1xRTT	BC 0, BC 1, BC10
VOIP / Data	CDMA2000 1xEVDO	BC 0, BC 1, BC10
VOIP / Data	LTE	Band 25
VOIP / Data	802.11a/b/g/n	2.4 GHz / 5 GHz
Data	Bluetooth	2.4 GHz

This device has two WWAN antennas and one WLAN/BT antenna design. The capabilities of antenna are listed as below.

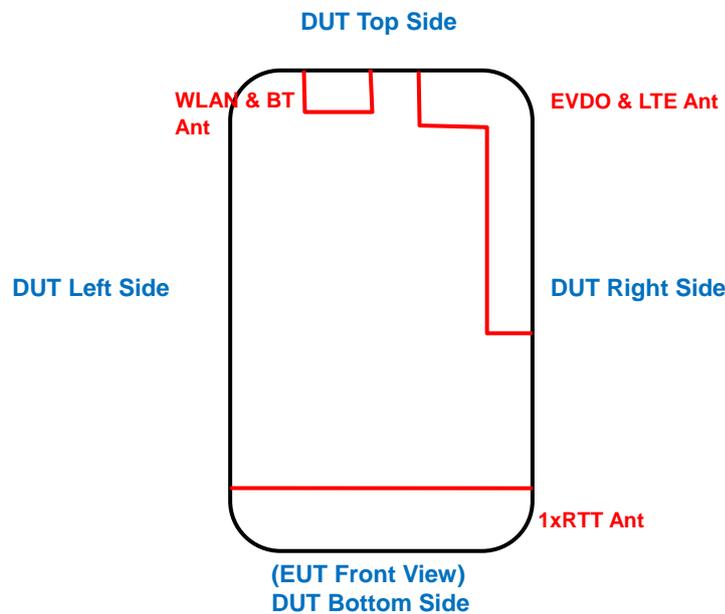

This device supports WiFi hotspot function, so body SAR was tested under 1 cm for the surfaces / slide edges where a transmitting antenna is within 2.5 cm from the edge. Hotspot SAR test mode for these antennas are as below.

CDMA 1xRTT : Front Face, Rear Face, Left Side, Right Side, Bottom Side

CDMA 1xEVDO : Front Face, Rear Face, Right Side, Top Side

LTE : Front Face, Rear Face, Right Side, Top Side

WLAN : Front Face, Rear Face, Left Side, Top Side

Confirming the LTE transmitter follows 3GPP standards, is category 3, BW 5MHz and 10MHz, band 25, and supports QPSK / 16QAM modulations. Tested per 3GPP 36.521 maximum transmit procedures for both QPSK / 16QAM.



FCC SAR Test Report

LTE Maximum Power Reduction in accordance with 3GPP 36.101: Power Reduction in accordance to 3GPP is active all times during LTE operation.

Modulation	Channel bandwidth / Transmission bandwidth configuration (RB)		3GPP Requirement (dB)	MPR Setting (dB)
	BW 5 MHz	BW 10 MHz		
QPSK	> 8	> 12	<= 1	1
16QAM	<= 8	<= 12	<= 1	1
16QAM	> 8	> 12	<= 2	2

Note: MPR is according to the standard and implemented in the circuit (mandatory).

In addition, the device is compliant with A-MPR requirements defined in 36.101 section 6.2.4 that may be required to meet 3GPP Adjacent Channel Leakage Ratio (“ACLR”) requirements. A-MPR was disabled for all FCC compliance testing.

A simultaneous CDMA 1xRTT voice and CDMA 1xEVDO data connection is referred to as “SVDO” while a simultaneous CDMA 1xRTT voice and LTE data connection is referred to as “SVLTE”. The transmitters are independent in respect to the RF chains as each transmitter has dedicated RF circuitry (PA, RF filtering) and a unique transmit antenna. The device also contains an additional antenna associated with receiver diversity or unlicensed transmitters. The LTE Uplink MIMO configuration is 1x2 (1 Uplink antenna and 2 Downlink antennas).

Although the RF circuits are independent for both transmitters, the chipset solution incorporated SVDO/SVLTE implementation does include electrical connections between the voice and data transmitters such that the device can coordinate the transmit power of both transmitters. That said the transmitters operate independently in the sense that they independently support voice or data connection without interaction between the modems or signaling from the WWAN network.



FCC SAR Test Report

Table 2.2 Simultaneous Transmission Possibilities

Simultaneous TX Combination	Configuration	Head SAR	Hotspot SAR	Body-Worn SAR
1	RTT BC0 Voice + EVDO BC0 Data + WLAN/BT	Yes	Yes	Yes
2	RTT BC0 Voice + EVDO BC1 Data + WLAN/BT	Yes	Yes	Yes
3	RTT BC0 Voice + EVDO BC10 Data + WLAN/BT	Yes	Yes	Yes
4	RTT BC0 Voice + LTE 25 Data + WLAN/BT	Yes	Yes	Yes
5	RTT BC1 Voice + EVDO BC0 Data + WLAN/BT	Yes	Yes	Yes
6	RTT BC1 Voice + EVDO BC1 Data + WLAN/BT	Yes	Yes	Yes
7	RTT BC1 Voice + EVDO BC10 Data + WLAN/BT	Yes	Yes	Yes
8	RTT BC1 Voice + LTE 25 Data + WLAN/BT	Yes	Yes	Yes
9	RTT BC10 Voice + EVDO BC0 Data + WLAN/BT	Yes	Yes	Yes
10	RTT BC10 Voice + EVDO BC1 Data + WLAN/BT	Yes	Yes	Yes
11	RTT BC10 Voice + EVDO BC10 Data + WLAN/BT	Yes	Yes	Yes
12	RTT BC10 Voice + LTE 25 Data + WLAN/BT	Yes	Yes	Yes
13	RTT BC0 Voice + EVDO BC0 Data	Yes	No	Yes
14	RTT BC0 Voice + EVDO BC1 Data	Yes	No	Yes
15	RTT BC0 Voice + EVDO BC10 Data	Yes	No	Yes
16	RTT BC0 Voice + LTE 25 Data	Yes	No	Yes
17	RTT BC1 Voice + EVDO BC0 Data	Yes	No	Yes
18	RTT BC1 Voice + EVDO BC1 Data	Yes	No	Yes
19	RTT BC1 Voice + EVDO BC10 Data	Yes	No	Yes
20	RTT BC1 Voice + LTE 25 Data	Yes	No	Yes
21	RTT BC10 Voice + EVDO BC0 Data	Yes	No	Yes
22	RTT BC10 Voice + EVDO BC1 Data	Yes	No	Yes
23	RTT BC10 Voice + EVDO BC10 Data	Yes	No	Yes
24	RTT BC10 Voice + LTE 25 Data	Yes	No	Yes
25	RTT BC0 Voice + WLAN/BT	Yes	No	Yes
26	RTT BC1 Voice + WLAN/BT	Yes	No	Yes
27	RTT BC10 Voice + WLAN/BT	Yes	No	Yes
28	EVDO BC0 Data + WLAN/BT	Yes	Yes	Yes
29	EVDO BC1 Data + WLAN/BT	Yes	Yes	Yes
30	EVDO BC10 Data + WLAN/BT	Yes	Yes	Yes
31	LTE 25 Data + WLAN/BT	Yes	Yes	Yes

1. In the SVDO modes, CDMA 1xRTT and EVDO can transmit at maximum power level simultaneously.
2. In the SVLTE modes, CDMA 1xRTT and LTE can transmit at maximum power level simultaneously.

SAR measurements were tested under maximum power level for CDMA 1xRTT/EVDO, LTE, and WLAN technologies.

The WLAN and BT cannot transmit simultaneously, so there is no co-location test requirement for WLAN and BT.

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)


SAR measurement can be related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY4/5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

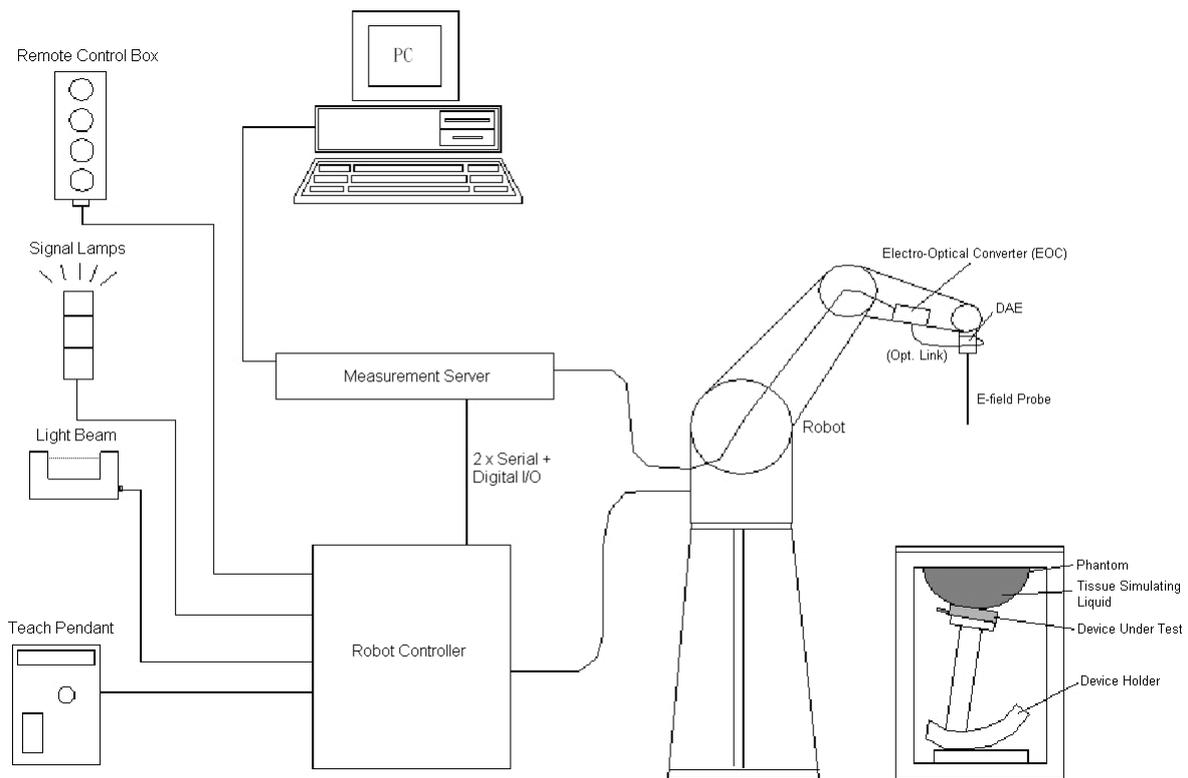
Fig-3.1 DASY System Setup
3.2.1 Robot

The DASY system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)


Fig-3.2 DASY4

Fig-3.3 DASY5

FCC SAR Test Report

3.2.2 Probes

The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

Model	EX3DV4	
Construction	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Model	ES3DV3	
Construction	Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 4 GHz Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	

3.2.3 Data Acquisition Electronics (DAE)

Model	DAE3, DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	< 5 μ V (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	

FCC SAR Test Report

3.2.4 Phantoms

Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	

Model	ELI	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	

FCC SAR Test Report

3.2.5 Device Holder

Model	Mounting Device	
Construction	In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
Material	POM	

Model	Laptop Extensions Kit	
Construction	Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner.	
Material	POM, Acrylic glass, Foam	

3.2.6 System Validation Dipoles

Model	D-Serial	
Construction	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
Frequency	750 MHz to 5800 MHz	
Return Loss	> 20 dB	
Power Capability	> 100 W (f < 1GHz), > 40 W (f > 1GHz)	



FCC SAR Test Report

3.2.7 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.

The body tissue parameters that have not been specified in IEEE 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE 1528. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

Table-3.1 Targets of Tissue Simulating Liquid

Frequency (MHz)	Target Permittivity	Range of $\pm 5\%$	Target Conductivity	Range of $\pm 5\%$
For Head				
750	41.9	39.8 ~ 44.0	0.89	0.85 ~ 0.93
835	41.5	39.4 ~ 43.6	0.90	0.86 ~ 0.95
900	41.5	39.4 ~ 43.6	0.97	0.92 ~ 1.02
1450	40.5	38.5 ~ 42.5	1.20	1.14 ~ 1.26
1640	40.3	38.3 ~ 42.3	1.29	1.23 ~ 1.35
1750	40.1	38.1 ~ 42.1	1.37	1.30 ~ 1.44
1800	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
1900	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2000	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2300	39.5	37.5 ~ 41.5	1.67	1.59 ~ 1.75
2450	39.2	37.2 ~ 41.2	1.80	1.71 ~ 1.89
2600	39.0	37.1 ~ 41.0	1.96	1.86 ~ 2.06
3500	37.9	36.0 ~ 39.8	2.91	2.76 ~ 3.06
5200	36.0	34.2 ~ 37.8	4.66	4.43 ~ 4.89
5300	35.9	34.1 ~ 37.7	4.76	4.52 ~ 5.00
5500	35.6	33.8 ~ 37.4	4.96	4.71 ~ 5.21
5600	35.5	33.7 ~ 37.3	5.07	4.82 ~ 5.32
5800	35.3	33.5 ~ 37.1	5.27	5.01 ~ 5.53
For Body				
750	55.5	52.7 ~ 58.3	0.96	0.91 ~ 1.01
835	55.2	52.4 ~ 58.0	0.97	0.92 ~ 1.02
900	55.0	52.3 ~ 57.8	1.05	1.00 ~ 1.10
1450	54.0	51.3 ~ 56.7	1.30	1.24 ~ 1.37
1640	53.8	51.1 ~ 56.5	1.40	1.33 ~ 1.47
1750	53.4	50.7 ~ 56.1	1.49	1.42 ~ 1.56
1800	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
1900	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2000	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2300	52.9	50.3 ~ 55.5	1.81	1.72 ~ 1.90
2450	52.7	50.1 ~ 55.3	1.95	1.85 ~ 2.05
2600	52.5	49.9 ~ 55.1	2.16	2.05 ~ 2.27
3500	51.3	48.7 ~ 53.9	3.31	3.14 ~ 3.48
5200	49.0	46.6 ~ 51.5	5.30	5.04 ~ 5.57
5300	48.9	46.5 ~ 51.3	5.42	5.15 ~ 5.69
5500	48.6	46.2 ~ 51.0	5.65	5.37 ~ 5.93
5600	48.5	46.1 ~ 50.9	5.77	5.48 ~ 6.06
5800	48.2	45.8 ~ 50.6	6.00	5.70 ~ 6.30



FCC SAR Test Report

The following table gives the recipes for tissue simulating liquids.

Table-3.2 Recipes of Tissue Simulating Liquid

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
H750	0.2	-	0.2	1.5	56.0	-	42.1	-
H835	0.2	-	0.2	1.5	57.0	-	41.1	-
H900	0.2	-	0.2	1.4	58.0	-	40.2	-
H1450	-	43.3	-	0.6	-	-	56.1	-
H1640	-	45.8	-	0.5	-	-	53.7	-
H1750	-	47.0	-	0.4	-	-	52.6	-
H1800	-	44.5	-	0.3	-	-	55.2	-
H1900	-	44.5	-	0.2	-	-	55.3	-
H2000	-	44.5	-	0.1	-	-	55.4	-
H2300	-	44.9	-	0.1	-	-	55.0	-
H2450	-	45.0	-	0.1	-	-	54.9	-
H2600	-	45.1	-	0.1	-	-	54.8	-
H3500	-	8.0	-	0.2	-	20.0	71.8	-
H5G	-	-	-	-	-	17.2	65.5	17.3
B750	0.2	-	0.2	0.8	48.8	-	50.0	-
B835	0.2	-	0.2	0.9	48.5	-	50.2	-
B900	0.2	-	0.2	0.9	48.2	-	50.5	-
B1450	-	34.0	-	0.3	-	-	65.7	-
B1640	-	32.5	-	0.3	-	-	67.2	-
B1750	-	31.0	-	0.2	-	-	68.8	-
B1800	-	29.5	-	0.4	-	-	70.1	-
B1900	-	29.5	-	0.3	-	-	70.2	-
B2000	-	30.0	-	0.2	-	-	69.8	-
B2300	-	31.0	-	0.1	-	-	68.9	-
B2450	-	31.4	-	0.1	-	-	68.5	-
B2600	-	31.8	-	0.1	-	-	68.1	-
B3500	-	28.8	-	0.1	-	-	71.1	-
B5G	-	-	-	-	-	10.7	78.6	10.7

3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

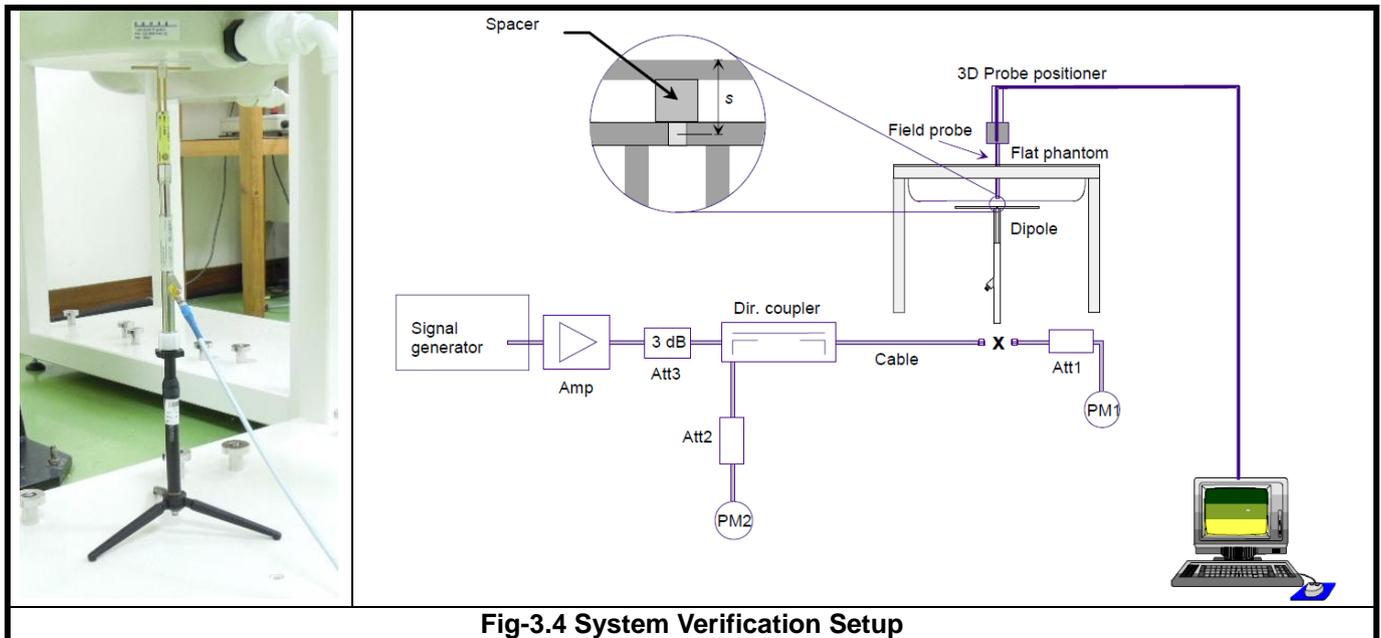


Fig-3.4 System Verification Setup

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASY system
- (e) Record the SAR value

3.4.1 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for below 3 GHz, and 7x7x9 points with step size 4, 4 and 2.5 mm for above 5 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

FCC SAR Test Report

3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.



4. SAR Measurement Evaluation

4.1 EUT Configuration and Setting

For WWAN SAR testing, the EUT was linked and controlled by base station emulator. Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

For LTE, set the related parameters of operating band, channel bandwidth, uplink channel number, modulation type, and RB in base station simulator. When the EUT has registered and communicated to base station simulator, set the simulator to make EUT transmitting the maximum radiated power. The steps for system simulator (Anritsu MT8820C) setup are as below.

1. Press the “Std” button to select “LTE 22.20S” function
2. Choose the “Screen Select” item to “Fundamental Measurement”
3. Enter the “Common” item
4. Set the Operating Band
5. Set the Channel Bandwidth
6. Set the UL Channel & Frequency
7. Set the Modulation
8. Set the RB number and RB shift
9. Press “Start Call” button when EUT register to the system simulator
10. Set the TX-1 Max. Power to make the EUT transmit maximum output power

For WLAN SAR testing, the EUT has installed WLAN engineering testing software which can provide continuous transmitting RF signal. This RF signal utilized in SAR measurement has almost 100% duty cycle. The data rates for WLAN SAR testing were set in lowest data rate as 1 Mbps for 802.11b, 6 Mbps for 802.11g, and MCS0 for 802.11n per KDB 248227 request.

4.2 EUT Testing Position

This DUT was tested in **Right Cheek, Right Tilted, Left Cheek, Left Tilted, Front Face, Rear Face, Left Side, Right Side, Top Side,** and **Bottom Side** positions as illustrated below:

1. Define two imaginary lines on the handset

- (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

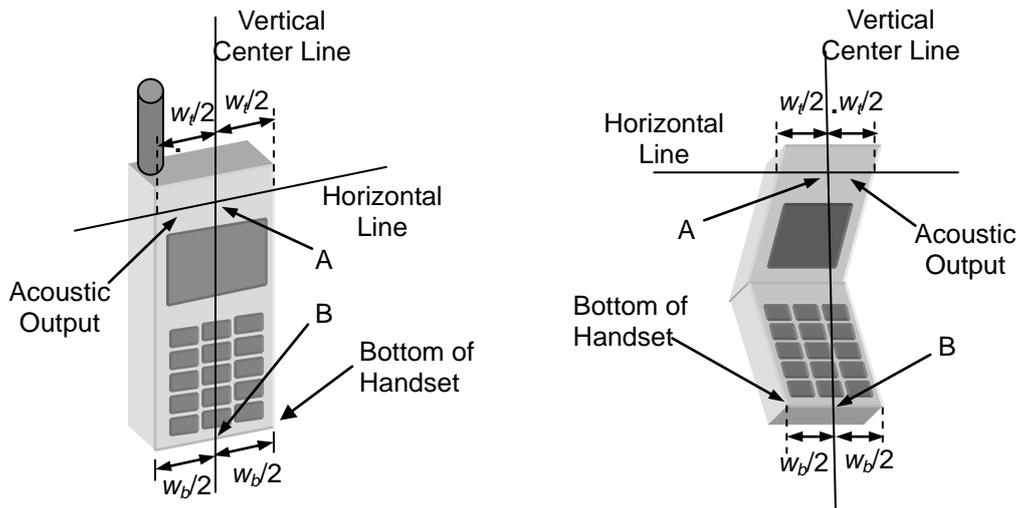
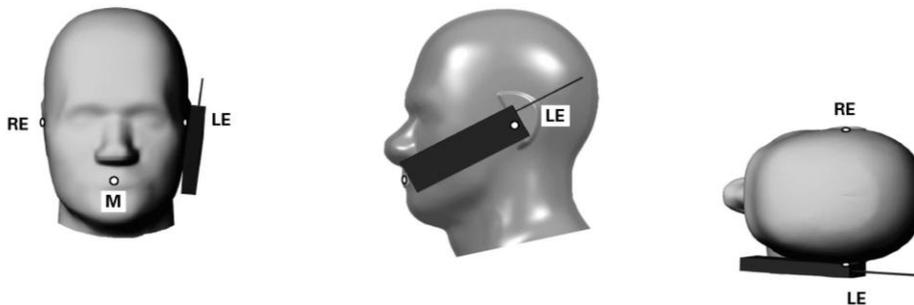



Fig-4.1 Illustration for Handset Vertical and Horizontal Reference Lines

2. Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig-4.2).



Fig-4.2 Illustration for Cheek Position
3. Tilted Position

- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig-4.3).

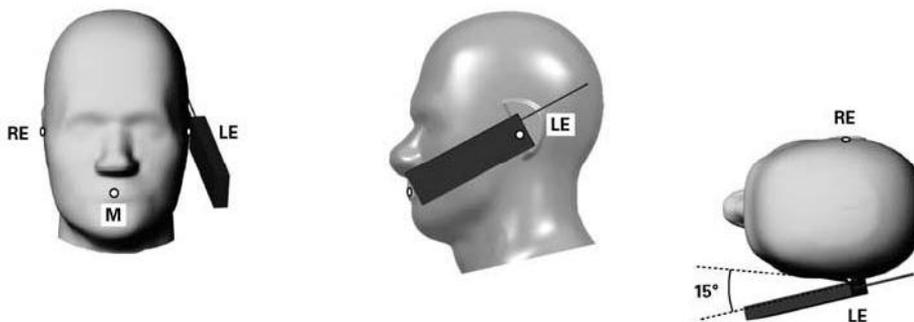
Fig-4.3 Illustration for Tilted Position

4. Body Worn Position

- (a) To position the EUT parallel to the phantom surface.
- (b) To adjust the EUT parallel to the flat phantom.
- (c) To adjust the distance between the EUT surface and the flat phantom to 1 cm.

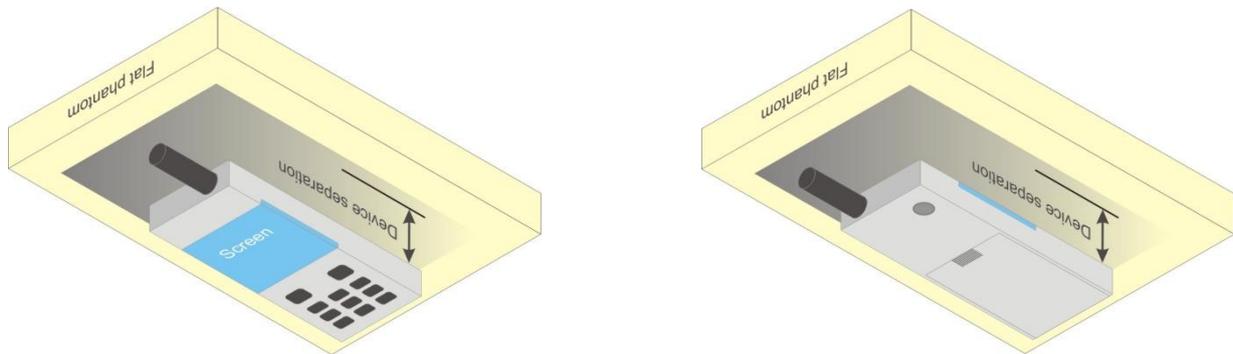**Fig-4.4 Illustration for Body Worn Position**

4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Target Conductivity (σ)	Target Permittivity (ϵ_r)	Conductivity Deviation (%)	Permittivity Deviation (%)	Test Date
H835	835	21.4	0.886	42.111	0.90	41.5	-1.56	1.47	Jan. 23, 2012
H835	835	20.8	0.886	42.018	0.90	41.5	-1.56	1.25	Feb. 17, 2012
H835	835	20.6	0.887	42.124	0.90	41.5	-1.44	1.50	Feb. 22, 2012
B835	835	20.5	0.995	55.155	0.97	55.2	2.58	-0.08	Jan. 24, 2012
B835	835	20.4	0.993	54.844	0.97	55.2	2.37	-0.64	Feb. 02, 2012
B835	835	20.6	0.996	55.33	0.97	55.2	2.68	0.24	Feb. 16, 2012
B835	835	21.1	0.998	55.551	0.97	55.2	2.89	0.64	Feb. 20, 2012
B835	835	20.4	0.997	55.338	0.97	55.2	2.78	0.25	Feb. 22, 2012
H1900	1900	20.3	1.382	39.644	1.40	40.0	-1.29	-0.89	Jan. 22, 2012
H1900	1900	21.1	1.435	40.484	1.40	40.0	2.50	1.21	Feb. 13, 2012
H1900	1900	20.8	1.433	39.805	1.40	40.0	2.36	-0.49	Feb. 17, 2012
H1900	1900	20.6	1.436	40.996	1.40	40.0	2.57	2.49	Feb. 22, 2012
B1900	1900	20.7	1.545	52.605	1.52	53.3	1.64	-1.30	Feb. 15, 2012
B1900	1900	20.6	1.548	52.474	1.52	53.3	1.84	-1.55	Feb. 16, 2012
B1900	1900	20.5	1.544	52.883	1.52	53.3	1.58	-0.78	Feb. 22, 2012
H2450	2450	21.1	1.837	37.891	1.80	39.2	2.06	-3.34	Jan. 25, 2012
H2450	2450	20.4	1.846	38.051	1.80	39.2	2.56	-2.93	Feb. 23, 2012
B2450	2450	20.7	2.015	53.957	1.95	52.7	3.33	2.39	Jan. 25, 2012
B2450	2450	20.6	1.97	51.315	1.95	52.7	1.03	-2.63	Feb. 18, 2012
B2450	2450	20.4	1.975	50.958	1.95	52.7	1.28	-3.31	Feb. 23, 2012
H5G	5200	20.6	4.811	35.44	4.66	36.0	3.24	-1.56	Jan. 25, 2012
H5G	5200	20.4	4.706	35.322	4.66	36.0	0.99	-1.88	Feb. 23, 2012
B5G	5200	20.4	5.168	47.47	5.30	49.0	-2.49	-3.12	Jan. 26, 2012
B5G	5200	20.6	5.196	48.174	5.30	49.0	-1.96	-1.69	Feb. 15, 2012
B5G	5200	20.5	5.168	47.47	5.30	49.0	-2.49	-3.12	Feb. 18, 2012
B5G	5200	20.7	5.163	47.766	5.30	49.0	-2.58	-2.52	Feb. 23, 2012
H5G	5500	20.6	5.133	34.946	4.96	35.6	3.49	-1.84	Jan. 25, 2012
H5G	5500	20.4	4.86	34.784	4.96	35.6	-2.02	-2.29	Feb. 23, 2012
B5G	5500	20.4	5.665	47.358	5.65	48.6	0.27	-2.56	Jan. 26, 2012
B5G	5500	20.6	5.699	48.07	5.65	48.6	0.87	-1.09	Feb. 15, 2012
B5G	5500	20.5	5.665	47.358	5.65	48.6	0.27	-2.56	Feb. 18, 2012
B5G	5500	20.7	5.663	47.654	5.65	48.6	0.23	-1.95	Feb. 23, 2012
H5G	5800	20.6	5.42	34.328	5.27	35.3	2.85	-2.75	Jan. 25, 2012
H5G	5800	20.4	5.07	34.591	5.27	35.3	-3.80	-2.01	Feb. 23, 2012
B5G	5800	20.4	6.253	46.677	6.00	48.2	4.22	-3.16	Jan. 26, 2012
B5G	5800	20.6	6.273	47.376	6.00	48.2	4.55	-1.71	Feb. 15, 2012
B5G	5800	20.5	6.253	46.677	6.00	48.2	4.22	-3.16	Feb. 18, 2012
B5G	5800	20.7	6.255	46.971	6.00	48.2	4.25	-2.55	Feb. 23, 2012

Note:

The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within $\pm 5\%$ of the target values. Liquid temperature during the SAR testing must be within $\pm 2^\circ\text{C}$.



FCC SAR Test Report

4.4 System Verification

The measuring results for system check are shown as below.

Tissue Type	Test Date	Frequency (MHz)	1W Target SAR-1g (W/kg)	Measured SAR-1g (W/kg)	Normalized to 1W SAR-1g (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N
H835	Jan. 23, 2012	835	9.65	2.33	9.32	-3.42	4d021	3590	1277
H835	Feb. 17, 2012	835	9.65	2.50	10.00	3.63	4d021	3661	579
H835	Feb. 22, 2012	835	9.65	2.46	9.84	1.97	4d021	3661	579
B835	Jan. 24, 2012	835	10.10	2.71	10.84	7.33	4d021	3590	1277
B835	Feb. 02, 2012	835	10.10	2.59	10.36	2.57	4d021	3590	1277
B835	Feb. 16, 2012	835	10.10	2.59	10.36	2.57	4d021	3661	579
B835	Feb. 20, 2012	835	10.10	2.71	10.84	7.33	4d021	3661	579
B835	Feb. 22, 2012	835	10.10	2.60	10.40	2.97	4d021	3661	579
H1900	Jan. 22, 2012	1900	40.90	10.20	40.80	-0.24	5d022	3590	1277
H1900	Feb. 13, 2012	1900	38.90	10.10	40.40	3.86	5d036	3800	861
H1900	Feb. 17, 2012	1900	38.90	10.50	42.00	7.97	5d036	3661	579
H1900	Feb. 22, 2012	1900	38.90	10.30	41.20	5.91	5d036	3661	579
B1900	Feb. 15, 2012	1900	38.90	10.40	41.60	6.94	5d036	3800	861
B1900	Feb. 16, 2012	1900	38.90	9.42	37.68	-3.14	5d036	3661	579
B1900	Feb. 22, 2012	1900	38.90	10.00	40.00	2.83	5d036	3661	579
H2450	Jan. 25, 2012	2450	54.80	13.60	54.40	-0.73	716	3590	1277
H2450	Feb. 23, 2012	2450	52.90	14.20	56.80	7.37	737	3661	579
B2450	Jan. 25, 2012	2450	53.30	13.50	54.00	1.31	716	3590	1277
B2450	Feb. 18, 2012	2450	50.00	12.80	51.20	2.40	737	3650	861
B2450	Feb. 23, 2012	2450	50.00	11.60	46.40	-7.20	737	3661	579
H5G	Jan. 25, 2012	5200	79.60	7.97	79.70	0.13	1018	3590	1277
H5G	Feb. 23, 2012	5200	79.60	8.31	83.10	4.40	1018	3661	579
B5G	Jan. 26, 2012	5200	72.70	7.72	77.20	6.19	1018	3590	1277
B5G	Feb. 15, 2012	5200	72.70	7.59	75.90	4.40	1018	3661	579
B5G	Feb. 18, 2012	5200	72.70	7.99	79.90	9.90	1018	3650	861
B5G	Feb. 23, 2012	5200	72.70	7.54	75.40	3.71	1018	3661	579
H5G	Jan. 25, 2012	5500	84.70	8.65	86.50	2.13	1018	3590	1277
H5G	Feb. 23, 2012	5500	84.70	8.65	86.50	2.13	1018	3661	579
B5G	Jan. 26, 2012	5500	78.30	8.18	81.80	4.47	1018	3590	1277
B5G	Feb. 15, 2012	5500	78.30	8.36	83.60	6.77	1018	3661	579
B5G	Feb. 18, 2012	5500	78.30	8.33	83.30	6.39	1018	3650	861
B5G	Feb. 23, 2012	5500	78.30	8.01	80.10	2.30	1018	3661	579
H5G	Jan. 25, 2012	5800	78.60	8.14	81.40	3.56	1018	3590	1277
H5G	Feb. 23, 2012	5800	78.60	7.62	76.20	-3.05	1018	3661	579
B5G	Jan. 26, 2012	5800	73.40	7.35	73.50	0.14	1018	3590	1277
B5G	Feb. 15, 2012	5800	73.40	7.43	74.30	1.23	1018	3661	579
B5G	Feb. 18, 2012	5800	73.40	7.44	74.40	1.36	1018	3650	861
B5G	Feb. 23, 2012	5800	73.40	7.76	77.60	5.72	1018	3661	579

Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.



FCC SAR Test Report

4.5 Conducted Power Results

The measuring conducted power (Unit: dBm) are shown as below.

Band	CDMA2000 BC0			CDMA2000 BC1		
	1013	384	777	25	600	1175
Channel	824.70	836.52	848.31	1851.25	1880.00	1908.75
Frequency (MHz)	824.70	836.52	848.31	1851.25	1880.00	1908.75
1xRTT RC1+SO55	24.62	24.89	24.42	24.79	24.82	24.79
1xRTT RC3+SO55	24.55	24.90	24.13	24.83	24.75	24.67
1xRTT RC3+SO32 (FCH)	24.59	24.84	24.12	24.78	24.75	24.69
1xRTT RC3+SO32 (SCH)	24.51	24.83	24.21	24.77	24.74	24.68
1xEVDO Rev.0 RTAP 153.6	23.88	23.95	23.82	23.89	23.62	23.61
1xEVDO Rev.A RETAP 4096	23.86	23.93	23.80	23.88	23.60	23.66

Band	CDMA2000 BC10			-		
	476	573	670	-	-	-
Channel	817.9	820.325	822.75	-	-	-
Frequency (MHz)	817.9	820.325	822.75	-	-	-
1xRTT RC1+SO55	25.03	25.02	24.76	-	-	-
1xRTT RC3+SO55	25.04	25.03	24.71	-	-	-
1xRTT RC3+SO32 (FCH)	25.02	25.02	24.73	-	-	-
1xRTT RC3+SO32 (SCH)	25.03	25.01	24.71	-	-	-
1xEVDO Rev.0 RTAP 153.6	24.06	24.03	23.85	-	-	-
1xEVDO Rev.A RETAP 4096	23.96	24.02	23.84	-	-	-

Band	802.11b			802.11g		
	1	6	11	1	6	11
Channel	2412	2437	2462	2412	2437	2462
Frequency (MHz)	2412	2437	2462	2412	2437	2462
Average Power	18.09	18.19	18.15	13.21	13.36	13.28

Band	802.11n (HT20)			-		
	1	6	11	-	-	-
Channel	2412	2437	2462	-	-	-
Frequency (MHz)	2412	2437	2462	-	-	-
Average Power	12.13	12.25	12.08	-	-	-



FCC SAR Test Report

Band	802.11a							
Channel	36	40	44	48	52	56	60	64
Frequency (MHz)	5180	5200	5220	5240	5260	5280	5300	5320
Average Power	13.16	13.18	13.13	13.09	13.10	13.16	13.08	13.34

Band	802.11a							
Channel	100	104	108	112	116	132	136	140
Frequency (MHz)	5500	5520	5540	5560	5580	5660	5680	5700
Average Power	13.01	13.25	13.28	13.23	13.12	13.04	13.01	13.36

Band	802.11a							
Channel	149	153	157	161	-	-	-	-
Frequency (MHz)	5745	5765	5785	5805	-	-	-	-
Average Power	13.18	13.12	13.02	13.11	-	-	-	-

Band	802.11n (HT20)							
Channel	36	40	44	48	52	56	60	64
Frequency (MHz)	5180	5200	5220	5240	5260	5280	5300	5320
Average Power	10.12	10.06	10.09	10.06	10.03	10.02	10.00	10.34

Band	802.11n (HT20)							
Channel	100	104	108	112	116	132	136	140
Frequency (MHz)	5500	5520	5540	5560	5580	5660	5680	5700
Average Power	10.32	10.23	10.26	10.21	10.28	10.31	10.28	10.36

Band	802.11n (HT20)							
Channel	149	153	157	161	165	-	-	-
Frequency (MHz)	5745	5765	5785	5805	5825	-	-	-
Average Power	10.35	10.19	10.09	9.91	10.02	-	-	-

Band	802.11n (HT40)								
Channel	38	46	54	62	102	118	134	151	159
Frequency (MHz)	5190	5230	5270	5310	5510	5590	5670	5755	5795
Average Power	10.29	10.31	10.33	10.38	10.56	10.36	10.32	10.18	9.92



FCC SAR Test Report

A D T

LTE Band 25								
BW	Modulation	CH	Frequency (MHz)	RB	RB Offset	MPR	Target Power	Measured Power
10 MHz	QPSK	26090	1855.0	1	0	0	24	23.95
		26365	1882.5	1	0	0	24	23.94
		26640	1910.0	1	0	0	24	23.98
		26090	1855.0	1	49	0	24	23.98
		26365	1882.5	1	49	0	24	23.94
		26640	1910.0	1	49	0	24	23.99
		26090	1855.0	25	12	1	24	23.41
		26365	1882.5	25	12	1	24	23.20
		26640	1910.0	25	12	1	24	23.59
		26090	1855.0	50	0	1	24	23.53
		26365	1882.5	50	0	1	24	23.29
		26640	1910.0	50	0	1	24	23.57
	16QAM	26090	1855.0	1	0	1	24	23.27
		26365	1882.5	1	0	1	24	23.23
		26640	1910.0	1	0	1	24	23.34
		26090	1855.0	1	49	1	24	23.53
		26365	1882.5	1	49	1	24	23.31
		26640	1910.0	1	49	1	24	23.77
		26090	1855.0	25	12	2	24	22.82
		26365	1882.5	25	12	2	24	22.57
		26640	1910.0	25	12	2	24	22.63
		26090	1855.0	50	0	2	24	22.47
5 MHz	QPSK	26065	1852.5	1	0	0	24	23.94
		26365	1882.5	1	0	0	24	23.94
		26665	1912.5	1	0	0	24	23.91
		26065	1852.5	1	24	0	24	23.96
		26365	1882.5	1	24	0	24	23.94
		26665	1912.5	1	24	0	24	23.65
		26065	1852.5	12	6	1	24	23.18
		26365	1882.5	12	6	1	24	23.18
		26665	1912.5	12	6	1	24	23.39
		26065	1852.5	25	0	1	24	23.31
		26365	1882.5	25	0	1	24	23.20
		26665	1912.5	25	0	1	24	23.42
	16QAM	26065	1852.5	1	0	1	24	23.25
		26365	1882.5	1	0	1	24	23.25
		26665	1912.5	1	0	1	24	23.42
		26065	1852.5	1	24	1	24	23.43
		26365	1882.5	1	24	1	24	23.31
		26665	1912.5	1	24	1	24	23.12
		26065	1852.5	12	6	2	24	22.14
		26365	1882.5	12	6	2	24	22.16
		26665	1912.5	12	6	2	24	22.49
		26065	1852.5	25	0	2	24	22.70
26365	1882.5	25	0	2	24	22.68		
26665	1912.5	25	0	2	24	22.88		



FCC SAR Test Report

4.6 SAR Testing Results

4.6.1 SAR Results for Head

Plot No.	Band	Mode	Test Position	Channel	Battery	SAR-1g (W/kg)
01	CDMA2000 BC0	RC3+SO55	Right Cheek	384	1	0.388
02	CDMA2000 BC0	RC3+SO55	Right Tilted	384	1	0.233
03	CDMA2000 BC0	RC3+SO55	Left Cheek	384	1	0.434
04	CDMA2000 BC0	RC3+SO55	Left Tilted	384	1	0.215
05	CDMA2000 BC0	RC3+SO55	Left Cheek	384	2	0.421
06	CDMA2000 BC1	RC3+SO55	Right Cheek	25	1	0.724
07	CDMA2000 BC1	RC3+SO55	Right Tilted	25	1	0.237
08	CDMA2000 BC1	RC3+SO55	Left Cheek	25	1	0.715
09	CDMA2000 BC1	RC3+SO55	Left Tilted	25	1	0.31
10	CDMA2000 BC1	RC3+SO55	Right Cheek	25	2	0.457
11	CDMA2000 BC10	RC3+SO55	Right Cheek	476	1	0.332
12	CDMA2000 BC10	RC3+SO55	Right Tilted	476	1	0.191
13	CDMA2000 BC10	RC3+SO55	Left Cheek	476	1	0.361
14	CDMA2000 BC10	RC3+SO55	Left Tilted	476	1	0.187
15	CDMA2000 BC10	RC3+SO55	Left Cheek	476	2	0.329
16	CDMA2000 BC0	EVDO Rev.0	Right Cheek	384	1	0.23
17	CDMA2000 BC0	EVDO Rev.0	Right Tilted	384	1	0.33
18	CDMA2000 BC0	EVDO Rev.0	Left Cheek	384	1	0.188
19	CDMA2000 BC0	EVDO Rev.0	Left Tilted	384	1	0.306
20	CDMA2000 BC0	EVDO Rev.0	Right Tilted	384	2	0.212
21	CDMA2000 BC1	EVDO Rev.0	Right Cheek	25	1	0.406
22	CDMA2000 BC1	EVDO Rev.0	Right Tilted	25	1	0.461
23	CDMA2000 BC1	EVDO Rev.0	Left Cheek	25	1	0.497
24	CDMA2000 BC1	EVDO Rev.0	Left Tilted	25	1	0.266
25	CDMA2000 BC1	EVDO Rev.0	Left Cheek	25	2	0.391
26	CDMA2000 BC10	EVDO Rev.0	Right Cheek	476	1	0.416
27	CDMA2000 BC10	EVDO Rev.0	Right Tilted	476	1	0.318
28	CDMA2000 BC10	EVDO Rev.0	Left Cheek	476	1	0.378
29	CDMA2000 BC10	EVDO Rev.0	Left Tilted	476	1	0.267
30	CDMA2000 BC10	EVDO Rev.0	Right Cheek	476	2	0.389

Note:

1. According to KDB 941225, the SAR testing for 1xEVDO REV.A is not required because its maximum power is less than 1xEVDO REV.0.



FCC SAR Test Report

A D T

Plot No.	Band	Mode	Test Position	Channel	RB	Offset	Battery	SAR-1g (W/kg)
101	LTE 25	QPSK 10M	Right Cheek	26640	25	12	1	0.168
102	LTE 25	QPSK 10M	Right Cheek	26640	1	0	1	0.21
103	LTE 25	QPSK 10M	Right Cheek	26640	1	49	1	0.194
104	LTE 25	QPSK 10M	Right Tilted	26640	25	12	1	0.196
105	LTE 25	QPSK 10M	Right Tilted	26640	1	0	1	0.246
106	LTE 25	QPSK 10M	Right Tilted	26640	1	49	1	0.223
107	LTE 25	QPSK 10M	Left Cheek	26640	25	12	1	0.235
108	LTE 25	QPSK 10M	Left Cheek	26640	1	0	1	0.292
109	LTE 25	QPSK 10M	Left Cheek	26640	1	49	1	0.267
110	LTE 25	QPSK 10M	Left Tilted	26640	25	12	1	0.132
111	LTE 25	QPSK 10M	Left Tilted	26640	1	0	1	0.164
112	LTE 25	QPSK 10M	Left Tilted	26640	1	49	1	0.149
113	LTE 25	16QAM 10M	Left Cheek	26640	25	12	1	0.203
114	LTE 25	16QAM 10M	Left Cheek	26640	1	0	1	0.258
115	LTE 25	16QAM 10M	Left Cheek	26640	1	49	1	0.241
116	LTE 25	QPSK 10M	Left Cheek	26640	1	0	2	0.243

Note:

1. According to KDB 941225, the SAR testing for 100% RB is not required since the maximum SAR of 50% RB is less than 1.45 W/kg.
2. According to KDB 941225, the SAR testing was performed on largest channel bandwidth, and SAR for other channel bandwidths is not required since the maximum power of smaller channel bandwidth is within 1/2 dB higher or lower of measured for the largest channel bandwidth and maximum SAR of largest channel bandwidth is less than 1.45 W/kg.



FCC SAR Test Report

A D T

Plot No.	Band	Test Position	Channel	Battery	SAR-1g (W/kg)
201	802.11b	Right Cheek	6	1	0.205
202	802.11b	Right Tilted	6	1	0.185
203	802.11b	Left Cheek	6	1	0.129
204	802.11b	Left Tilted	6	1	0.153
205	802.11b	Right Cheek	6	2	0.152
206	802.11a	Right Cheek	40	1	0.029
207	802.11a	Right Tilted	40	1	0.151
208	802.11a	Left Cheek	40	1	0.108
209	802.11a	Left Tilted	40	1	0.185
210	802.11a	Left Tilted	40	2	0.155
211	802.11a	Right Cheek	64	1	0.094
212	802.11a	Right Tilted	64	1	0.00455
213	802.11a	Left Cheek	64	1	0.127
214	802.11a	Left Tilted	64	1	0.234
215	802.11a	Left Tilted	64	2	0.176
216	802.11a	Right Cheek	140	1	0.00516
217	802.11a	Right Tilted	140	1	0.0066
218	802.11a	Left Cheek	140	1	0.106
219	802.11a	Left Tilted	140	1	0.195
220	802.11a	Left Tilted	140	2	0.158
221	802.11a	Right Cheek	149	1	0.086
222	802.11a	Right Tilted	149	1	0.015
223	802.11a	Left Cheek	149	1	0.103
224	802.11a	Left Tilted	149	1	0.179
225	802.11a	Left Tilted	149	2	0.156

Note:

1. According to KDB 248227, the SAR testing for 802.11g/n is not required since the maximum power of 802.11g/n is less 1/4 dB higher than maximum power of 802.11b.



FCC SAR Test Report

4.6.2 SAR Results for Body

<Hotspot Mode>

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Channel	Battery	SAR-1g (W/kg)
301	CDMA2000 BC0	RC3+SO32	Front Face	1	384	1	0.582
302	CDMA2000 BC0	RC3+SO32	Rear Face	1	384	1	0.977
303	CDMA2000 BC0	RC3+SO32	Left Side	1	384	1	0.735
304	CDMA2000 BC0	RC3+SO32	Right Side	1	384	1	0.417
305	CDMA2000 BC0	RC3+SO32	Bottom Side	1	384	1	0.534
306	CDMA2000 BC0	RC3+SO32	Rear Face	1	1013	1	0.825
307	CDMA2000 BC0	RC3+SO32	Rear Face	1	777	1	0.813
308	CDMA2000 BC0	RC3+SO32	Rear Face	1	384	2	0.79
312	CDMA2000 BC1	RC3+SO32	Front Face	1	25	1	1.25
313	CDMA2000 BC1	RC3+SO32	Rear Face	1	25	1	0.999
314	CDMA2000 BC1	RC3+SO32	Left Side	1	25	1	0.113
315	CDMA2000 BC1	RC3+SO32	Right Side	1	25	1	0.146
316	CDMA2000 BC1	RC3+SO32	Bottom Side	1	25	1	0.319
317	CDMA2000 BC1	RC3+SO32	Front Face	1	600	1	1.29
318	CDMA2000 BC1	RC3+SO32	Front Face	1	1175	1	1.17
319	CDMA2000 BC1	RC3+SO32	Rear Face	1	600	1	0.939
320	CDMA2000 BC1	RC3+SO32	Rear Face	1	1175	1	0.799
321	CDMA2000 BC1	RC3+SO32	Front Face	1	600	2	1.19
322	CDMA2000 BC1	RC3+SO32	Front Face	1	25	2	1.07
323	CDMA2000 BC1	RC3+SO32	Front Face	1	1175	2	0.998
327	CDMA2000 BC10	RC3+SO32	Front Face	1	476	1	0.467
328	CDMA2000 BC10	RC3+SO32	Rear Face	1	476	1	0.859
329	CDMA2000 BC10	RC3+SO32	Left Side	1	476	1	0.556
330	CDMA2000 BC10	RC3+SO32	Right Side	1	476	1	0.242
331	CDMA2000 BC10	RC3+SO32	Bottom Side	1	476	1	0.375
332	CDMA2000 BC10	RC3+SO32	Rear Face	1	573	1	0.901
333	CDMA2000 BC10	RC3+SO32	Rear Face	1	670	1	0.823
334	CDMA2000 BC10	RC3+SO32	Rear Face	1	573	2	0.778
336	CDMA2000 BC0	EVDO Rev.0	Front Face	1	384	1	0.199
337	CDMA2000 BC0	EVDO Rev.0	Rear Face	1	384	1	0.352
338	CDMA2000 BC0	EVDO Rev.0	Right Side	1	384	1	0.389
339	CDMA2000 BC0	EVDO Rev.0	Top Side	1	384	1	0.067
340	CDMA2000 BC0	EVDO Rev.0	Right Side	1	384	2	0.353
342	CDMA2000 BC1	EVDO Rev.0	Front Face	1	25	1	0.123
343	CDMA2000 BC1	EVDO Rev.0	Rear Face	1	25	1	0.329
344	CDMA2000 BC1	EVDO Rev.0	Right Side	1	25	1	0.074
345	CDMA2000 BC1	EVDO Rev.0	Top Side	1	25	1	0.291
346	CDMA2000 BC1	EVDO Rev.0	Rear Face	1	25	2	0.326
348	CDMA2000 BC10	EVDO Rev.0	Front Face	1	476	1	0.208
349	CDMA2000 BC10	EVDO Rev.0	Rear Face	1	476	1	0.291
350	CDMA2000 BC10	EVDO Rev.0	Right Side	1	476	1	0.354
351	CDMA2000 BC10	EVDO Rev.0	Top Side	1	476	1	0.042
352	CDMA2000 BC10	EVDO Rev.0	Right Side	1	476	2	0.328

Note:

1. According to KDB 941225, the SAR testing for 1xEVDO REV.A is not required since the maximum power is less than 1xEVDO REV.0.

**FCC SAR Test Report**

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Channel	RB	Offset	Battery	SAR-1g (W/kg)
401	LTE 25	QPSK 10M	Front Face	1	26640	25	12	1	0.076
402	LTE 25	QPSK 10M	Front Face	1	26640	1	0	1	0.094
403	LTE 25	QPSK 10M	Front Face	1	26640	1	49	1	0.086
404	LTE 25	QPSK 10M	Rear Face	1	26640	25	12	1	0.241
405	LTE 25	QPSK 10M	Rear Face	1	26640	1	0	1	0.253
406	LTE 25	QPSK 10M	Rear Face	1	26640	1	49	1	0.247
407	LTE 25	QPSK 10M	Right Side	1	26640	25	12	1	0.037
408	LTE 25	QPSK 10M	Right Side	1	26640	1	0	1	0.046
409	LTE 25	QPSK 10M	Right Side	1	26640	1	49	1	0.045
410	LTE 25	QPSK 10M	Top Side	1	26640	25	12	1	0.192
411	LTE 25	QPSK 10M	Top Side	1	26640	1	0	1	0.217
412	LTE 25	QPSK 10M	Top Side	1	26640	1	49	1	0.21
413	LTE 25	16QAM 10M	Rear Face	1	26640	25	12	1	0.181
414	LTE 25	16QAM 10M	Rear Face	1	26640	1	0	1	0.221
415	LTE 25	16QAM 10M	Rear Face	1	26640	1	49	1	0.218
416	LTE 25	QPSK 10M	Rear Face	1	26640	1	0	2	0.22

Note:

1. According to KDB 941225, the SAR testing for 100% RB is not required since the maximum SAR of 50% RB is less than 1.45 W/kg.
2. According to KDB 941225, the SAR testing was performed on largest channel bandwidth, and SAR for other channel bandwidths is not required since the maximum power of smaller channel bandwidth is within 1/2 dB higher or lower of measured for the largest channel bandwidth and maximum SAR of largest channel bandwidth is less than 1.45 W/kg.

FCC SAR Test Report

Plot No.	Band	Test Position	Separation Distance (cm)	Channel	Battery	SAR-1g (W/kg)
501	802.11b	Front Face	1	6	1	0.042
502	802.11b	Rear Face	1	6	1	0.182
503	802.11b	Left Side	1	6	1	0.02
504	802.11b	Top Side	1	6	1	0.103
505	802.11b	Rear Face	1	6	2	0.156
507	802.11a	Front Face	1	40	1	0.014
508	802.11a	Rear Face	1	40	1	0.201
509	802.11a	Left Side	1	40	1	0.022
510	802.11a	Top Side	1	40	1	0.143
511	802.11a	Rear Face	1	40	2	0.197
513	802.11a	Front Face	1	64	1	0.026
514	802.11a	Rear Face	1	64	1	0.195
515	802.11a	Left Side	1	64	1	0.053
516	802.11a	Top Side	1	64	1	0.28
517	802.11a	Top Side	1	64	2	0.253
519	802.11a	Front Face	1	140	1	0.021
520	802.11a	Rear Face	1	140	1	0.195
521	802.11a	Left Side	1	140	1	0.034
522	802.11a	Top Side	1	140	1	0.201
523	802.11a	Top Side	1	140	2	0.191
525	802.11a	Front Face	1	149	1	0.012
526	802.11a	Rear Face	1	149	1	0.196
527	802.11a	Left Side	1	149	1	0.032
528	802.11a	Top Side	1	149	1	0.24
529	802.11a	Top Side	1	149	2	0.195

Note:

1. According to KDB 248227, the SAR testing for 802.11g/n is not required since the maximum power of 802.11g/n is less 1/4 dB higher than maximum power of 802.11b.
2. According to KDB 248227, the SAR testing for 802.11n is not required since the maximum power of 802.11n is less 1/4 dB higher than maximum power of 802.11a.



FCC SAR Test Report

A D T

<Body Worn Mode>

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Channel	Battery	Ear- phone	SAR-1g (W/kg)
301	CDMA2000 BC0	RC3+SO32	Front Face	1	384	1	w/o	0.582
302	CDMA2000 BC0	RC3+SO32	Rear Face	1	384	1	w/o	0.977
306	CDMA2000 BC0	RC3+SO32	Rear Face	1	1013	1	w/o	0.825
307	CDMA2000 BC0	RC3+SO32	Rear Face	1	777	1	w/o	0.813
309	CDMA2000 BC0	RC3+SO32	Rear Face	1	384	1	w/	0.931
310	CDMA2000 BC0	RC3+SO32	Rear Face	1	1013	1	w/	0.842
311	CDMA2000 BC0	RC3+SO32	Rear Face	1	777	1	w/	0.65
312	CDMA2000 BC1	RC3+SO32	Front Face	1	25	1	w/o	1.25
313	CDMA2000 BC1	RC3+SO32	Rear Face	1	25	1	w/o	0.999
317	CDMA2000 BC1	RC3+SO32	Front Face	1	600	1	w/o	1.29
318	CDMA2000 BC1	RC3+SO32	Front Face	1	1175	1	w/o	1.17
319	CDMA2000 BC1	RC3+SO32	Rear Face	1	600	1	w/o	0.939
320	CDMA2000 BC1	RC3+SO32	Rear Face	1	1175	1	w/o	0.799
324	CDMA2000 BC1	RC3+SO32	Front Face	1	600	1	w/	1.13
325	CDMA2000 BC1	RC3+SO32	Front Face	1	25	1	w/	1
326	CDMA2000 BC1	RC3+SO32	Front Face	1	1175	1	w/	0.888
327	CDMA2000 BC10	RC3+SO32	Front Face	1	476	1	w/o	0.467
328	CDMA2000 BC10	RC3+SO32	Rear Face	1	476	1	w/o	0.859
332	CDMA2000 BC10	RC3+SO32	Rear Face	1	573	1	w/o	0.901
333	CDMA2000 BC10	RC3+SO32	Rear Face	1	670	1	w/o	0.823
335	CDMA2000 BC10	RC3+SO32	Rear Face	1	573	1	w/	0.719
336	CDMA2000 BC0	EVDO Rev.0	Front Face	1	384	1	w/o	0.199
337	CDMA2000 BC0	EVDO Rev.0	Rear Face	1	384	1	w/o	0.352
341	CDMA2000 BC0	EVDO Rev.0	Rear Face	1	384	1	w/	0.351
342	CDMA2000 BC1	EVDO Rev.0	Front Face	1	25	1	w/o	0.123
343	CDMA2000 BC1	EVDO Rev.0	Rear Face	1	25	1	w/o	0.329
347	CDMA2000 BC1	EVDO Rev.0	Rear Face	1	25	1	w/	0.322
348	CDMA2000 BC10	EVDO Rev.0	Front Face	1	476	1	w/o	0.208
349	CDMA2000 BC10	EVDO Rev.0	Rear Face	1	476	1	w/o	0.291
353	CDMA2000 BC10	EVDO Rev.0	Rear Face	1	476	1	w/	0.325

Note:

1. According to KDB 941225, the SAR testing for 1xEVDO REV.A is not required because its maximum power is less than 1xEVDO REV.0.



FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Channel	RB	Offset	Battery	Ear- phone	SAR-1g (W/kg)
401	LTE 25	QPSK 10M	Front Face	1	26640	25	12	1	w/o	0.076
402	LTE 25	QPSK 10M	Front Face	1	26640	1	0	1	w/o	0.094
403	LTE 25	QPSK 10M	Front Face	1	26640	1	49	1	w/o	0.086
404	LTE 25	QPSK 10M	Rear Face	1	26640	25	12	1	w/o	0.241
405	LTE 25	QPSK 10M	Rear Face	1	26640	1	0	1	w/o	0.253
406	LTE 25	QPSK 10M	Rear Face	1	26640	1	49	1	w/o	0.247
413	LTE 25	16QAM 10M	Rear Face	1	26640	25	12	1	w/o	0.181
414	LTE 25	16QAM 10M	Rear Face	1	26640	1	0	1	w/o	0.221
415	LTE 25	16QAM 10M	Rear Face	1	26640	1	49	1	w/o	0.218
417	LTE 25	QPSK 10M	Rear Face	1	26640	1	0	1	w/	0.233

Note:

1. According to KDB 941225, the SAR testing for 100% RB is not required since the maximum SAR of 50% RB is less than 1.45 W/kg.
2. According to KDB 941225, the SAR testing was performed on largest channel bandwidth, and SAR for other channel bandwidths is not required since the maximum power of smaller channel bandwidth is within 1/2 dB higher or lower of measured for the largest channel bandwidth and maximum SAR of largest channel bandwidth is less than 1.45 W/kg.

Plot No.	Band	Test Position	Separation Distance (cm)	Channel	Battery	Earphone	SAR-1g (W/kg)
501	802.11b	Front Face	1	6	1	w/o	0.042
502	802.11b	Rear Face	1	6	1	w/o	0.182
506	802.11b	Rear Face	1	6	1	w/	0.087
507	802.11a	Front Face	1	40	1	w/o	0.014
508	802.11a	Rear Face	1	40	1	w/o	0.201
512	802.11a	Rear Face	1	40	1	w/	0.151
513	802.11a	Front Face	1	64	1	w/o	0.026
514	802.11a	Rear Face	1	64	1	w/o	0.195
518	802.11a	Rear Face	1	64	1	w/	0.169
519	802.11a	Front Face	1	140	1	w/o	0.021
520	802.11a	Rear Face	1	140	1	w/o	0.195
524	802.11a	Rear Face	1	140	1	w/	0.185
525	802.11a	Front Face	1	149	1	w/o	0.012
526	802.11a	Rear Face	1	149	1	w/o	0.196
530	802.11a	Rear Face	1	149	1	w/	0.195

Note:

1. According to KDB 248227, the SAR testing for 802.11g/n is not required since the maximum power of 802.11g/n is less 1/4 dB higher than maximum power of 802.11b.
2. According to KDB 248227, the SAR testing for 802.11n is not required since the maximum power of 802.11n is less 1/4 dB higher than maximum power of 802.11a.

Test Engineer : Herbort Liu,and Jerome Chang



FCC SAR Test Report

4.6.3 Simultaneous Multi-band Transmission Evaluation

<Simultaneous Transmission Configuration 1>

Position	1xRTT BC0 (Voice)	1xEVDO BC0 (Data)	WLAN (Data)	Max. SAR Summation
Head SAR				
Right Cheek	0.388	0.23	0.205	0.823
Right Tilted	0.233	0.33	0.185	0.748
Left Cheek	0.434	0.188	0.129	0.751
Left Tilted	0.215	0.306	0.234	0.755
Hotspot Mode SAR				
Front Face	0.582	0.199	0.042	0.823
Rear Face	0.977	0.352	0.201	1.53
Left Side	0.735	0	0.053	0.788
Right Side	0.417	0.389	0	0.806
Top Side	0	0.067	0.28	0.347
Bottom Side	0.534	0	0	0.534
Body-Worn SAR				
Front Face	0.582	0.199	0.042	0.823
Rear Face	0.977	0.352	0.201	1.53

<Simultaneous Transmission Configuration 2>

Position	1xRTT BC0 (Voice)	1xEVDO BC1 (Data)	WLAN (Data)	Max. SAR Summation
Head SAR				
Right Cheek	0.388	0.406	0.205	0.999
Right Tilted	0.233	0.461	0.185	0.879
Left Cheek	0.434	0.497	0.129	1.06
Left Tilted	0.215	0.266	0.234	0.715
Hotspot Mode SAR				
Front Face	0.582	0.123	0.042	0.747
Rear Face	0.977	0.329	0.201	1.507
Left Side	0.735	0	0.053	0.788
Right Side	0.417	0.074	0	0.491
Top Side	0	0.291	0.28	0.571
Bottom Side	0.534	0	0	0.534
Body-Worn SAR				
Front Face	0.582	0.123	0.042	0.747
Rear Face	0.977	0.329	0.201	1.507



FCC SAR Test Report

<Simultaneous Transmission Configuration 3>

Position	1xRTT BC0 (Voice)	1xEVDO BC10 (Data)	WLAN (Data)	Max. SAR Summation
Head SAR				
Right Cheek	0.388	0.416	0.205	1.009
Right Tilted	0.233	0.318	0.185	0.736
Left Cheek	0.434	0.378	0.129	0.941
Left Tilted	0.215	0.267	0.234	0.716
Hotspot Mode SAR				
Front Face	0.582	0.208	0.042	0.832
Rear Face	0.977	0.291	0.201	1.469
Left Side	0.735	0	0.053	0.788
Right Side	0.417	0.354	0	0.771
Top Side	0	0.042	0.28	0.322
Bottom Side	0.534	0	0	0.534
Body-Worn SAR				
Front Face	0.582	0.208	0.042	0.832
Rear Face	0.977	0.325	0.201	1.503

<Simultaneous Transmission Configuration 4>

Position	1xRTT BC0 (Voice)	LTE 25 (Data)	WLAN (Data)	Max. SAR Summation
Head SAR				
Right Cheek	0.388	0.21	0.205	0.803
Right Tilted	0.233	0.246	0.185	0.664
Left Cheek	0.434	0.292	0.129	0.855
Left Tilted	0.215	0.164	0.234	0.613
Hotspot Mode SAR				
Front Face	0.582	0.094	0.042	0.718
Rear Face	0.977	0.253	0.201	1.431
Left Side	0.735	0	0.053	0.788
Right Side	0.417	0.046	0	0.463
Top Side	0	0.217	0.28	0.497
Bottom Side	0.534	0	0	0.534
Body-Worn SAR				
Front Face	0.582	0.094	0.042	0.718
Rear Face	0.977	0.253	0.201	1.431



FCC SAR Test Report

A D T

<Simultaneous Transmission Configuration 5>

Position	1xRTT BC1 (Voice)	1xEVDO BC0 (Data)	WLAN (Data)	Max. SAR Summation
Head SAR				
Right Cheek	0.724	0.23	0.205	1.159
Right Tilted	0.237	0.33	0.185	0.752
Left Cheek	0.715	0.188	0.129	1.032
Left Tilted	0.31	0.306	0.234	0.85
Hotspot Mode SAR				
Front Face	1.29	0.199	0.042	1.531
Rear Face	0.999	0.352	0.201	1.552
Left Side	0.113	0	0.053	0.166
Right Side	0.146	0.389	0	0.535
Top Side	0	0.067	0.28	0.347
Bottom Side	0.319	0	0	0.319
Body-Worn SAR				
Front Face	1.29	0.199	0.042	1.531
Rear Face	0.999	0.352	0.201	1.552

<Simultaneous Transmission Configuration 6>

Position	1xRTT BC1 (Voice)	1xEVDO BC1 (Data)	WLAN (Data)	Max. SAR Summation
Head SAR				
Right Cheek	0.724	0.406	0.205	1.335
Right Tilted	0.237	0.461	0.185	0.883
Left Cheek	0.715	0.497	0.129	1.341
Left Tilted	0.31	0.266	0.234	0.81
Hotspot Mode SAR				
Front Face	1.29	0.123	0.042	1.455
Rear Face	0.999	0.329	0.201	1.529
Left Side	0.113	0	0.053	0.166
Right Side	0.146	0.074	0	0.22
Top Side	0	0.291	0.28	0.571
Bottom Side	0.319	0	0	0.319
Body-Worn SAR				
Front Face	1.29	0.123	0.042	1.455
Rear Face	0.999	0.329	0.201	1.529



FCC SAR Test Report

<Simultaneous Transmission Configuration 7>

Position	1xRTT BC1 (Voice)	1xEVDO BC10 (Data)	WLAN (Data)	Max. SAR Summation
Head SAR				
Right Cheek	0.724	0.416	0.205	1.345
Right Tilted	0.237	0.318	0.185	0.74
Left Cheek	0.715	0.378	0.129	1.222
Left Tilted	0.31	0.267	0.234	0.811
Hotspot Mode SAR				
Front Face	1.29	0.208	0.042	1.54
Rear Face	0.999	0.291	0.201	1.491
Left Side	0.113	0	0.053	0.166
Right Side	0.146	0.354	0	0.5
Top Side	0	0.042	0.28	0.322
Bottom Side	0.319	0	0	0.319
Body-Worn SAR				
Front Face	1.29	0.208	0.042	1.54
Rear Face	0.999	0.325	0.201	1.525

<Simultaneous Transmission Configuration 8>

Position	1xRTT BC1 (Voice)	LTE 25 (Data)	WLAN (Data)	Max. SAR Summation
Head SAR				
Right Cheek	0.724	0.21	0.205	1.139
Right Tilted	0.237	0.246	0.185	0.668
Left Cheek	0.715	0.292	0.129	1.136
Left Tilted	0.31	0.164	0.234	0.708
Hotspot Mode SAR				
Front Face	1.29	0.094	0.042	1.426
Rear Face	0.999	0.253	0.201	1.453
Left Side	0.113	0	0.053	0.166
Right Side	0.146	0.046	0	0.192
Top Side	0	0.217	0.28	0.497
Bottom Side	0.319	0	0	0.319
Body-Worn SAR				
Front Face	1.29	0.094	0.042	1.426
Rear Face	0.999	0.253	0.201	1.453



FCC SAR Test Report

A D T

<Simultaneous Transmission Configuration 9>

Position	1xRTT BC10 (Voice)	1xEVDO BC0 (Data)	WLAN (Data)	Max. SAR Summation
Head SAR				
Right Cheek	0.332	0.23	0.205	0.767
Right Tilted	0.191	0.33	0.185	0.706
Left Cheek	0.361	0.188	0.129	0.678
Left Tilted	0.187	0.306	0.234	0.727
Hotspot Mode SAR				
Front Face	0.467	0.199	0.042	0.708
Rear Face	0.901	0.352	0.201	1.454
Left Side	0.556	0	0.053	0.609
Right Side	0.242	0.389	0	0.631
Top Side	0	0.067	0.28	0.347
Bottom Side	0.375	0	0	0.375
Body-Worn SAR				
Front Face	0.467	0.199	0.042	0.708
Rear Face	0.901	0.352	0.201	1.454

<Simultaneous Transmission Configuration 10>

Position	1xRTT BC10 (Voice)	1xEVDO BC1 (Data)	WLAN (Data)	Max. SAR Summation
Head SAR				
Right Cheek	0.332	0.406	0.205	0.943
Right Tilted	0.191	0.461	0.185	0.837
Left Cheek	0.361	0.497	0.129	0.987
Left Tilted	0.187	0.266	0.234	0.687
Hotspot Mode SAR				
Front Face	0.467	0.123	0.042	0.632
Rear Face	0.901	0.329	0.201	1.431
Left Side	0.556	0	0.053	0.609
Right Side	0.242	0.074	0	0.316
Top Side	0	0.291	0.28	0.571
Bottom Side	0.375	0	0	0.375
Body-Worn SAR				
Front Face	0.467	0.123	0.042	0.632
Rear Face	0.901	0.329	0.201	1.431



FCC SAR Test Report

A D T

<Simultaneous Transmission Configuration 11>

Position	1xRTT BC10 (Voice)	1xEVDO BC10 (Data)	WLAN (Data)	Max. SAR Summation
Head SAR				
Right Cheek	0.332	0.416	0.205	0.953
Right Tilted	0.191	0.318	0.185	0.694
Left Cheek	0.361	0.378	0.129	0.868
Left Tilted	0.187	0.267	0.234	0.688
Hotspot Mode SAR				
Front Face	0.467	0.208	0.042	0.717
Rear Face	0.901	0.291	0.201	1.393
Left Side	0.556	0	0.053	0.609
Right Side	0.242	0.354	0	0.596
Top Side	0	0.042	0.28	0.322
Bottom Side	0.375	0	0	0.375
Body-Worn SAR				
Front Face	0.467	0.208	0.042	0.717
Rear Face	0.901	0.325	0.201	1.427

<Simultaneous Transmission Configuration 12>

Position	1xRTT BC10 (Voice)	LTE 25 (Data)	WLAN (Data)	Max. SAR Summation
Head SAR				
Right Cheek	0.332	0.21	0.205	0.747
Right Tilted	0.191	0.246	0.185	0.622
Left Cheek	0.361	0.292	0.129	0.782
Left Tilted	0.187	0.164	0.234	0.585
Hotspot Mode SAR				
Front Face	0.467	0.094	0.042	0.603
Rear Face	0.901	0.253	0.201	1.355
Left Side	0.556	0	0.053	0.609
Right Side	0.242	0.046	0	0.288
Top Side	0	0.217	0.28	0.497
Bottom Side	0.375	0	0	0.375
Body-Worn SAR				
Front Face	0.467	0.094	0.042	0.603
Rear Face	0.901	0.253	0.201	1.355

Summary:

According to KDB 648474, the simultaneous transmission SAR for WWAN and WLAN was not required, because the SAR summation is less than 1.6 W/kg. The BT standalone SAR and WWAN/BT simultaneous transmission SAR were not required, because the maximum output power of Bluetooth is less than P_{Ref} (10.8 dBm) and the closest separation distance of these antennas is larger than 2.5 cm, and maximum WWAN SAR is less than 1.2 W/kg.



5. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Kit	SPEAG	D835V2	4d021	Mar. 23, 2011	Annual
System Validation Kit	SPEAG	D1900V2	5d022	Jan. 26, 2011	Annual
System Validation Kit	SPEAG	D1900V2	5d036	Jan. 26, 2012	Annual
System Validation Kit	SPEAG	D2450V2	716	Jan. 26, 2011	Annual
System Validation Kit	SPEAG	D2450V2	737	Jan. 24, 2012	Annual
System Validation Kit	SPEAG	D5GHzV2	1018	Jan. 18, 2012	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3590	Feb. 25, 2011	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3650	Oct. 26, 2011	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3661	Jan. 27, 2012	Annual
Dosimetric E-Field Probe	SPEAG	EX3DV4	3800	Aug. 05, 2011	Annual
Data Acquisition Electronics	SPEAG	DAE3	579	Sep. 23, 2011	Annual
Data Acquisition Electronics	SPEAG	DAE4	861	Aug. 29, 2011	Annual
Data Acquisition Electronics	SPEAG	DAE4	1277	Jul. 29, 2011	Annual
SAM Phantom	SPEAG	QD000P40CD	TP-1485	N/A	N/A
SAM Phantom	SPEAG	QD000P40CD	TP-1202	N/A	N/A
SAM Phantom	SPEAG	QD000P40CD	TP-1653	N/A	N/A
ELI Phantom	SPEAG	QDOVA001B	TP-1043	N/A	N/A
Radio Communication Tester	Agilent	E5515C	MY50266628	Sep. 26, 2011	Biennial
Radio Communication Analyzer	Anritsu	MT8820C	6201010284	Aug. 01, 2011	Biennial
ENA Series Network Analyzer	Agilent	E5071C	MY46104190	Apr. 15, 2011	Annual
Signal Generator	Agilent	E8257C	MY43320668	Dec. 20, 2011	Annual
Power Meter	Anritsu	ML2487A	6K00001571	May 25, 2011	Annual
Power Sensor	Anritsu	MA2491A	030954	May 25, 2011	Annual
Dielectric Probe Kit	Agilent	85070D	N/A	N/A	N/A
Thermometer	YFE	YF-160A	110600361	Feb. 21, 2012	Annual

6. Measurement Uncertainty

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)	Vi
Measurement System						
Probe Calibration	6.0	Normal	1	1	± 6.0 %	∞
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %	∞
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %	∞
Boundary Effects	1.0	Rectangular	√3	1	± 0.6 %	∞
Linearity	4.7	Rectangular	√3	1	± 2.7 %	∞
System Detection Limits	1.0	Rectangular	√3	1	± 0.6 %	∞
Readout Electronics	0.6	Normal	1	1	± 0.6 %	∞
Response Time	0.0	Rectangular	√3	1	± 0.0 %	∞
Integration Time	1.7	Rectangular	√3	1	± 1.0 %	∞
RF Ambient Noise	3.0	Rectangular	√3	1	± 1.7 %	∞
RF Ambient Reflections	3.0	Rectangular	√3	1	± 1.7 %	∞
Probe Positioner	0.5	Rectangular	√3	1	± 0.3 %	∞
Probe Positioning	2.9	Rectangular	√3	1	± 1.7 %	∞
Max. SAR Eval.	2.3	Rectangular	√3	1	± 1.3 %	∞
Test Sample Related						
Device Positioning	3.9	Normal	1	1	± 3.9 %	31
Device Holder	2.7	Normal	1	1	± 2.7 %	19
Power Drift	5.0	Rectangular	√3	1	± 2.9 %	∞
Phantom and Setup						
Phantom Uncertainty	4.0	Rectangular	√3	1	± 2.3 %	∞
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	± 1.8 %	∞
Liquid Conductivity (Meas.)	5.0	Normal	1	0.64	± 3.2 %	29
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	± 1.7 %	∞
Liquid Permittivity (Meas.)	5.0	Normal	1	0.6	± 3.0 %	29
Combined Standard Uncertainty					± 11.7 %	
Expanded Uncertainty (K=2)					± 23.4 %	

Uncertainty budget for frequency range 300 MHz to 3 GHz



FCC SAR Test Report

A D T

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)	Vi
Measurement System						
Probe Calibration	6.55	Normal	1	1	± 6.55 %	∞
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %	∞
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %	∞
Boundary Effects	2.0	Rectangular	√3	1	± 1.2 %	∞
Linearity	4.7	Rectangular	√3	1	± 2.7 %	∞
System Detection Limits	1.0	Rectangular	√3	1	± 0.6 %	∞
Readout Electronics	0.3	Normal	1	1	± 0.3 %	∞
Response Time	0.8	Rectangular	√3	1	± 0.5 %	∞
Integration Time	2.6	Rectangular	√3	1	± 1.5 %	∞
RF Ambient Noise	3.0	Rectangular	√3	1	± 1.7 %	∞
RF Ambient Reflections	3.0	Rectangular	√3	1	± 1.7 %	∞
Probe Positioner	0.8	Rectangular	√3	1	± 0.5 %	∞
Probe Positioning	9.9	Rectangular	√3	1	± 5.7 %	∞
Max. SAR Eval.	4.0	Rectangular	√3	1	± 2.3 %	∞
Test Sample Related						
Device Positioning	3.9	Normal	1	1	± 3.9 %	31
Device Holder	2.7	Normal	1	1	± 2.7 %	19
Power Drift	5.0	Rectangular	√3	1	± 2.9 %	∞
Phantom and Setup						
Phantom Uncertainty	4.0	Rectangular	√3	1	± 2.3 %	∞
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	± 1.8 %	∞
Liquid Conductivity (Meas.)	5.0	Normal	1	0.64	± 3.2 %	30
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	± 1.7 %	∞
Liquid Permittivity (Meas.)	5.0	Normal	1	0.6	± 3.0 %	30
Combined Standard Uncertainty					± 13.4 %	
Expanded Uncertainty (K=2)					± 26.8 %	

Uncertainty budget for frequency range 3 GHz to 6 GHz



7. Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site. If you have any comments, please feel free to contact us at the following:

Taiwan HwaYa EMC/RF/Safety/Telecom Lab:

Add: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-318-3232

Fax: 886-3-318-5050

Taiwan LinKo EMC/RF Lab:

Add: No. 47, 14th Ling, Chia Pau Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C.

Tel: 886-2-2605-2180

Fax: 886-2-2605-1924

Taiwan HsinChu EMC/RF Lab:

Add: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Vil., Chiung Lin Township, Hsinchu County 307, Taiwan, R.O.C.

Tel: 886-3-593-5343

Fax: 886-3-593-5342

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The road map of all our labs can be found in our web site also.

---END---



Appendix A. SAR Plots of System Verification

The plots for system verification are shown as follows.



Appendix B. SAR Plots of SAR Measurement

The plots for SAR measurement are shown as follows.



Appendix C. Calibration Certificate for Probe and Dipole

The SPEAG calibration certificates are shown as follows.



Appendix D. Photographs of EUT and Setup