



FCC RF Test Report

APPLICANT : HTC Corporation
EQUIPMENT : Smartphone
MODEL NAME : PK76310
FCC ID : NM8PK76310
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
Tx/Rx FREQUENCY RANGE : CDMA2000 BC0 : 824.70 ~ 848.31 MHz /
869.70 ~ 893.31 MHz
CDMA2000 BC1 : 1851.25 ~ 1908.75 MHz /
1931.25 ~ 1988.75 MHz
CDMA2000 BC15 : 1711.25 ~ 1753.75 MHz /
2111.25 ~ 2153.75 MHz
MAX. ERP/EIRP POWER : CDMA2000 BC0 : 0.0832 W
CDMA2000 BC1 : 0.1365 W
CDMA2000 BC15 : 0.1986 W

The product was received on Feb. 17, 2012 and completely tested on Mar. 26, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test..... 5

 1.4 Emission Designator 6

 1.5 Testing Site..... 6

 1.6 Applied Standards 6

 1.7 Ancillary Equipment List 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Test Mode..... 8

 2.2 Connection Diagram of Test System 9

3 TEST RESULT 10

 3.1 Conducted Output Power Measurement 10

 3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement 12

 3.3 Occupied Bandwidth Measurement 17

 3.4 Band Edge Measurement..... 27

 3.5 Conducted Emission Measurement 34

 3.6 Field Strength of Spurious Radiation Measurement 43

 3.7 Frequency Stability Measurement..... 57

4 LIST OF MEASURING EQUIPMENT 61

5 UNCERTAINTY OF EVALUATION 62

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	N/A	Conducted Output Power	N/A	PASS	-
3.2	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.2	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.2	§27.50(d)(2)	RSS-139 (6.4) SRSP-513(5.1.2)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.3	§2.1049 §22.917(a) §24.238(a) §27.53(g)	N/A	Occupied Bandwidth	N/A	PASS	-
3.4	§2.1051 §22.917(a) §24.238(a) §27.53(g)	RSS-132 (4.5.1) RSS-133 (6.5.1) RSS-139 (6.5)	Band Edge Measurement	< 43+10log ₁₀ (P[Watts])	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a) §27.53(g)	RSS-132 (4.5.1) RSS-133 (6.5.1) RSS-139 (6.5)	Conducted Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
3.6	§2.1053 §22.917(a) §24.238(a) §27.53(g)	RSS-132 (4.5.1) RSS-133 (6.5.1) RSS-139 (6.5)	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 20.54 dB at 13850.000 MHz
3.7	§2.1055 §22.355 §24.235 §27.54	RSS-132 (4.3) RSS-133 (6.3) RSS-139 (6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

1 General Description

1.1 Applicant

HTC Corporation

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan

1.2 Manufacturer

HTC Corporation

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Smartphone
Model Name	PK76310
FCC ID	NM8PK76310
Sample 1	EUT with LCM1, Camera 1, and Battery 1
Sample 2	EUT with LCM2, Camera 2, and Battery 2
Tx Frequency	CDMA2000 BC0 : 824 MHz ~ 849 MHz CDMA2000 BC1 : 1850 MHz ~ 1910 MHz CDMA2000 BC15 : 1710 ~ 1755 MHz
Rx Frequency	CDMA2000 BC0 : 869 MHz ~ 894 MHz CDMA2000 BC1 : 1930 MHz ~ 1990 MHz CDMA2000 BC15 : 2110 ~ 2155 MHz
Maximum Output Power to Antenna	CDMA2000 BC0 : 23.45 dBm CDMA2000 BC1 : 23.21 dBm CDMA2000 BC15 : 23.33 dBm
Antenna Type	Fixed Internal Antenna
Type of Modulation	QPSK
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Emission Designator

FCC Rule	System	Type of Modulation	Emission Designator	Maximum ERP/EIRP
Part 22	CDMA2000 BC0 1xEV-DO Rev. A	QPSK	1M28F9W	0.0832 W
Part 24	CDMA2000 BC1 1xEV-DO Rev. 0	QPSK	1M28F9W	0.1365 W
Part 27	CDMA2000 BC15 1xEV-DO Rev. 0	QPSK	1M27F9W	0.1986 W

1.5 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH05-HY	722060/4086B-1

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- 47 CFR Part 2, 22(H), 24(E), 27(L)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v01
- IC RSS-132 Issue 2
- IC RSS-133 Issue 5
- IC RSS-139 Issue 2

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.7 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Agilent	8960	N/A	N/A	N/A



2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for CDMA2000 BC0.
2. 30 MHz to 19000 MHz for CDMA2000 BC1.
3. 30 MHz to 18000 MHz for CDMA2000 BC15.

Test Modes		
Band	Radiated TCs	Conducted TCs
CDMA2000 BC0	<ul style="list-style-type: none">■ 1xEV-DO Rev. A Link Mode for Sample 1■ 1xEV-DO Rev. A Link Mode for Sample 2	<ul style="list-style-type: none">■ 1xEV-DO Rev. A Link Mode
CDMA2000 BC1	<ul style="list-style-type: none">■ 1xEV-DO Rev. 0 Link Mode for Sample 1■ 1xEV-DO Rev. 0 Link Mode for Sample 2	<ul style="list-style-type: none">■ 1xEV-DO Rev. 0 Link Mode
CDMA2000 BC15	<ul style="list-style-type: none">■ 1xEV-DO Rev. 0 Link Mode for Sample 1■ 1xEV-DO Rev. 0 Link Mode for Sample 2	<ul style="list-style-type: none">■ 1xEV-DO Rev. 0 Link Mode

Note:


1. The maximum RF output power levels are 1xEV-DO Rev. 0 mode for CDMA2000 BC0, 1xEV-DO Rev. 0 mode for CDMA2000 BC1 and 1xEV-DO Rev. 0 mode for CDMA2000 BC15 on QPSK link; only these modes were used for all tests.
2. Because there are individual antennas for each CDMA2000, WLAN, and Bluetooth, the co-location test modes are not required.

The conducted power tables are as follows:

Conducted Power (*Unit: dBm)						
Band	CDMA2000 BC0			CDMA2000 BC1		
Channel	1013	384	777	25	600	1175
Frequency	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1+SO55	23.41	23.36	23.37	23.19	23.15	23.12
1xRTT RC3+SO55	23.32	23.33	23.22	23.08	23.09	23.10
1xRTT RC3+SO32 (FCH)	23.34	23.35	23.25	23.12	23.11	23.13
1xRTT RC3+SO32 (FCH+SCH)	23.30	23.32	23.18	23.04	23.06	23.07
1xEVDO RTAP 153.6K	23.39	23.40	23.33	23.15	23.20	23.21
1xEVDO RETAP 4096K	23.40	23.45	23.35	23.16	23.20	23.11

Conducted Power (*Unit: dBm)			
Band	CDMA2000 BC15		
Channel	25	425	875
Frequency	1711.25	1731.25	1753.75
1xRTT RC1+SO55	23.03	23.05	23.01
1xRTT RC3+SO55	23.02	23.03	23.01
1xRTT RC3+SO32 (FCH)	23.10	23.21	23.07
1xRTT RC3+SO32 (FCH+SCH)	23.04	23.13	23.02
1xEVDO RTAP 153.6K	23.21	23.33	23.24
1xEVDO RETAP 4096K	23.25	23.27	23.22

2.2 Connection Diagram of Test System

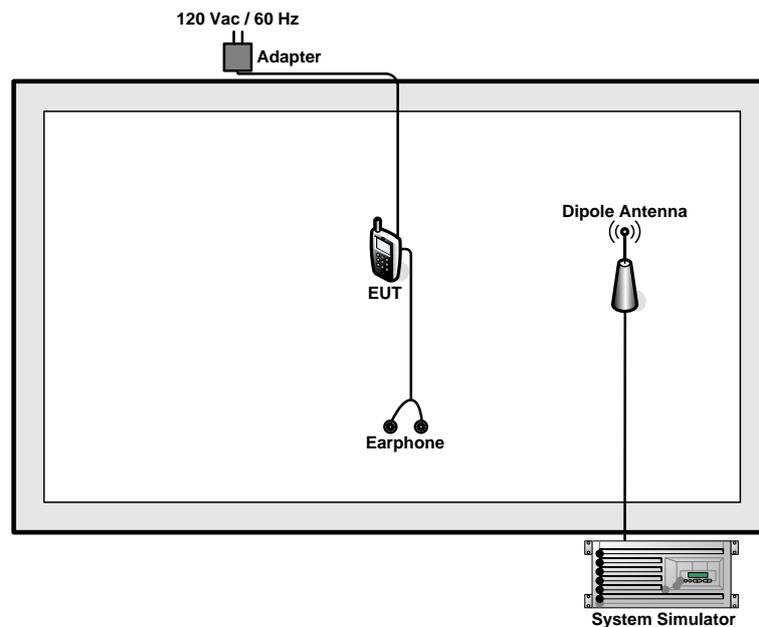

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

3.1.4 Test Setup

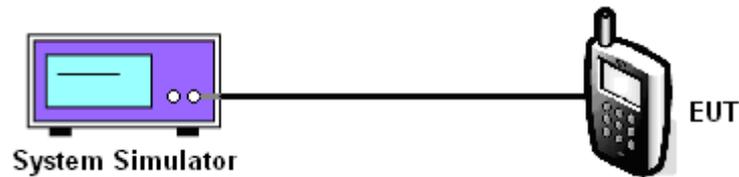



3.1.5 Test Result of Conducted Output Power

CDMA2000 BC0			
Test Mode	CDMA 2000 1xEV-DO Rev. A		
Test Status	RETAP 4096K		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
Conducted Power (dBm)	23.40	23.45	23.35
Conducted Power (Watts)	0.22	0.22	0.22

CDMA2000 BC1			
Test Mode	CDMA 2000 1xEV-DO Rev. 0		
Test Status	RTAP 153.6K		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880.00	1908.75
Conducted Power (dBm)	23.15	23.20	23.21
Conducted Power (Watts)	0.21	0.21	0.21

CDMA2000 BC15			
Test Mode	CDMA 2000 1xEV-DO Rev. 0		
Test Status	RTAP 153.6K		
Channel	25 (Low)	425 (Mid)	875 (High)
Frequency (MHz)	1711.25	1731.25	1753.75
Conducted Power (dBm)	23.21	23.33	23.24
Conducted Power (Watts)	0.21	0.22	0.21



3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.2.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v01. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The EUT was placed on a turntable with 1.0 meter height in a fully anechoic chamber.
2. The EUT was set at 1.2 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiated power.
4. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
5. Taking the record of maximum ERP/EIRP.
6. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
7. The conducted power at the terminal of the dipole antenna is measured.
8. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
9. $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

P_s (dBm) : Input power to substitution antenna.

G_s (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$


$E_s = R_s + AF$

AF (dB/m) : Receive antenna factor

R_t : The highest received signal in spectrum analyzer for EUT.

R_s : The highest received signal in spectrum analyzer for substitution antenna.

3.2.4 Test Setup

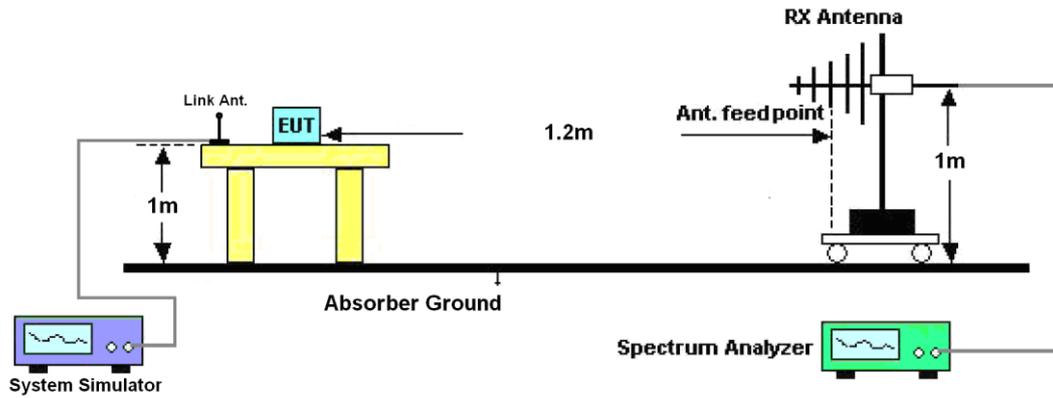



3.2.5 Test Result of ERP

<Sample 1>

CDMA2000 BC0 1xEV-DO Rev. A_RETAP 4096K Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.70	-29.22	-48.12	0.00	-1.08	17.82	0.0605
836.52	-28.60	-48.28	0.00	-0.93	18.75	0.0750
848.31	-28.86	-48.35	0.00	-0.76	18.73	0.0746
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.70	-44.16	-47.97	0.00	-1.08	2.73	0.0019
836.52	-43.20	-48.01	0.00	-0.93	3.88	0.0024
848.31	-42.98	-48.05	0.00	-0.76	4.31	0.0027

<Sample 2>

CDMA2000 BC0 1xEV-DO Rev. A_RETAP 4096K Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.70	-29.40	-48.12	0.00	-1.08	17.64	0.0581
836.52	-28.81	-48.28	0.00	-0.93	18.54	0.0714
848.31	-28.39	-48.35	0.00	-0.76	19.20	0.0832
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.70	-44.53	-47.97	0.00	-1.08	2.36	0.0017
836.52	-43.30	-48.01	0.00	-0.93	3.78	0.0024
848.31	-42.49	-48.05	0.00	-0.76	4.80	0.0030



3.2.6 Test Result of EIRP

<Sample 1>

CDMA2000 BC1 1xEV-DO Rev. 0_RTAP 153.6K Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1851.25	-34.43	-51.88	0.00	1.96	19.41	0.0873
1880.00	-35.14	-52.99	0.00	2.00	19.85	0.0966
1908.75	-36.10	-54.28	0.00	1.98	20.16	0.1038
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1851.25	-33.65	-52.13	0.00	1.96	20.44	0.1107
1880.00	-34.38	-53.17	0.00	2.00	20.79	0.1199
1908.75	-35.37	-54.13	0.00	1.98	20.74	0.1186

<Sample 2>

CDMA2000 BC1 1xEV-DO Rev. 0_RTAP 153.6K Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1851.25	-33.04	-51.88	0.00	1.96	20.80	0.1202
1880.00	-34.33	-52.99	0.00	2.00	20.66	0.1164
1908.75	-35.95	-54.28	0.00	1.98	20.31	0.1074
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1851.25	-32.74	-52.13	0.00	1.96	21.35	0.1365
1880.00	-34.50	-53.17	0.00	2.00	20.67	0.1167
1908.75	-35.19	-54.13	0.00	1.98	20.92	0.1236



<Sample 1>

CDMA2000 BC15 1xEV-DO Rev. 0_RTAP 153.6K Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1711.25	-33.00	-51.88	0.00	1.96	20.84	0.1213
1731.25	-33.87	-52.99	0.00	2.00	21.12	0.1294
1753.75	-35.24	-54.28	0.00	1.98	21.02	0.1265
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1711.25	-32.22	-52.13	0.00	1.96	21.87	0.1538
1731.25	-33.05	-53.17	0.00	2.00	22.12	0.1629
1753.75	-33.77	-54.13	0.00	1.98	22.34	0.1714

<Sample 2>

CDMA2000 BC15 1xEV-DO Rev. 0_RTAP 153.6K Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1711.25	-32.96	-51.88	0.00	1.96	20.88	0.1225
1731.25	-33.63	-52.99	0.00	2.00	21.36	0.1368
1753.75	-33.91	-54.28	0.00	1.98	22.35	0.1718
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1711.25	-32.47	-52.13	0.00	1.96	21.62	0.1452
1731.25	-32.71	-53.17	0.00	2.00	22.46	0.1762
1753.75	-33.13	-54.13	0.00	1.98	22.98	0.1986

3.3 Occupied Bandwidth Measurement

3.3.1 Description of Occupied Bandwidth Measurement

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers were measured.

3.3.4 Test Setup

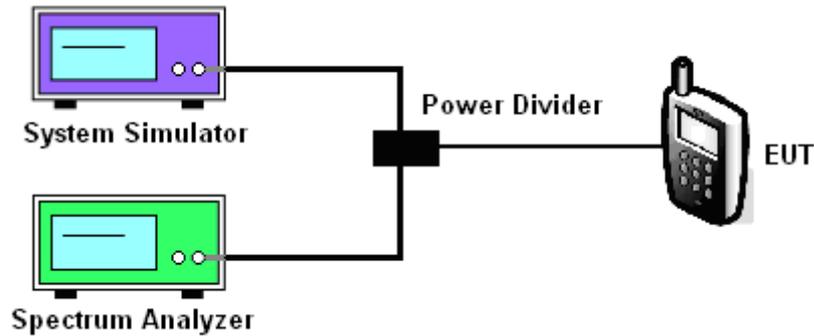




3.3.5 Test Result (Plots) of Occupied Bandwidth


Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xEV-DO Rev. A_RETAP 4096K		

99% Occupied Bandwidth Plot on Channel 1013

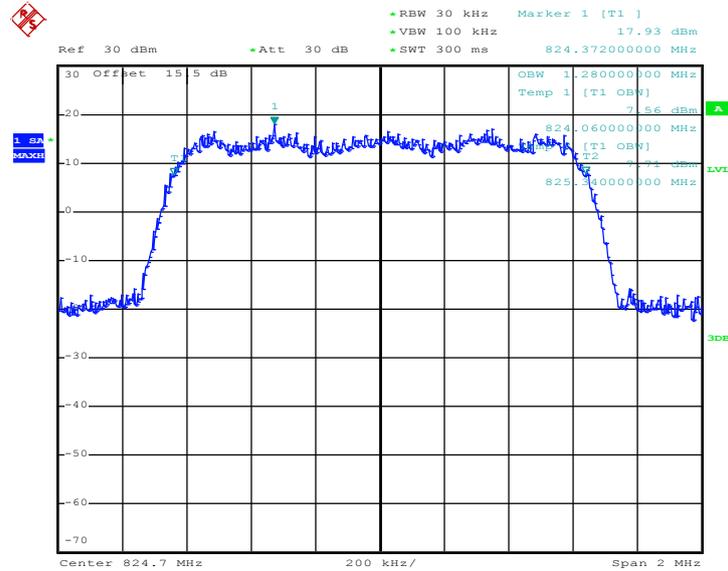

Date: 27.FEB.2012 20:01:58

26dB Bandwidth Plot on Channel 1013

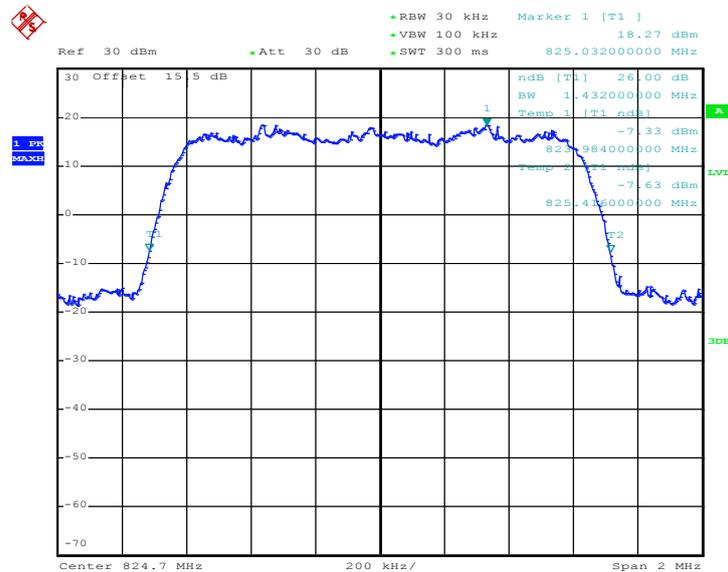


Date: 27.FEB.2012 19:39:52




Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xEV-DO Rev. A_RETAP 4096K		

99% Occupied Bandwidth Plot on Channel 384

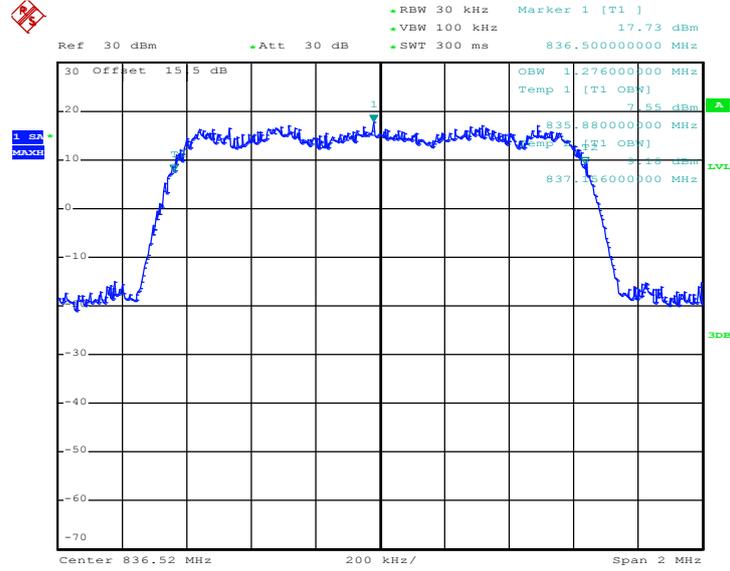

Date: 27.FEB.2012 19:57:31

26dB Bandwidth Plot on Channel 384

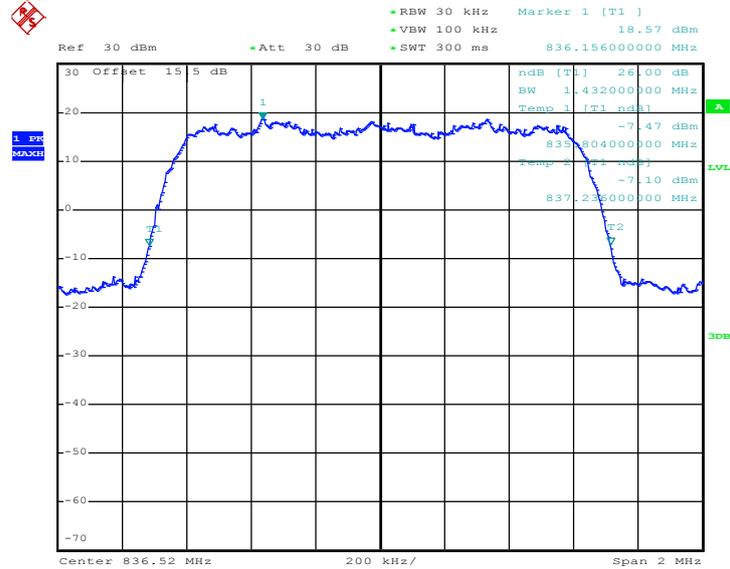


Date: 27.FEB.2012 19:37:02




Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xEV-DO Rev. A_RETAP 4096K		

99% Occupied Bandwidth Plot on Channel 777

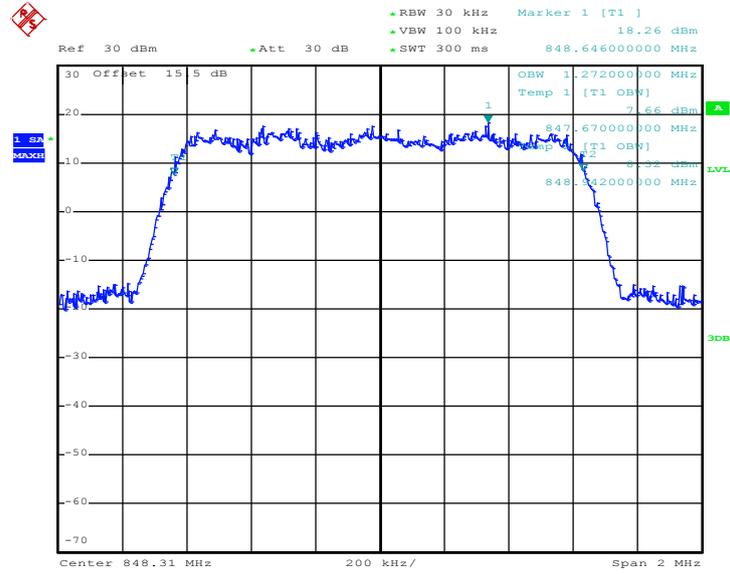

Date: 27.FEB.2012 19:56:08

26dB Bandwidth Plot on Channel 777

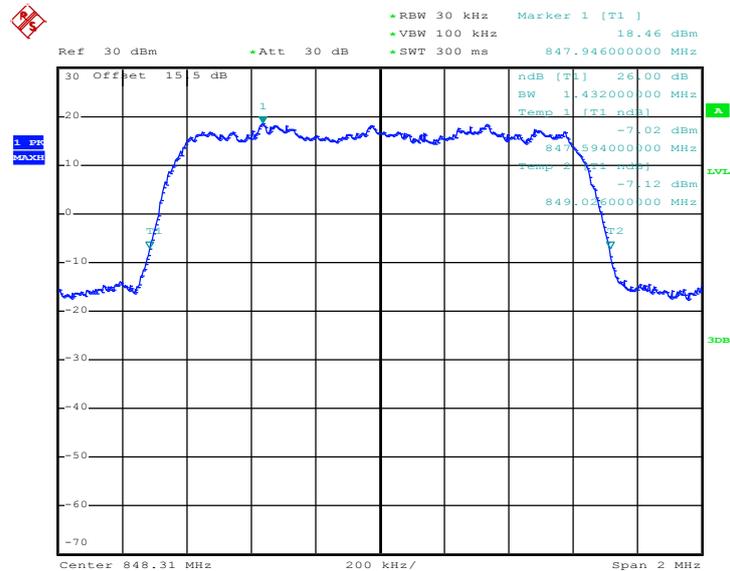


Date: 27.FEB.2012 19:38:28




Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

99% Occupied Bandwidth Plot on Channel 25

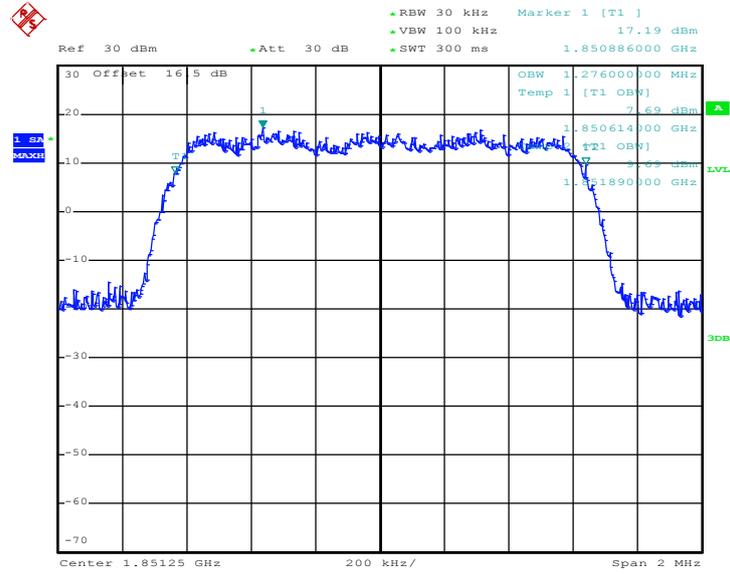

Date: 27.FEB.2012 18:23:12

26dB Bandwidth Plot on Channel 25

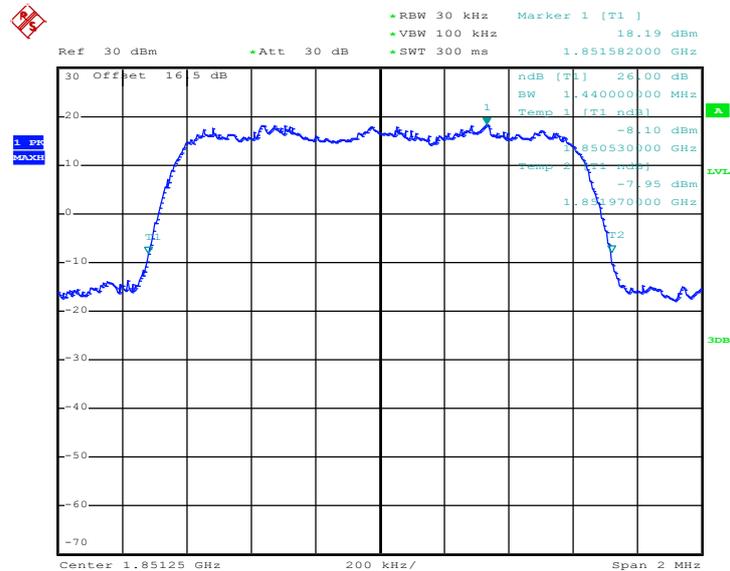


Date: 27.FEB.2012 18:11:38




Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

99% Occupied Bandwidth Plot on Channel 600

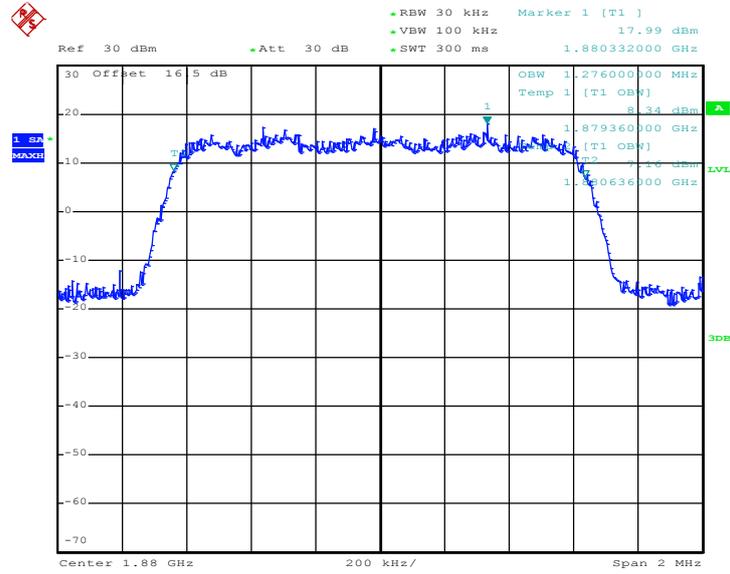

Date: 27.FEB.2012 18:26:12

26dB Bandwidth Plot on Channel 600

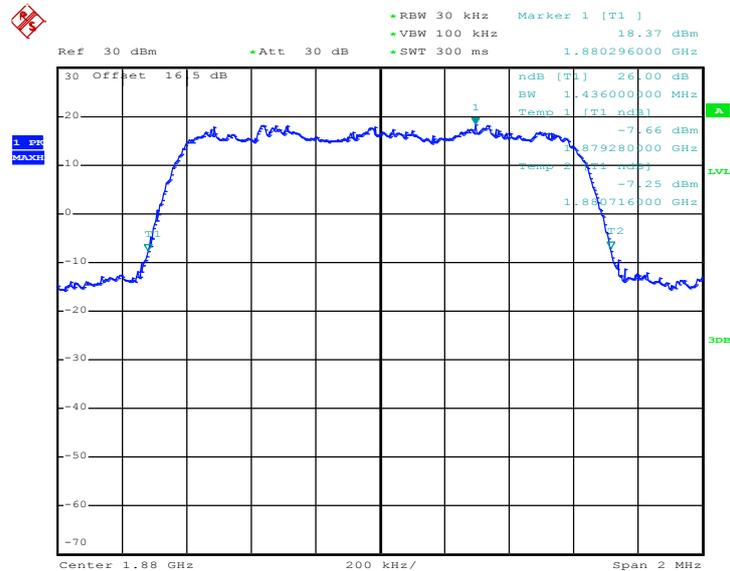


Date: 27.FEB.2012 18:13:00




Band :	CDMA2000 BC15	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

99% Occupied Bandwidth Plot on Channel 25

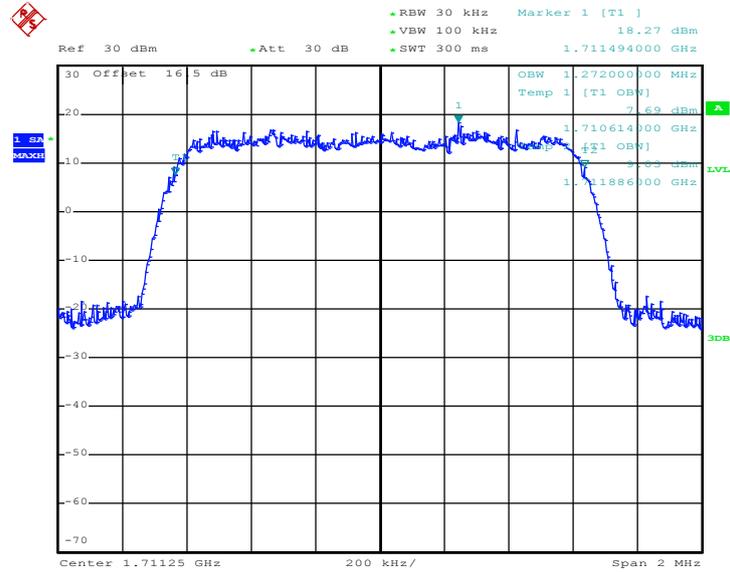

Date: 27.FEB.2012 20:33:56

26dB Bandwidth Plot on Channel 25

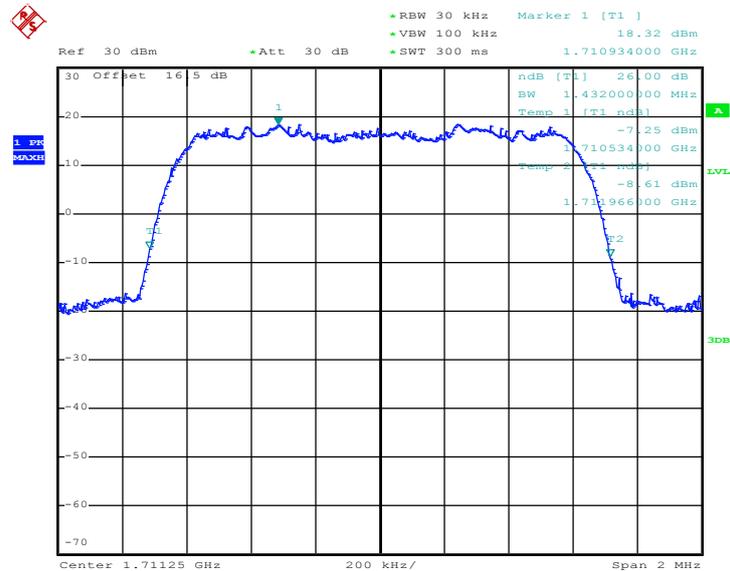


Date: 27.FEB.2012 20:24:32




Band :	CDMA2000 BC15	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

99% Occupied Bandwidth Plot on Channel 425

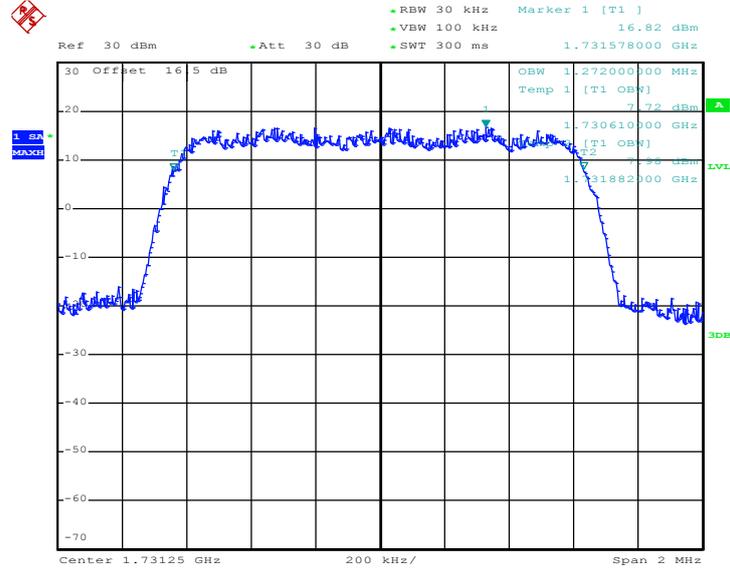

Date: 27.FEB.2012 20:35:05

26dB Bandwidth Plot on Channel 425

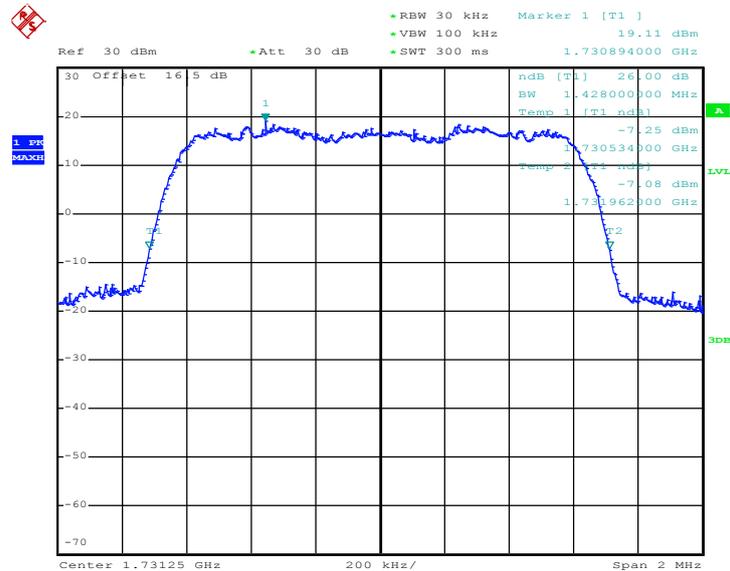

Date: 27.FEB.2012 20:25:25

3.4 Band Edge Measurement

3.4.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

3. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
4. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly $BW/100$.
5. The RBW was replaced by 10 kHz, slightly smaller than the value in (2), due to the spectrum analyzer limitation to set the exact value. A worst case correction factor of $10 \cdot \log (1\% \text{ emission-BW}/\text{measurement RBW})$ was compensated.

3.4.4 Test Setup

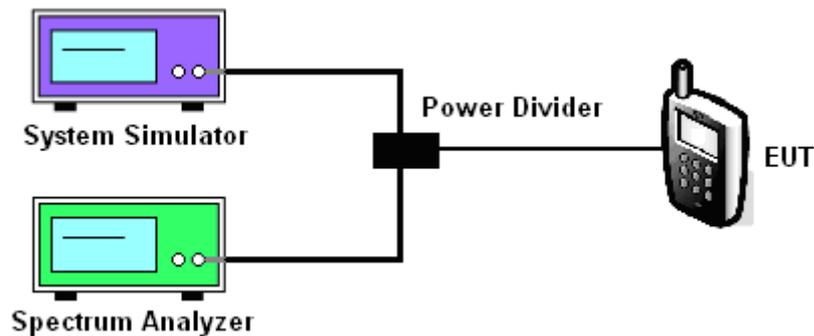




3.4.5 Test Result (Plots) of Conducted Band Edge

Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xEV-DO Rev. A_RETAP 4096K	Max. 26dB Bandwidth :	1.432MHz
Correction Factor :	1.56dB	Measurement Value :	-19.63dBm
Band Edge :	-18.07dBm		

Lower Band Edge Plot on Channel 1013

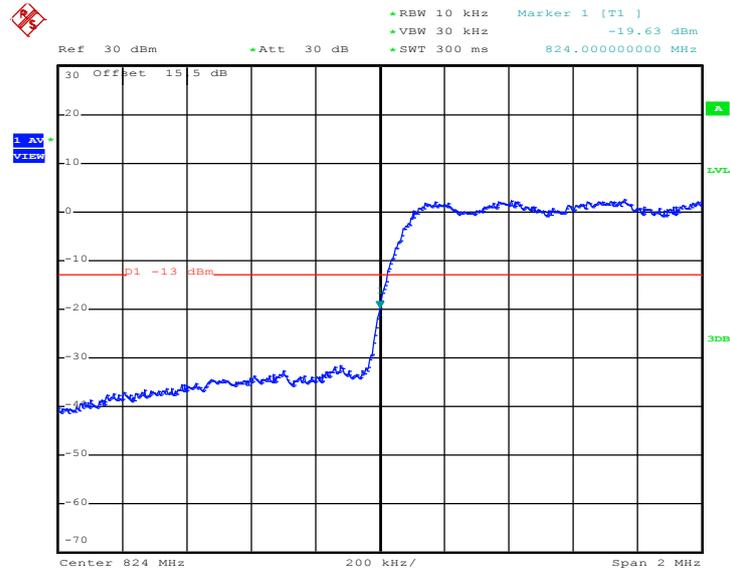


Date: 27.FEB.2012 19:48:16

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xEV-DO Rev. A_RETAP 4096K	Max. 26dB Bandwidth :	1.432MHz
Correction Factor :	1.56dB	Measurement Value :	-16.45dBm
Band Edge :	-14.89dBm		

Higher Band Edge Plot on Channel 777

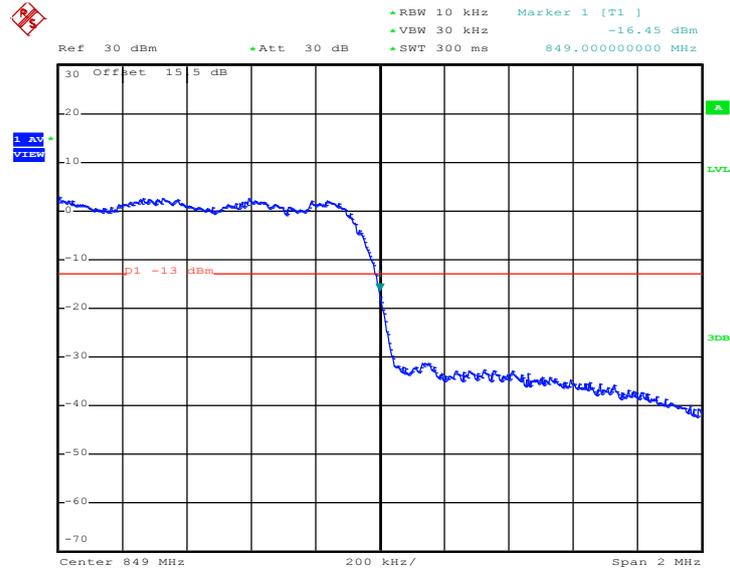


Date: 27.FEB.2012 19:45:34

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K	Max. 26dB Bandwidth :	1.440MHz
Correction Factor :	1.58dB	Measurement Value :	-34.68dBm
Band Edge :	-33.10dBm		

Lower Band Edge Plot on Channel 25

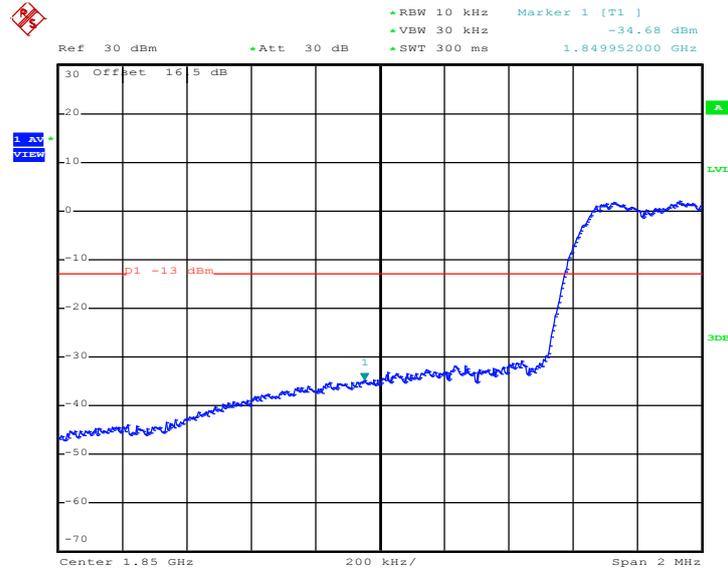


Date: 15.MAR.2012 18:17:56

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K	Max. 26dB Bandwidth :	1.440MHz
Correction Factor :	1.58dB	Measurement Value :	-34.38dBm
Band Edge :	-32.80dBm		

Higher Band Edge Plot on Channel 1175

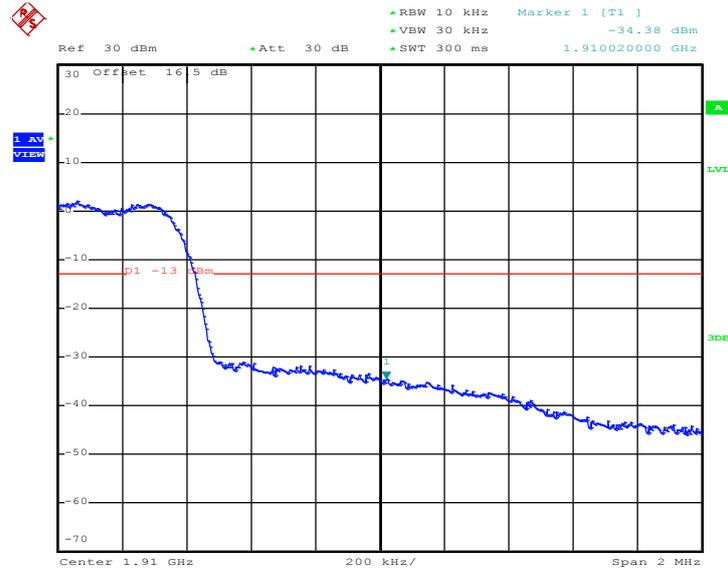


Date: 15.MAR.2012 18:22:39

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	CDMA2000 BC15	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K	Max. 26dB Bandwidth :	1.432MHz
Correction Factor :	1.56dB	Measurement Value :	-37.54dBm
Band Edge :	-35.98dBm		

Lower Band Edge Plot on Channel 25

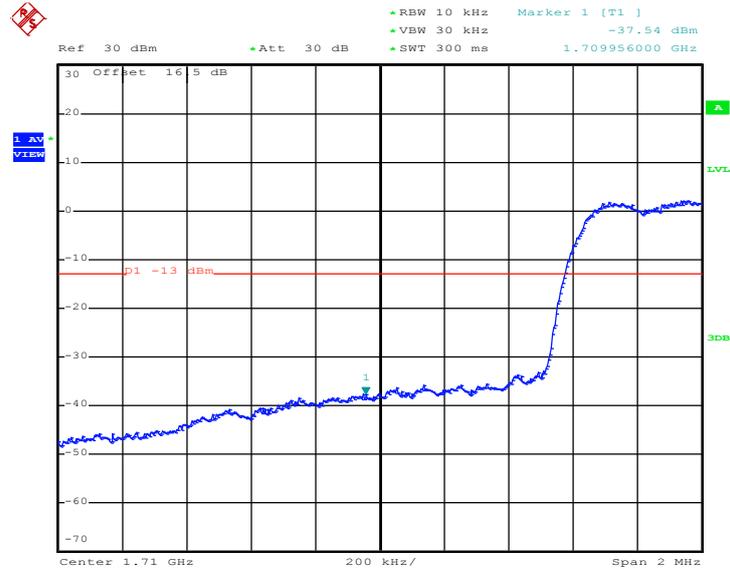


Date: 27.FEB.2012 20:28:40

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	CDMA2000 BC15	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K	Max. 26dB Bandwidth :	1.432MHz
Correction Factor :	1.56dB	Measurement Value :	-36.29dBm
Band Edge :	-34.73dBm		

Higher Band Edge Plot on Channel 875

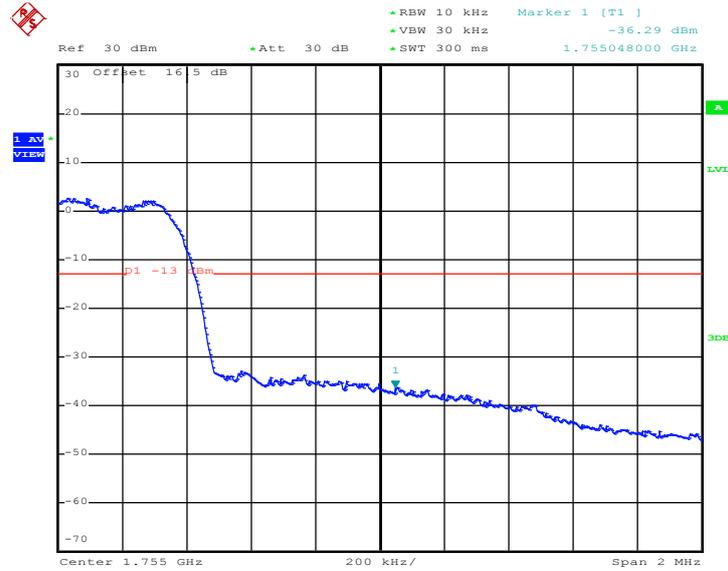

Date: 27.FEB.2012 20:32:00

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

3.5 Conducted Emission Measurement

3.5.1 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.

3.5.4 Test Setup

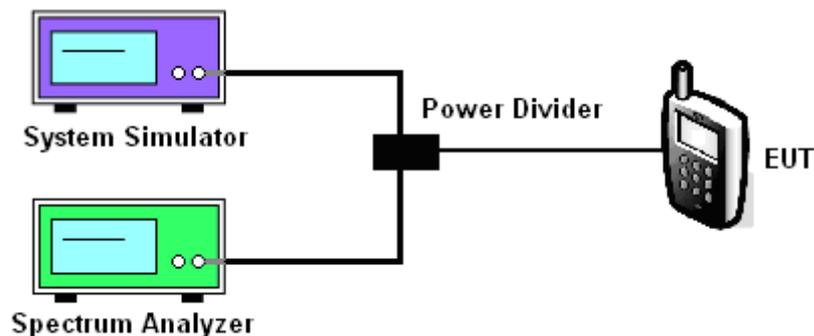




3.5.5 Test Result (Plots) of Conducted Emission


Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xEV-DO Rev. A_RETAP 4096K		

Conducted Emission Plot between 30MHz ~ 1GHz

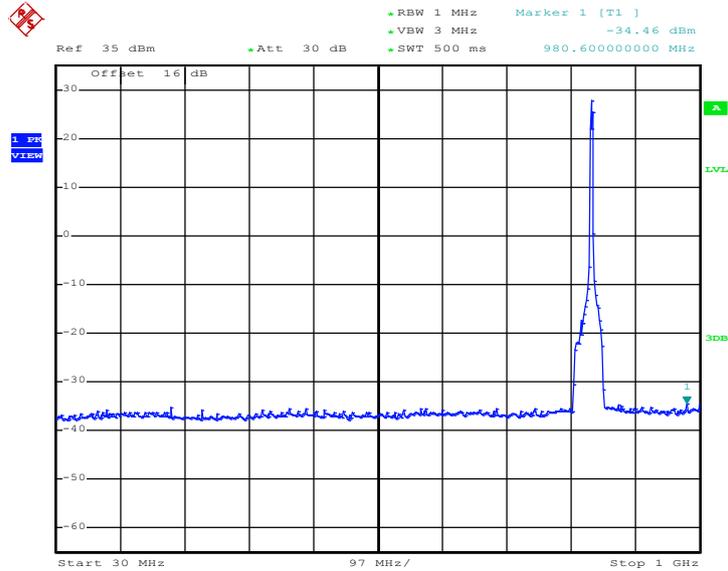

Date: 26.MAR.2012 16:39:00


Conducted Emission Plot between 1GHz ~ 3GHz

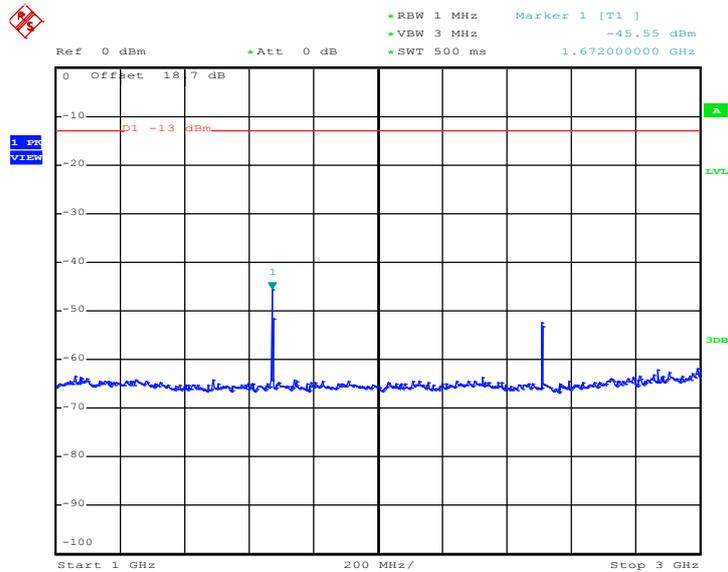

Date: 27.FEB.2012 19:32:17




Conducted Emission Plot between 3GHz ~ 7GHz

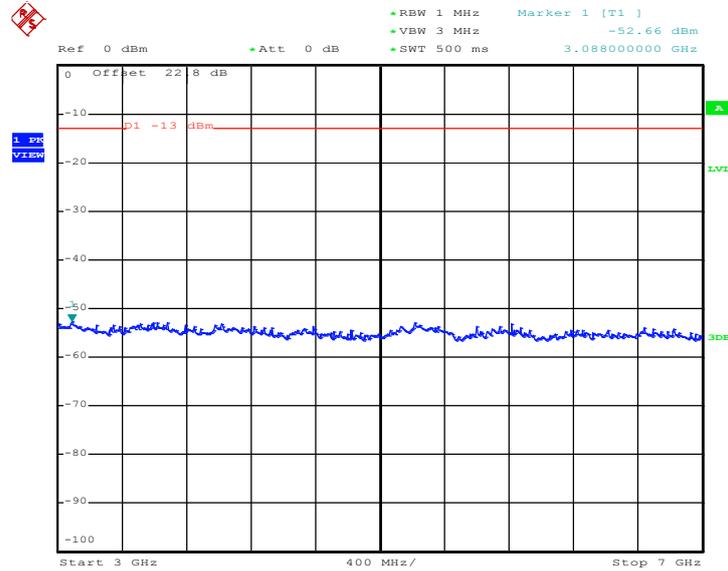

Date: 27.FEB.2012 19:32:30

Conducted Emission Plot between 7GHz ~ 9GHz

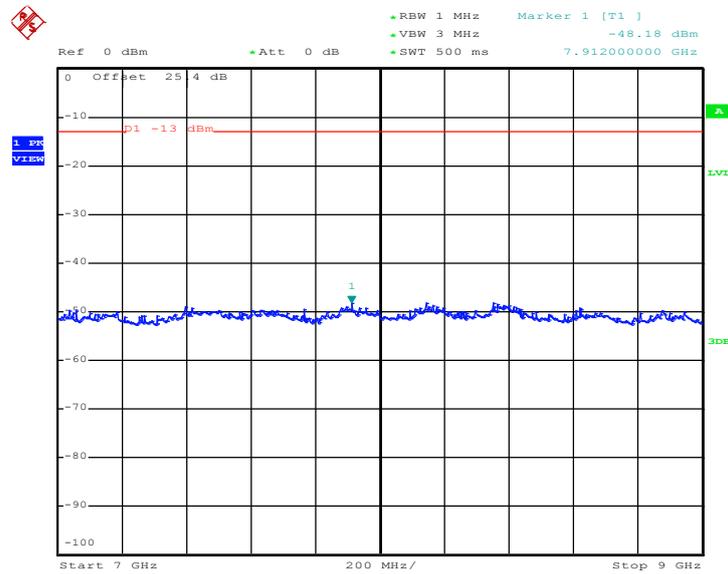


Date: 27.FEB.2012 19:32:42




Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

Conducted Emission Plot between 30MHz ~ 1GHz

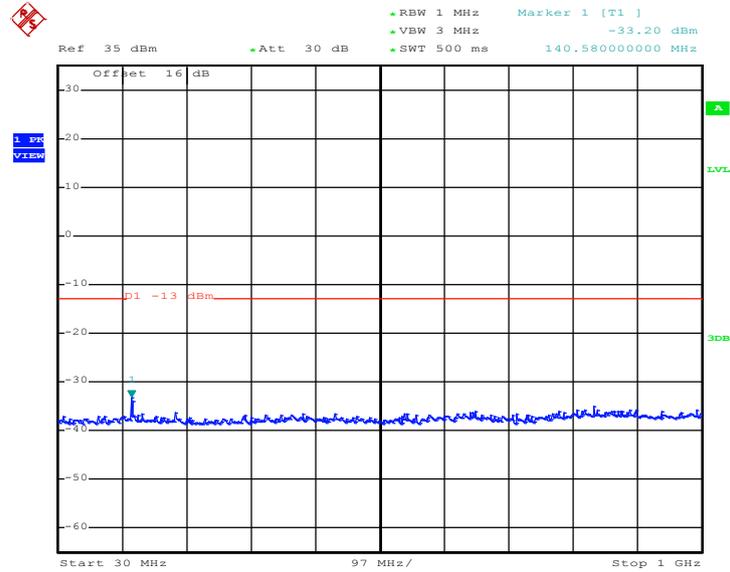

Date: 27.FEB.2012 18:28:56


Conducted Emission Plot between 1GHz ~ 3GHz

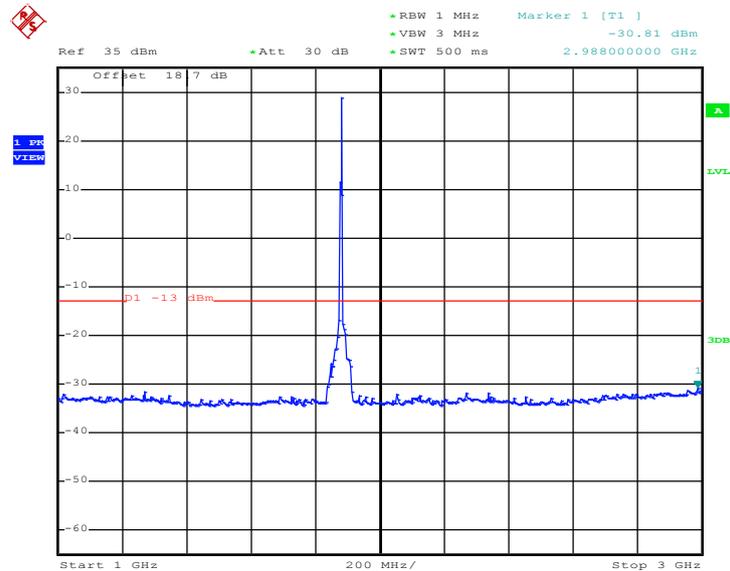

Date: 27.FEB.2012 19:12:52




Conducted Emission Plot between 3GHz ~ 7GHz

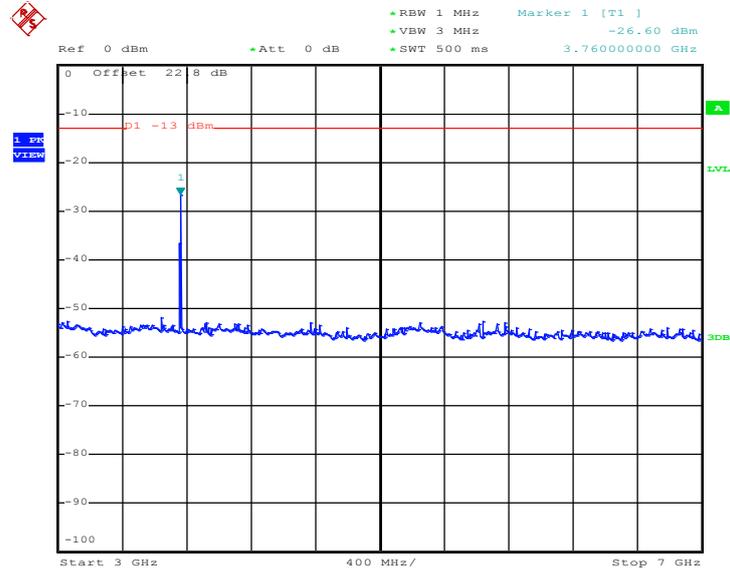

Date: 27.FEB.2012 19:13:16


Conducted Emission Plot between 7GHz ~ 13.6GHz

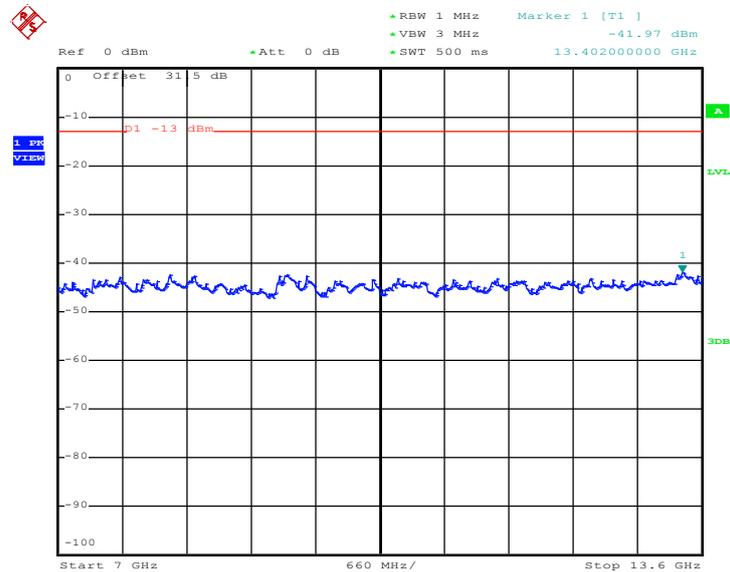

Date: 27.FEB.2012 19:13:29



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

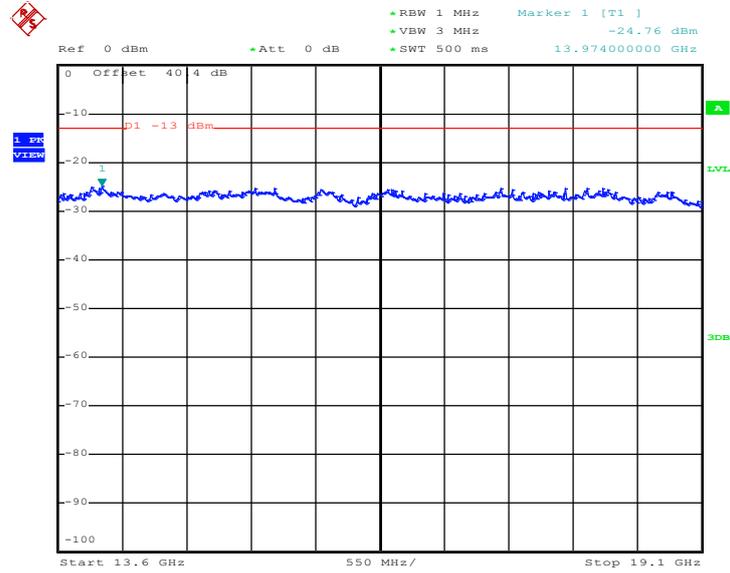


Date: 27.FEB.2012 19:13:42




Band :	CDMA2000 BC15	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

Conducted Emission Plot between 30MHz ~ 1GHz

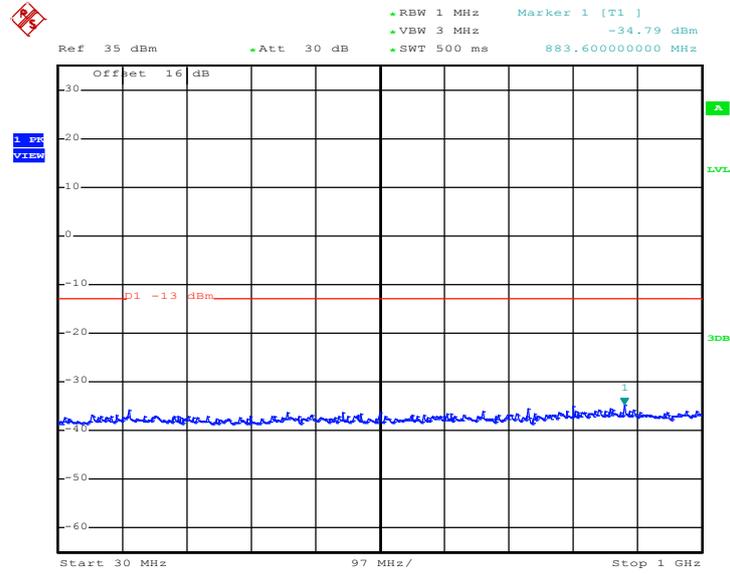

Date: 27.FEB.2012 20:41:05


Conducted Emission Plot between 1GHz ~ 3GHz

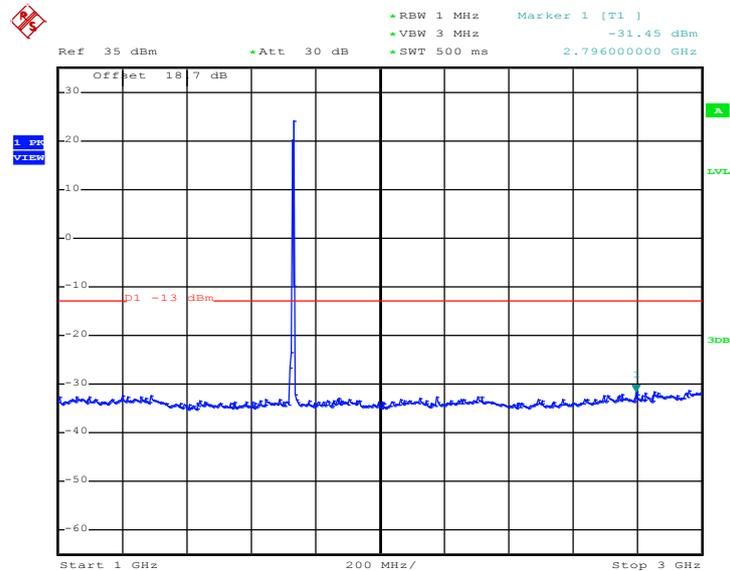

Date: 27.FEB.2012 20:44:32




Conducted Emission Plot between 3GHz ~ 7GHz

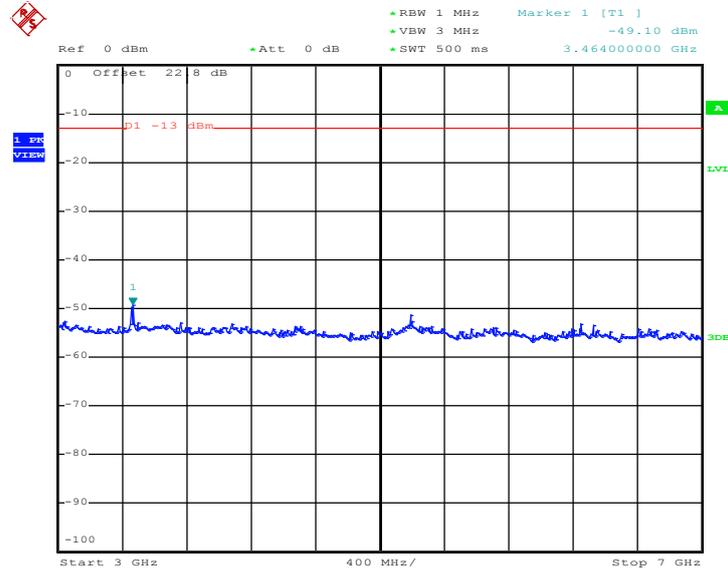

Date: 27.FEB.2012 20:45:02


Conducted Emission Plot between 7GHz ~ 13.6GHz

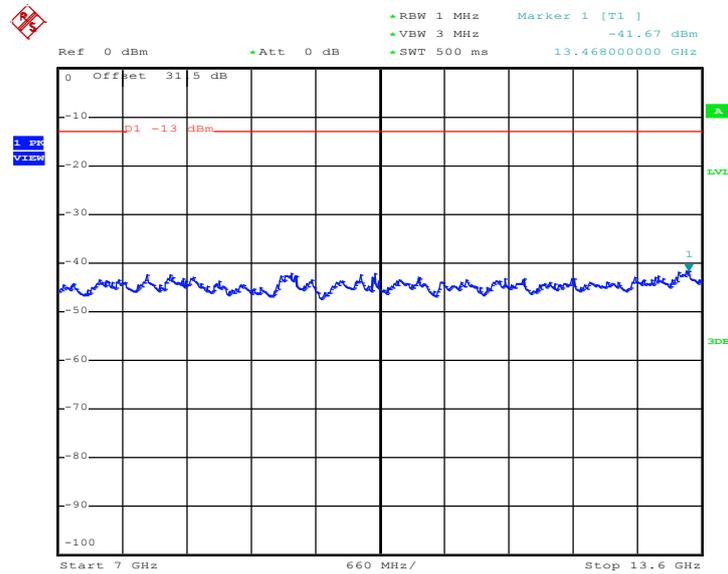

Date: 27.FEB.2012 20:45:14



Conducted Emission Plot between 13.6GHz ~ 18GHz

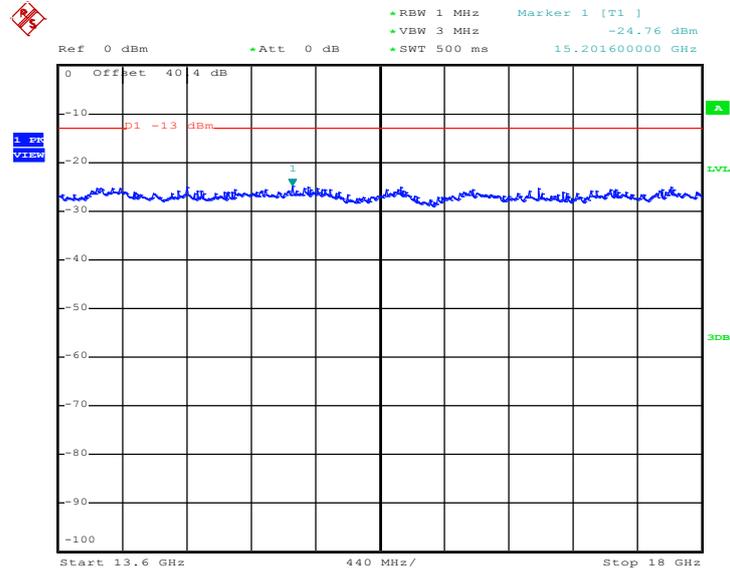

Date: 27.FEB.2012 20:45:27

3.6 Field Strength of Spurious Radiation Measurement

3.6.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Measuring Instruments


See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$

3.6.4 Test Setup

For radiated emissions below 30MHz

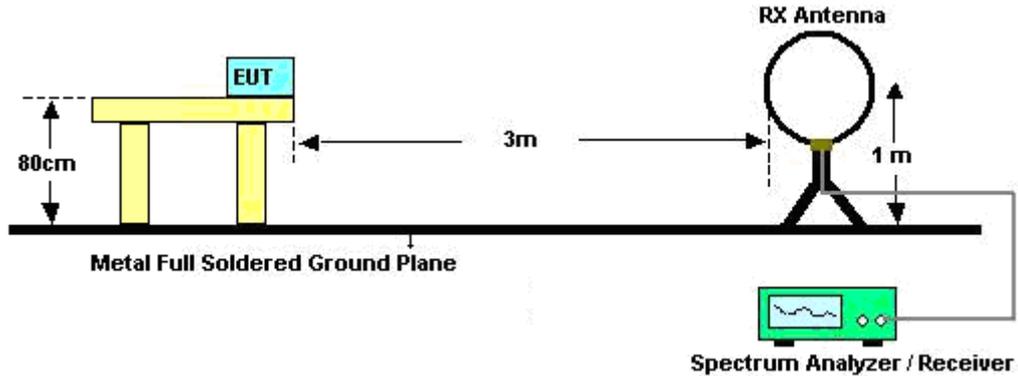

For radiated emissions above 30MHz

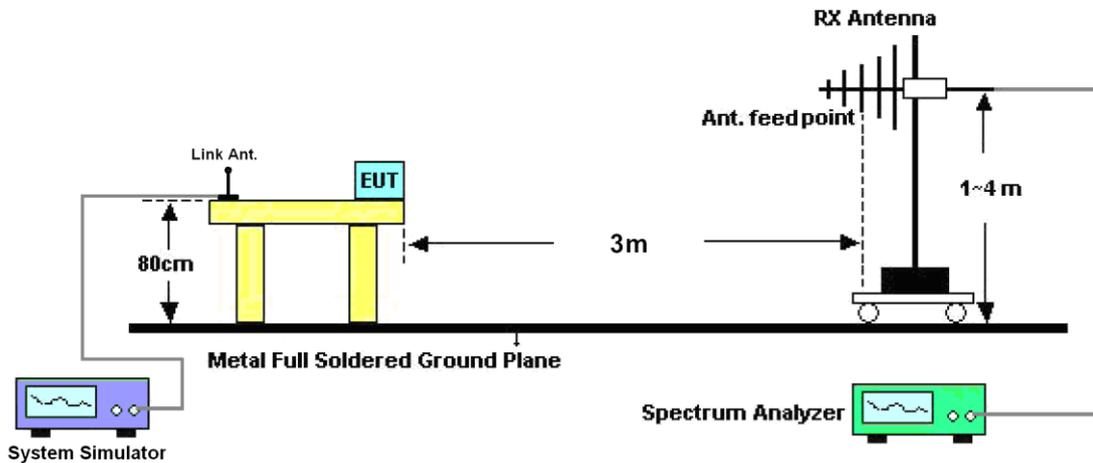


3.6.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.6.6 Test Result of Field Strength of Spurious Radiated

Band :	CDMA2000 BC0	Temperature :	23~24°C
Test Mode :	1xEV-DO Rev. A_RETAP 4096K for Sample 1	Relative Humidity :	45~47%
Test Engineer :	David Ke / Kai Wang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

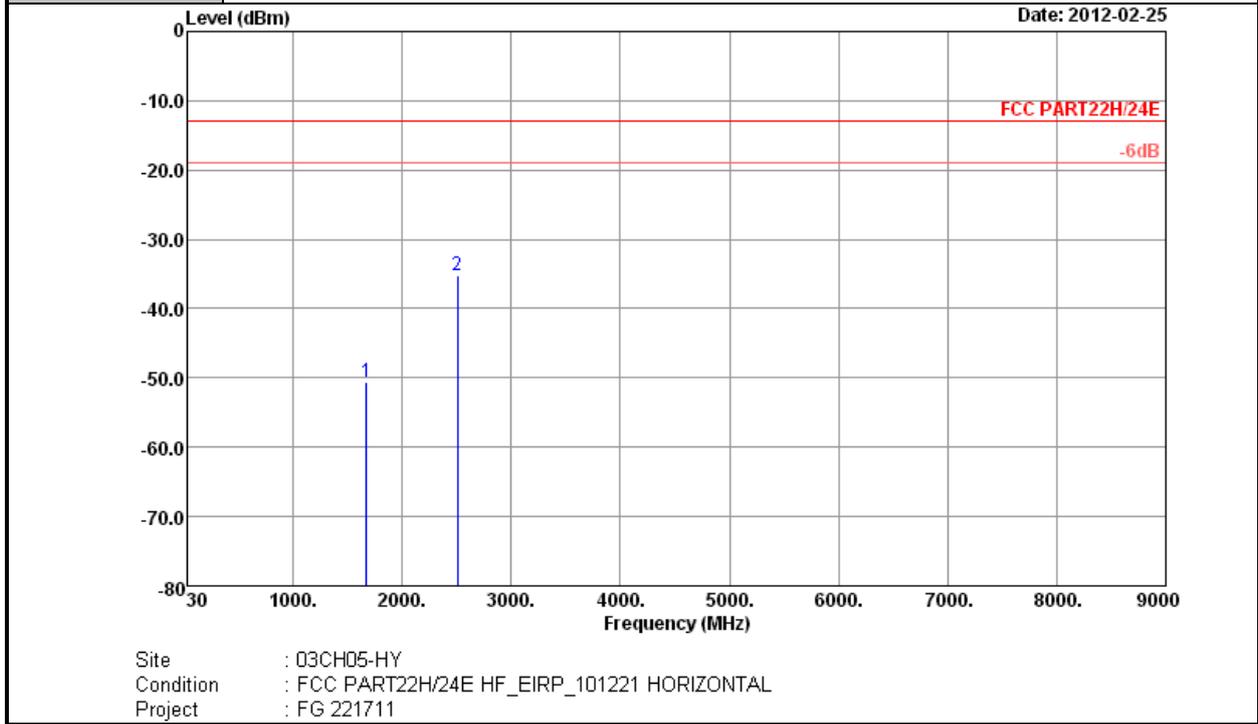


Site : 03CH05-HY
 Condition : FCC PART22H/24E HF_EIRP_101221 HORIZONTAL
 Project : FG 221711

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1673.04	-50.67	-13	-37.67	-56.29	-51.86	2.15	5.49	H	Pass
2509.56	-35.32	-13	-22.32	-44.46	-37.21	2.38	6.41	H	Pass



Band :	CDMA2000 BC0	Temperature :	23~24°C
Test Mode :	1xEV-DO Rev. A_RETAP 4096K for Sample 1	Relative Humidity :	45~47%
Test Engineer :	David Ke / Kai Wang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

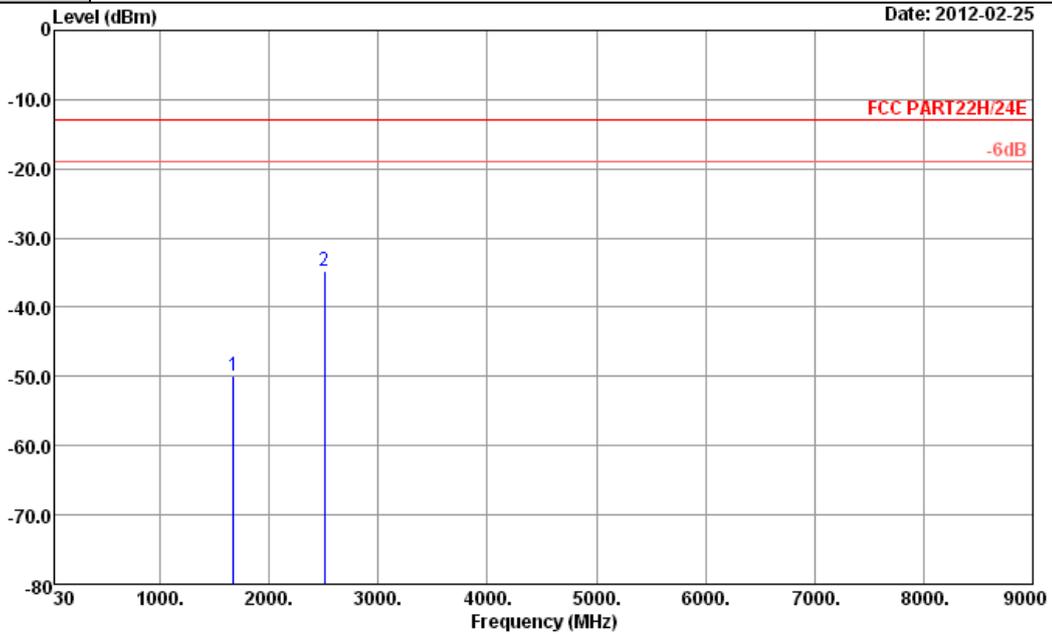


Site : 03CH05-HY
 Condition : FCC PART22H/24E HF_EIRP_101221 VERTICAL
 Project : FG 221711

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1673.04	-49.92	-13	-36.92	-55.72	-51.11	2.15	5.49	V	Pass
2509.56	-34.73	-13	-21.73	-43.56	-36.62	2.38	6.41	V	Pass




Band :	CDMA2000 BC0	Temperature :	23~24°C
Test Mode :	1xEV-DO Rev. A_RETAP 4096K for Sample 2	Relative Humidity :	45~47%
Test Engineer :	David Ke / Kai Wang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

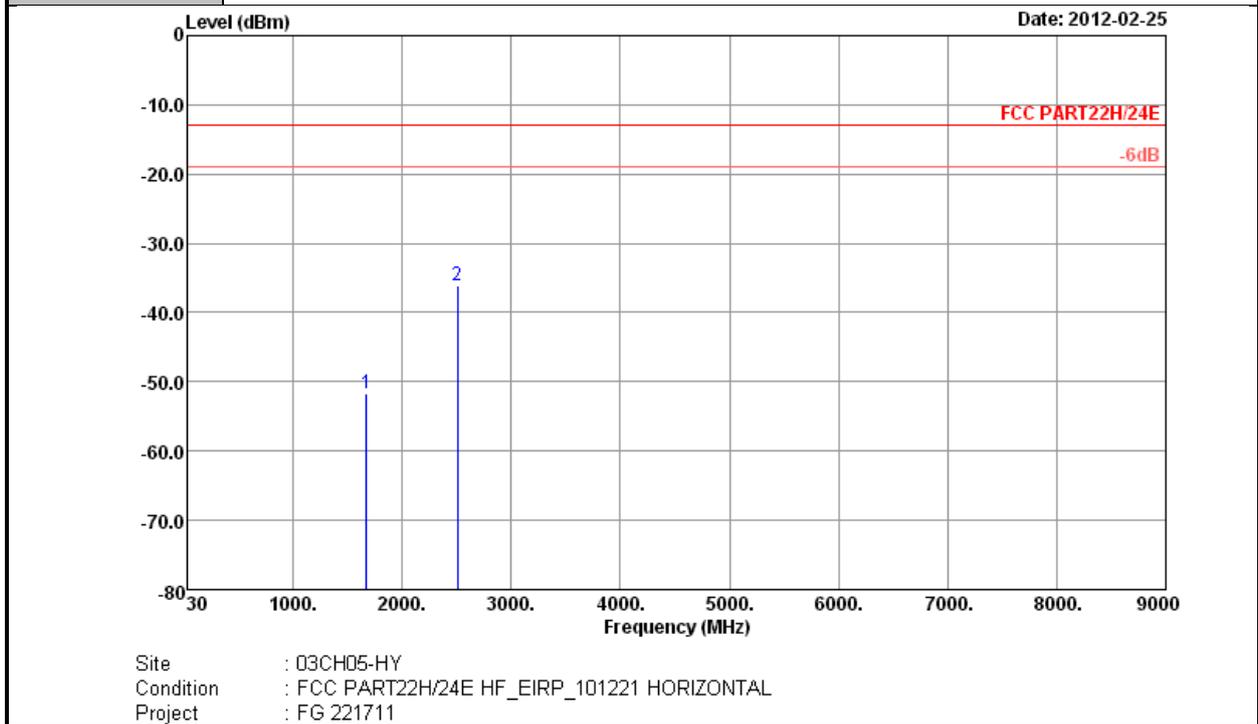

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1673.04	-51.77	-13	-38.77	-57.49	-52.96	2.15	5.49	H	Pass
2509.56	-36.03	-13	-23.03	-45.06	-37.92	2.38	6.41	H	Pass



Band :	CDMA2000 BC0	Temperature :	23~24°C
Test Mode :	1xEV-DO Rev. A_RETAP 4096K for Sample 2	Relative Humidity :	45~47%
Test Engineer :	David Ke / Kai Wang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

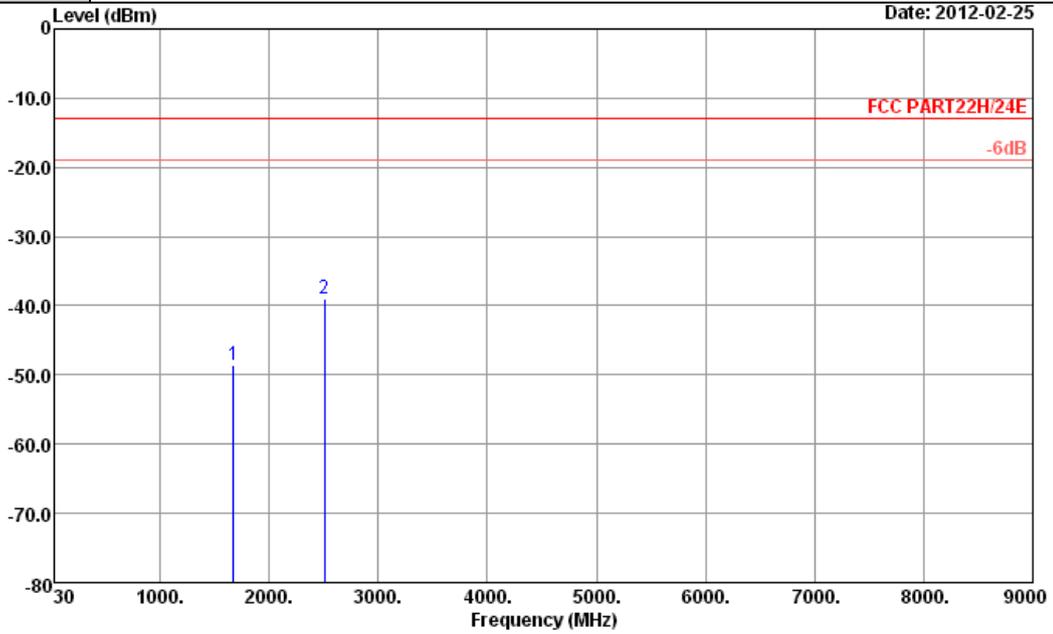


Site : 03CH05-HY
 Condition : FCC PART22H/24E HF_EIRP_101221 VERTICAL
 Project : FG 221711

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1673.04	-48.56	-13	-35.56	-54.13	-49.75	2.15	5.49	V	Pass
2509.56	-39.06	-13	-26.06	-47.93	-40.95	2.38	6.41	V	Pass



Band :	CDMA2000 BC1	Temperature :	23~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Sample 1	Relative Humidity :	45~47%
Test Engineer :	David Ke / Kai Wang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

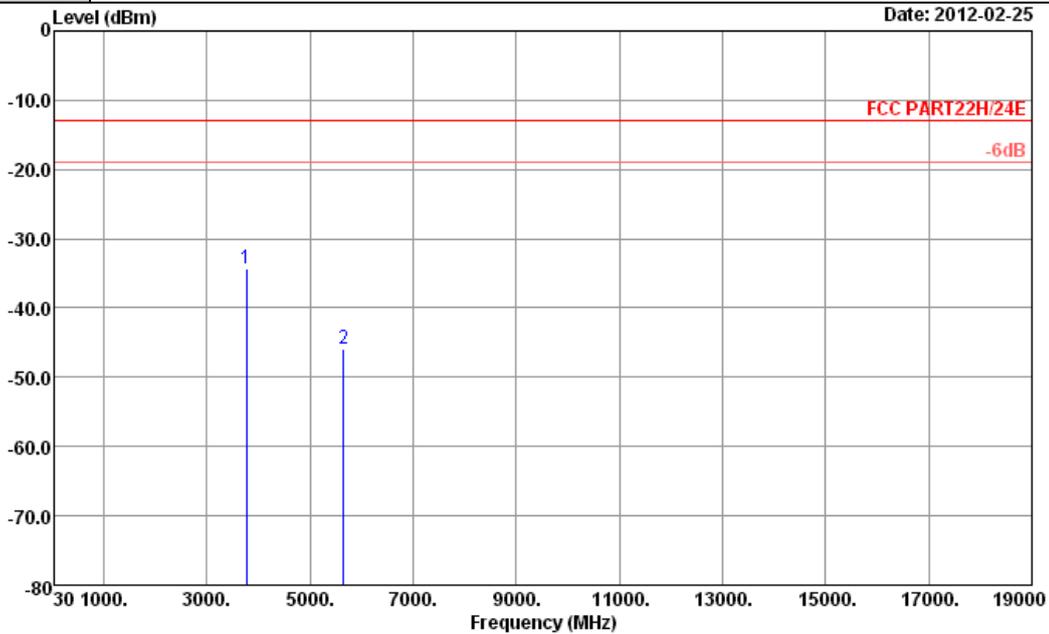


Site : 03CH05-HY
 Condition : FCC PART22H/24E HF_EIRP_101221 HORIZONTAL
 Project : FG 221711

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-34.25	-13	-21.25	-47.42	-40.38	2.9292	9.06	H	Pass
5640	-45.84	-13	-32.84	-64.45	-52.76	3.9072	10.83	H	Pass



Band :	CDMA2000 BC1	Temperature :	23~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Sample 1	Relative Humidity :	45~47%
Test Engineer :	David Ke / Kai Wang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

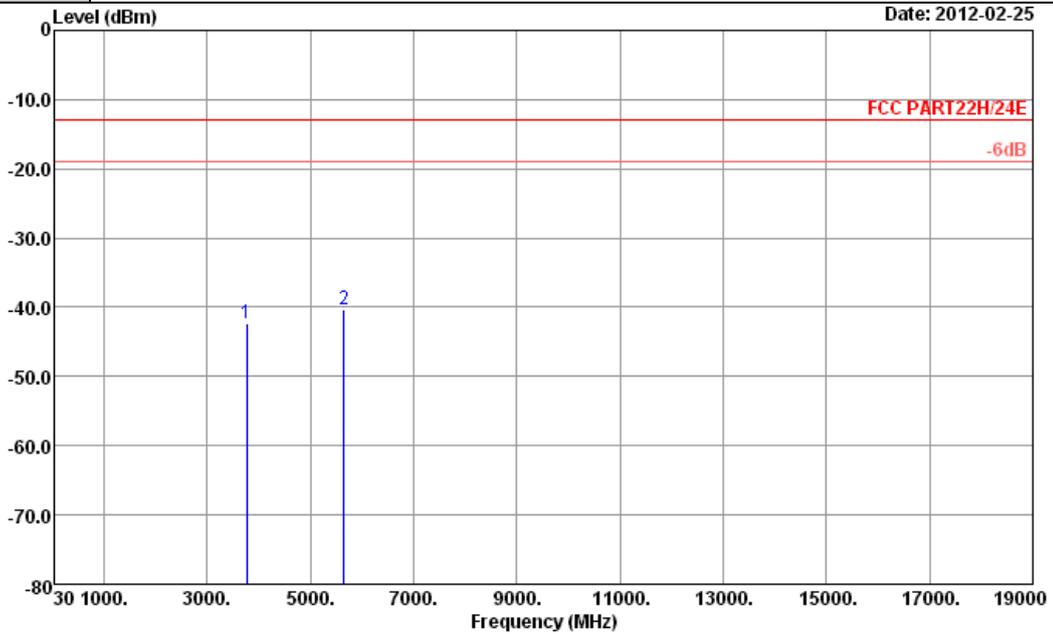


Site : 03CH05-HY
 Condition : FCC PART22H/24E HF_EIRP_101221 VERTICAL
 Project : FG 221711

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-42.28	-13	-29.28	-55.47	-48.41	2.9292	9.06	V	Pass
5640	-40.24	-13	-27.24	-58.82	-47.16	3.9072	10.83	V	Pass



Band :	CDMA2000 BC1	Temperature :	23~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Sample 2	Relative Humidity :	45~47%
Test Engineer :	David Ke / Kai Wang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

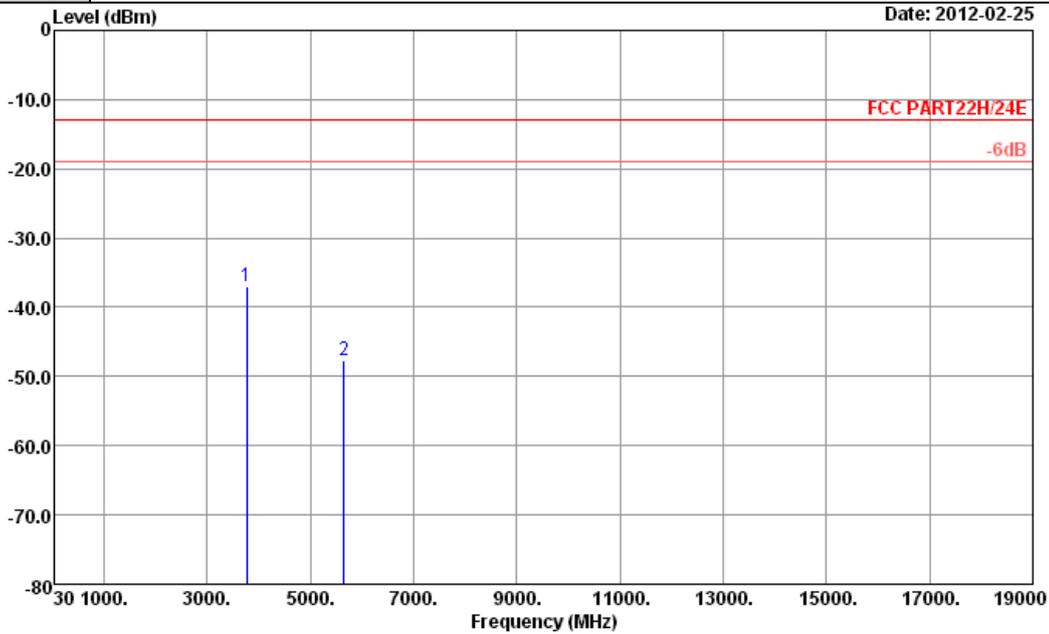


Site : 03CH05-HY
 Condition : FCC PART22H/24E HF_EIRP_101221 HORIZONTAL
 Project : FG 221711

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-37.03	-13	-24.03	-50.36	-43.16	2.9292	9.06	H	Pass
5640	-47.70	-13	-34.70	-66.36	-54.62	3.9072	10.83	H	Pass



Band :	CDMA2000 BC1	Temperature :	23~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Sample 2	Relative Humidity :	45~47%
Test Engineer :	David Ke / Kai Wang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

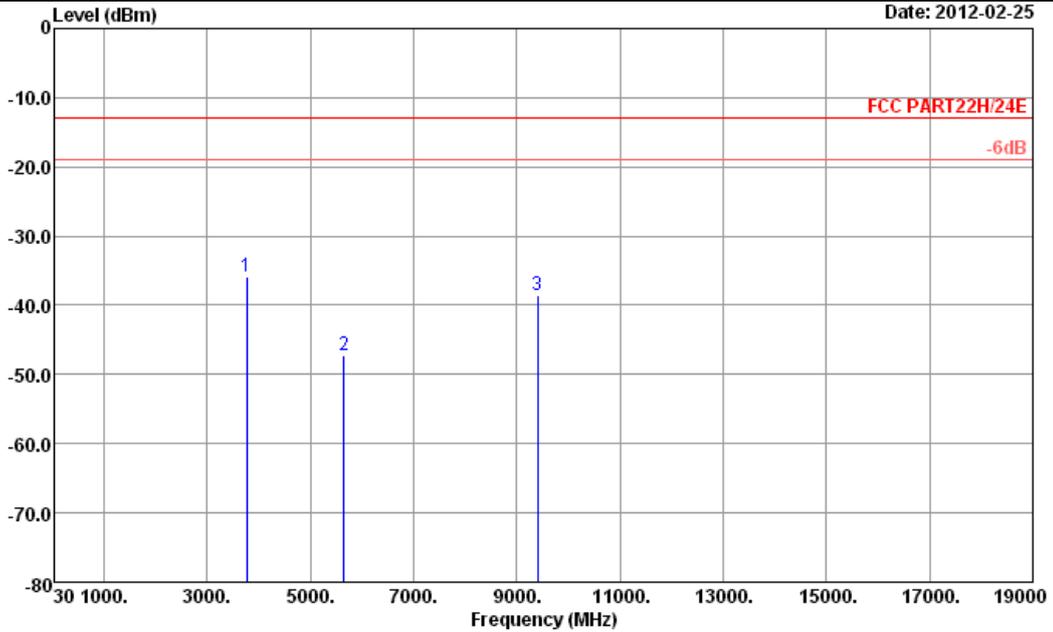


Site : 03CH05-HY
 Condition : FCC PART22H/24E HF_EIRP_101221 VERTICAL
 Project : FG 221711

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-35.92	-13	-22.92	-49.18	-42.05	2.9292	9.06	V	Pass
5640	-47.29	-13	-34.29	-65.78	-54.21	3.9072	10.83	V	Pass
9400	-38.59	-13	-25.59	-62.17	-46.55	5.398	13.36	V	Pass




Band :	CDMA2000 BC15	Temperature :	23~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Sample 1	Relative Humidity :	45~47%
Test Engineer :	David Ke / Kai Wang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

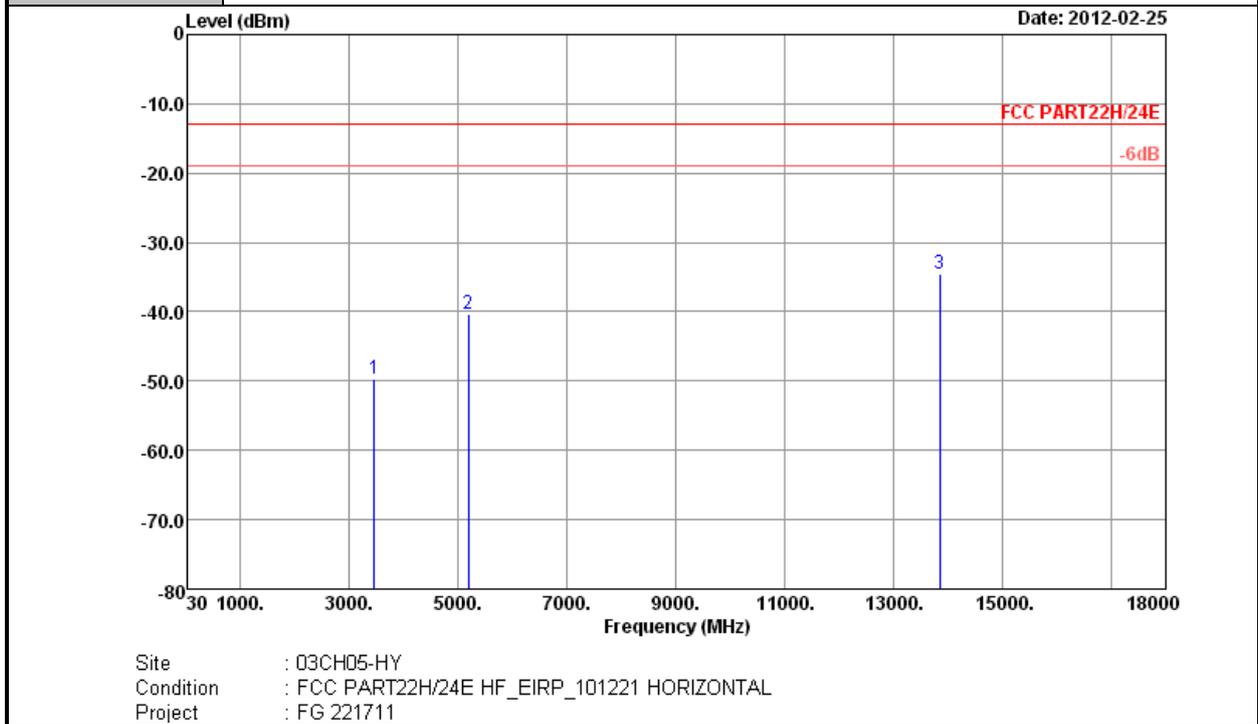

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3462.5	-49.65	-13	-36.65	-61.73	-55.87	2.6578	8.88	H	Pass
5193.75	-40.43	-13	-27.43	-57.85	-47.35	3.8194	10.74	H	Pass
13850	-34.64	-13	-21.64	-66.45	-42.73	6.3636	14.46	H	Pass




Band :	CDMA2000 BC15	Temperature :	23~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Sample 1	Relative Humidity :	45~47%
Test Engineer :	David Ke / Kai Wang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

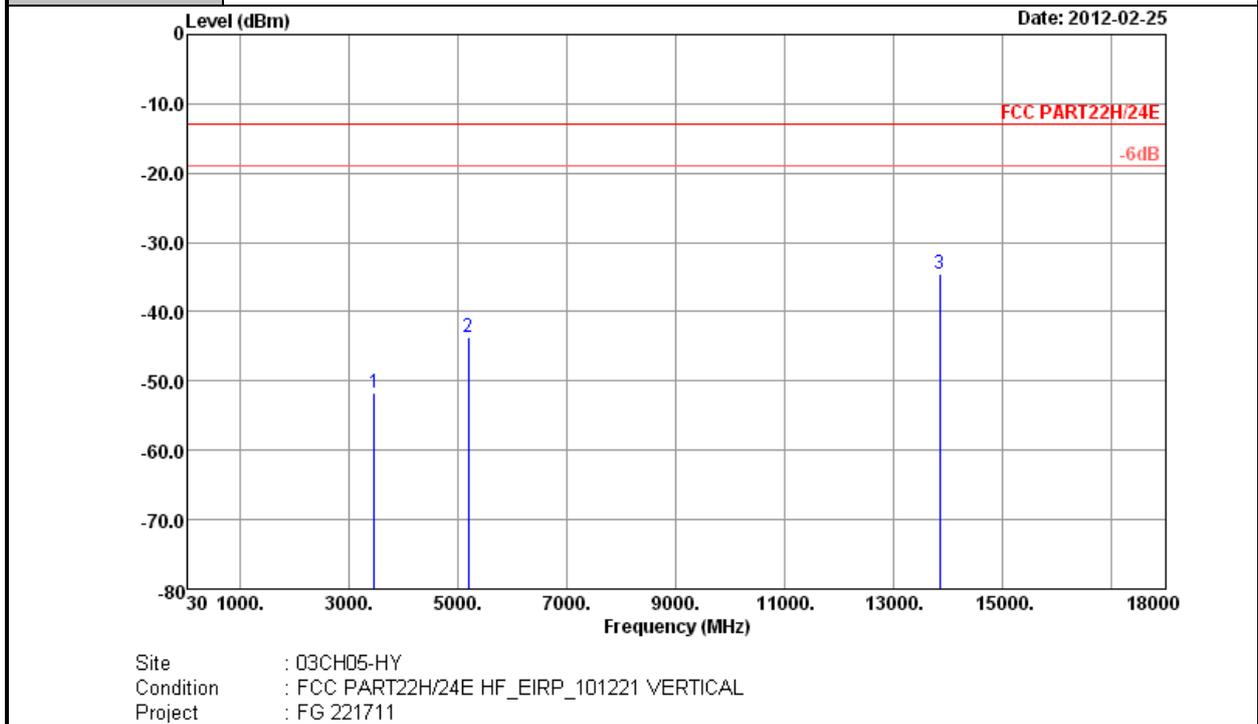

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3462.5	-51.67	-13	-38.67	-63.22	-57.89	2.6578	8.88	V	Pass
5193.75	-43.75	-13	-30.75	-61.12	-50.67	3.8194	10.74	V	Pass
13850	-34.51	-13	-21.51	-66.36	-42.6	6.3636	14.46	V	Pass




Band :	CDMA2000 BC15	Temperature :	23~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Sample 2	Relative Humidity :	45~47%
Test Engineer :	David Ke / Kai Wang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

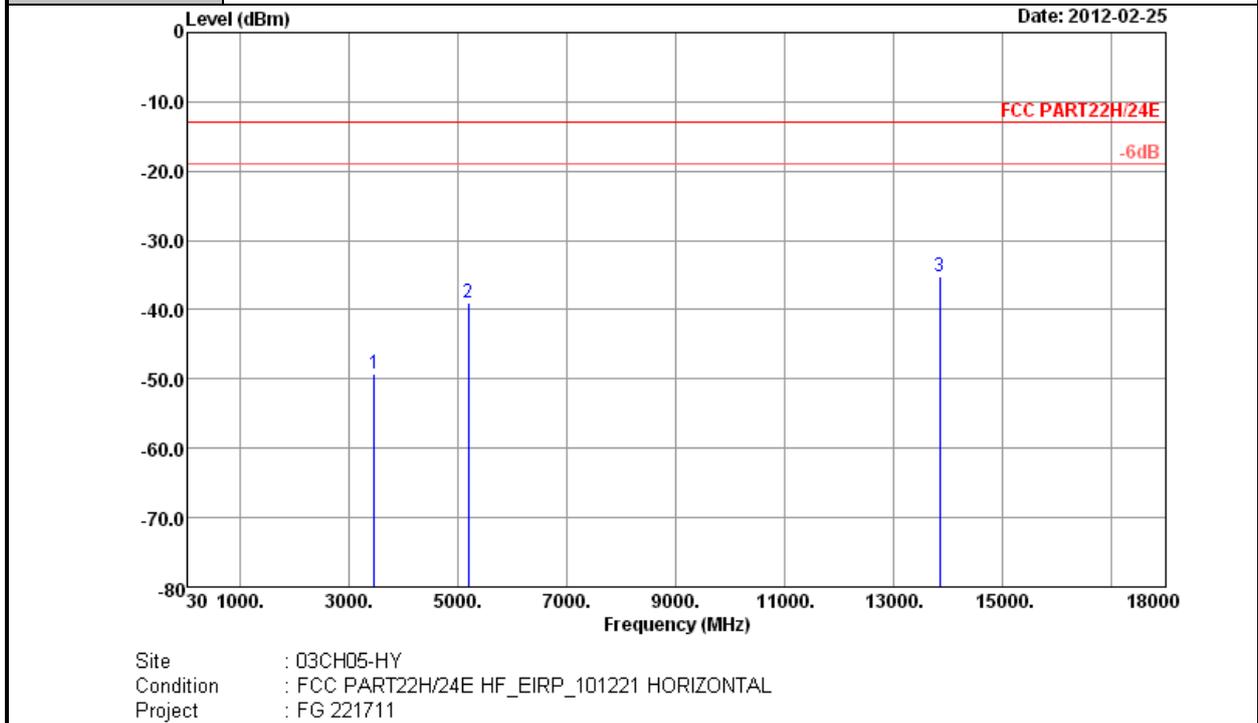

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3462.5	-49.20	-13	-36.20	-60.63	-55.42	2.6578	8.88	H	Pass
5193.75	-39.04	-13	-26.04	-56.39	-45.96	3.8194	10.74	H	Pass
13850	-35.19	-13	-22.19	-67.2	-43.28	6.3636	14.46	H	Pass



Band :	CDMA2000 BC15	Temperature :	23~24°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Sample 2	Relative Humidity :	45~47%
Test Engineer :	David Ke / Kai Wang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

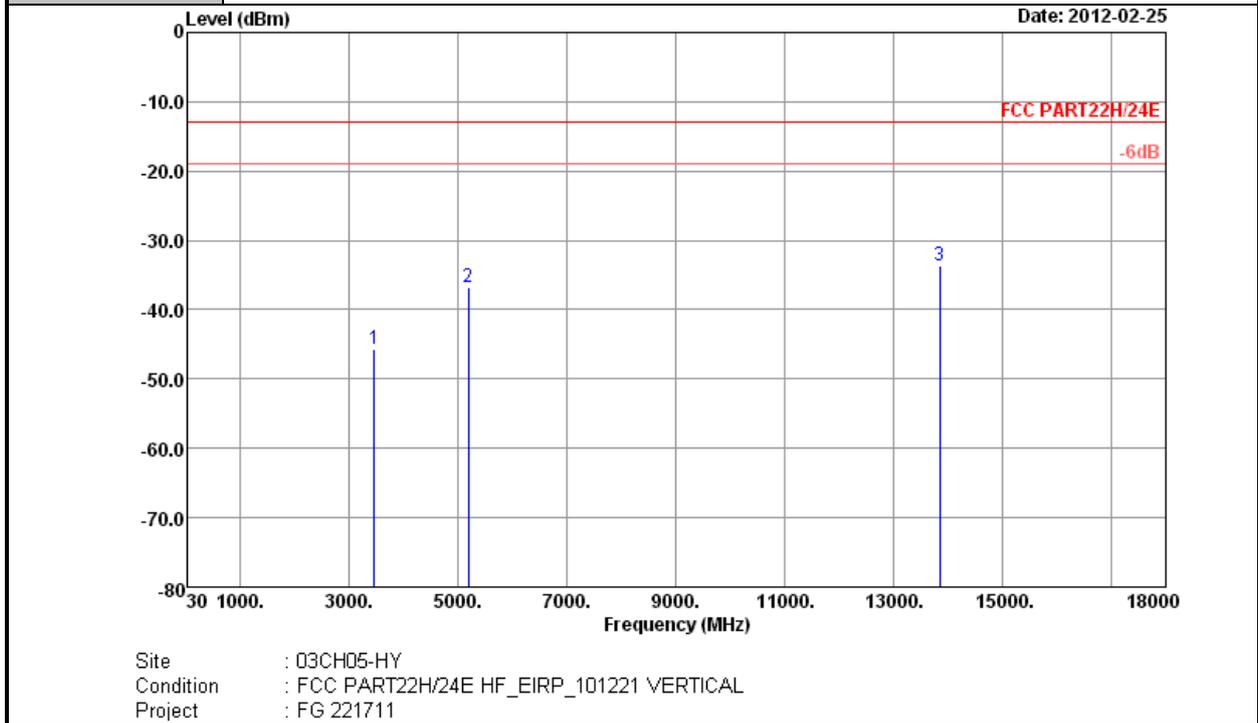

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3462.5	-45.64	-13	-32.64	-57.14	-51.86	2.6578	8.88	V	Pass
5193.75	-36.84	-13	-23.84	-54.18	-43.76	3.8194	10.74	V	Pass
13850	-33.54	-13	-20.54	-65.47	-41.63	6.3636	14.46	V	Pass

3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.7.2 Measuring Instruments

See list of measuring instruments of this test report.


3.7.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT cannot be turned on at -30°C , the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

3.7.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.7.5 Test Setup

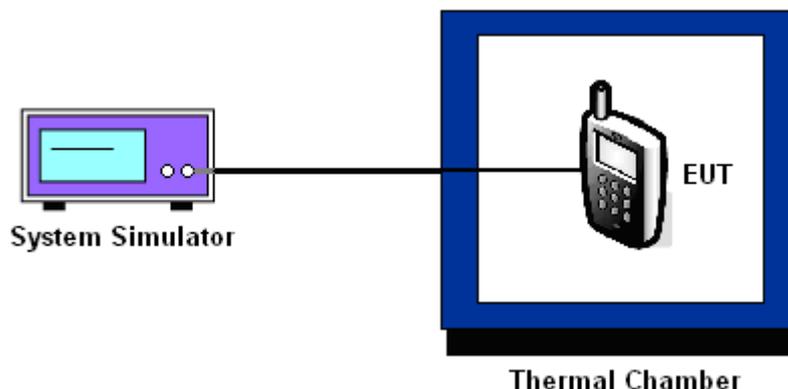

3.7.6 Test Result of Temperature Variation

Band :	CDMA2000 BC0	Channel :	384
Test Mode :	1xEV-DO Rev. A_RETAP 4096K	Limit (ppm) :	2.5

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	N/A	N/A	PASS
-20	11	0.01	
-10	9	0.01	
0	-7	-0.01	
10	8	0.01	
20	-10	-0.01	
30	6	0.01	
40	4	0.00	
50	12	0.01	

Note: The manufacturer declared that the EUT could work properly between temperatures -20°C~50°C.



Band :	CDMA2000 BC1	Channel :	600
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K	Limit (ppm) :	2.5

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	N/A	N/A	PASS
-20	13	0.01	
-10	-8	0.00	
0	10	0.01	
10	9	0.00	
20	7	0.00	
30	6	0.00	
40	-7	0.00	
50	5	0.00	

Note: The manufacturer declared that the EUT could work properly between temperatures -20°C~50°C.

Band :	CDMA2000 BC15	Channel :	425
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K	Limit (ppm) :	2.5

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	N/A	N/A	PASS
-20	-15	-0.01	
-10	13	0.01	
0	7	0.00	
10	9	0.00	
20	-11	-0.01	
30	12	0.01	
40	8	0.00	
50	10	0.01	

Note: The manufacturer declared that the EUT could work properly between temperatures -20°C~50°C.



3.7.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
CDMA2000 BC0 CH384	1xEV-DO Rev. A RETAP 4096K	3.8	-7	-0.01	2.5	PASS
		BEP	10	0.01		
		4.2	8	0.01		
CDMA2000 BC1 CH600	1xEV-DO Rev. 0 RTAP 153.6K	3.8	9	0.00	2.5	PASS
		BEP	10	0.01		
		4.2	-6	0.00		
CDMA2000 BC15 CH425	1xEV-DO Rev. 0 RTAP 153.6K	3.8	9	0.00	2.5	PASS
		BEP	11	0.01		
		4.2	13	0.01		

Note:

- 1. Normal Voltage = 3.8V.
- 2. Battery End Point (BEP) = 3.6 V.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	R&S	CMU200	117995	N/A	Jul. 28, 2011	Feb. 27, 2012 ~ Mar. 26, 2012	Jul. 27, 2012	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 13, 2011	Feb. 27, 2012 ~ Mar. 26, 2012	Jun. 12, 2012	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D35P	TBN-930701	N/A	Jul. 27, 2011	Feb. 27, 2012 ~ Mar. 26, 2012	Jul. 26, 2012	Conducted (TH02-HY)
Spectrum Analyzer	R&S	ESU26	100390	20Hz ~ 26.5GHz	Dec. 22, 2011	Feb. 25, 2012 ~ Mar. 02, 2012	Dec. 21, 2012	Radiation (03CH05-HY)
COM-POWER	Double Ridge Horn	AH-118	701030	1GHz ~ 18GHz	N/A	Feb. 25, 2012 ~ Mar. 02, 2012	N/A	Radiation (03CH05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2725	30MHz ~ 2GHz	Oct. 22, 2011	Feb. 25, 2012 ~ Mar. 02, 2012	Oct. 21, 2012	Radiation (03CH05-HY)
Turn Table	HD	Deis HD 2000	420/611	0 ~ 360 degree	N/A	Feb. 25, 2012 ~ Mar. 02, 2012	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	MA 240	240/666	1 m ~ 4 m	N/A	Feb. 25, 2012 ~ Mar. 02, 2012	N/A	Radiation (03CH05-HY)
Horn Antenna	ESCO	3117	66584	1GHz ~ 18GHz	Aug. 04, 2011	Feb. 25, 2012 ~ Mar. 02, 2012	Aug. 03, 2012	Radiation (03CH05-HY)
COM-POWER	COM-POWER	PA-103	161075	10Hz ~ 1000MHz Gain:32dB	Mar. 29, 2011	Feb. 25, 2012 ~ Mar. 02, 2012	Mar. 28, 2012	Radiation (03CH05-HY)
Pre Amplifier	EMCI	EMC051845	SN980048	1GHz~18GHz	Jul. 18, 2011	Feb. 25, 2012 ~ Mar. 02, 2012	Jul. 17, 2012	Radiation (03CH05-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1GHz~26.5GHz	Aug. 30, 2011	Feb. 25, 2012 ~ Mar. 02, 2012	Aug. 29, 2012	Radiation (03CH05-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 29, 2010	Feb. 25, 2012 ~ Mar. 02, 2012	Jul. 28, 2012	Radiation (03CH05-HY)
System Simulator	Agilent	E5515C (8960)	GB46311322	N/A	Mar. 23, 2011	Feb. 25, 2012 ~ Mar. 02, 2012	Mar. 22, 2013	Radiation (03CH05-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				