

FCC RF Test Report

APPLICANT : HTC Corporation
EQUIPMENT : Smartphone
MODEL NAME : PL80110
FCC ID : NM8PL80110
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Oct. 26, 2012 and completely tested on Dec. 14, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	6
1.5 Testing Site.....	6
1.6 Applied Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration and system.....	9
2.4 Measurement Results Explanation Example	9
3 TEST RESULT	10
3.1 Conducted Output Power Measurement.....	10
3.2 Peak-to-Average Ratio	12
3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	16
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	20
3.5 Band Edge Measurement.....	28
3.6 Conducted Spurious Emission Measurement	34
3.7 Field Strength of Spurious Radiation Measurement	40
3.8 Frequency Stability Measurement.....	49
4 LIST OF MEASURING EQUIPMENT	53
5 UNCERTAINTY OF EVALUATION	54
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG2O2633A	Rev. 01	Initial issue of report	Dec. 21, 2012

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	N/A	Conducted Output Power	N/A	PASS	-
3.2	§24.232(d)	N/A	Peak-to-Average Ratio	< 13 dB	PASS	-
3.3	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.3	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.4	§2.1049 §22.917(a) §24.238(a)	N/A	Occupied Bandwidth	N/A	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge Measurement	< 43+10log ₁₀ (P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Conducted Spurious Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 28.24 dB at 7520.000 MHz
3.8	§2.1055 §22.355 §24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

1 General Description

1.1 Applicant

HTC Corporation

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan

1.2 Manufacturer

HTC Corporation

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Smartphone
Model Name	PL80110
FCC ID	NM8PL80110
Sample 1	EUT with LCD Panel 1, Camera Front 1, 2nd Camera 1
Sample 2	EUT with LCD Panel 2, Camera Front 2, 2nd Camera 2
EUT supports Radios application	CDMA/EV-DO/LTE WLAN 11abgn / Bluetooth 3.0/4.0 / NFC
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Product Specification subjective to this standard	
Tx Frequency	CDMA2000 BC0: 824.70 MHz ~ 848.31 MHz CDMA2000 BC1: 1851.25 MHz ~ 1908.75 MHz
Rx Frequency	CDMA2000 BC0: 869.70 MHz ~ 893.31 MHz CDMA2000 BC1: 1931.25 MHz ~ 1988.75 MHz
Maximum Output Power to Antenna	CDMA2000 BC0 : 23.87 dBm CDMA2000 BC1 : 24.05 dBm
Antenna Type	PIFA Antenna
Type of Modulation	CDMA2000 : QPSK CDMA2000 1xEV-DO : 8PSK

1.4 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (% , Hz, ppm)	Emission Designator
Part 22	CDMA2000 BC0 1xRTT	QPSK	0.1648	0.02 ppm	1M28F9W
Part 24	CDMA2000 BC1 1xRTT	8PSK	0.5070	0.01 ppm	1M28F9W

1.5 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH07-HY	722060/4086B-1

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- ♦ FCC 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v01
- ♦ NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, " Receivers Excluded from Industry Canada Requirements", only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for CDMA2000 BC0.
2. 30 MHz to 19000 MHz for CDMA2000 BC1.

Test Modes		
Band	Radiated TCs	Conducted TCs
CDMA2000 BC0	■ 1xRTT Link Mode for Sample 1 ■ 1xRTT Link Mode for Sample 2	■ 1xRTT Link Mode
CDMA2000 BC1	■ 1xRTT Link Mode for Sample 1	■ 1xRTT Link Mode


Note:

1. The maximum RF output power levels are 1xRTT RC1+SO55 mode for CDMA2000 BC0 on QPSK Link and 1xRTT RC1+SO55 mode for CDMA2000 BC1 on 8PSK Link; only these modes were used for all tests.
2. Because there are individual antennas for each WWAN, WLAN, and Bluetooth, the co-location test modes are not required.
3. For Radiated TCs, all test items were performance with Adapter 1, Earphone, Battery 2, and USB Cable 2.

The conducted power table is as follows:

Conducted Power (*Unit: dBm)						
Band	CDMA2000 BC0			CDMA2000 BC1		
Channel	1013	384	777	25	600	1175
Frequency	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1+SO55	23.76	23.87	23.80	24.02	24.03	24.05
1xRTT RC3+SO55	23.75	23.84	23.77	24.00	24.03	24.04
1xRTT RC3 SO32(+ F-SCH)	23.60	23.71	23.63	23.98	23.99	24.03
1xRTT RC3 SO32(+SCH)	23.59	23.65	23.62	23.97	23.98	24.01
1xRTT RC8 SO75	23.78	23.84	23.80	23.92	24.00	23.96
1xEV-DO RTAP 153.6K	23.70	23.86	23.76	23.99	24.02	24.03
1xEV-DO RETAP 4096K	23.64	23.75	23.70	23.97	23.98	24.00

2.2 Connection Diagram of Test System

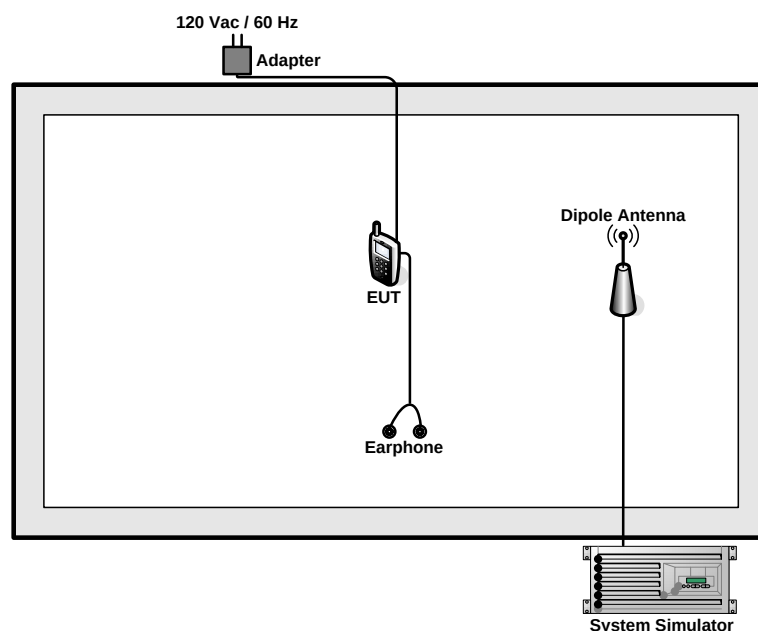

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

3.1.4 Test Setup

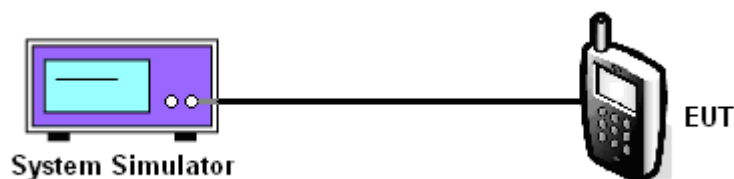

3.1.5 Test Result of Conducted Output Power

CDMA2000 BC0			
Test Mode	CDMA 2000 1xRTT		
Test Status	RC1+SO55		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.7	836.52	848.31
Conducted Power (dBm)	23.76	23.87	23.80
Conducted Power (Watts)	0.24	0.24	0.24

CDMA2000 BC1			
Test Mode	CDMA 2000 1xRTT		
Test Status	RC1+SO55		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880	1908.75
Conducted Power (dBm)	24.02	24.03	24.05
Conducted Power (Watts)	0.25	0.25	0.25

Note: maximum average power for CDMA2000.

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
 - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

3.2.4 Test Setup

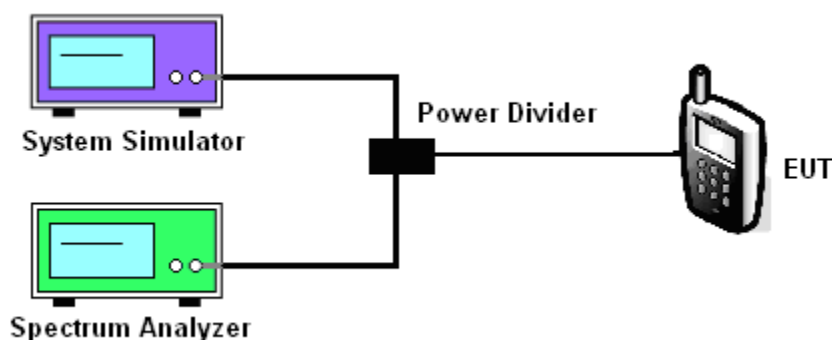




3.2.5 Test Result of Peak-to-Average Ratio

CDMA2000 BC1			
Modes	CDMA 2000 1xRTT		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880	1908.75
Peak-to-Average Ratio (dB)	2.80	3.28	2.96

3.2.6 Test Result (Plots) of Peak-to-Average Ratio


Band :	CDMA2000 BC1	Test Mode :	1xRTT Link
---------------	--------------	--------------------	------------

Peak-to-Average Ratio on Channel 25 (1851.25 MHz)

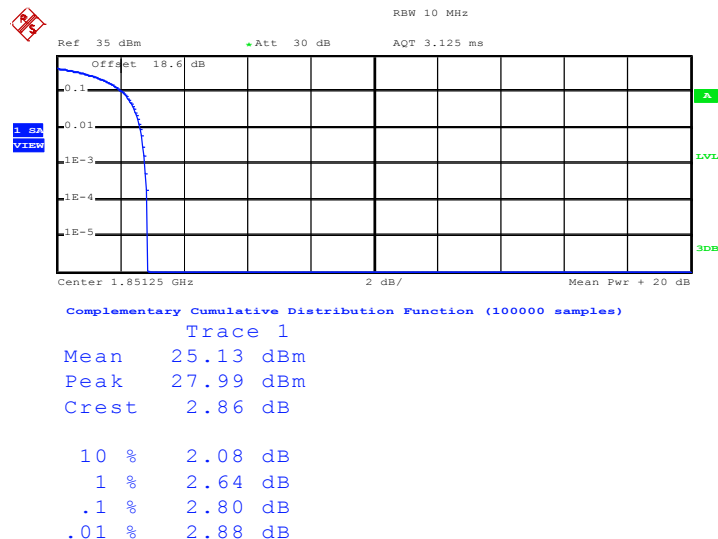

Date: 9.NOV.2012 09:04:50


Peak-to-Average Ratio on Channel 600 (1880 MHz)

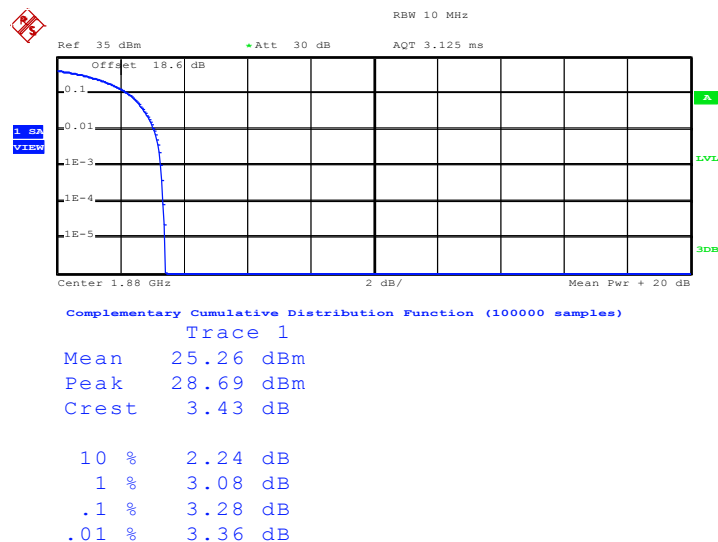

Date: 9.NOV.2012 09:04:22



Peak-to-Average Ratio on Channel 1175 (1908.75 MHz)

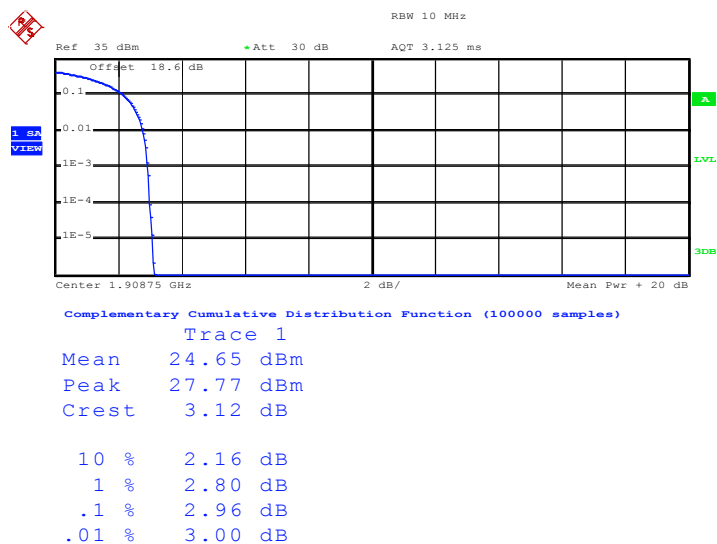

Date: 9.NOV.2012 09:05:41

3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v01. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The EUT was placed on an non-conductive rotating platform with 0.8 meter height in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RBW= 100 KHz, VBW= 300 KHz, RMS detector settings per section 4.0 of KDB 971168 D01.
2. During the measurement, the EUT was enforced in maximum power and linked with a base station. The highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power(EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.

3.3.4 Test Setup

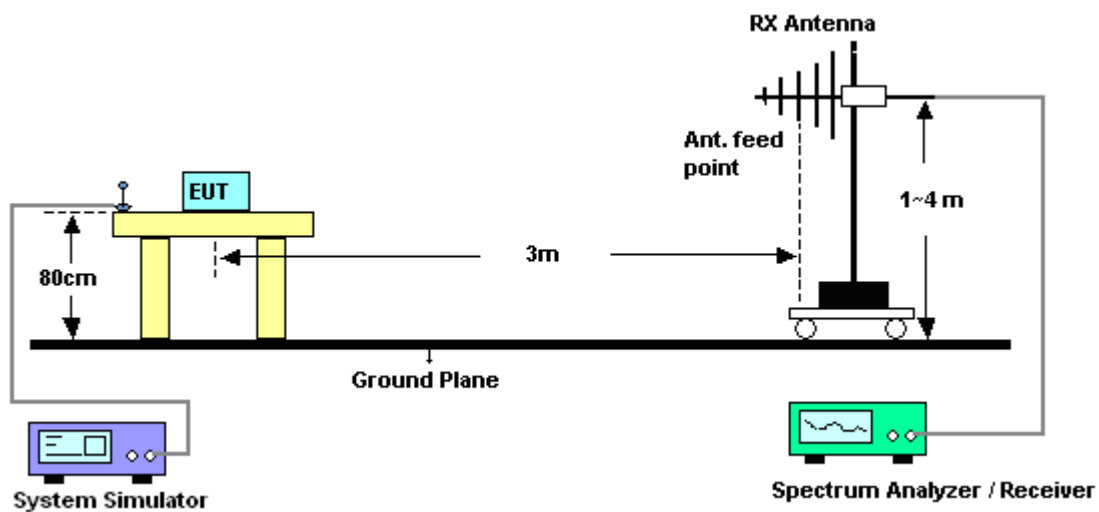

3.3.5 Test Result of ERP

<Sample 1>

CDMA2000 BC0 1xRTT_RC1+SO55 Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.70	-8.61	31.35	20.59	0.1146
836.52	-8.81	32.13	21.17	0.1309
848.31	-8.32	32.64	22.17	0.1648
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.70	-17.32	32.83	13.36	0.0217
836.52	-16.66	32.81	14.00	0.0251
848.31	-15.86	33.52	15.51	0.0356

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

<Sample 2>

CDMA2000 BC0 1xRTT_RC1+SO55 Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.70	-8.77	31.35	20.43	0.1104
836.52	-9.82	32.13	20.16	0.1038
848.31	-9.59	32.64	20.90	0.1230
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.70	-17.47	32.83	13.21	0.0209
836.52	-17.60	32.81	13.06	0.0202
848.31	-16.78	33.52	14.59	0.0288

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

3.3.6 Test Result of EIRP

<Sample 1>

CDMA2000 BC1 1xRTT_RC1+SO55 Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1851.25	-21.63	43.92	22.29	0.1694
1880.00	-22.39	44.79	22.40	0.1738
1908.75	-20.89	43.75	22.86	0.1932
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1851.25	-22.85	45.35	22.50	0.1778
1880.00	-22.24	46.78	24.54	0.2844
1908.75	-21.57	46.74	25.17	0.3289

* EIRP = LVL (dBm) + Correction Factor (dB)

<Sample 2>

CDMA2000 BC1 1xRTT_RC1+SO55 Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1851.25	-23.13	43.92	20.79	0.1199
1880.00	-23.00	44.79	21.79	0.1510
1908.75	-23.15	43.75	20.60	0.1148
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1851.25	-19.95	45.35	25.40	0.3467
1880.00	-19.73	46.78	27.05	0.5070
1908.75	-20.48	46.74	26.26	0.4227

* EIRP = LVL (dBm) + Correction Factor (dB)

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth and 26 dB bandwidth of the middle channel for the highest RF powers were measured.

3.4.4 Test Setup

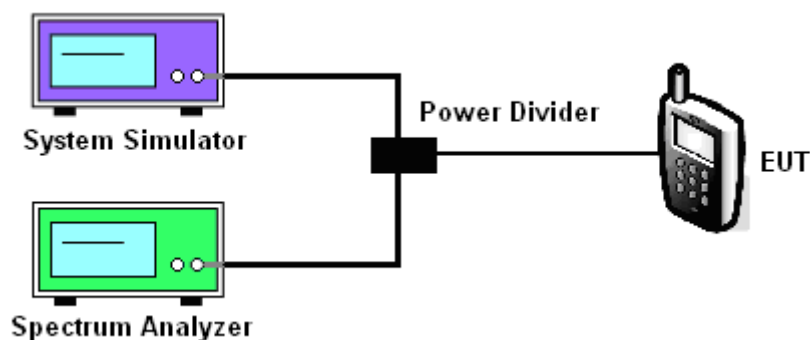

3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth


CDMA2000 BC0			
Test Mode	CDMA 2000 1xRTT		
Test Status	RC1+SO55		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
99% OBW (MHz)	1.276	1.280	1.280
26dB BW (MHz)	1.432	1.432	1.444

CDMA2000 BC1			
Test Mode	CDMA 2000 1xRTT		
Test Status	RC1+SO55		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880.00	1908.75
99% OBW (MHz)	1.284	1.276	1.280
26dB BW (MHz)	1.464	1.448	1.460

3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	CDMA2000 BC0	Test Mode :	1xRTT_RC1+SO55
---------------	--------------	--------------------	----------------

99% Occupied Bandwidth Plot on Channel 1013 (824.7 MHz)

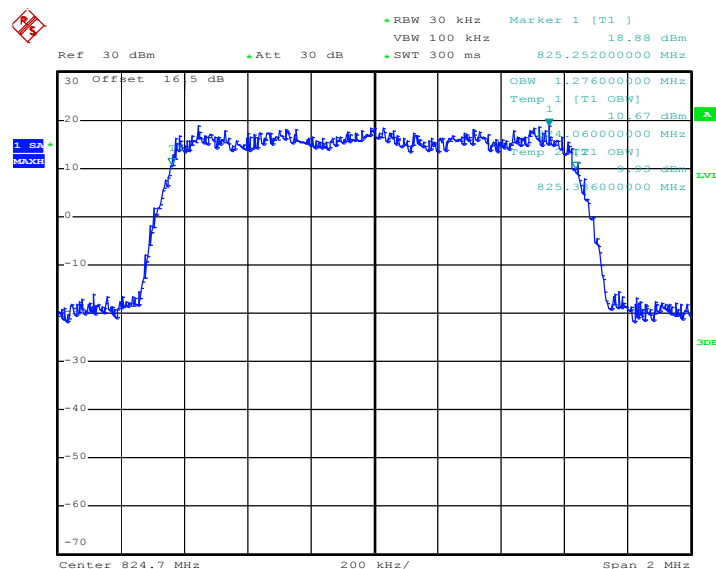


Date: 9.NOV.2012 08:47:39


26dB Bandwidth Plot on Channel 1013 (824.7 MHz)

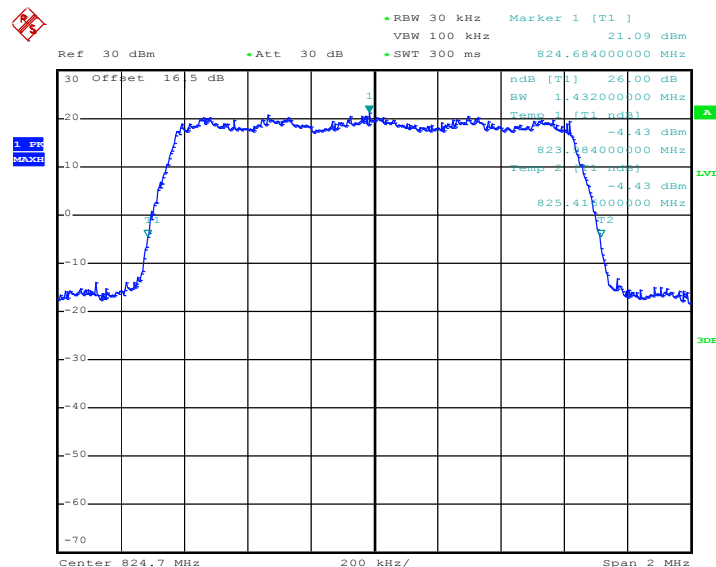


Date: 9.NOV.2012 08:40:01

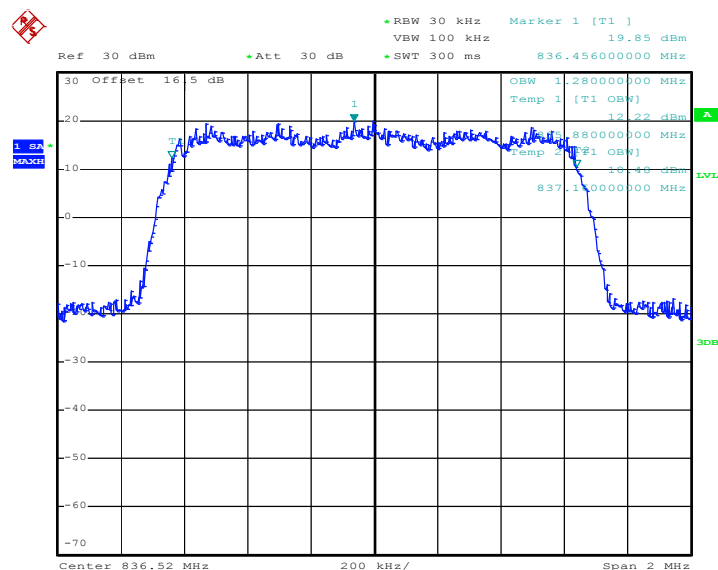99% Occupied Bandwidth Plot on Channel 384 (836.52 MHz)


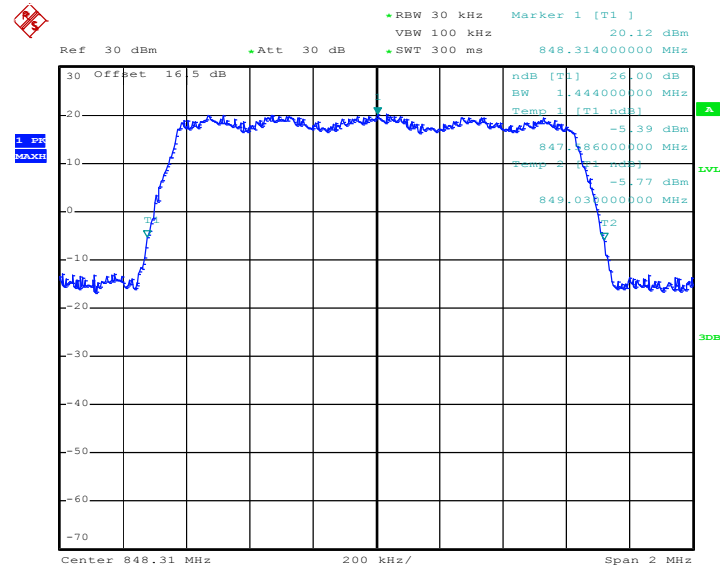
Date: 9.NOV.2012 08:46:48

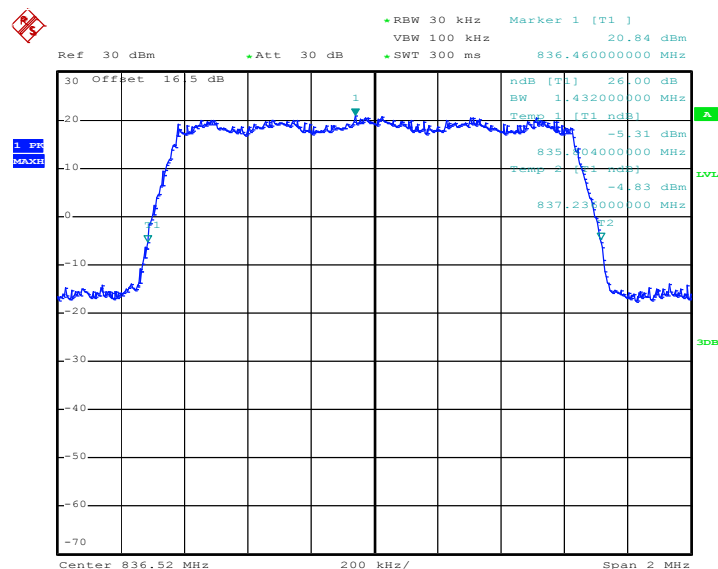26dB Bandwidth Plot on Channel 384 (836.52 MHz)


Date: 9.NOV.2012 08:40:49

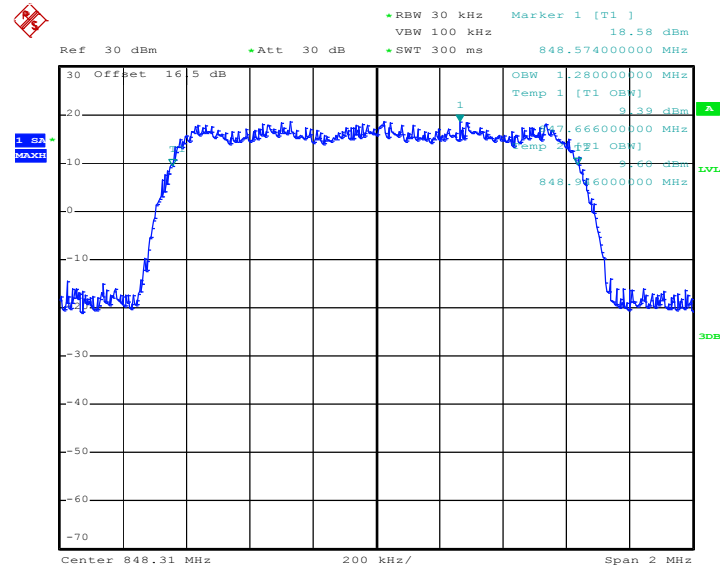99% Occupied Bandwidth Plot on Channel 777 (848.31 MHz)


Date: 9.NOV.2012 08:43:51


26dB Bandwidth Plot on Channel 777 (848.31 MHz)


Date: 9.NOV.2012 08:41:29




Band :	CDMA2000 BC1	Test Mode :	1xRTT_RC1+SO55
--------	--------------	-------------	----------------

99% Occupied Bandwidth Plot on Channel 25 (1851.25 MHz)

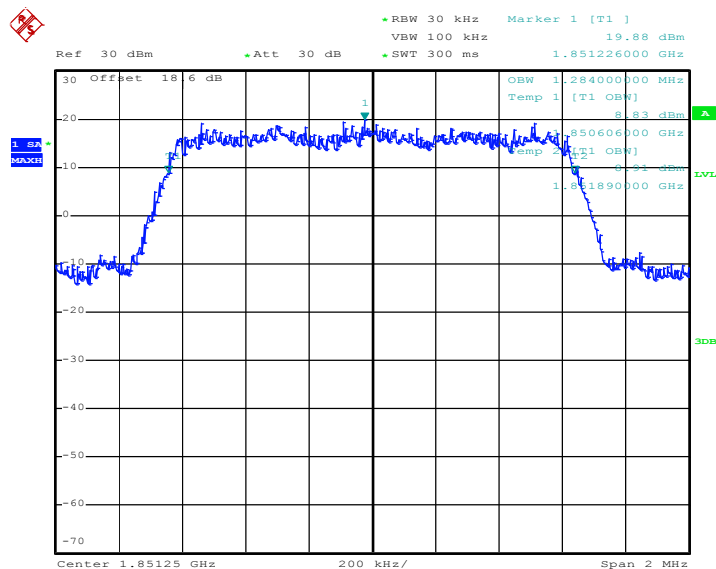


Date: 9.NOV.2012 09:13:40

26dB Bandwidth Plot on Channel 25 (1851.25 MHz)

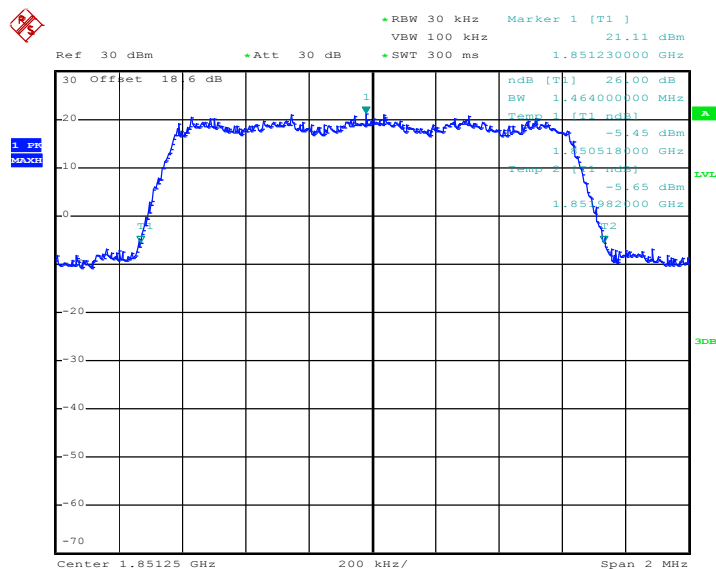


Date: 9.NOV.2012 09:10:35

99% Occupied Bandwidth Plot on Channel 600 (1880.0 MHz)

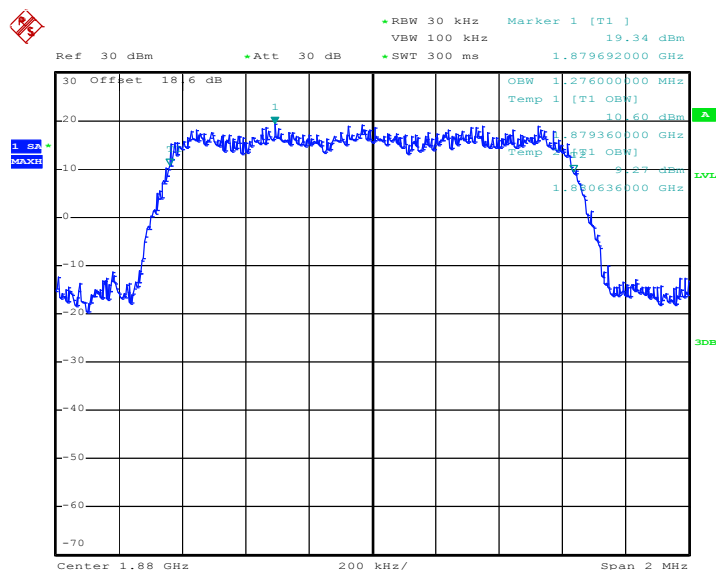


Date: 9.NOV.2012 09:12:54


26dB Bandwidth Plot on Channel 600 (1880.0 MHz)

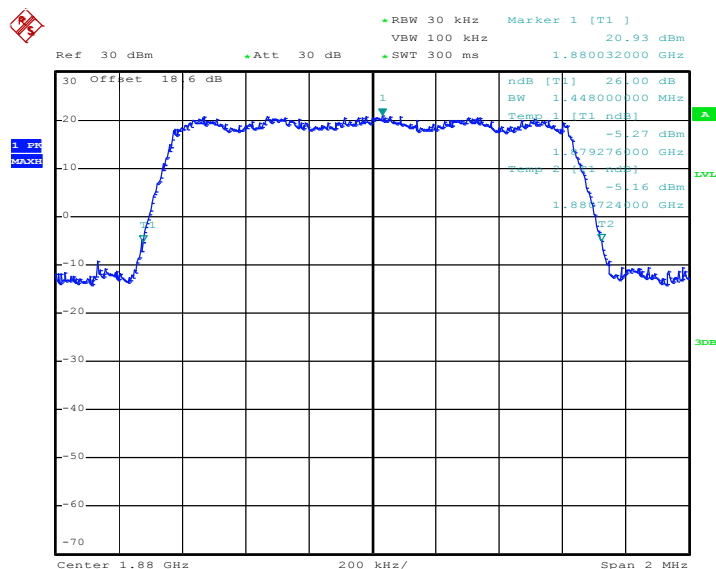

Date: 9.NOV.2012 09:10:03

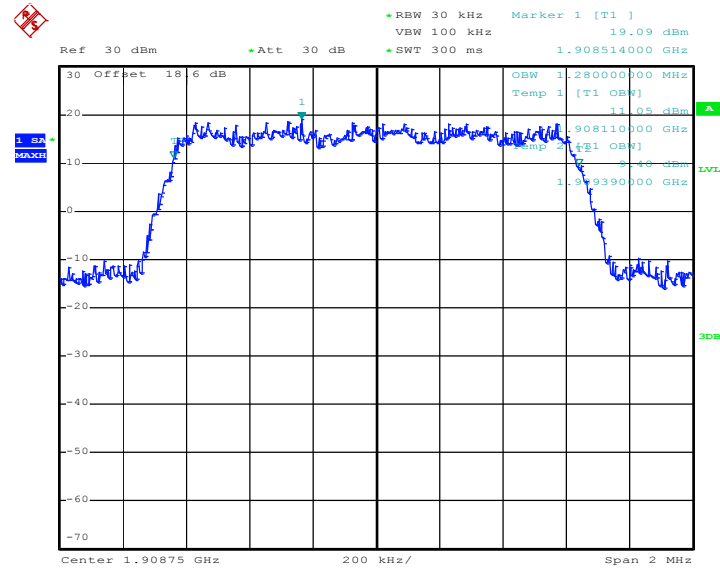99% Occupied Bandwidth Plot on Channel 1175 (1908.75 MHz)


Date: 9.NOV.2012 09:12:18

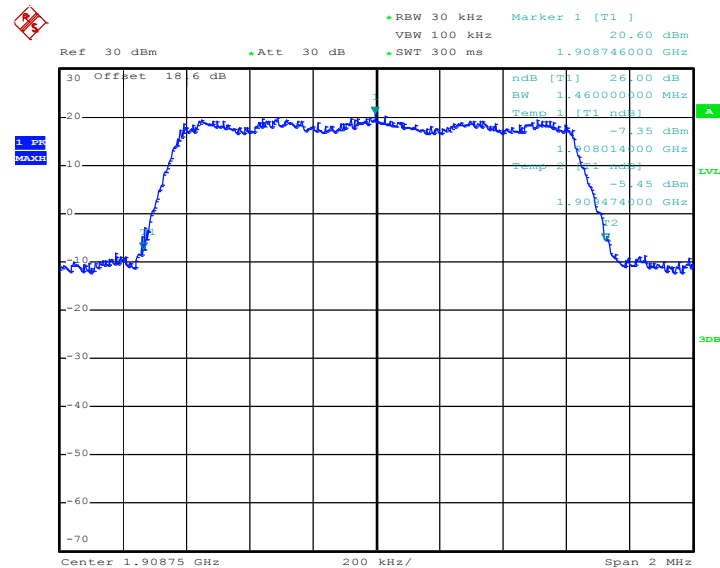26dB Bandwidth Plot on Channel 1175 (1908.75 MHz)


Date: 9.NOV.2012 09:11:12

3.5 Band Edge Measurement

3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Measuring Instruments


See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
4. The RBW was replaced by 10 kHz, slightly smaller than the value in (3), due to the spectrum analyzer limitation to set the exact value. A worst case correction factor of $10 \cdot \log (1\% \text{ emission-BW/measurement RBW})$ was compensated.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10 \log (P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10 \log (P)] \text{ (dB)}$
 $= [30 + 10 \log (P)] \text{ (dBm)} - [43 + 10 \log (P)] \text{ (dB)}$
 $= -13 \text{ dBm}.$

3.5.4 Test Setup


<Conducted Band Edge >

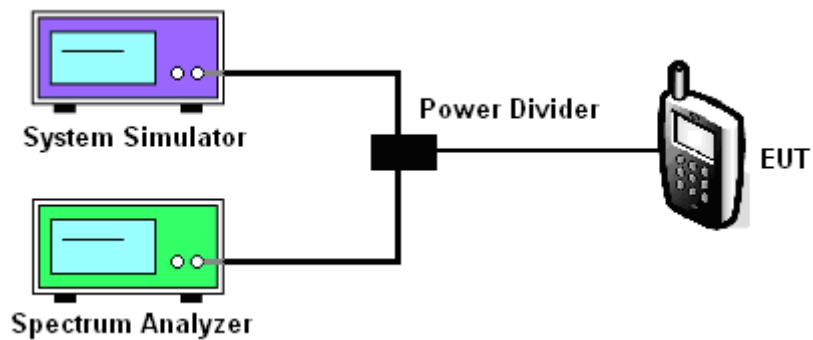

3.5.5 Test Result (Plots) of Conducted Band Edge

Band :	CDMA2000 BC0	Test Mode :	1xRTT_RC1+SO55
Correction Factor :	1.60dB	Maximum 26dB Bandwidth :	1.444MHz
Band Edge :	-16.66dBm	Measurement Value :	-18.26dBm


Lower Band Edge Plot on Channel 1013 (824.7 MHz)

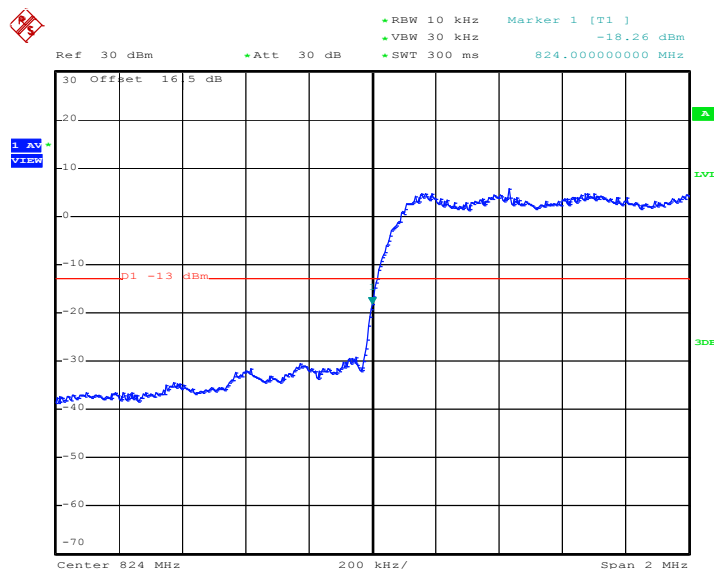

Date: 8.NOV.2012 19:51:42

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	CDMA2000 BC0	Test Mode :	1xRTT_RC1+SO55
Correction Factor :	1.60dB	Maximum 26dB Bandwidth:	1.444MHz
Band Edge :	-13.56dBm	Measurement Value :	-15.16dBm

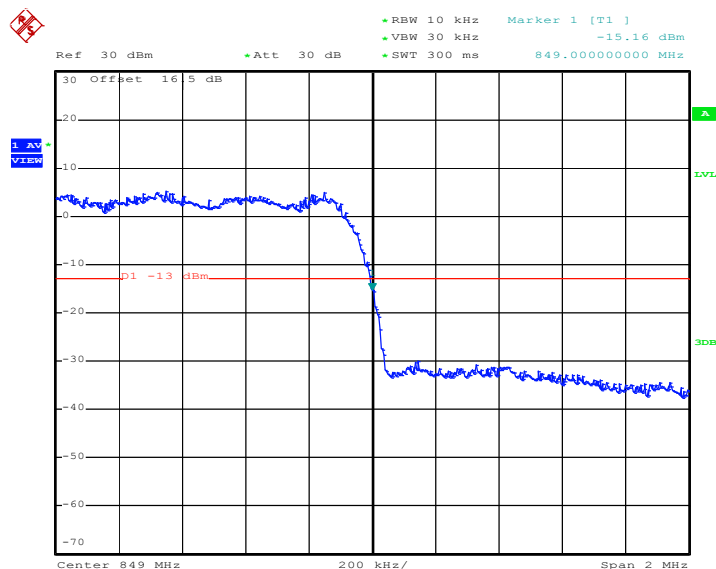Higher Band Edge Plot on Channel 777 (848.31 MHz)


Date: 8.NOV.2012 19:53:20

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	CDMA2000 BC1	Test Mode :	1xRTT_RC1+SO55
Correction Factor :	1.66dB	Maximum 26dB Bandwidth:	1.464MHz
Band Edge :	-24.38dBm	Measurement Value :	-26.04dBm

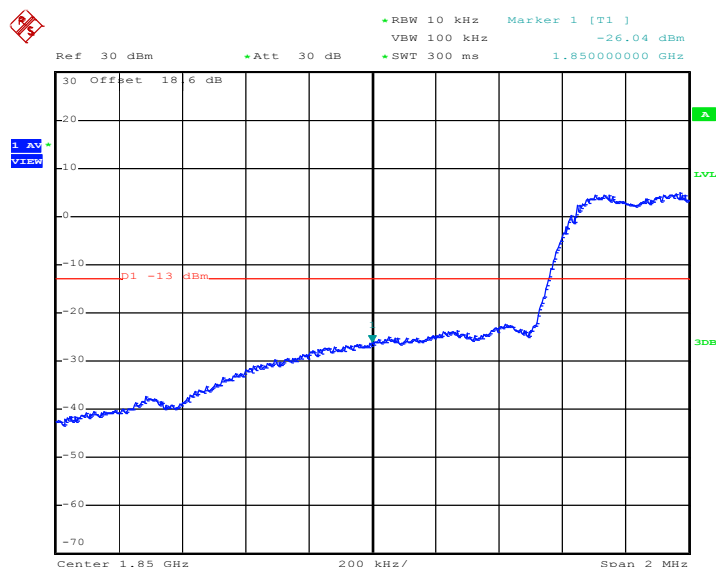Lower Band Edge Plot on Channel 25 (1851.25 MHz)


Date: 9.NOV.2012 09:24:32

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)

Band :	CDMA2000 BC1	Test Mode :	1xRTT_RC1+SO55
Correction Factor :	1.66dB	Maximum 26dB Bandwidth:	1.464MHz
Band Edge :	-26.44dBm	Measurement Value :	-28.10dBm

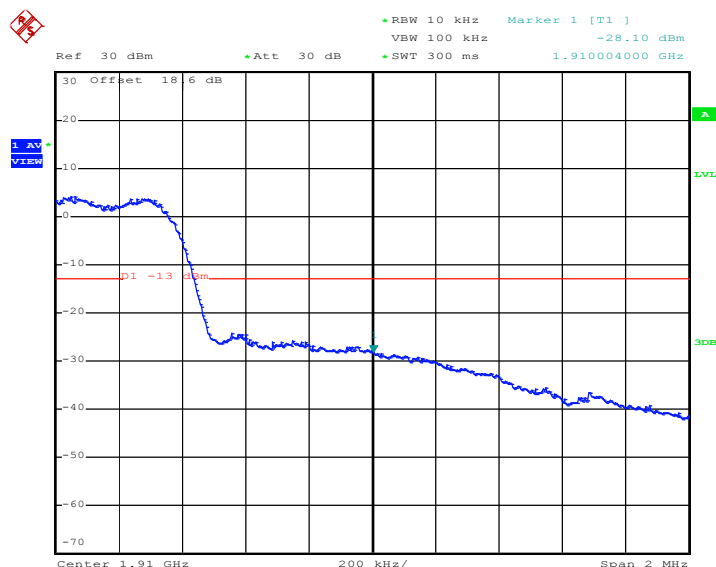Higher Band Edge Plot on Channel 1175 (1908.75 MHz)


Date: 9.NOV.2012 09:21:35

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

3.6 Conducted Spurious Emission Measurement

3.6.1 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.6.4 Test Setup

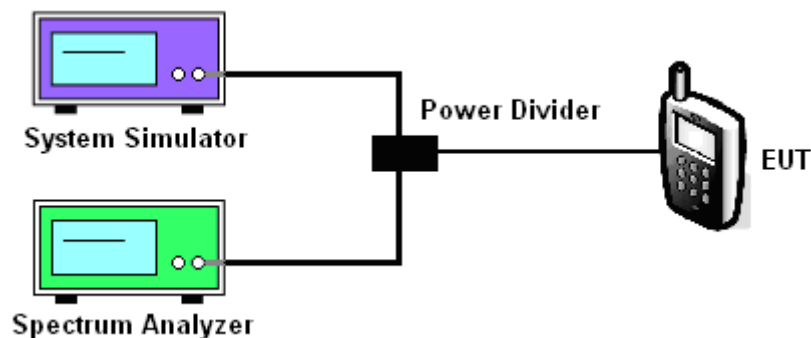


3.6.5 Test Result (Plots) of Conducted Spurious Emission


Band :	CDMA2000 BC0	Channel	384
Test Mode :	1xRTT_RC1+SO55	Frequency :	836.52 MHz

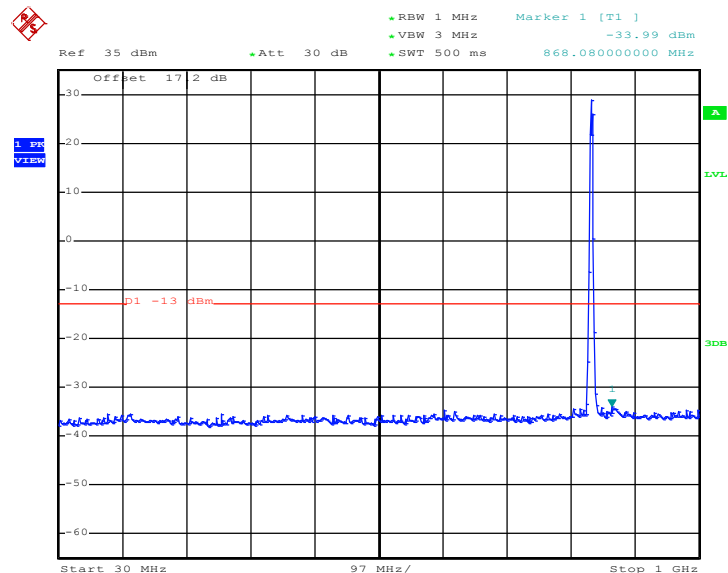Conducted Spurious Emission Plot between 30MHz ~ 1GHz


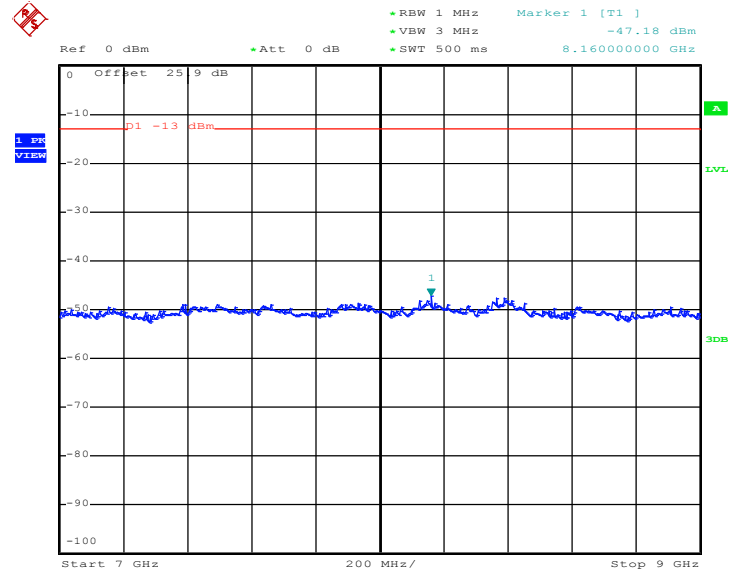
Date: 9.NOV.2012 08:32:46

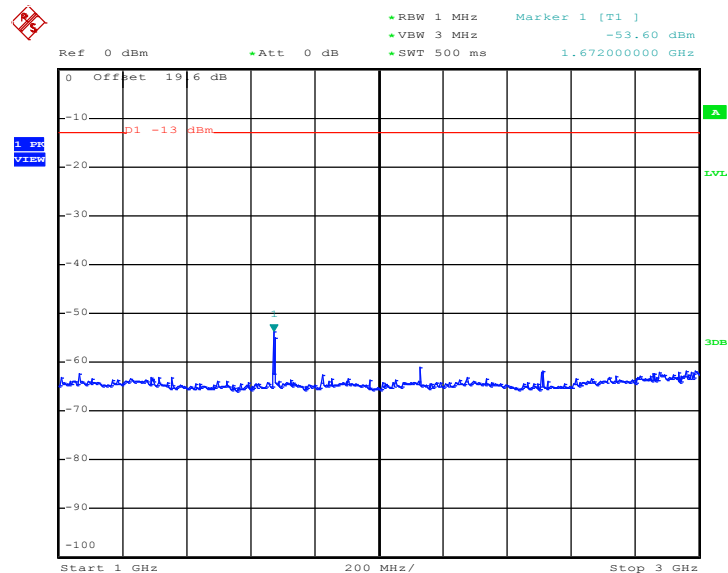Conducted Spurious Emission Plot between 1GHz ~ 3GHz


Date: 9.NOV.2012 08:33:06

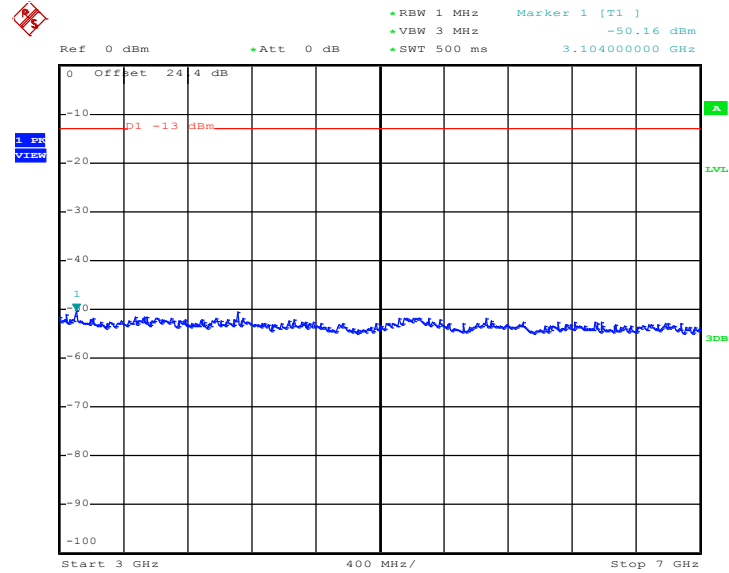Conducted Spurious Emission Plot between 3GHz ~ 7GHz


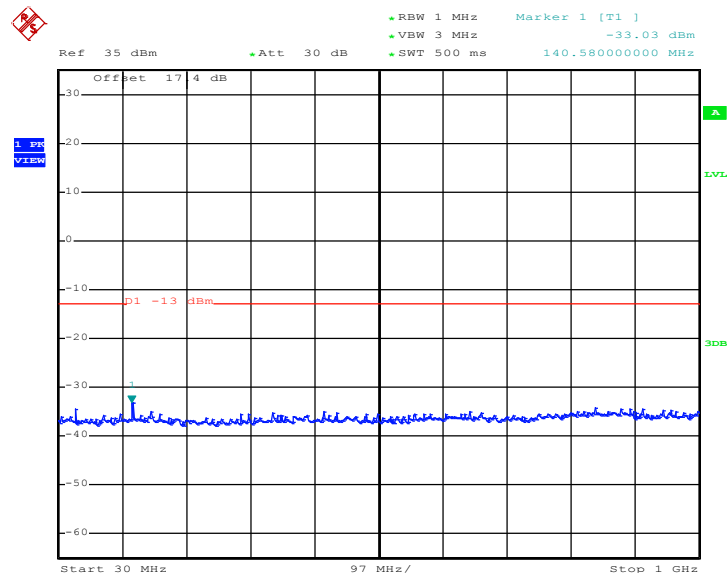
Date: 9.NOV.2012 08:33:18

Conducted Spurious Emission Plot between 7GHz ~ 9GHz


Date: 9.NOV.2012 08:33:31


Band :	CDMA2000 BC1	Channel	600
Test Mode :	1xRTT_RC1+SO55	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz




Date: 9.NOV.2012 08:59:56


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

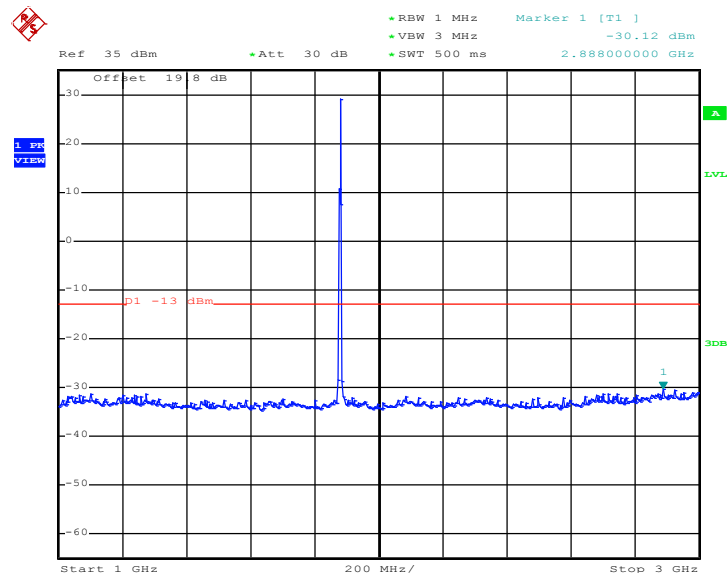

Date: 9.NOV.2012 09:00:08

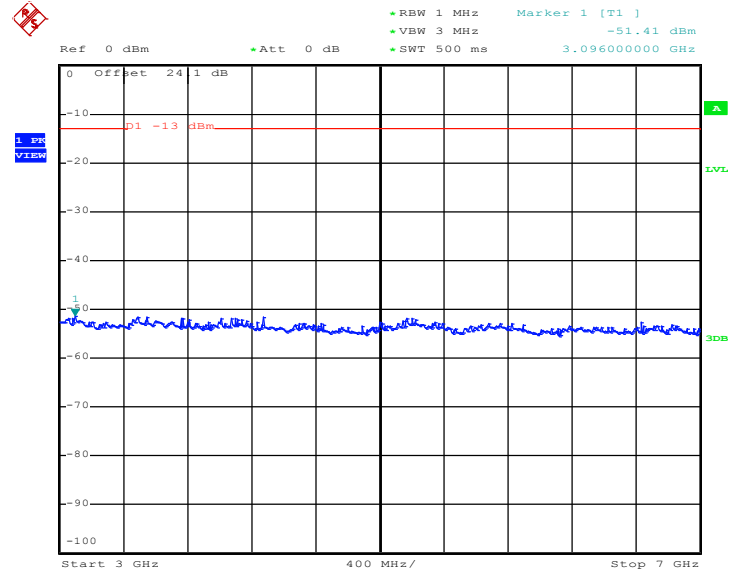
Conducted Spurious Emission Plot between 3GHz ~ 7GHz


Date: 9.NOV.2012 09:00:26

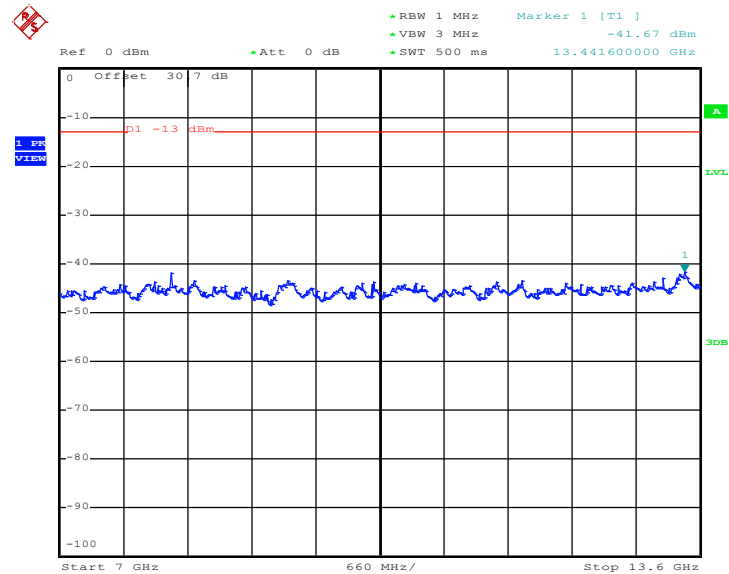Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz


Date: 9.NOV.2012 09:00:38

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

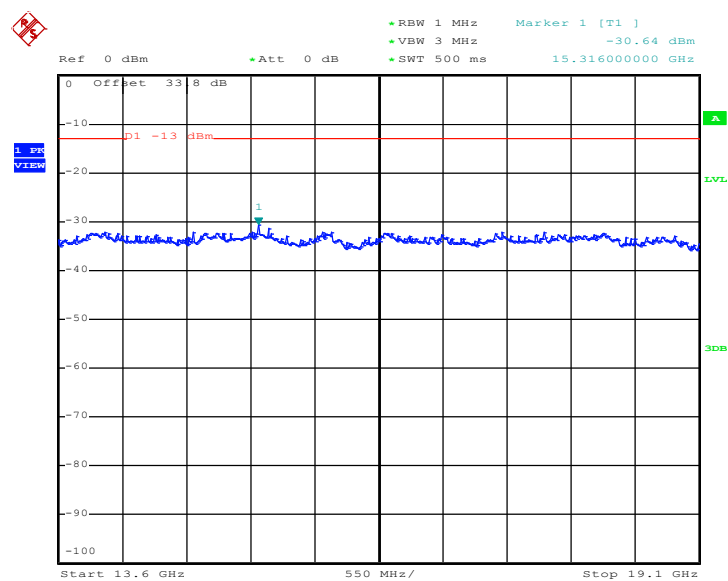

Date: 9.NOV.2012 09:00:51

3.7 Field Strength of Spurious Radiation Measurement

3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43+10\log_{10}(P[\text{Watts}])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments


See list of measuring instruments of this test report.

3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
11. $\text{ERP (dBm)} = \text{EIRP} - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.7.4 Test Setup


For radiated emissions below 30MHz

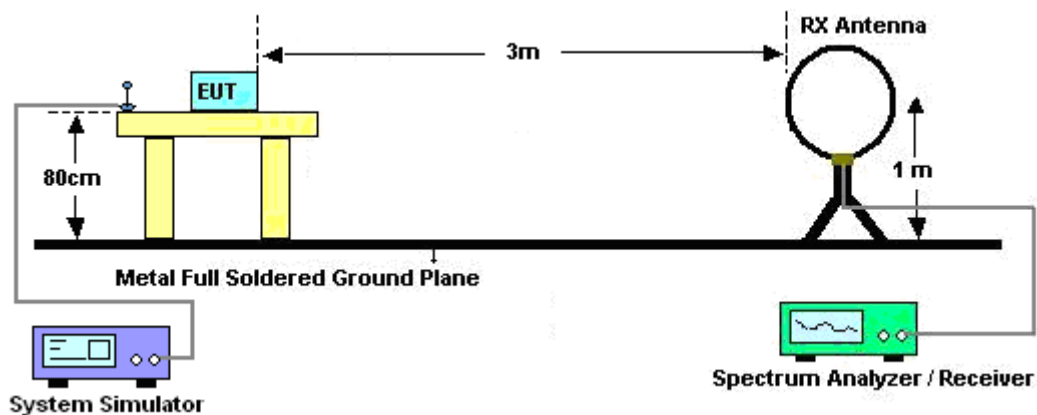

For radiated emissions from 30MHz to 1GHz

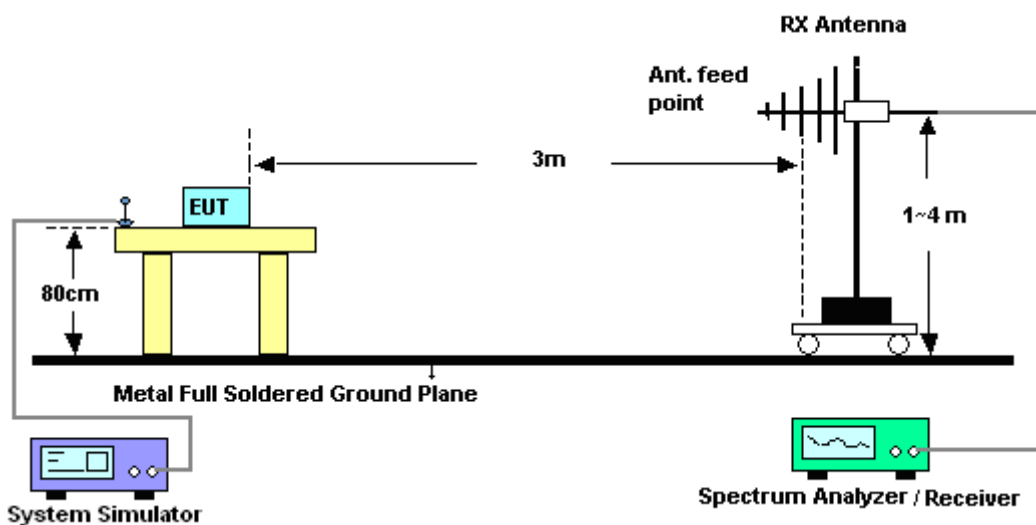

For radiated emissions above 1GHz

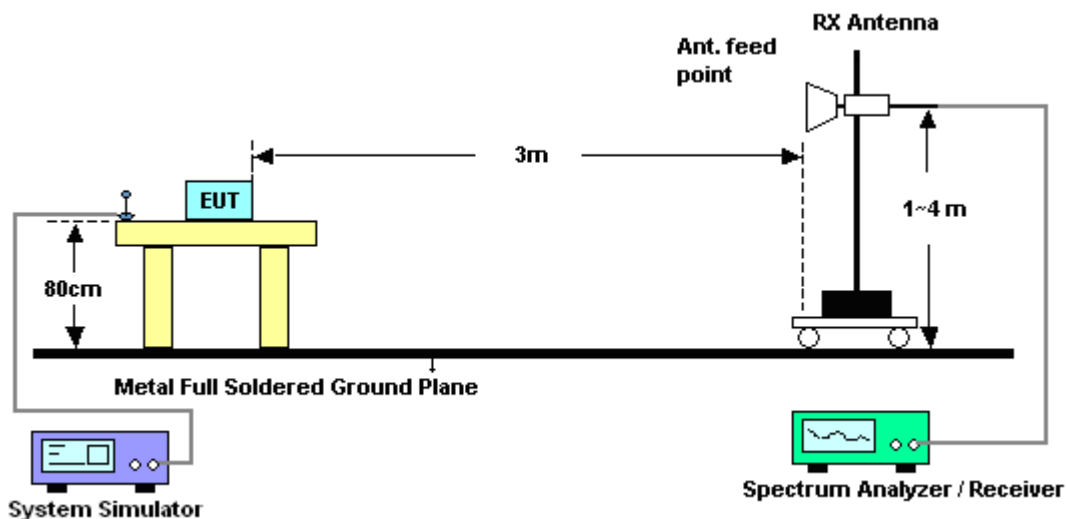


3.7.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.7.6 Test Result of Field Strength of Spurious Radiated


<Sample 1>

Band :	CDMA2000 BC0	Temperature :	24~25°C
Test Mode :	1xRTT_RC1+SO55	Relative Humidity :	42~43%
Test Engineer :	Gavin Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

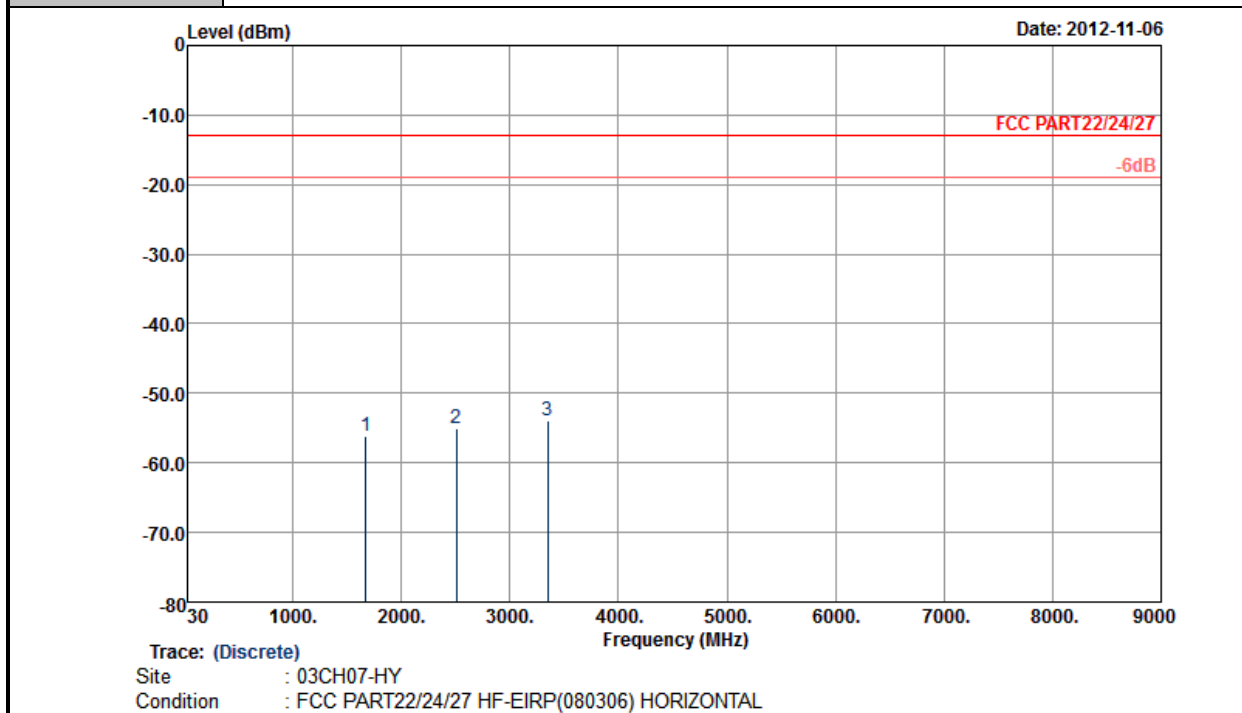


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-56.16	-13	-43.16	-65.45	-57.88	1.62	5.49	H	Pass
2509	-55.07	-13	-42.07	-68.7	-57.04	2.1	6.22	H	Pass
3346	-53.95	-13	-40.95	-68.26	-56.84	3.03	8.07	H	Pass

Band :	CDMA2000 BC0	Temperature :	24~25°C
Test Mode :	1xRTT_RC1+SO55	Relative Humidity :	42~43%
Test Engineer :	Gavin Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

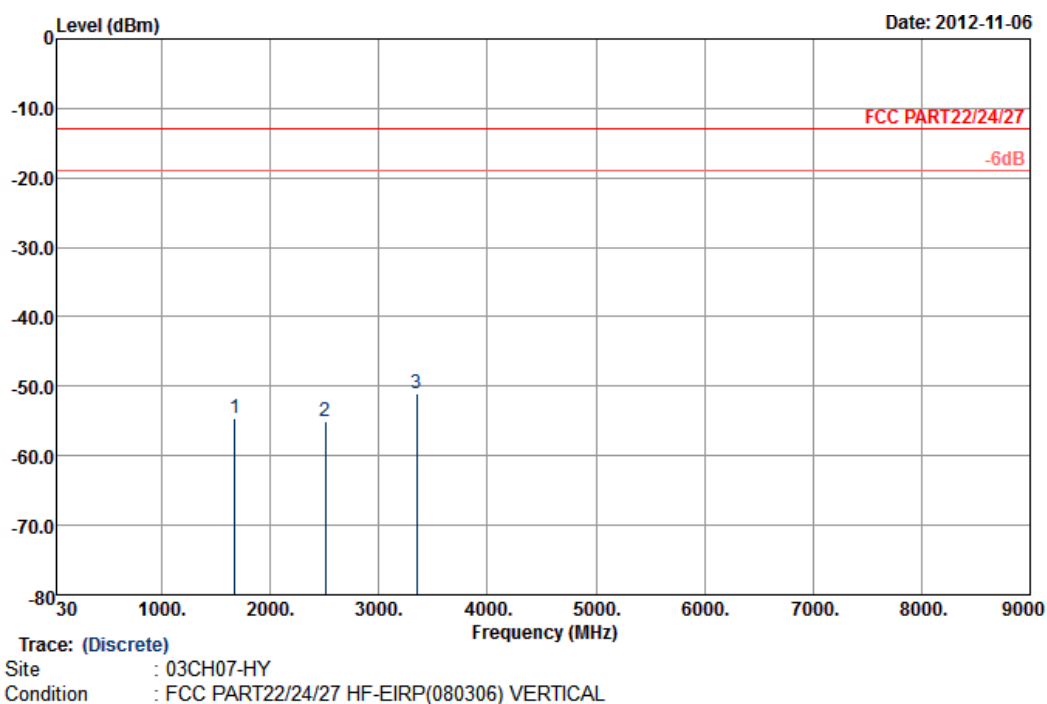


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-54.51	-13	-41.51	-65.89	-56.23	1.62	5.49	V	Pass
2509	-55.15	-13	-42.15	-68.99	-57.12	2.1	6.22	V	Pass
3346	-51.08	-13	-38.08	-66.84	-53.97	3.03	8.07	V	Pass

Band :	CDMA2000 BC1	Temperature :	24~25°C
Test Mode :	1xRTT_RC1+SO55	Relative Humidity :	42~43%
Test Engineer :	Gavin Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

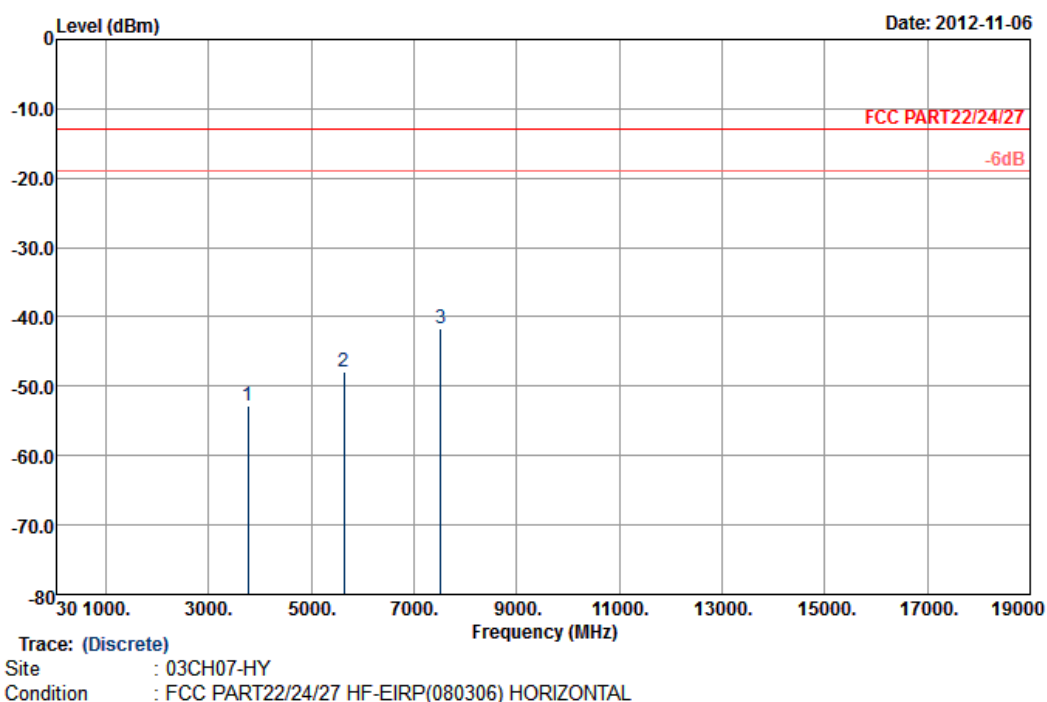

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-52.90	-13	-39.90	-69.76	-59.2	2.51	8.81	H	Pass
5636	-47.97	-13	-34.97	-69.59	-55.68	2.99	10.70	H	Pass
7520	-41.71	-13	-28.71	-69.18	-50.24	3.59	12.12	H	Pass


Band :	CDMA2000 BC1	Temperature :	24~25°C
Test Mode :	1xRTT_RC1+SO55	Relative Humidity :	42~43%
Test Engineer :	Gavin Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

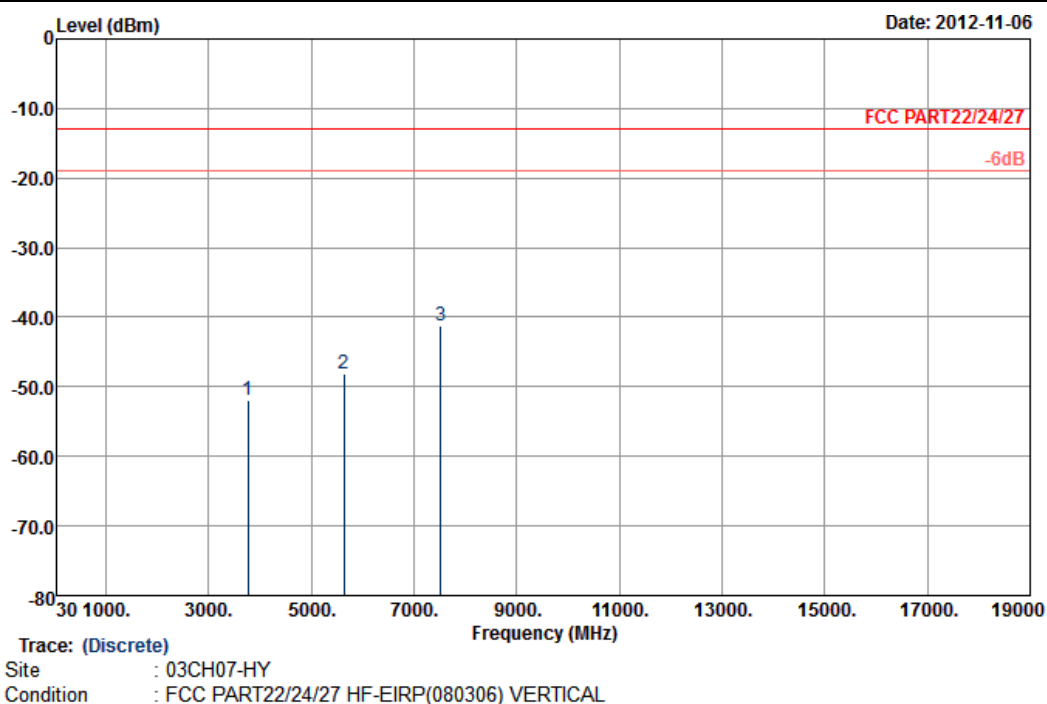

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-51.94	-13	-38.94	-68.84	-58.24	2.51	8.81	V	Pass
5636	-48.17	-13	-35.17	-69.9	-55.88	2.99	10.70	V	Pass
7520	-41.24	-13	-28.24	-69.5	-49.77	3.59	12.12	V	Pass


<Sample 2>

Band :	CDMA2000 BC0	Temperature :	24~25°C
Test Mode :	1xRTT_RC1+SO55	Relative Humidity :	42~43%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

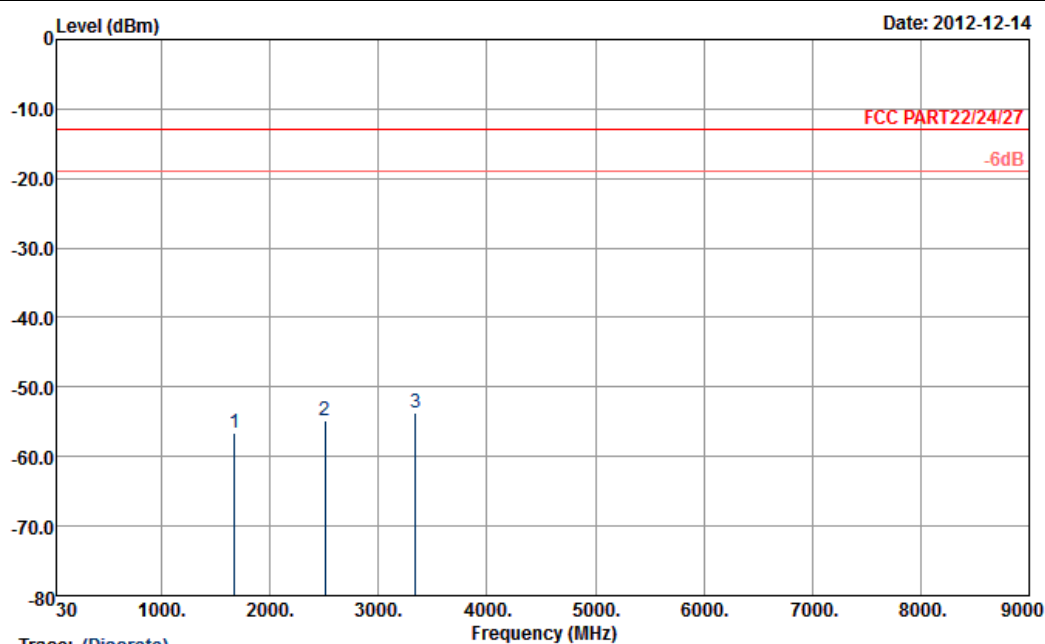

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-56.52	-13	-43.52	-65.21	-58.24	1.62	5.49	H	Pass
2509	-54.90	-13	-41.90	-67.79	-56.87	2.1	6.22	H	Pass
3345	-53.76	-13	-40.76	-67.2	-56.65	3.03	8.07	H	Pass

Band :	CDMA2000 BC0	Temperature :	24~25°C
Test Mode :	1xRTT_RC1+SO55	Relative Humidity :	42~43%
Test Engineer :	Gavin Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

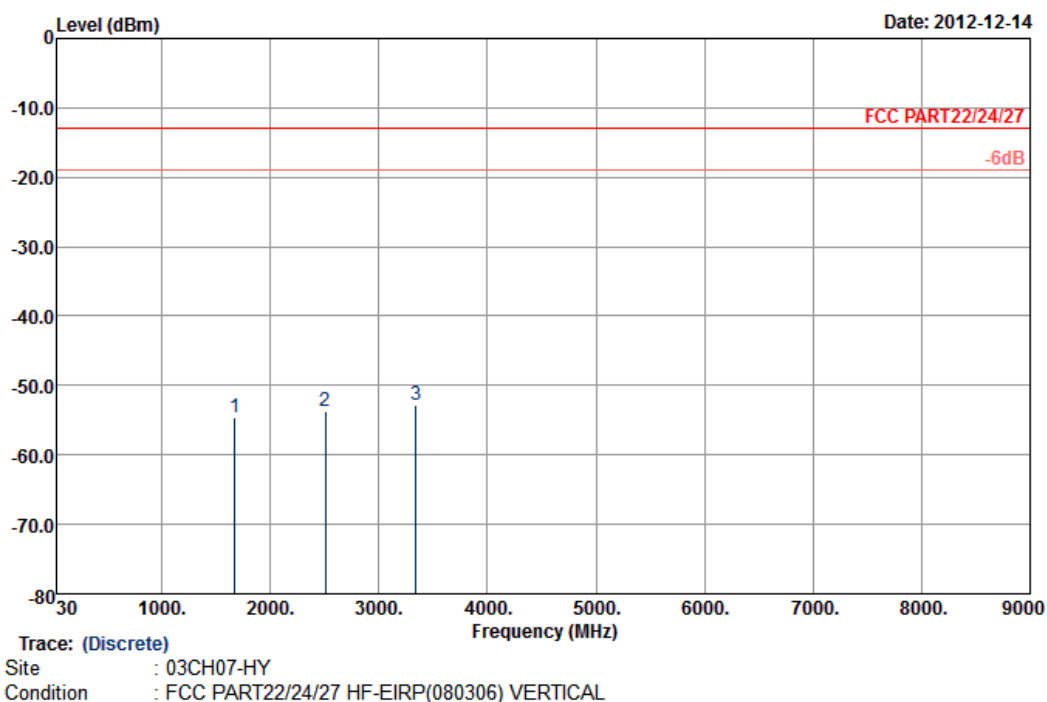

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-54.52	-13	-41.52	-66.19	-56.24	1.62	5.49	V	Pass
2509	-53.80	-13	-40.80	-67.86	-55.77	2.1	6.22	V	Pass
3345	-52.89	-13	-39.89	-67.63	-55.78	3.03	8.07	V	Pass

3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.8.2 Measuring Instruments

See list of measuring instruments of this test report.


3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT cannot be turned on at -30°C , the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.8.5 Test Setup

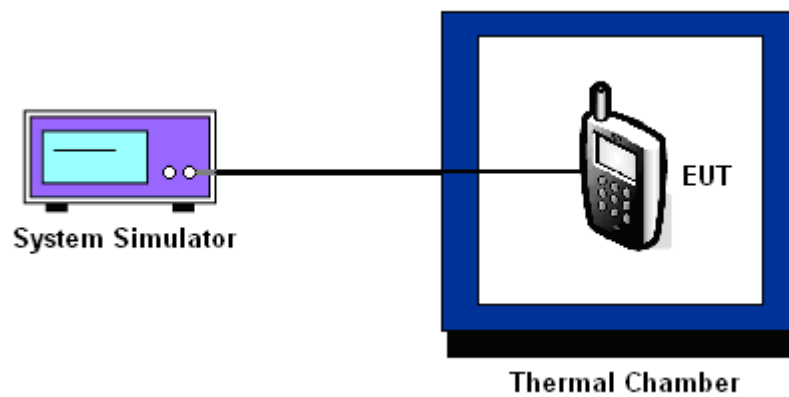

3.8.6 Test Result of Temperature Variation

Band :	CDMA2000 BC0 1xRTT_RC1+SO55	Channel :	384
Limit (ppm) :	2.5	Frequency :	836.52 MHz

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	-11	-0.01	PASS
-20	-16	-0.02	
-10	-14	-0.02	
0	10	0.01	
10	-17	-0.02	
20	-9	-0.01	
30	-18	-0.02	
40	-19	-0.02	
50	-16	-0.02	

Band :	CDMA2000 BC1 1xRTT_RC1+SO55	Channel :	600
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	15	0.01	PASS
-20	14	0.01	
-10	17	0.01	
0	14	0.01	
10	16	0.01	
20	13	0.01	
30	21	0.01	
40	24	0.01	
50	19	0.01	

3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
CDMA2000 BC0 CH384	1xRTT RC1+SO55	3.8	-13	-0.02	2.5	PASS
		BEP	-18	-0.02		
		4.2	-15	-0.02		
CDMA2000 BC1 CH600	1xRTT RC1+SO55	3.8	23	0.01	2.5	PASS
		BEP	21	0.01		
		4.2	22	0.01		

Note :

1. Normal Voltage = 3.8V.
2. Battery End Point (BEP) = 3.6 V.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	R&S	CMU200	117995	N/A	Jul. 30, 2012	Nov. 08, 2012 ~ Nov. 09, 2012	Jul. 29, 2013	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 06, 2012	Nov. 08, 2012 ~ Nov. 09, 2012	Jun. 05, 2013	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 23, 2012	Nov. 08, 2012 ~ Nov. 09, 2012	Jul. 22, 2013	Conducted (TH02-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 06, 2012	Nov. 06, 2012 ~ Dec. 14, 2012	Oct. 05, 2013	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9KHz ~ 30GHz	Dec. 06, 2011	Nov. 06, 2012 ~ Nov. 30, 2012	Dec. 05, 2012	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9KHz ~ 30GHz	Nov. 30, 2012	Nov. 30, 2012 ~ Dec. 14, 2012	Nov. 29, 2013	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 22, 2012	Nov. 06, 2012 ~ Dec. 14, 2012	Aug. 21, 2013	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A01917	1GHz ~ 26.5GHz	Apr. 13, 2012	Nov. 06, 2012 ~ Dec. 14, 2012	Apr. 12, 2013	Radiation (03CH07-HY)
Pre Amplifier	MITEQ	AMF-7D-00 101800-30-1	159088	1GHz ~ 18GHz	Mar. 10, 2012	Nov. 06, 2012 ~ Dec. 14, 2012	Mar. 09, 2013	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz. 32dB.GAIN	Feb. 27, 2012	Nov. 06, 2012 ~ Dec. 14, 2012	Feb. 26, 2013	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Sep. 03, 2012	Nov. 06, 2012 ~ Dec. 14, 2012	Sep. 02, 2013	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917025 1	15GHz ~ 40GHz	Sep. 28, 2012	Nov. 06, 2012 ~ Dec. 14, 2012	Sep. 27, 2013	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz ~ 30MHz	Jul. 03, 2012	Nov. 06, 2012 ~ Dec. 14, 2012	Jul. 02, 2013	Radiation (03CH07-HY)
System Simulator	R&S	CMU200	117995	N/A	Jul. 28, 2011	Nov. 06, 2012 ~ Dec. 14, 2012	Jul. 27, 2013	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------

