

System Check_Head_835MHz_121201**DUT: D835V2-SN:499**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_850_121201 Medium parameters used: $f = 835$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 40.246$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.4°C ; Liquid Temperature : 21.4°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.2, 6.2, 6.2); Calibrated: 2012/9/28;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Pin=250mW/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 2.49 mW/g



Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$,
 $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.490 V/m ; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 3.402 mW/g

SAR(1 g) = 2.31 mW/g ; SAR(10 g) = 1.51 mW/g

Maximum value of SAR (measured) = 2.49 mW/g

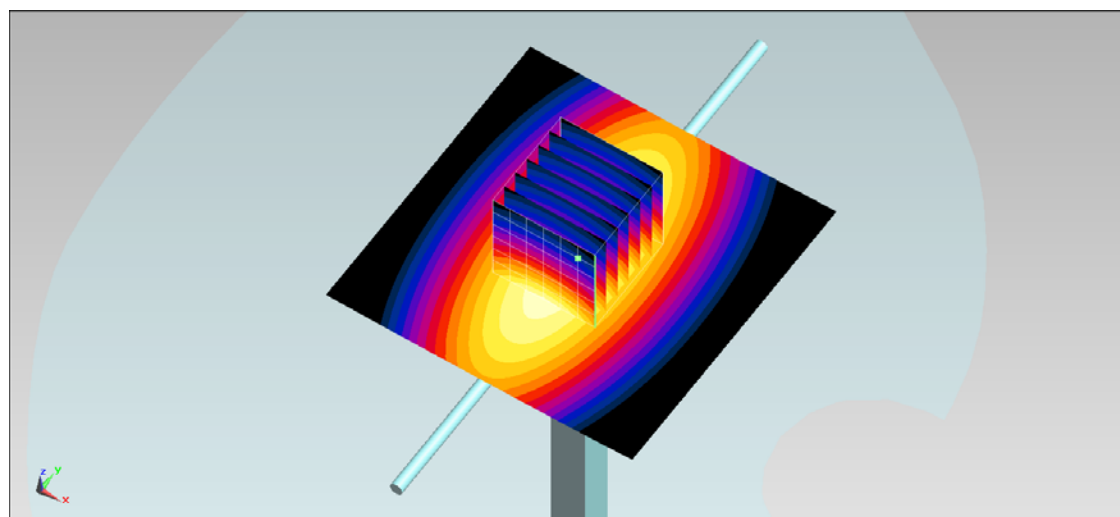

$0 \text{ dB} = 2.49 \text{ mW/g} = 7.92 \text{ dB mW/g}$

System Check_Head_835MHz_121202**DUT: D835V2-SN:499**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_850_121202 Medium parameters used: $f = 835$ MHz; $\sigma = 0.945$ mho/m; $\epsilon_r = 41.195$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.4°C ; Liquid Temperature : 21.4°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.2, 6.2, 6.2); Calibrated: 2012/9/28;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Pin=250mW/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 2.58 mW/g



Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$,
 $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.042 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.533 mW/g

SAR(1 g) = 2.39 mW/g ; SAR(10 g) = 1.57 mW/g

Maximum value of SAR (measured) = 2.58 mW/g

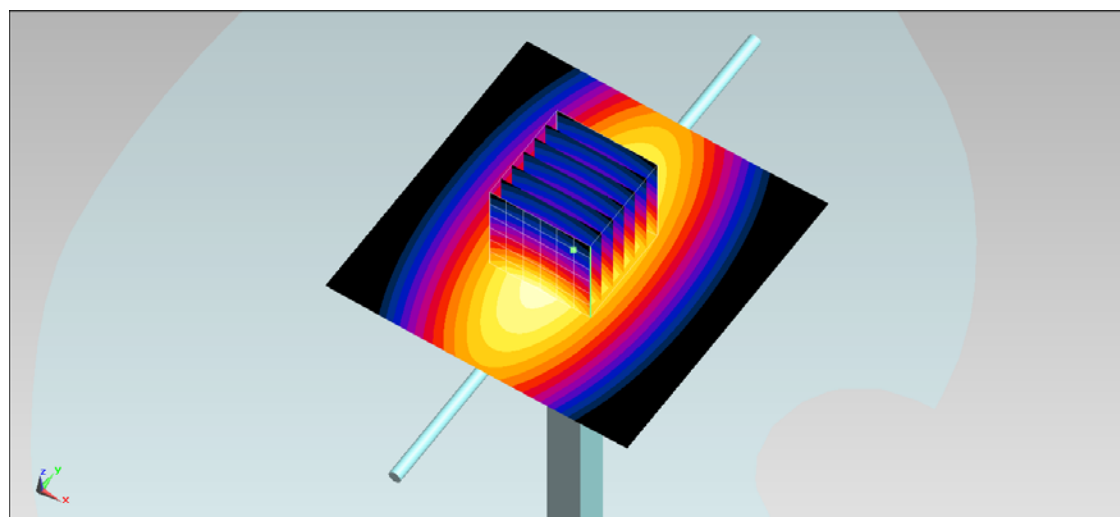

$0 \text{ dB} = 2.58 \text{ mW/g} = 8.23 \text{ dB mW/g}$

System Check_Body_835MHz_121201**DUT: D835V2-SN:499**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_850_121201 Medium parameters used: $f = 835$ MHz; $\sigma = 0.968$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.16, 6.16, 6.16); Calibrated: 2012/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.99 mW/g



Configuration/Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.250 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.754 mW/g

SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.68 mW/g

Maximum value of SAR (measured) = 2.96 mW/g

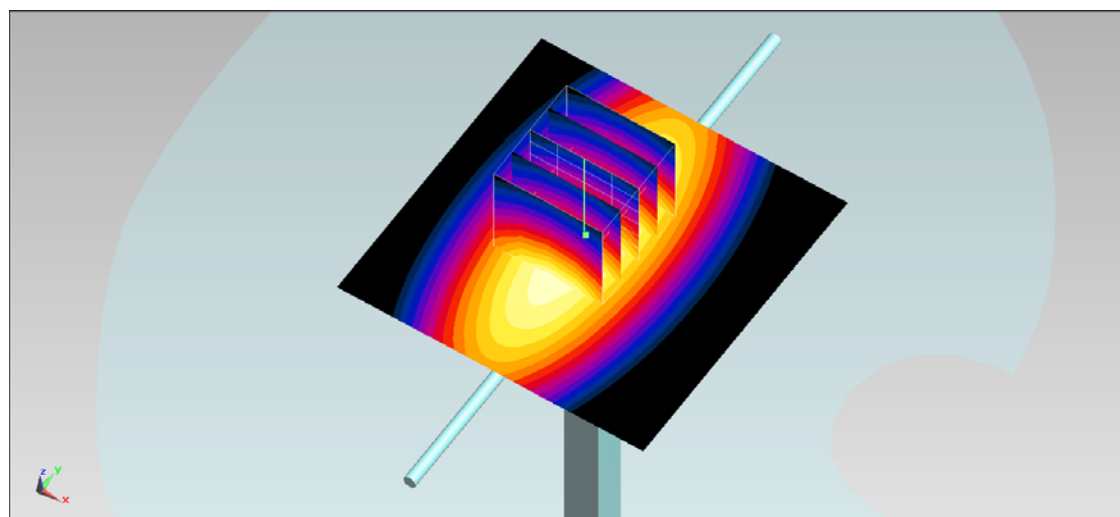

0 dB = 2.96 mW/g = 9.43 dB mW/g

System Check_Body_835MHz_121202**DUT: D835V2-SN:499**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_850_121202 Medium parameters used: $f = 835$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 53.888$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.5°C ; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.16, 6.16, 6.16); Calibrated: 2012/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Pin=250mW/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 3.08 mW/g


Configuration/Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$,
 $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.250 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.869 mW/g

SAR(1 g) = 2.63 mW/g ; SAR(10 g) = 1.73 mW/g

Maximum value of SAR (measured) = 3.05 mW/g

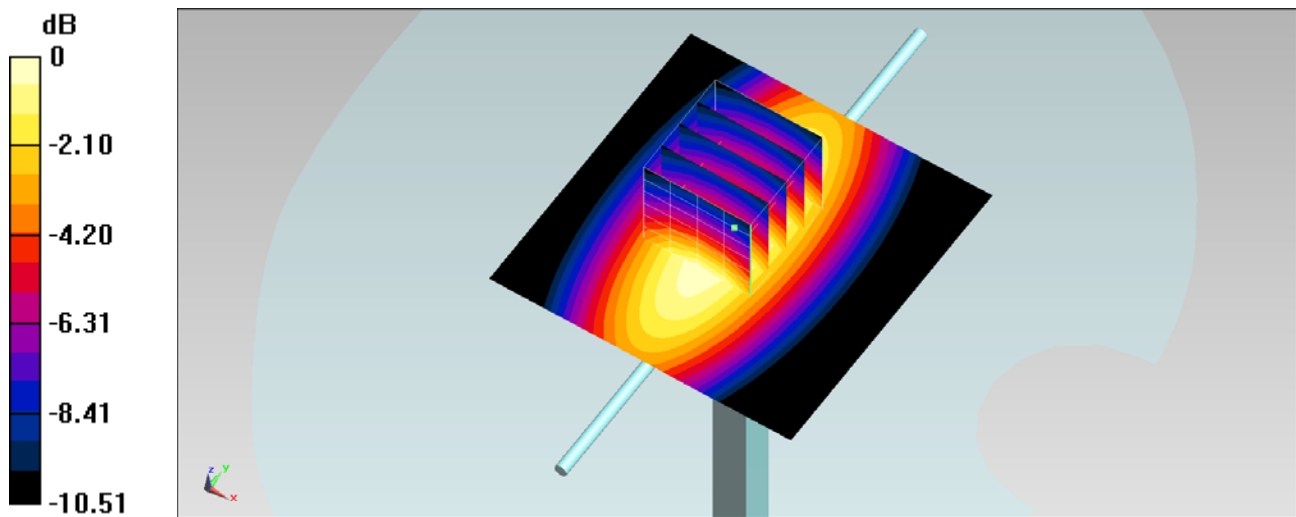

0 dB = 3.05 mW/g = 9.69 dB mW/g

System Check_Head_1900MHz_121130**DUT: D1900V2-SN:5d041**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900_121130 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.389$ mho/m; $\epsilon_r = 40.188$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(5.05, 5.05, 5.05); Calibrated: 2012/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 13.2 mW/g



Configuration/Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 98.258 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 18.286 mW/g

SAR(1 g) = 9.92 mW/g; SAR(10 g) = 5.15 mW/g

Maximum value of SAR (measured) = 12.3 mW/g

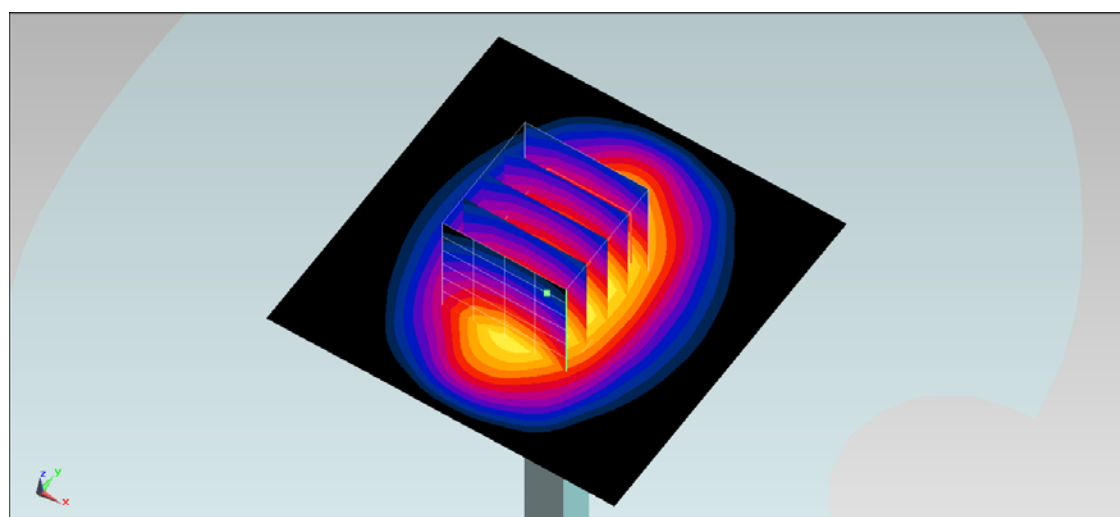

0 dB = 12.3 mW/g = 21.80 dB mW/g

System Check_Head_1900MHz_121202**DUT: D1900V2-SN:5d041**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900_121202 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.431$ mho/m; $\epsilon_r = 38.973$; ρ $= 1000$ kg/m³

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(5.05, 5.05, 5.05); Calibrated: 2012/9/28;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)



Configuration/Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 11.9 mW/g**Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.883 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 20.353 mW/g

SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.41 mW/g

Maximum value of SAR (measured) = 12.0 mW/g

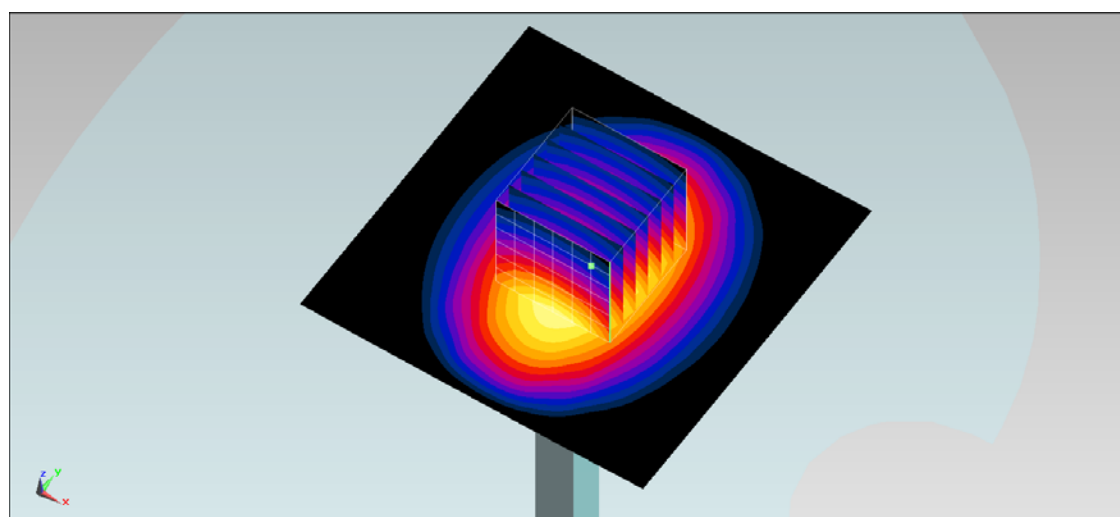

0 dB = 12.0 mW/g = 21.58 dB mW/g

System Check_Body_1900MHz_121201**DUT: D1900V2-SN:5d041**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121201 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.539$ mho/m; $\epsilon_r = 54.55$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.67, 4.67, 4.67); Calibrated: 2012/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 13.1 mW/g



Configuration/Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 90.033 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.521 mW/g

SAR(1 g) = 9.69 mW/g; SAR(10 g) = 5.04 mW/g

Maximum value of SAR (measured) = 12.2 mW/g

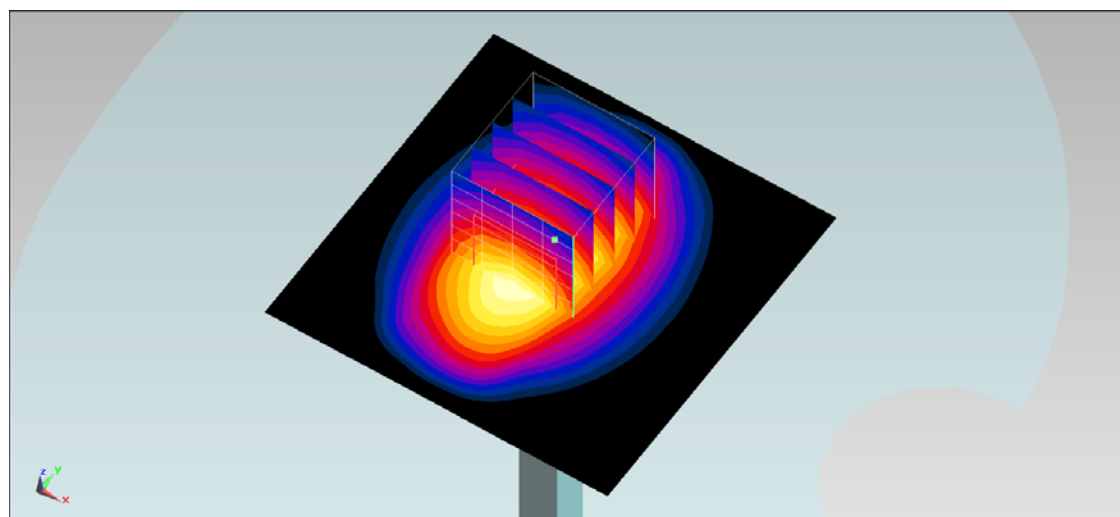

0 dB = 12.2 mW/g = 21.73 dB mW/g

System Check_Body_1900MHz_121203**DUT: Dipole 1900 MHz**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121203 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.545$ mho/m; $\epsilon_r = 51.942$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.67, 4.67, 4.67); Calibrated: 2012/9/28;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 11.0 mW/g


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.252 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 18.123 mW/g

SAR(1 g) = 9.6 mW/g; SAR(10 g) = 4.95 mW/g

Maximum value of SAR (measured) = 10.8 mW/g

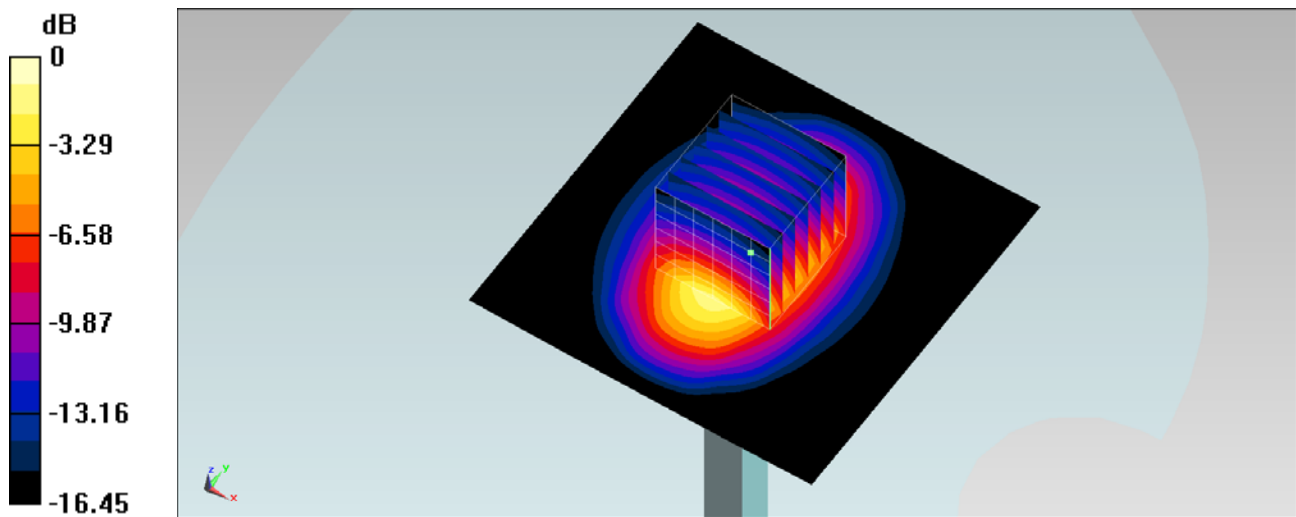

0 dB = 10.8 mW/g = 20.67 dB mW/g

System Check_Head_2450MHz_121205**DUT: D2450V2-SN:736**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450_121205 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.835$ mho/m; $\epsilon_r = 37.539$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.45, 4.45, 4.45); Calibrated: 2012/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 19.9 mW/g



Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.5 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 28.112 mW/g

SAR(1 g) = 14 mW/g; SAR(10 g) = 6.59 mW/g

Maximum value of SAR (measured) = 18.1 mW/g

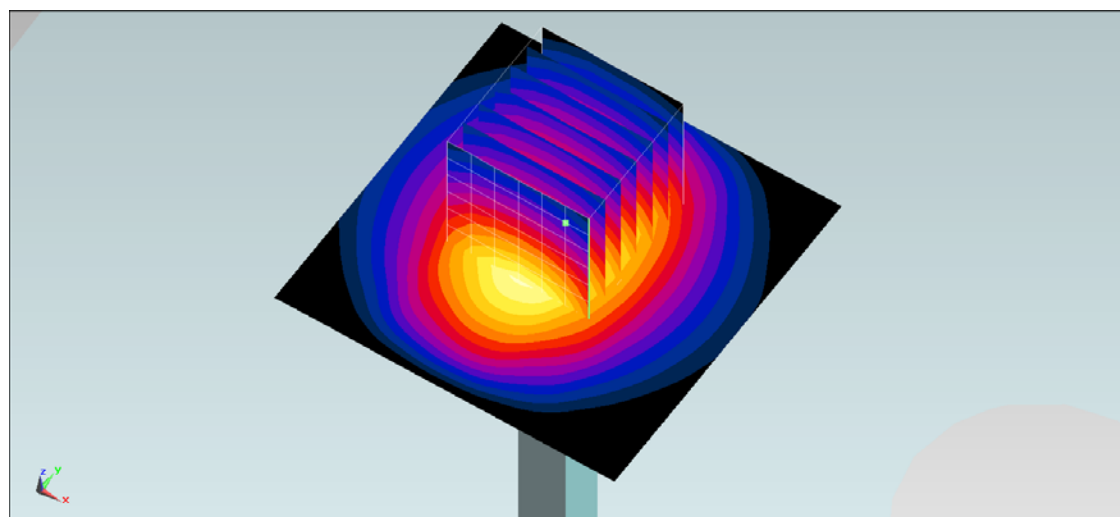

0 dB = 18.1 mW/g = 25.15 dB mW/g

System Check_Body_2450MHz_121205**DUT: Dipole 2450 MHz D2450V2**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121205 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.018$ mho/m; $\epsilon_r = 52.307$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.57, 6.57, 6.57); Calibrated: 2012/9/28;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM LEFT; Type: QD000P40CD; Serial: TP:1718
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 16.7 mW/g



Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.717 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 28.198 mW/g

SAR(1 g) = 14.1 mW/g; SAR(10 g) = 6.58 mW/g

Maximum value of SAR (measured) = 16.3 mW/g

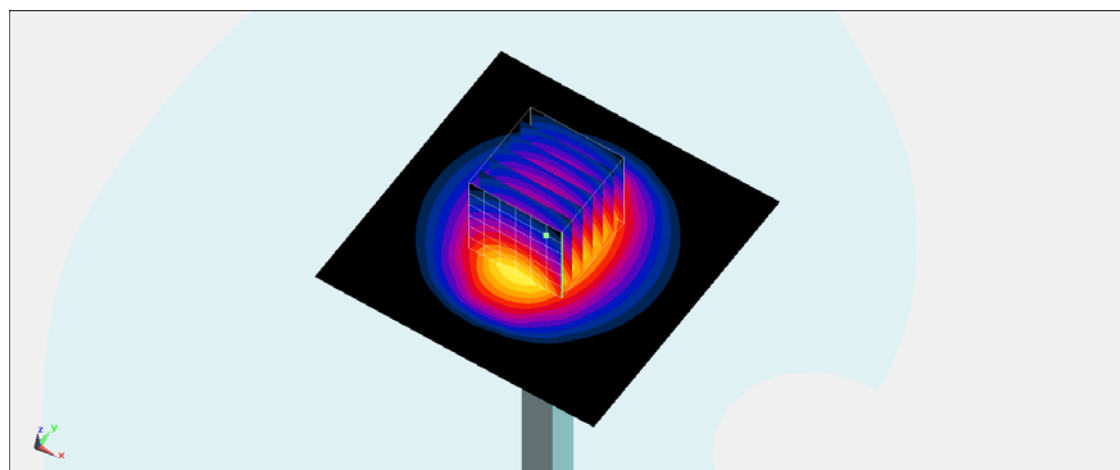

0 dB = 16.3 mW/g = 24.24 dB mW/g

System Check_Body_2450MHz_121227**DUT: D2450V2-SN:736**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121227 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.875$ mho/m; $\epsilon_r = 51.836$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.17, 4.17, 4.17); Calibrated: 2012/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 17.2 mW/g


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.762 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 26.052 mW/g

SAR(1 g) = 12.3 mW/g; SAR(10 g) = 5.78 mW/g

Maximum value of SAR (measured) = 16.1 mW/g

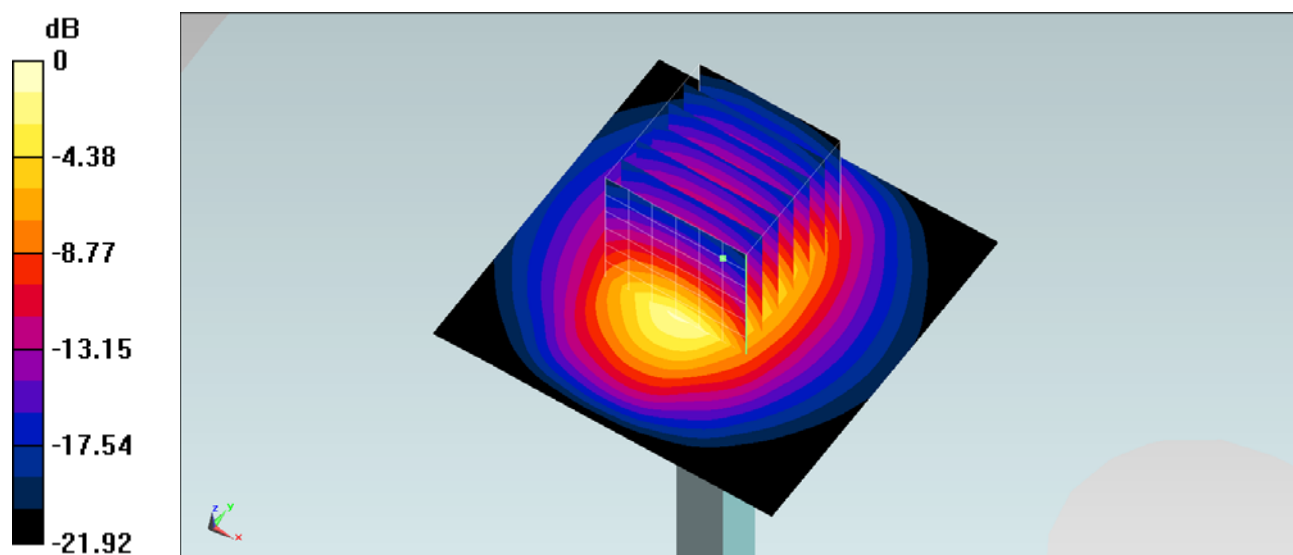

0 dB = 16.1 mW/g = 24.14 dB mW/g

System Check_Head_5200MHz_121206**DUT: D5GHzV2-SN:1006**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121206 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.687$ mho/m; $\epsilon_r = 37.2$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.86, 4.86, 4.86); Calibrated: 2012/9/28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Pin=100mW/Area Scan (71x71x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 21.0 mW/g


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 49.422 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 41.063 mW/g

SAR(1 g) = 8.02 mW/g ; SAR(10 g) = 2.16 mW/g

Maximum value of SAR (measured) = 20.3 mW/g

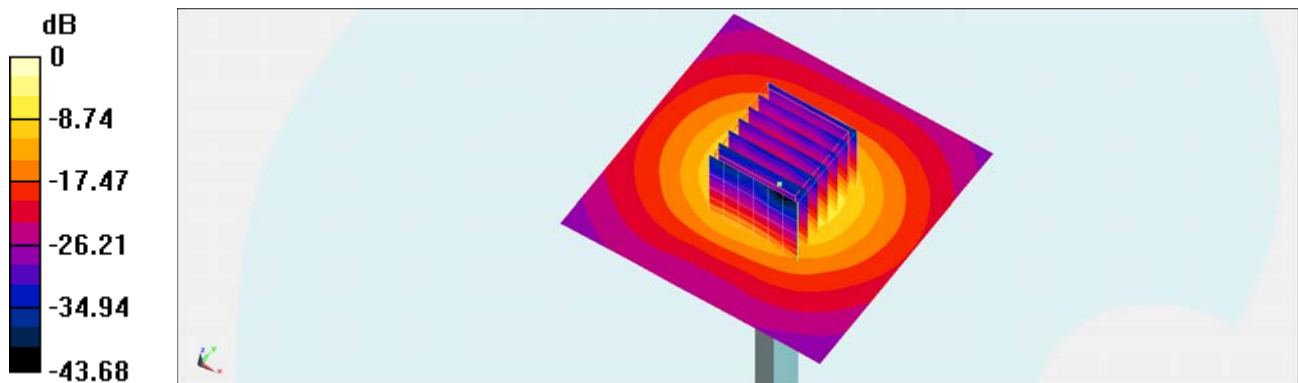

0 dB = 20.3 mW/g = 26.15 dB mW/g

System Check_Body_5200MHz_121205**DUT: D5GHzV2-SN:1006**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121205 Medium parameters used: $f = 5200$ MHz; $\sigma = 5.244$ mho/m; $\epsilon_r = 47.499$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.29, 4.29, 4.29); Calibrated: 2012/9/28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Pin=100mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 19.1 mW/g


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 45.762 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 35.367 mW/g

SAR(1 g) = 7.29 mW/g; SAR(10 g) = 2 mW/g

Maximum value of SAR (measured) = 18.2 mW/g

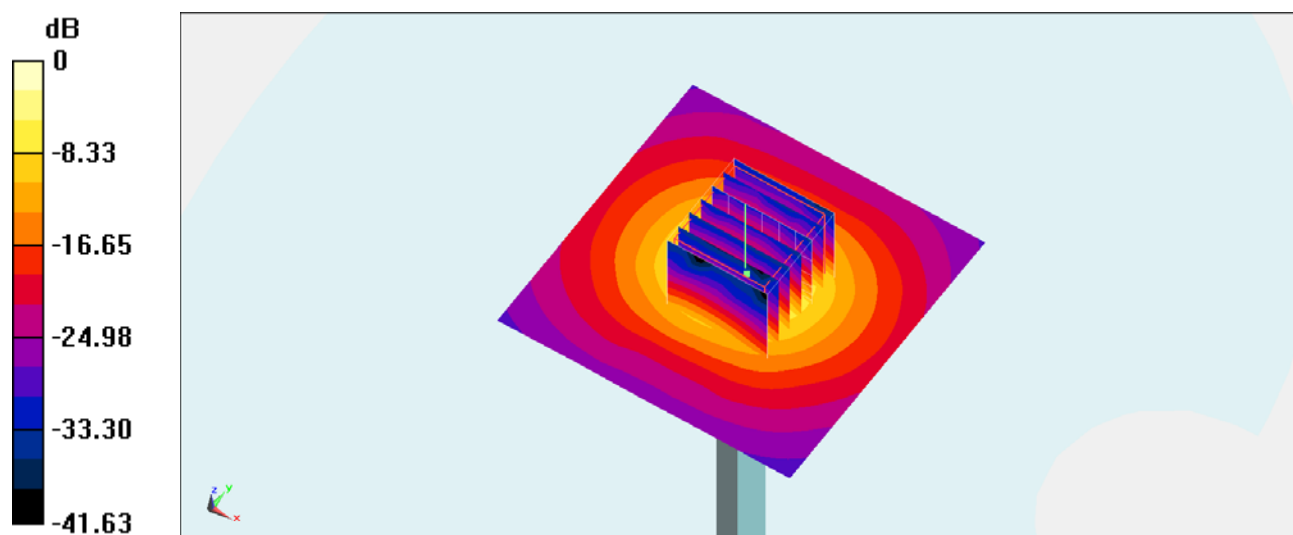

0 dB = 18.2 mW/g = 25.20 dB mW/g

System Check_Head_5300MHz_121206**DUT: D5GHzV2-SN:1006**

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121206 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.81$ mho/m; $\epsilon_r = 36.999$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.86, 4.86, 4.86); Calibrated: 2012/9/28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Pin=100mW/Area Scan (71x71x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 20.7 mW/g



Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 47.932 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 41.523 mW/g

SAR(1 g) = 7.78 mW/g ; SAR(10 g) = 2.12 mW/g

Maximum value of SAR (measured) = 19.8 mW/g

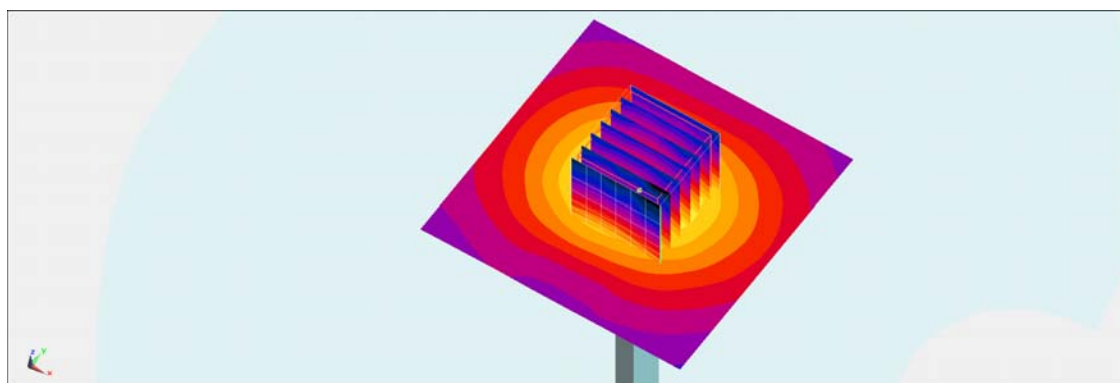

0 dB = 19.8 mW/g = 25.93 dB mW/g

System Check_Body_5300MHz_121205**DUT: D5GHzV2-SN:1006**

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121205 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.38$ mho/m; $\epsilon_r = 47.244$; $\rho =$

1000 kg/m³

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.29, 4.29, 4.29); Calibrated: 2012/9/28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Pin=100mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 19.8 mW/g


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 45.741 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 37.632 mW/g

SAR(1 g) = 7.5 mW/g; SAR(10 g) = 1.99 mW/g

Maximum value of SAR (measured) = 19.3 mW/g

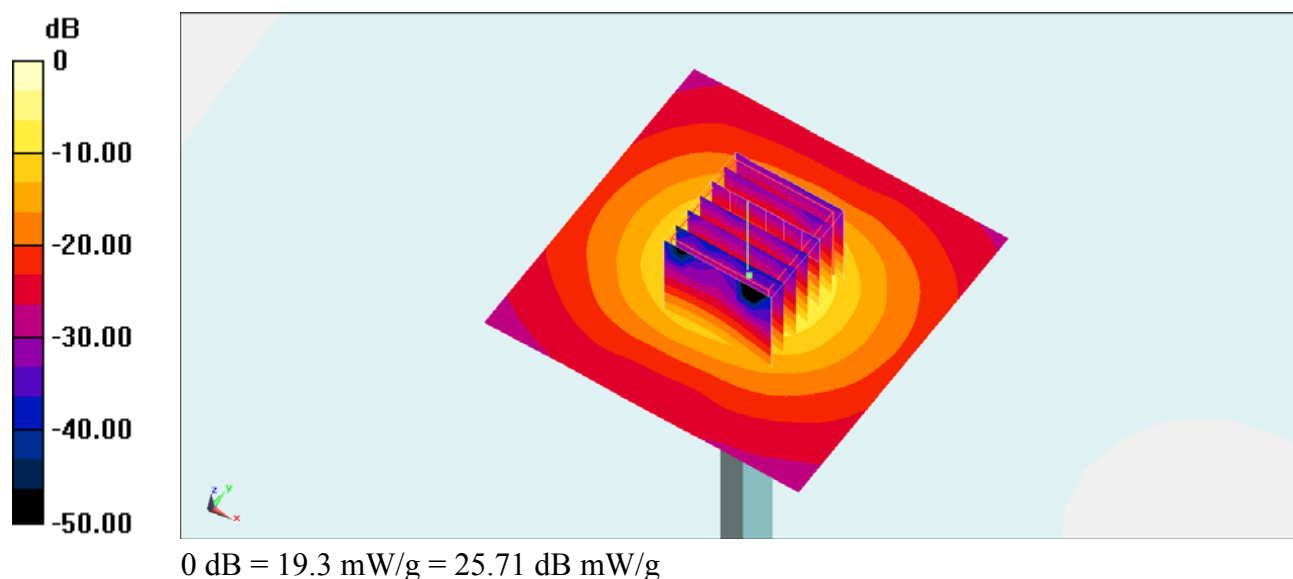

System Check_Head_5500MHz_121206**DUT: D5GHzV2-SN:1006**

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121206 Medium parameters used: $f = 5500$ MHz; $\sigma = 5.058$ mho/m; $\epsilon_r = 36.612$; $\rho =$

1000 kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.6, 4.6, 4.6); Calibrated: 2012/9/28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Pin=100mW/Area Scan (71x71x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (interpolated) = 24.0 mW/g


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm,
 $dy=4$ mm, $dz=1.4$ mm

Reference Value = 48.818 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 50.539 mW/g

SAR(1 g) = 8.72 mW/g; SAR(10 g) = 2.34 mW/g

Maximum value of SAR (measured) = 22.4 mW/g

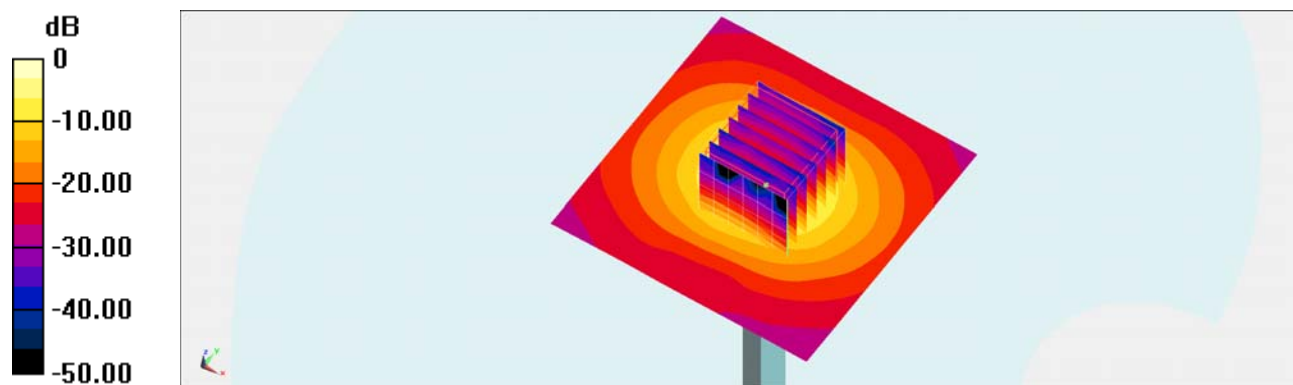

0 dB = 22.4 mW/g = 27.00 dB mW/g

System Check_Body_5500MHz_121205**DUT: D5GHzV2-SN:1006**

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121205 Medium parameters used: $f = 5500$ MHz; $\sigma = 5.631$ mho/m; $\epsilon_r = 46.992$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(3.91, 3.91, 3.91); Calibrated: 2012/9/28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Pin=100mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 20.1 mW/g


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 43.867 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 41.189 mW/g

SAR(1 g) = 7.45 mW/g; SAR(10 g) = 1.99 mW/g

Maximum value of SAR (measured) = 19.1 mW/g

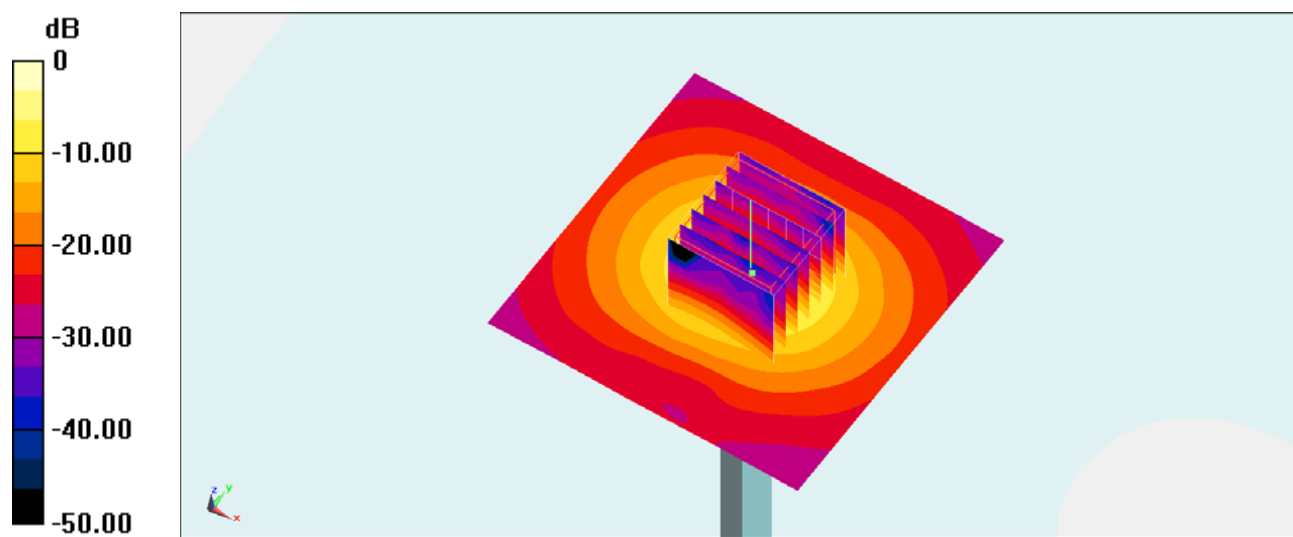

0 dB = 19.1 mW/g = 25.62 dB mW/g

System Check_Head_5600MHz_121206**DUT: D5GHzV2-SN:1006**

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121206 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.189$ mho/m; $\epsilon_r = 36.41$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.25, 4.25, 4.25); Calibrated: 2012/9/28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Pin=100mW/Area Scan (71x71x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 23.0 mW/g


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 48.584 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 49.244 mW/g

SAR(1 g) = 8.59 mW/g ; SAR(10 g) = 2.32 mW/g

Maximum value of SAR (measured) = 22.0 mW/g

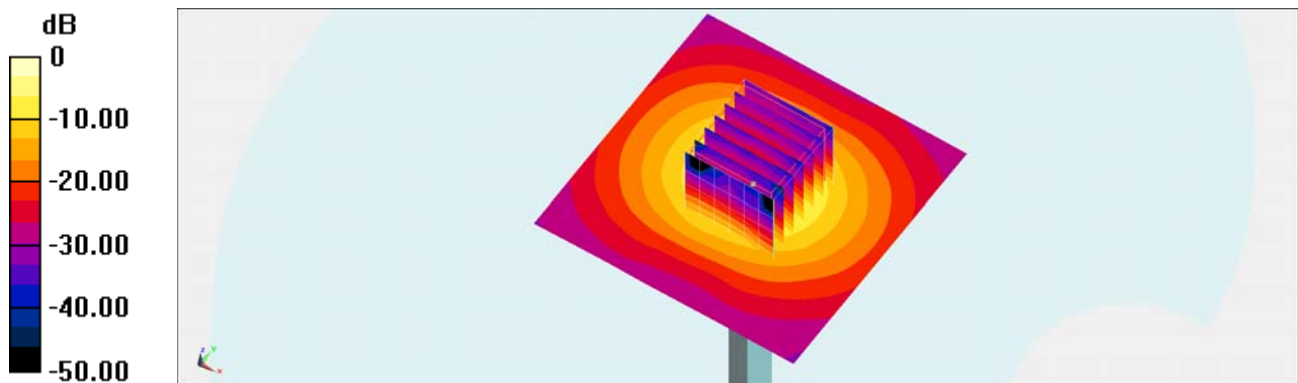

0 dB = 22.0 mW/g = 26.85 dB mW/g

System Check_Body_5600MHz_121205**DUT: Dipole 5GHz**

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121205 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.773$ mho/m; $\epsilon_r = 46.756$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(3.75, 3.75, 3.75); Calibrated: 2012/9/28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Pin=100mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 20.7 mW/g


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 43.738 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 43.698 mW/g

SAR(1 g) = 7.76 mW/g; SAR(10 g) = 2.09 mW/g

Maximum value of SAR (measured) = 19.9 mW/g

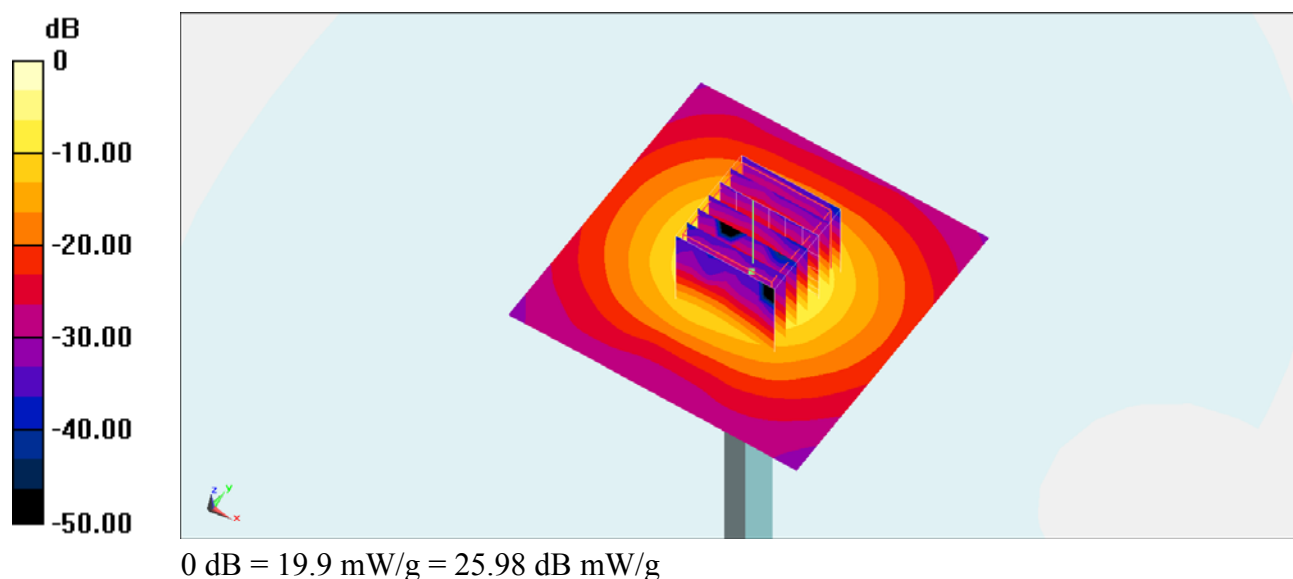

System Check_Head_5800MHz_121206**DUT: D5GHzV2-SN:1006**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121206 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.439$ mho/m; $\epsilon_r = 35.975$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.28, 4.28, 4.28); Calibrated: 2012/9/28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Pin=100mW/Area Scan (71x71x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 20.3 mW/g


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 44.630 V/m ; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 44.466 mW/g

SAR(1 g) = 7.61 mW/g ; SAR(10 g) = 2.04 mW/g

Maximum value of SAR (measured) = 19.6 mW/g

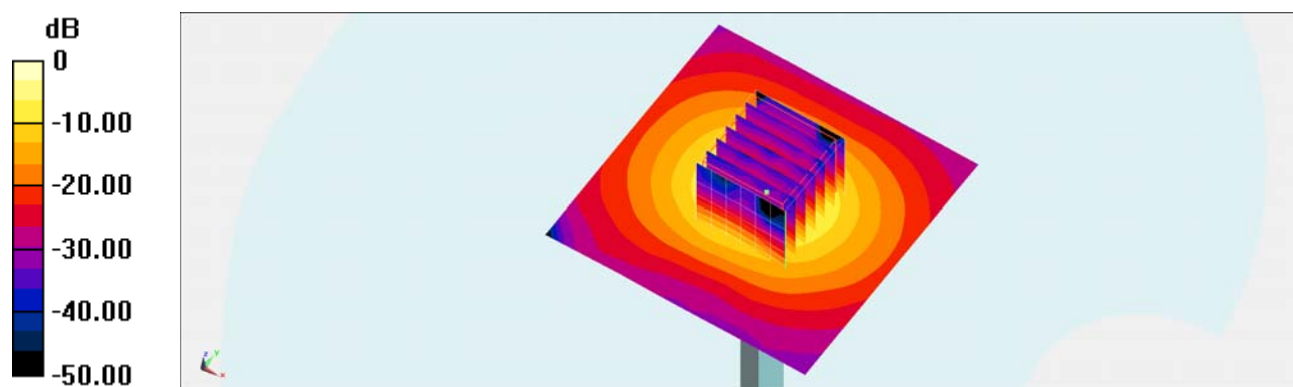

$0 \text{ dB} = 19.6 \text{ mW/g} = 25.85 \text{ dB mW/g}$

System Check_Body_5800MHz_121205**DUT: Dipole 5GHz**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121205 Medium parameters used: $f = 5800$ MHz; $\sigma = 6.127$ mho/m; $\epsilon_r = 46.464$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/9/28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Pin=100mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 18.5 mW/g


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.590 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 38.218 mW/g

SAR(1 g) = 6.9 mW/g; SAR(10 g) = 1.87 mW/g

Maximum value of SAR (measured) = 17.8 mW/g

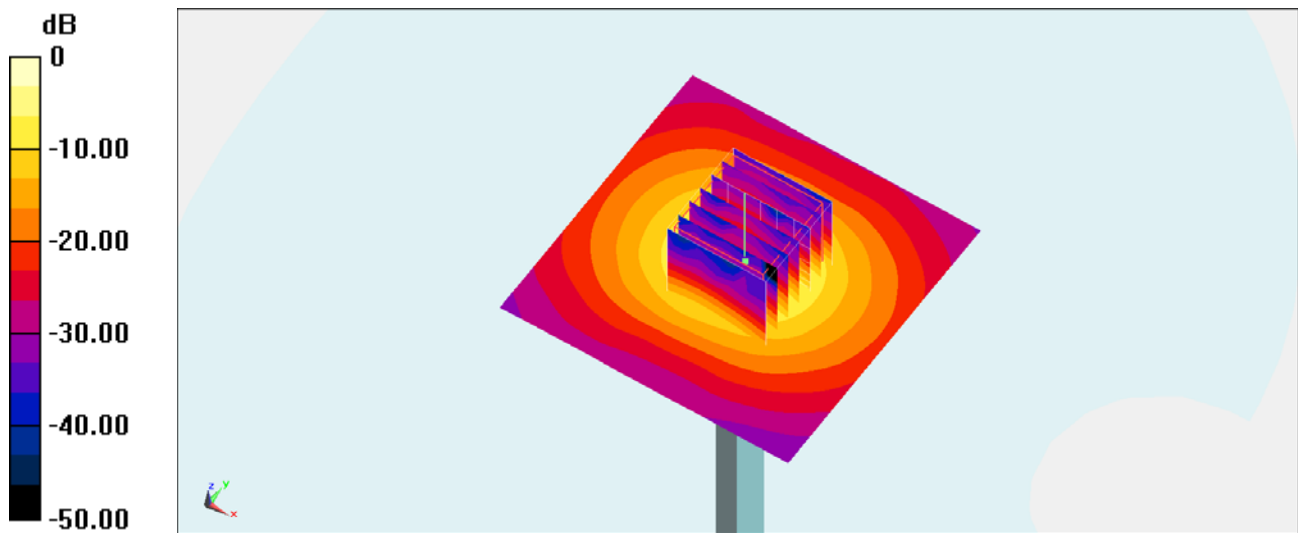

0 dB = 17.8 mW/g = 25.01 dB mW/g