

FCC RF Test Report

APPLICANT : HTC Corporation
EQUIPMENT : Smartphone
MODEL NAME : PM35110
FCC ID : NM8PM35110
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Aug. 14, 2012 and completely tested on Aug. 30, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Feature of Equipment Under Test 5

 1.4 Testing Site 6

 1.5 Applied Standards 6

 1.6 Ancillary Equipment List 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7

 2.1 RF Output Power 7

 2.2 Test Mode..... 8

 2.3 Connection Diagram of Test System..... 9

 2.4 RF Utility 9

3 TEST RESULT 10

 3.1 Number of Channel Measurement 10

 3.2 Hopping Channel Separation Measurement 12

 3.3 Dwell Time Measurement..... 19

 3.4 20dB Bandwidth Measurement 21

 3.5 Peak Output Power Measurement 28

 3.6 Conducted Band Edges Measurement..... 35

 3.7 Conducted Spurious Emission Measurement 38

 3.8 Radiated Band Edges Measurement..... 42

 3.9 Radiated Spurious Emission Measurement 47

 3.10 AC Conducted Emission Measurement..... 57

 3.11 Antenna Requirements..... 63

4 LIST OF MEASURING EQUIPMENT..... 64

5 UNCERTAINTY OF EVALUATION..... 65

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | IC Rule | Description | Limit | Result | Remark |
|----------------|-----------------------|-----------|-----------------------------|--|--------|---|
| 3.1 | 15.247(a)(1) | A8.4(2) | Number of Channels | ≥ 15Chs | Pass | - |
| 3.2 | 15.247(a)(1) | A8.1(b) | Hopping Channel Separation | ≥ 2/3 of 20dB BW | Pass | - |
| 3.3 | 15.247(a)(1) | A8.1(d) | Dwell Time of Each Channel | ≤ 0.4sec in 31.6sec period | Pass | - |
| 3.4 | 15.247(a)(1) | A8.1(a) | 20dB Bandwidth | NA | Pass | - |
| 3.5 | 15.247(b)(1) | A8.1(b) | Peak Output Power | ≤ 1 w for 1Mbps ≤ 125 Mw for 2, 3Mbps | Pass | - |
| 3.6 | 15.247(d) | A8.5 | Conducted Band Edges | ≤ 20dBc | Pass | - |
| 3.7 | 15.247(d) | A8.5 | Conducted Spurious Emission | ≤ 20dBc | Pass | - |
| 3.8 | 15.247(d) | A8.5 | Radiated Band Edges | 15.209(a) & 15.247(d) | Pass | - |
| 3.9 | 15.247(d) | A8.5 | Radiated Spurious Emission | 15.209(a) & 15.247(d) | Pass | Under limit 6.96 dB at 32.970 MHz |
| 3.10 | 15.207 | Gen 7.2.4 | AC Conducted Emission | 15.207(a) | Pass | Under limit 5.90 dB at 0.398 MHz |
| 3.11 | 15.203 & 15.247(b) | A8.4 | Antenna Requirement | N/A | Pass | - |

1 General Description

1.1 Applicant

HTC Corporation

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan

1.2 Manufacturer

HTC Corporation

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan

1.3 Feature of Equipment Under Test

| Product Feature | |
|---------------------------------|---|
| Equipment | Smartphone |
| Model Name | PM35110 |
| FCC ID | NM8PM35110 |
| Sample 1 | EUT with LCM 1, Camera Front 1, Camera Main 1, DDR Memory 1 and Battery 1 |
| Sample 2 | EUT with LCM 2, Camera Front 1, Camera Main 2, DDR Memory 2 and Battery 2 |
| Sample 3 | EUT with LCM 1, Camera Front 1, Camera Main 1, DDR Memory 3 and Battery 1 |
| Sample 4 | EUT with LCM 2, Camera Front 2, Camera Main 2, DDR Memory 3 and Battery 2 |
| EUT supports Radios application | GSM/ EGPRS/ WCDMA/ HSPA/ WLAN 11abgn/ Bluetooth/ NFC |
| EUT Stage | Production Unit |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

| Product Specification subjective to this standard | |
|---|---|
| Tx/Rx Frequency Range | 2402 MHz ~ 2480 MHz |
| Number of Channels | 79 |
| Carrier Frequency of Each Channel | 2402+n*1 MHz; n=0~78 |
| Maximum Output Power to Antenna | Bluetooth (1Mbps) : 7.57 dBm (0.0057 W) Bluetooth EDR (2Mbps) : 6.17 dBm (0.0041 W) Bluetooth EDR (3Mbps) : 6.55 dBm (0.0045 W) |
| Antenna Type | PIFA Antenna type with gain -0.40 dBi |
| Type of Modulation | Bluetooth (1Mbps) : GFSK Bluetooth 2.1EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth 2.1EDR (3Mbps) : 8-DPSK |

1.4 Testing Site

| | | | | |
|---------------------------|--|---------|-----------|--------------------------------|
| Test Site | SPORTON INTERNATIONAL INC. | | | |
| Test Site Location | No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978 | | | |
| Test Site No. | Sporton Site No. | | | FCC/IC Registration No. |
| | TH02-HY | CO05-HY | 03CH05-HY | 722060/4086B-1 |

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003 and ANSI C63.10-2009
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.6 Ancillary Equipment List

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|------------------------|---------------|-------------------|-------------|------------|--|
| 1. | System Simulator | R&S | CMU 200 | N/A | N/A | Unshielded, 1.8 m |
| 2. | GPS Station | Pendulum | GSG-54 | N/A | N/A | Unshielded, 1.8 m |
| 3. | WLAN AP | D-Link | DIR-628 | KA2DIR628A2 | N/A | Unshielded, 1.8 m |
| 4. | Notebook | DELL | Latitude E6320 | FCC DoC | N/A | AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m |
| 5. | Bluetooth Earphone | Sony Ericsson | MW600 | PY7DDA-2029 | N/A | N/A |
| 6. | Bluetooth Base Station | R&S | CBT32 | N/A | N/A | Unshielded, 1.8 m |

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

| Channel | Frequency | Bluetooth RF Output Power | | |
|---------|-----------|---------------------------|----------------|----------|
| | | Data Rate / Modulation | | |
| | | GFSK | $\pi/4$ -DQPSK | 8-DPSK |
| | | 1Mbps | 2Mbps | 3Mbps |
| Ch00 | 2402MHz | 6.13 dBm | 4.97 dBm | 5.50 dBm |
| Ch39 | 2441MHz | 7.09 dBm | 6.17 dBm | 6.23 dBm |
| Ch78 | 2480MHz | 7.57 dBm | 6.02 dBm | 6.55 dBm |

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
3. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases (X plane) and recorded in this report.


| Test Cases | | | |
|---|--|---|---|
| Test Item | Data Rate / Modulation | | |
| | Bluetooth 1Mbps GFSK | Bluetooth EDR 2Mbps $\pi/4$ -DQPSK | Bluetooth EDR 3Mbps 8-DPSK |
| Conducted TCs | Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz | Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz | Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz |
| Radiated TCs | Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz | Pretest | Pretest |
| AC Conducted Emission | Mode 1 :GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + GPS Rx + Earphone 1 + Battery + USB Cable 1 (Charging from Adapter 5) for Sample 1 Mode 2 :GSM850 Idle + Bluetooth Link + WLAN (5G) Link + GPS Rx + Earphone 1 + Battery + USB Cable 1 (Charging from Adapter 5) for Sample 1 Mode 3 :GSM850 Idle + Bluetooth Link + WLAN (5G) Link + GPS Rx + Earphone 1 + Battery + USB Cable 1 (Charging from Adapter 5) for Sample 2 | | |
| Remark: | | | |
| <ol style="list-style-type: none"> For radiated TCs, the data rate was set in 1Mbps due to the highest RF output power; only the data of these modes was reported. For conducted emission, the worst case is mode 3; only the test data of this mode was reported. For Radiated TCs, the test was performed with Sample 1, adapter 5, earphone 1, and USB cable 1. | | | |

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

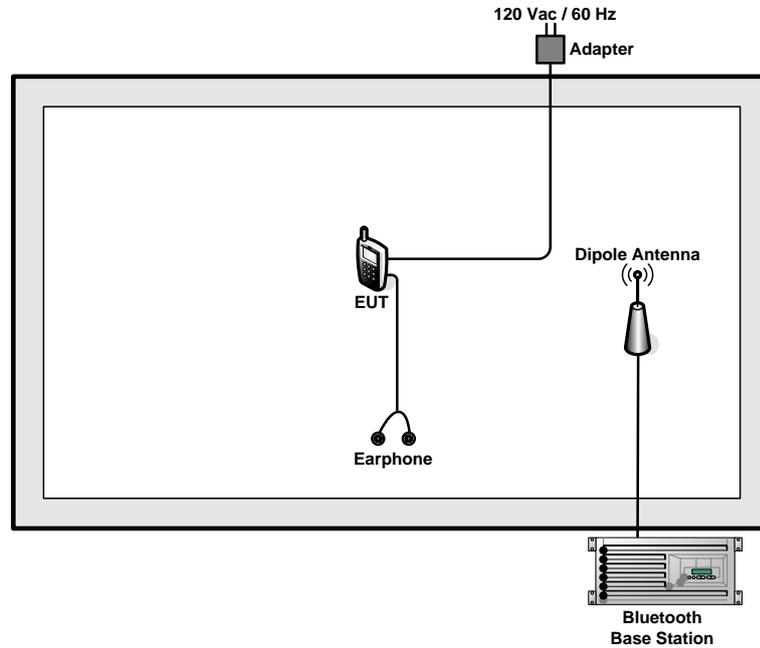

<AC Conducted Emission Mode>

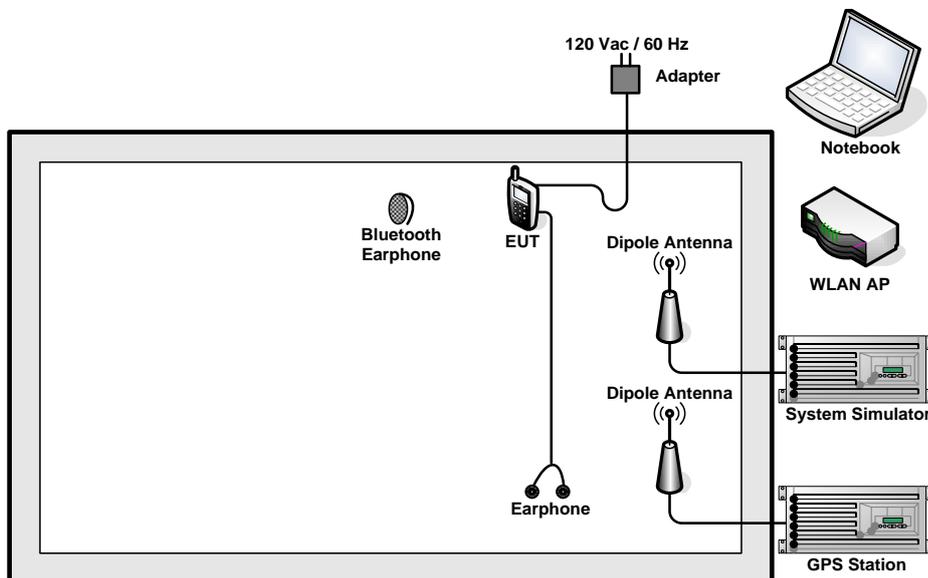


2.4 RF Utility


For Bluetooth function, execute "Bluetooth Test Mode" on the EUT directly. Then, the EUT will get into the engineering modes to contact with Bluetooth base station for continuous transmitting and receiving signals.



Number of Hopping Channel Plot on Channel 00 - 78

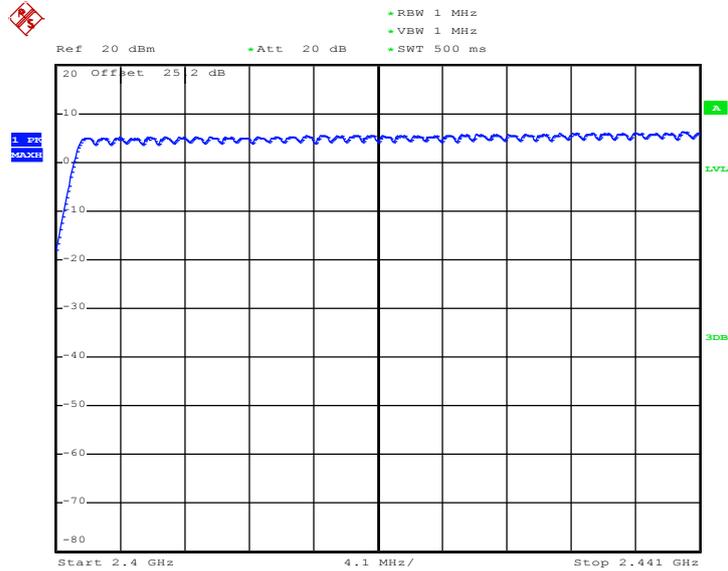

Date: 30.AUG.2012 02:58:16

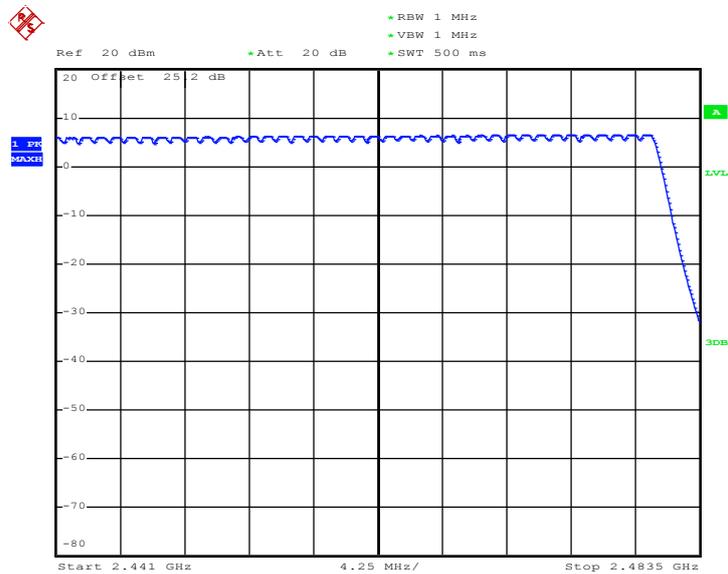

Date: 30.AUG.2012 03:02:02

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; RBW \geq 1% of the span;
VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.

3.2.4 Test Setup

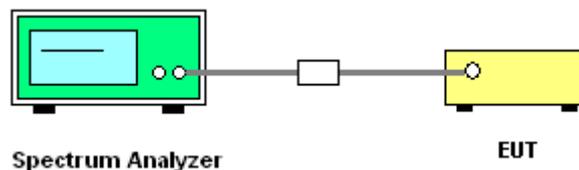


3.2.5 Test Result of Hopping Channel Separation

| | | | |
|-----------------|----------|---------------------|---------|
| Test Mode : | 1Mbps | Temperature : | 24~26°C |
| Test Engineer : | Book Lin | Relative Humidity : | 50~53% |

| Channel | Frequency (MHz) | Frequency Separation (MHz) | (2/3 of 20dB BW) Limits (MHz) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------------------|-----------|
| 00 | 2402 | 1.002 | 0.6027 | Pass |
| 39 | 2441 | 1.002 | 0.6027 | Pass |
| 78 | 2480 | 1.002 | 0.6027 | Pass |


Channel Separation Plot on Channel 00 - 01

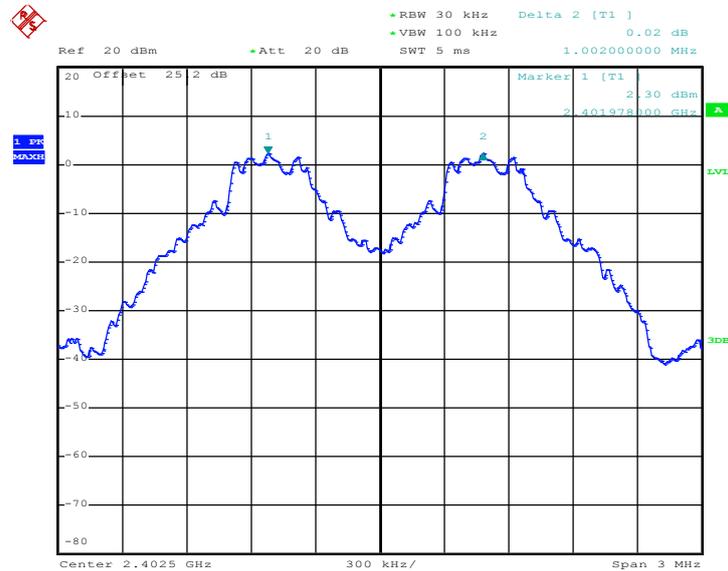

Date: 30.AUG.2012 02:19:28




Channel Separation Plot on Channel 39 - 40

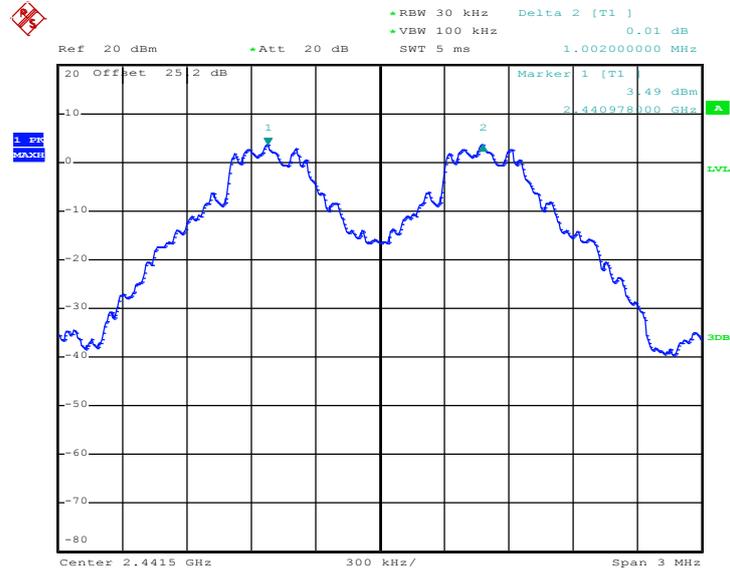

Date: 30.AUG.2012 02:20:09

Channel Separation Plot on Channel 77 - 78

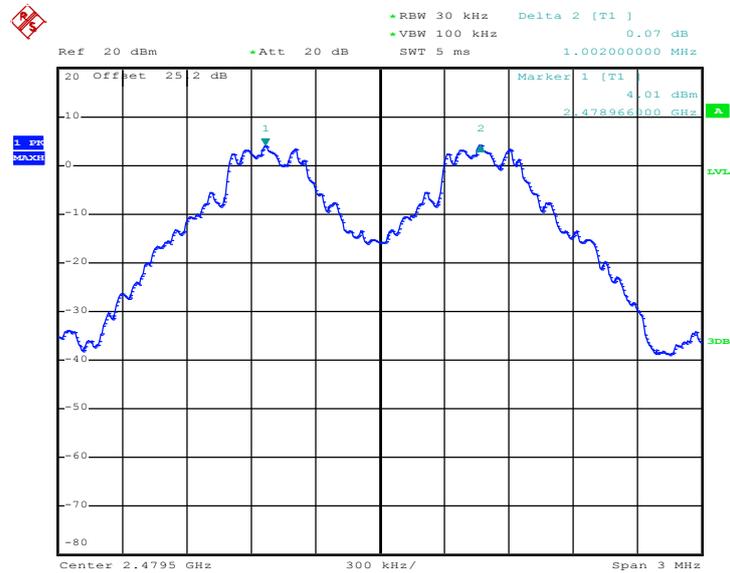


Date: 30.AUG.2012 02:20:50



| | | | |
|-----------------|----------|---------------------|---------|
| Test Mode : | 2Mbps | Temperature : | 24~26°C |
| Test Engineer : | Book Lin | Relative Humidity : | 50~53% |

| Channel | Frequency (MHz) | Frequency Separation (MHz) | (2/3 of 20dB BW) Limits (MHz) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------------------|-----------|
| 00 | 2402 | 1.002 | 0.9040 | Pass |
| 39 | 2441 | 1.002 | 0.9000 | Pass |
| 78 | 2480 | 1.008 | 0.9000 | Pass |


Channel Separation Plot on Channel 00 - 01

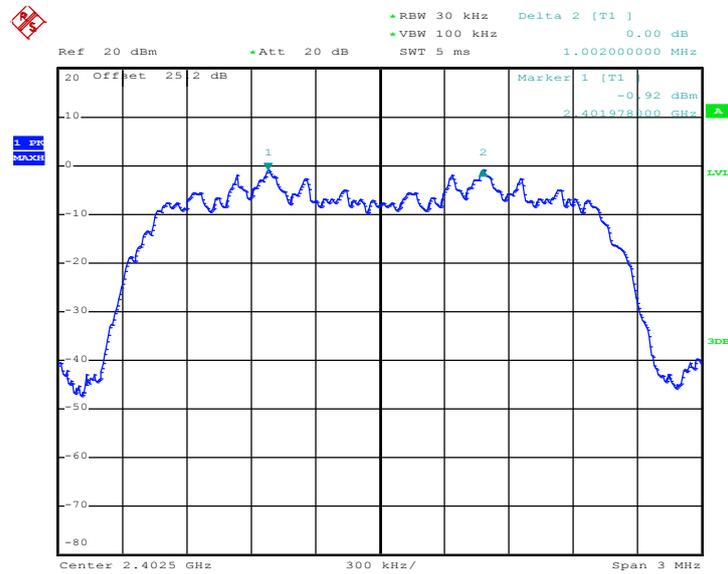

Date: 30.AUG.2012 02:22:33




Channel Separation Plot on Channel 39 - 40

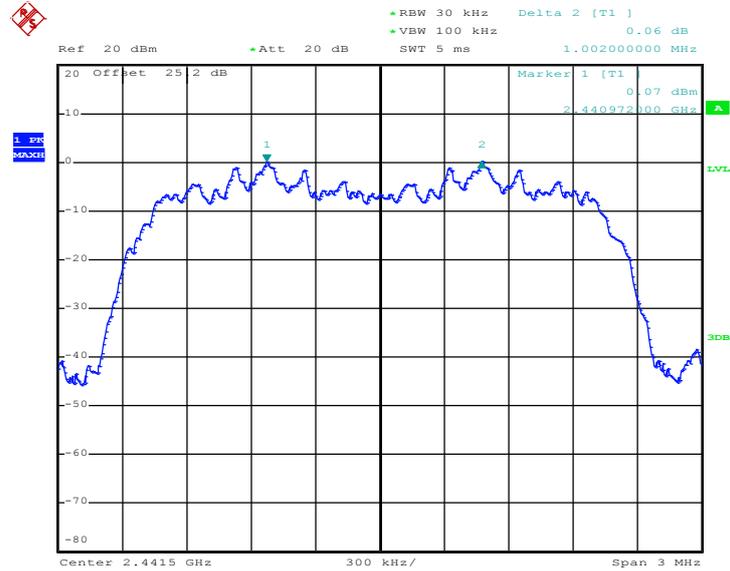

Date: 30.AUG.2012 02:23:14

Channel Separation Plot on Channel 77 - 78

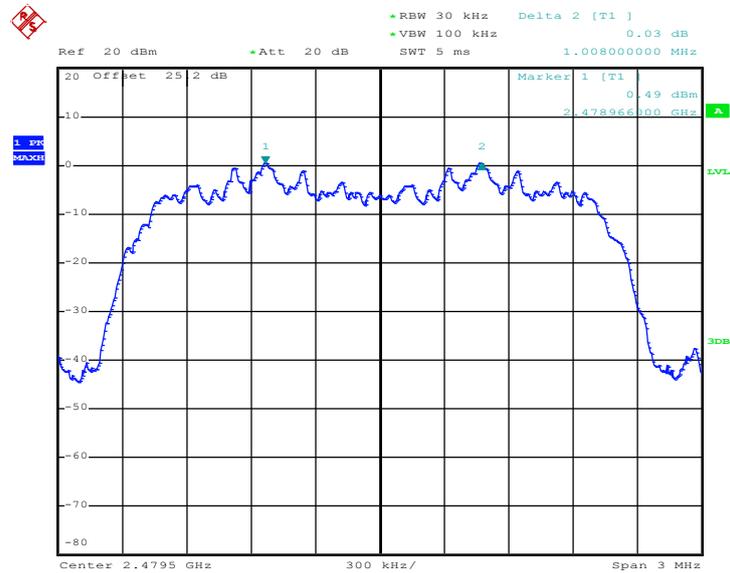


Date: 30.AUG.2012 02:25:12



| | | | |
|-----------------|----------|---------------------|---------|
| Test Mode : | 3Mbps | Temperature : | 24~26°C |
| Test Engineer : | Book Lin | Relative Humidity : | 50~53% |

| Channel | Frequency (MHz) | Frequency Separation (MHz) | (2/3 of 20dB BW) Limits (MHz) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------------------|-----------|
| 00 | 2402 | 1.002 | 0.8560 | Pass |
| 39 | 2441 | 1.002 | 0.8600 | Pass |
| 78 | 2480 | 1.002 | 0.8560 | Pass |


Channel Separation Plot on Channel 00 - 01

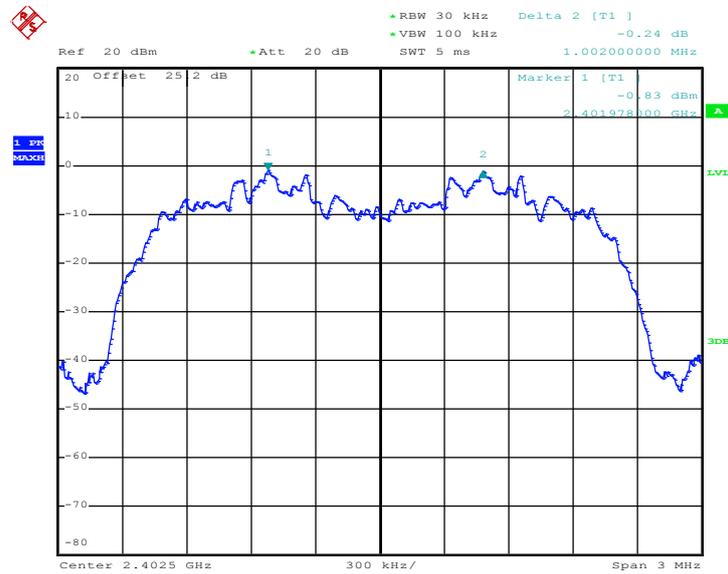

Date: 30.AUG.2012 02:25:54




Channel Separation Plot on Channel 39 - 40

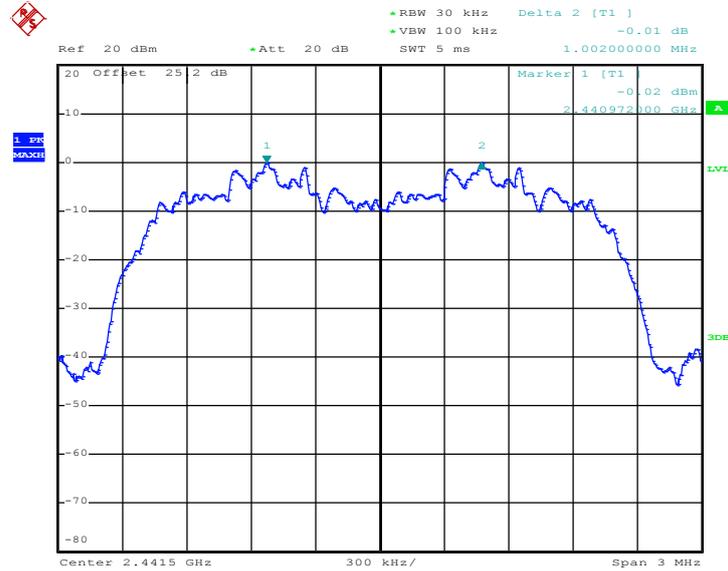

Date: 30.AUG.2012 02:26:35


Channel Separation Plot on Channel 77 - 78

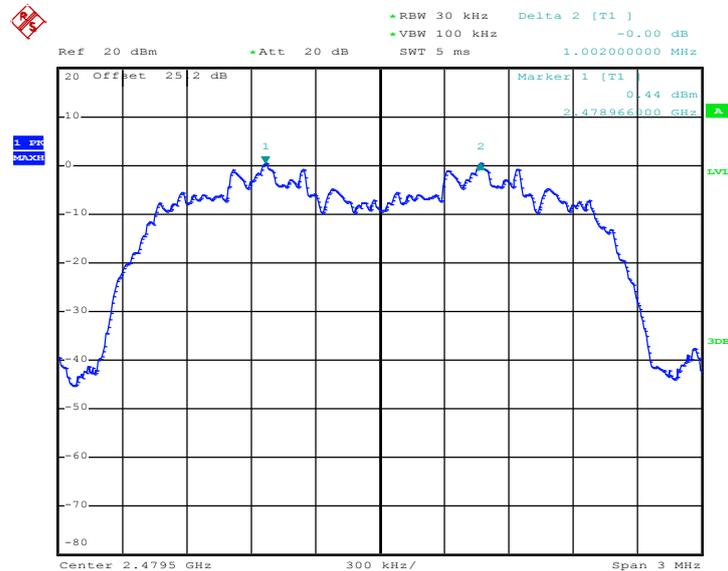

Date: 30.AUG.2012 02:27:15




DH5 Dwell Time (One Pulse) Plot on Channel 39

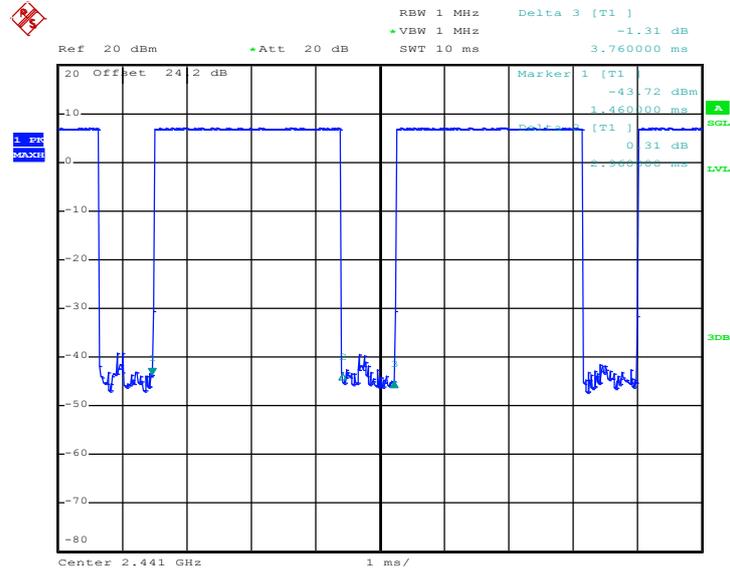

Date: 22.AUG.2012 22:48:53

DH5 Dwell Time (Count Pulses) Plot on Channel 39

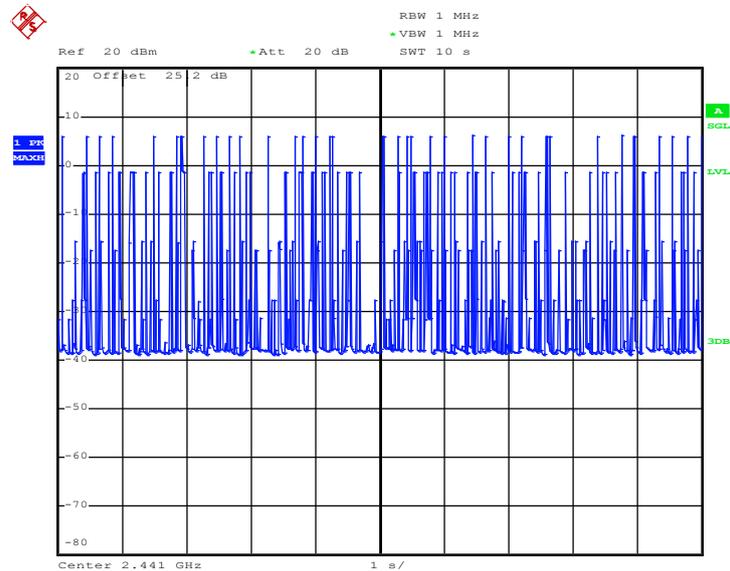

Date: 30.AUG.2012 02:50:50

3.4 20dB Bandwidth Measurement

3.4.1 Limit of 20dB Bandwidth

Reporting only


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.

3.4.4 Test Setup

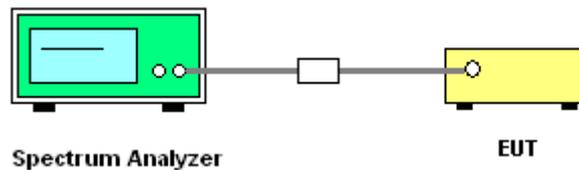




3.4.5 Test Result of 20dB Bandwidth

| | | | |
|-----------------|----------|---------------------|---------|
| Test Mode : | 1Mbps | Temperature : | 24~26°C |
| Test Engineer : | Book Lin | Relative Humidity : | 50~53% |

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| 00 | 2402 | 0.904 |
| 39 | 2441 | 0.904 |
| 78 | 2480 | 0.904 |


20 dB Bandwidth Plot on Channel 00

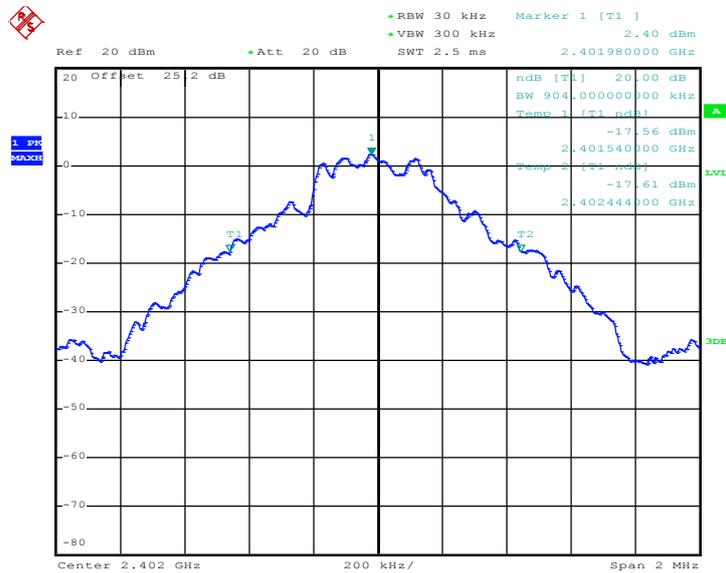

Date: 30.AUG.2012 02:27:49




20 dB Bandwidth Plot on Channel 39

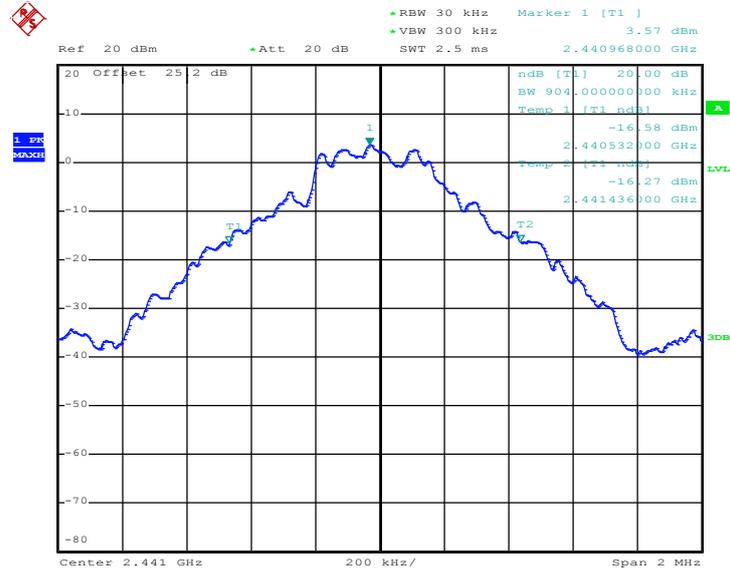

Date: 30.AUG.2012 02:28:14

20 dB Bandwidth Plot on Channel 78

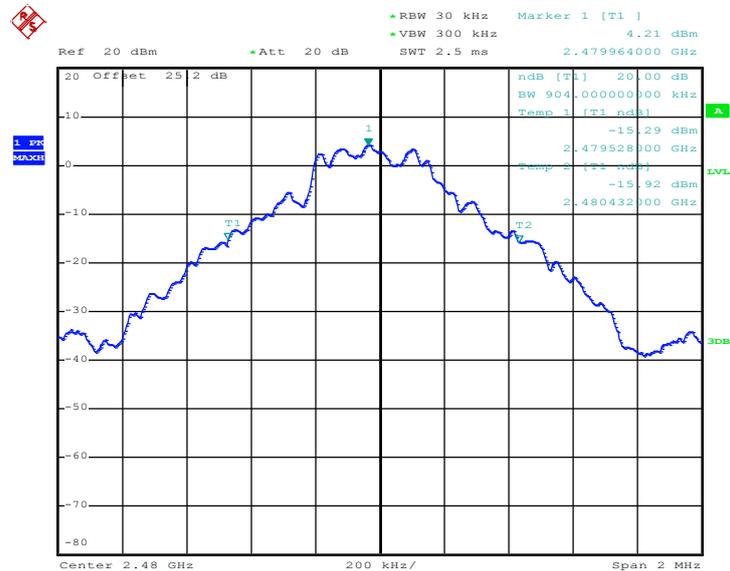


Date: 30.AUG.2012 02:29:03



| | | | |
|-----------------|----------|---------------------|---------|
| Test Mode : | 2Mbps | Temperature : | 24~26°C |
| Test Engineer : | Book Lin | Relative Humidity : | 50~53% |

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| 00 | 2402 | 1.356 |
| 39 | 2441 | 1.350 |
| 78 | 2480 | 1.350 |


20 dB Bandwidth Plot on Channel 00

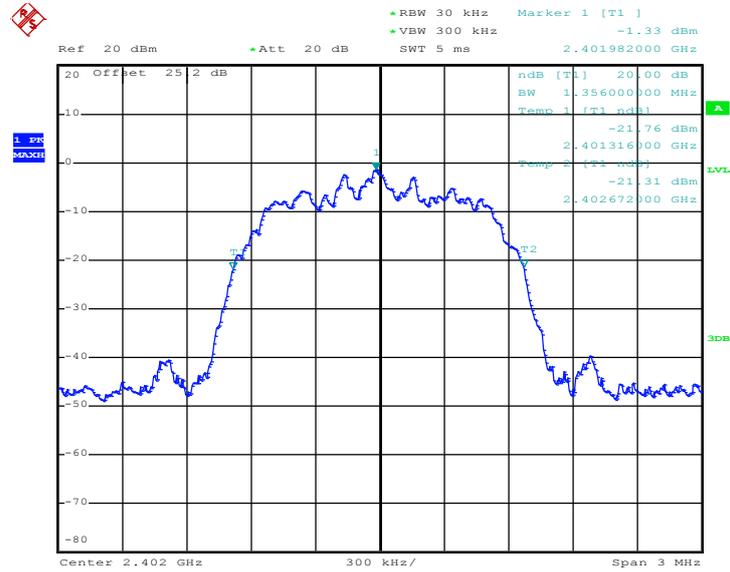

Date: 30.AUG.2012 02:29:23




20 dB Bandwidth Plot on Channel 39

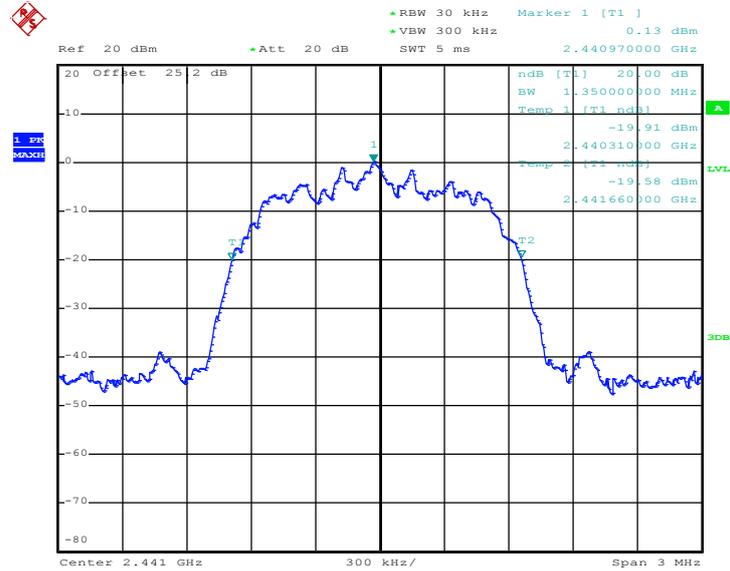

Date: 30.AUG.2012 02:29:46

20 dB Bandwidth Plot on Channel 78

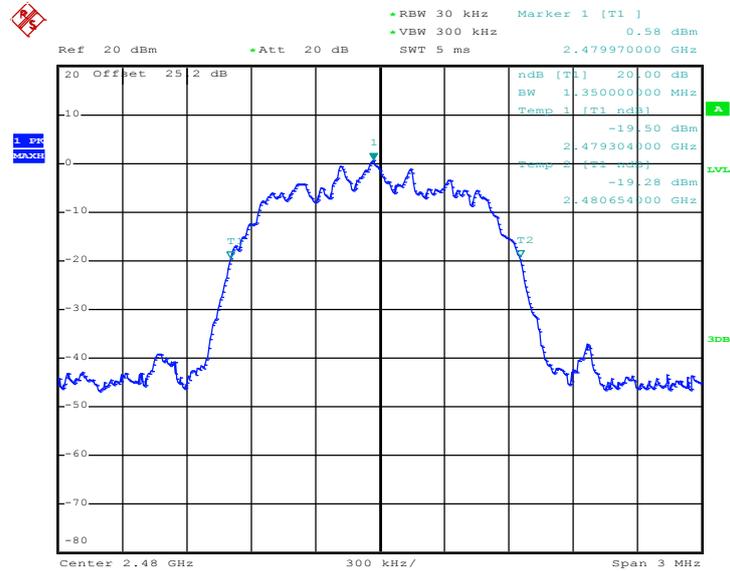


Date: 30.AUG.2012 02:30:09



| | | | |
|-----------------|----------|---------------------|---------|
| Test Mode : | 3Mbps | Temperature : | 24~26°C |
| Test Engineer : | Book Lin | Relative Humidity : | 50~53% |

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| 00 | 2402 | 1.284 |
| 39 | 2441 | 1.290 |
| 78 | 2480 | 1.284 |


20 dB Bandwidth Plot on Channel 00

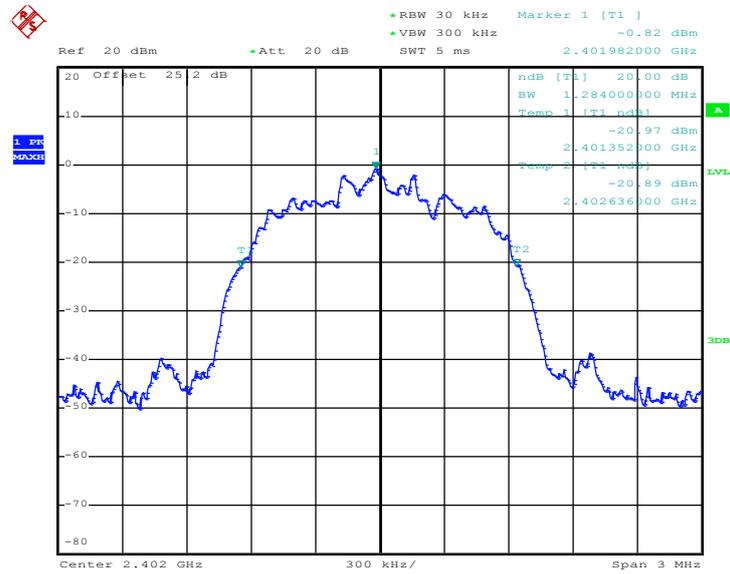

Date: 30.AUG.2012 02:30:27




20 dB Bandwidth Plot on Channel 39

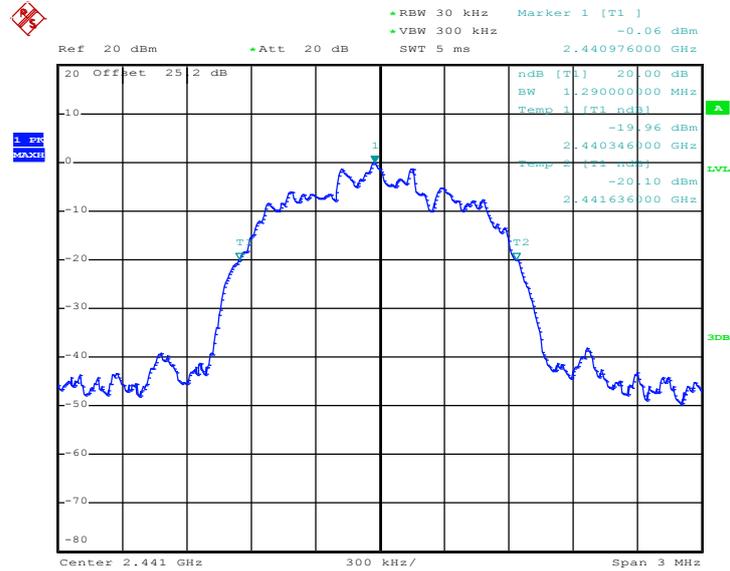

Date: 30.AUG.2012 02:30:43

20 dB Bandwidth Plot on Channel 78

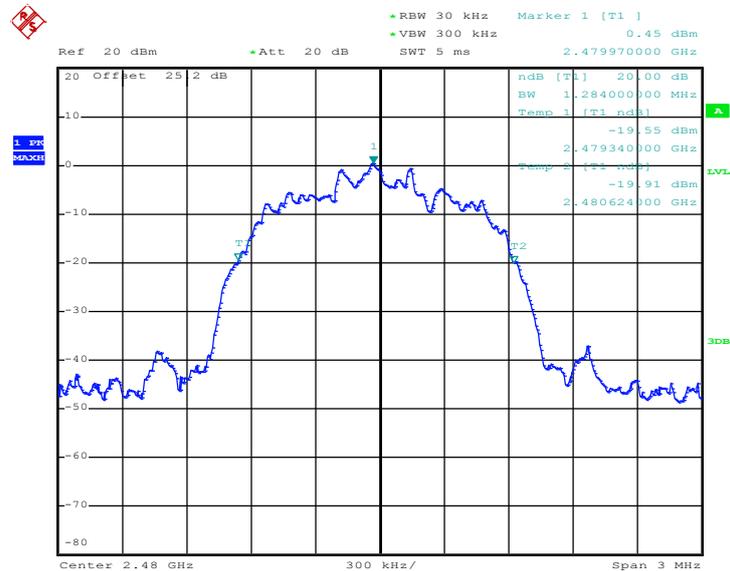

Date: 30.AUG.2012 02:31:01

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, and 3Mbps are 0.125 watts.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.5.4 Test Setup

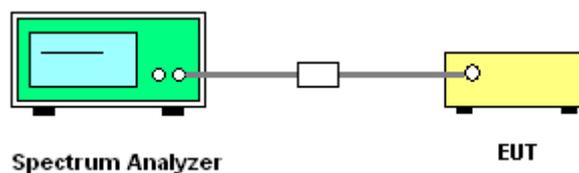




3.5.5 Test Result of Peak Output Power

| | | | |
|-----------------|----------|---------------------|---------|
| Test Mode : | 1Mbps | Temperature : | 24~26°C |
| Test Engineer : | Book Lin | Relative Humidity : | 50~53% |

| Channel | Frequency (MHz) | RF Power (dBm) | | |
|---------|-----------------|----------------|-------------------|-----------|
| | | GFSK | Max. Limits (dBm) | Pass/Fail |
| | | 1 Mbps | | |
| 00 | 2402 | 6.13 | 30.00 | Pass |
| 39 | 2441 | 7.09 | 30.00 | Pass |
| 78 | 2480 | 7.57 | 30.00 | Pass |


Peak Output Power Plot on Channel 00

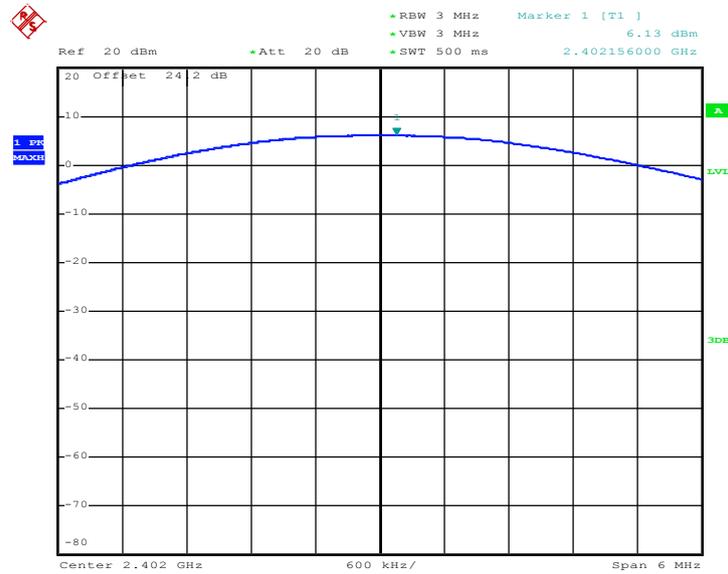

Date: 22.AUG.2012 23:10:42




Peak Output Power Plot on Channel 39

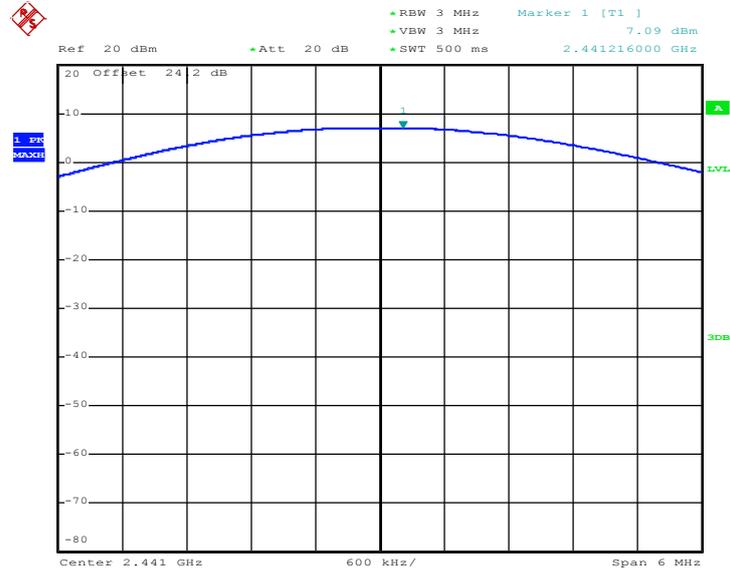

Date: 22.AUG.2012 23:12:36

Peak Output Power Plot on Channel 78

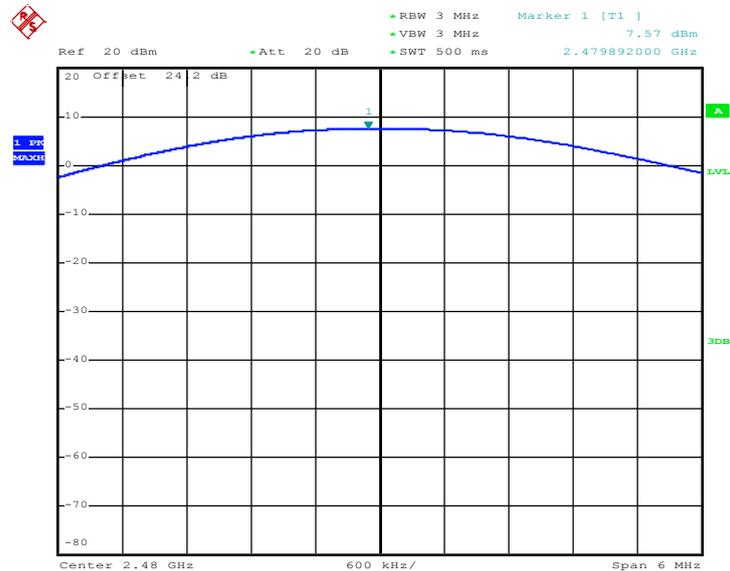


Date: 22.AUG.2012 23:14:16



| | | | |
|-----------------|----------|---------------------|---------|
| Test Mode : | 2Mbps | Temperature : | 24~26°C |
| Test Engineer : | Book Lin | Relative Humidity : | 50~53% |

| Channel | Frequency (MHz) | RF Power (dBm) | | |
|---------|-----------------|----------------|-------------------|-----------|
| | | $\pi/4$ -DQPSK | Max. Limits (dBm) | Pass/Fail |
| | | 2 Mbps | | |
| 00 | 2402 | 4.97 | 20.97 | Pass |
| 39 | 2441 | 6.17 | 20.97 | Pass |
| 78 | 2480 | 6.02 | 20.97 | Pass |


Peak Output Power Plot on Channel 00

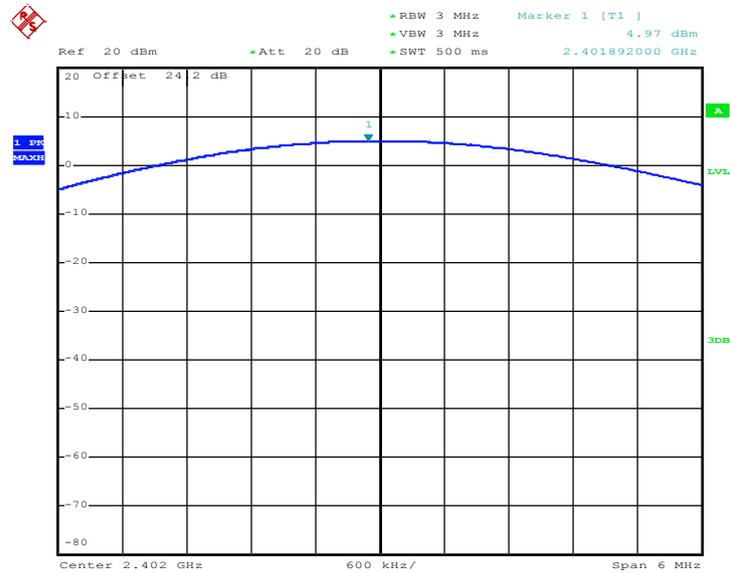

Date: 22.AUG.2012 23:11:46




Peak Output Power Plot on Channel 39

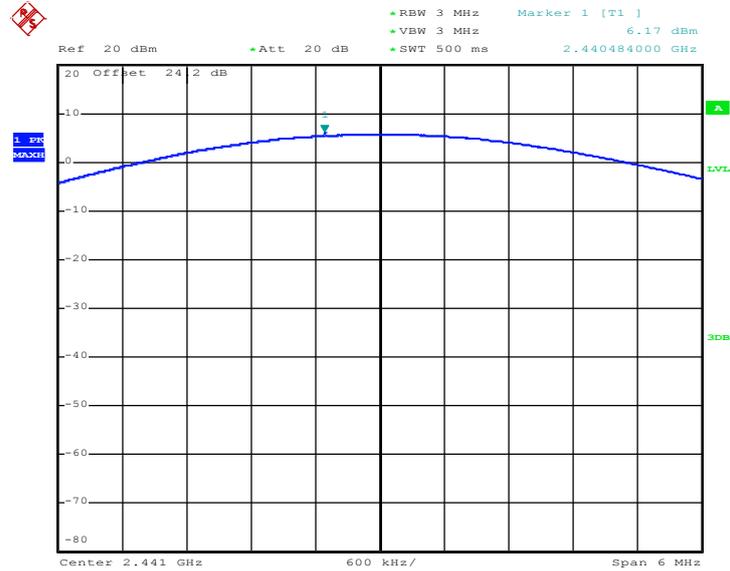

Date: 22.AUG.2012 23:13:29

Peak Output Power Plot on Channel 78

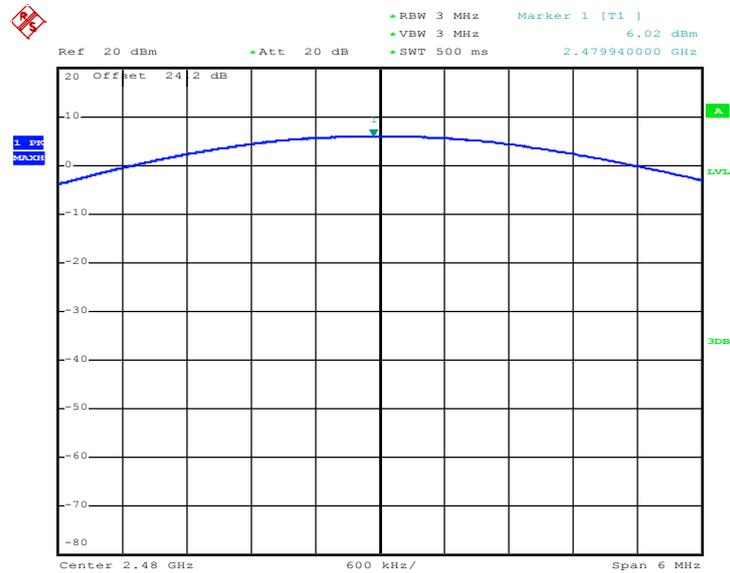


Date: 22.AUG.2012 23:15:13



| | | | |
|-----------------|----------|---------------------|---------|
| Test Mode : | 3Mbps | Temperature : | 24~26°C |
| Test Engineer : | Book Lin | Relative Humidity : | 50~53% |

| Channel | Frequency (MHz) | RF Power (dBm) | | |
|---------|-----------------|----------------|-------------------|-----------|
| | | 8-DPSK | Max. Limits (dBm) | Pass/Fail |
| | | 3 Mbps | | |
| 00 | 2402 | 5.50 | 20.97 | Pass |
| 39 | 2441 | 6.23 | 20.97 | Pass |
| 78 | 2480 | 6.55 | 20.97 | Pass |


Peak Output Power Plot on Channel 00

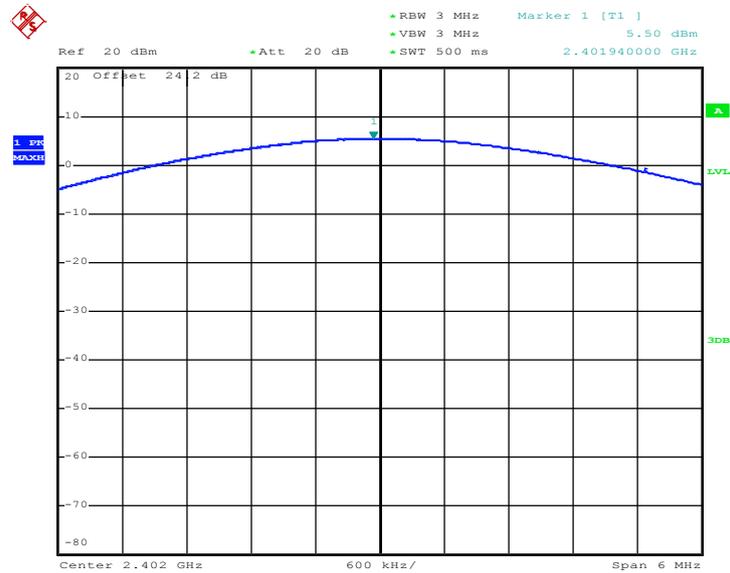

Date: 22.AUG.2012 23:11:59




Peak Output Power Plot on Channel 39

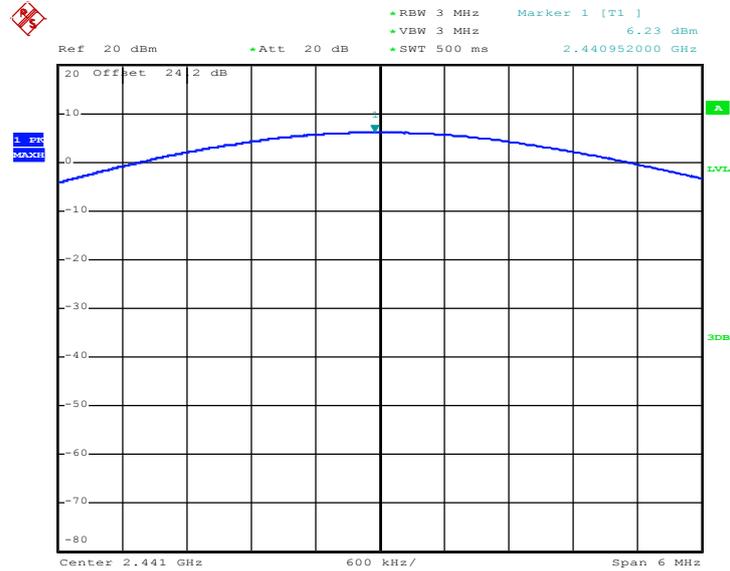

Date: 22.AUG.2012 23:13:40

Peak Output Power Plot on Channel 78

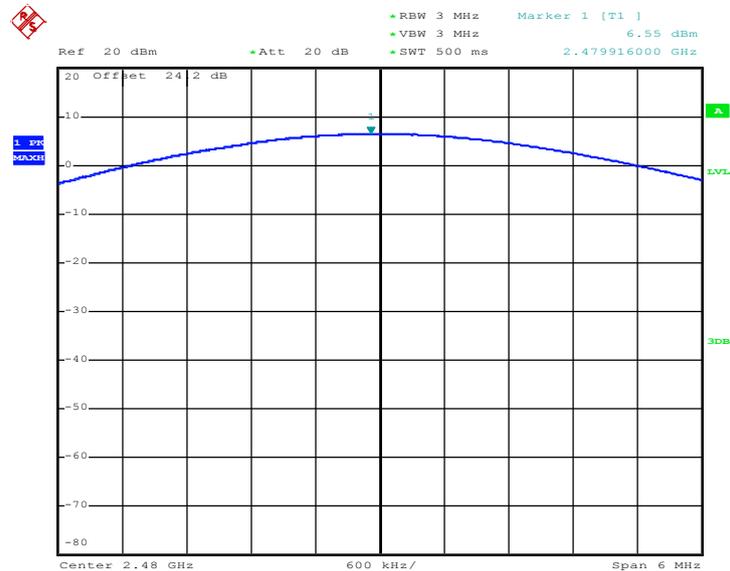

Date: 22.AUG.2012 23:15:26

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 300KHz ($\geq 1\%$ span=30MHz), VBW = 300KHz (\geq RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300KHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Record the results in the test report.

3.6.4 Test Setup

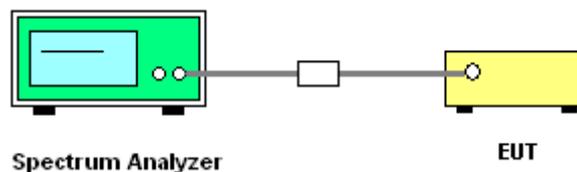




3.6.5 Test Result of Conducted Band Edges


| | | | |
|----------------|-----------|---------------------|----------|
| Test Mode : | 1Mbps | Temperature : | 24~26°C |
| Test Channel : | 00 and 78 | Relative Humidity : | 50~53% |
| | | Test Engineer : | Book Lin |

Low Band Edge Plot on Channel 00

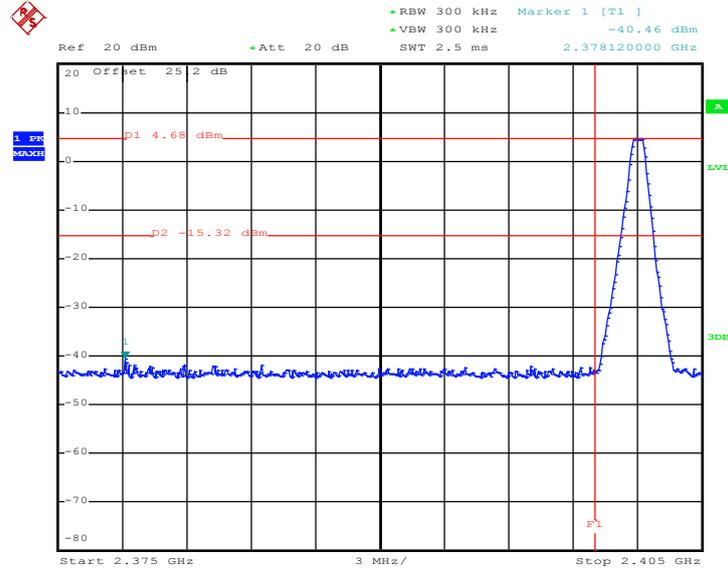

Date: 30.AUG.2012 02:32:25

High Band Edge Plot on Channel 78

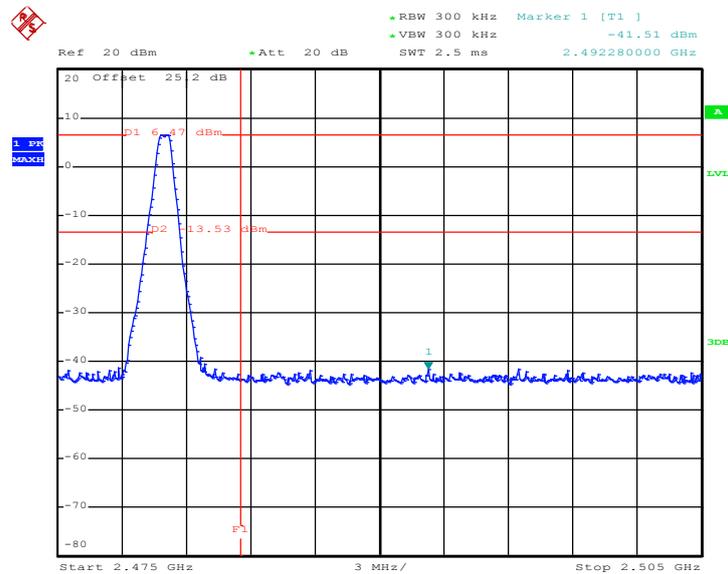


Date: 30.AUG.2012 02:33:29

3.6.6 Test Result of Conducted Hopping Mode Band Edges


| | | | |
|-----------------|----------|---------------------|---------|
| Test Mode : | 1Mbps | Temperature : | 24~26°C |
| Test Engineer : | Book Lin | Relative Humidity : | 50~53% |

Hopping Mode Low Band Edge Plot

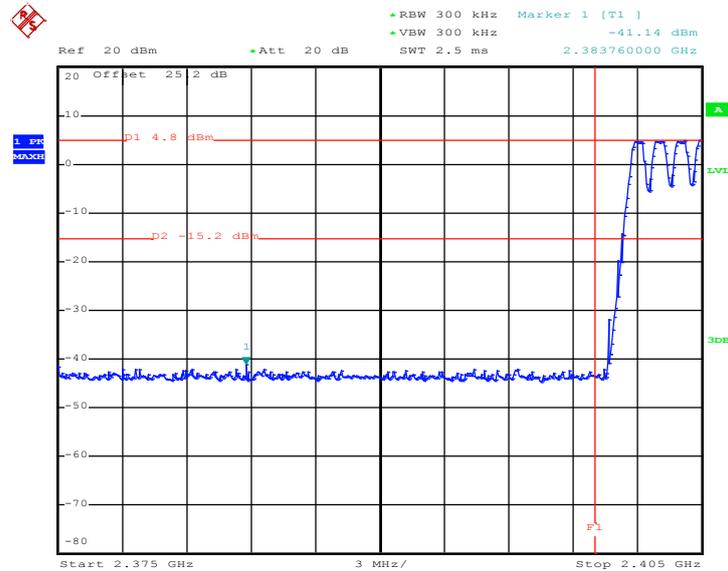

Date: 30.AUG.2012 04:06:37

Hopping Mode High Band Edge Plot

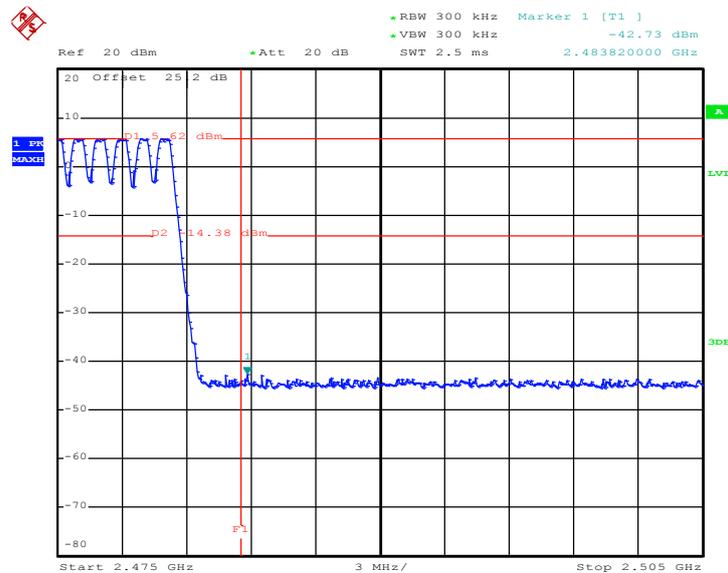

Date: 12.SEP.2012 16:40:34

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The transmitter output was connected to the spectrum analyzer via a low loss cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW = 300KHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 KHz RBW.
5. Record the results in the test report.

3.7.4 Test Setup

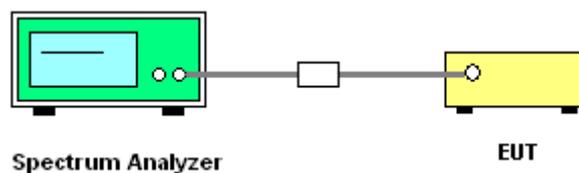




3.7.5 Test Result


| | | | |
|----------------|-------|---------------------|----------|
| Test Mode : | 1Mbps | Temperature : | 24~26°C |
| Test Channel : | 00 | Relative Humidity : | 50~53% |
| | | Test Engineer : | Book Lin |

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

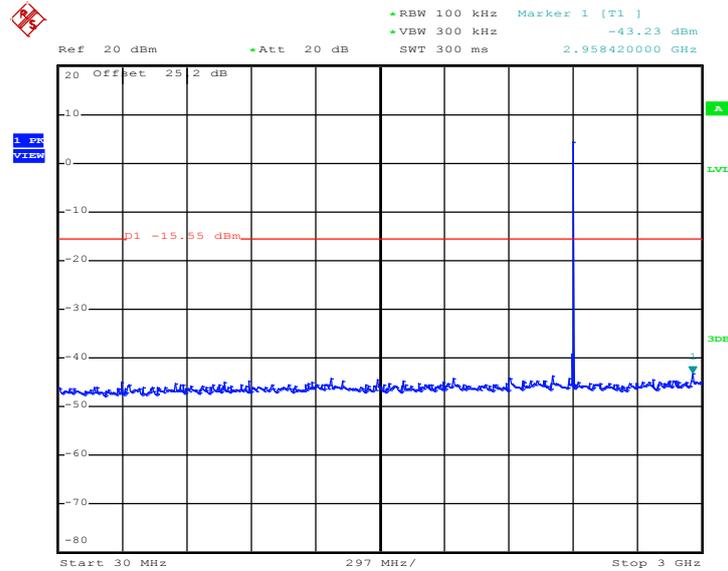

Date: 30.AUG.2012 02:43:47

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

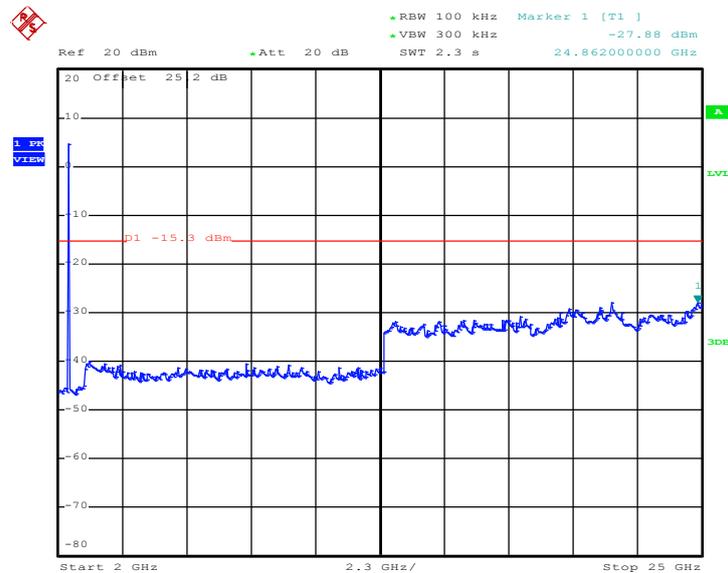


Date: 30.AUG.2012 02:44:39




| | | | |
|----------------|-------|---------------------|----------|
| Test Mode : | 1Mbps | Temperature : | 24~26°C |
| Test Channel : | 39 | Relative Humidity : | 50~53% |
| | | Test Engineer : | Book Lin |

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

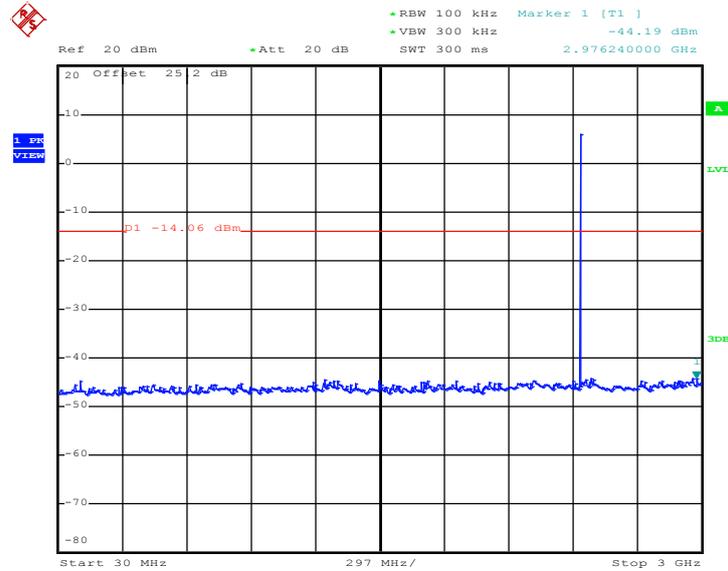

Date: 30.AUG.2012 02:45:33

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

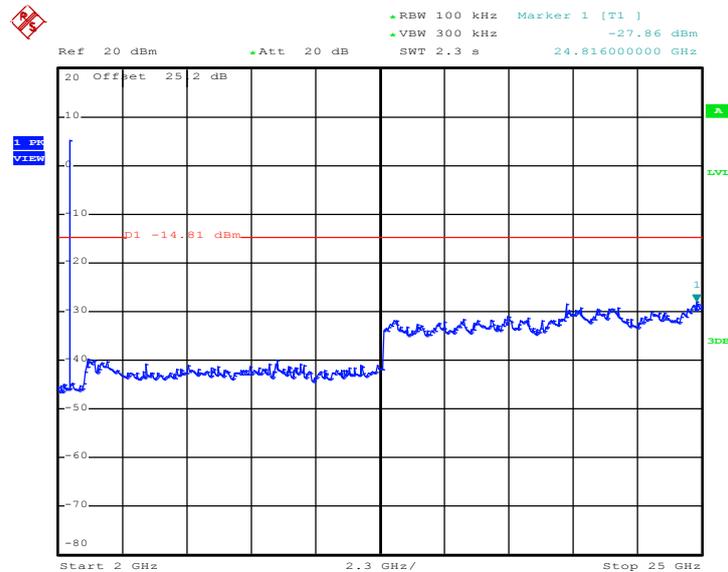


Date: 30.AUG.2012 02:46:29




| | | | |
|----------------|-------|---------------------|----------|
| Test Mode : | 1Mbps | Temperature : | 24~26°C |
| Test Channel : | 78 | Relative Humidity : | 50~53% |
| | | Test Engineer : | Book Lin |

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

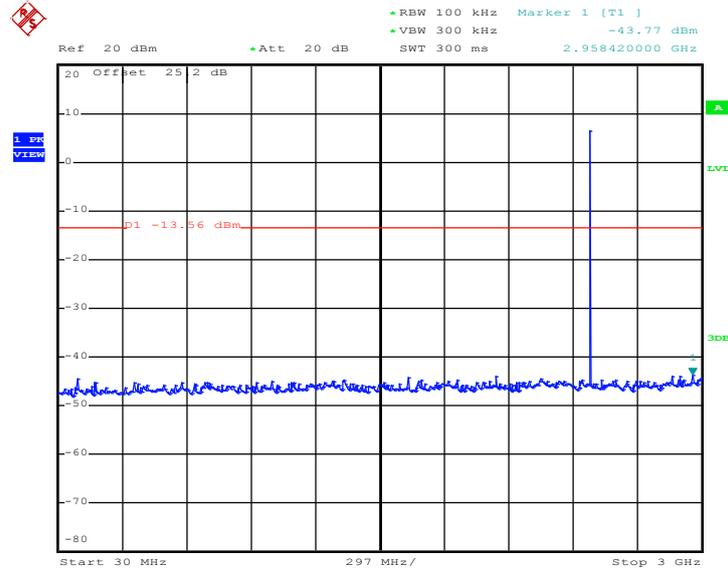

Date: 30.AUG.2012 02:47:25

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

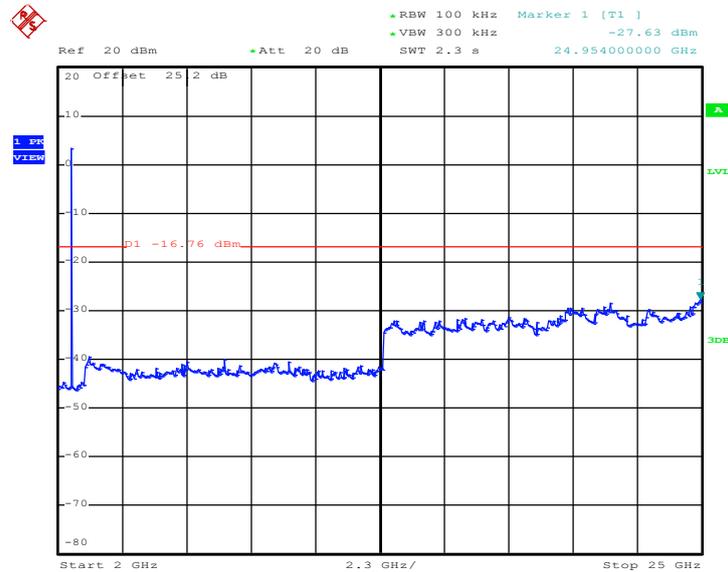

Date: 30.AUG.2012 02:48:20



3.8 Radiated Band Edges Measurement

3.8.1 Limit of Radiated Band Edges

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490 | 2400/F(KHz) | 300 |
| 0.490 – 1.705 | 24000/F(KHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.8.2 Measuring Instruments

See list of measuring instruments of this test report.




3.8.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines and fulfills ANSI C63.4-2003 and the guidelines in ANSI C63.10-2009 test site requirement.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method.
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Level = Peak Level + $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.5dB) derived from $20 \log(\text{dwell time}/100\text{ms})$.


For example: Average level = $45.61\text{dBuV/m} - 24.5 \text{ (dB)} = 21.11\text{dBuV/m}$.

3.8.4 Test Setup

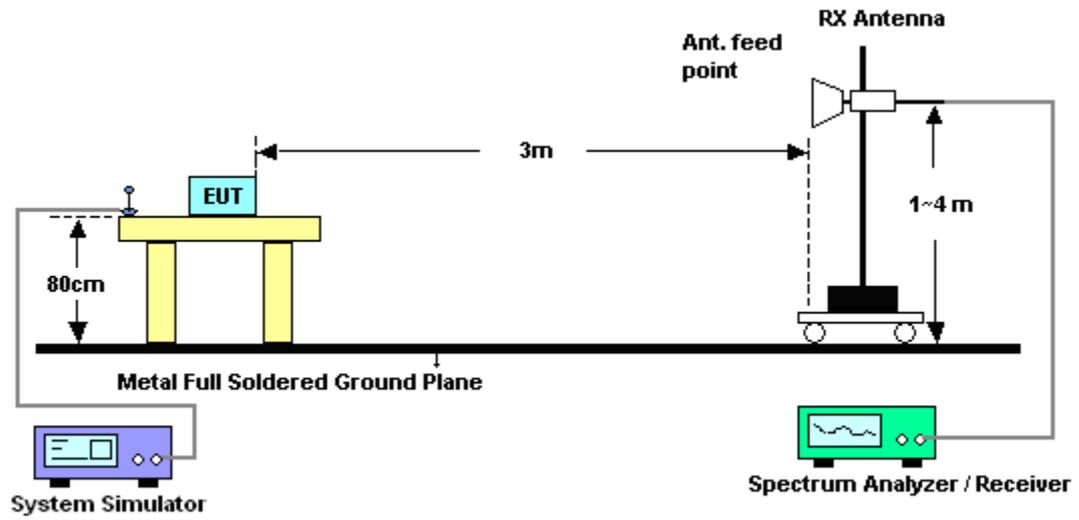


3.8.5 Duty cycle correction factor for average measurement

DH5 on time/100ms (One Pulse) Plot on Channel 39

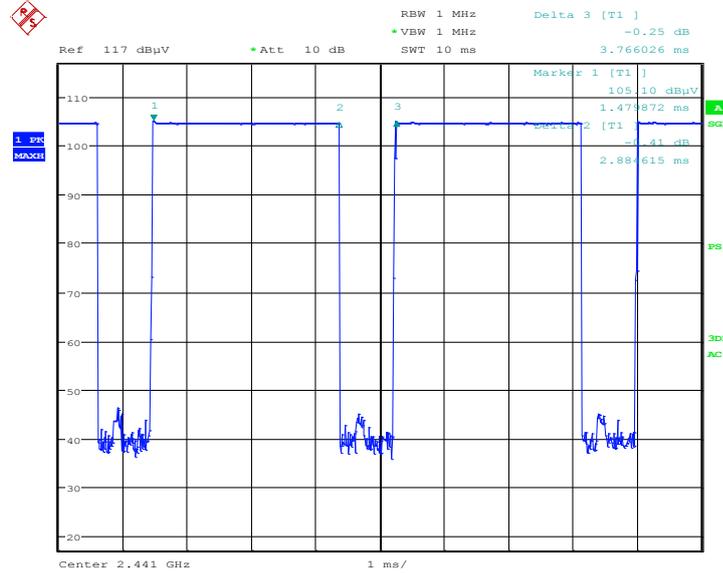

Date: 30.AUG.2012 19:43:07

DH5 on time/100ms (Count Pulses) Plot on Channel 39

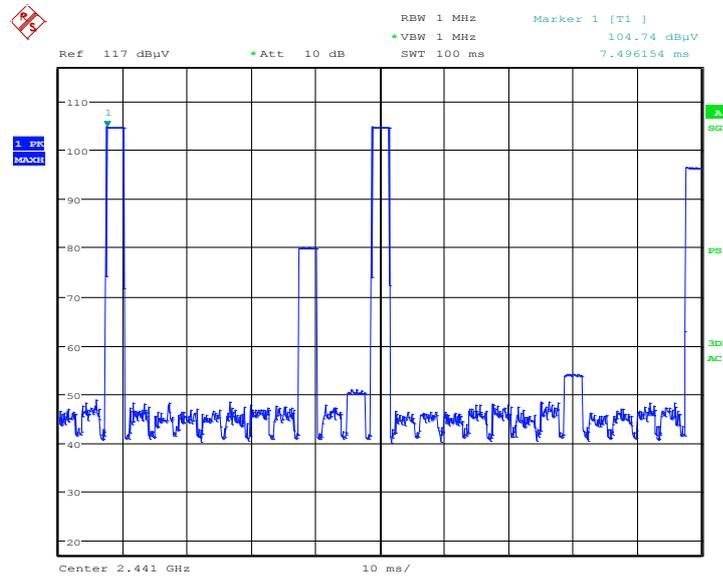

Date: 30.AUG.2012 19:45:59

Note:

1. Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle and is reported.



3.8.6 Test Result of Radiated Band Edges

| | | | |
|----------------|-------|---------------------|------------|
| Test Mode : | 1Mbps | Temperature : | 21~23°C |
| Test Channel : | 00 | Relative Humidity : | 49~51% |
| | | Test Engineer : | David Yang |

| ANTENNA POLARITY : HORIZONTAL | | | | | | | | | | |
|-------------------------------|------------------|-------------------|-----------------------|---------------------|-----------------------|-------------------|----------------------|----------------|-------------------|---------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 2381.19 | 47.99 | -26.01 | 74 | 47.13 | 32.16 | 4.58 | 35.88 | 102 | 184 | Peak |
| 2381.19 | 23.2 | -30.8 | 54 | - | - | - | - | - | - | Average |

| ANTENNA POLARITY : VERTICAL | | | | | | | | | | |
|-----------------------------|------------------|-------------------|-----------------------|---------------------|-----------------------|-------------------|----------------------|----------------|-------------------|---------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 2365.35 | 46.41 | -27.59 | 74 | 45.59 | 32.13 | 4.57 | 35.88 | 109 | 343 | Peak |
| 2365.35 | 21.62 | -32.38 | 54 | - | - | - | - | - | - | Average |

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from 20log (dwell time/100ms).

For example: Average level = 47.99dBuV/m – 24.79 (dB) = 23.20dBuV/m.

| | | | |
|----------------|-------|---------------------|------------|
| Test Mode : | 1Mbps | Temperature : | 21~23°C |
| Test Channel : | 78 | Relative Humidity : | 49~51% |
| | | Test Engineer : | David Yang |

| ANTENNA POLARITY : HORIZONTAL | | | | | | | | | | |
|-------------------------------|------------------|-------------------|-----------------------|---------------------|-----------------------|-------------------|----------------------|----------------|-------------------|---------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 2483.5 | 60.05 | -13.95 | 74 | 58.94 | 32.28 | 4.64 | 35.81 | 123 | 59 | Peak |
| 2483.5 | 35.26 | -18.74 | 54 | - | - | - | - | - | - | Average |

| ANTENNA POLARITY : VERTICAL | | | | | | | | | | |
|-----------------------------|------------------|-------------------|-----------------------|---------------------|-----------------------|-------------------|----------------------|----------------|-------------------|---------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 2483.5 | 57.28 | -16.72 | 74 | 56.17 | 32.28 | 4.64 | 35.81 | 130 | 5 | Peak |
| 2483.5 | 32.49 | -21.51 | 54 | - | - | - | - | - | - | Average |



3.9 Radiated Spurious Emission Measurement

3.9.1 Limit of Radiated Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490 | 2400/F(KHz) | 300 |
| 0.490 – 1.705 | 24000/F(KHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.9.2 Measuring Instruments

See list of measuring instruments of this test report.



3.9.3 Test Procedures


1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines and fulfills ANSI C63.4-2003 and the guidelines in ANSI C63.10-2009 test site requirement.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method.
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Level = Peak Level + $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
8. For measurement below 1GHz, if the emission level of the EUT measured by the peak detector is more than 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement by using the quasi-peak detector will be reported.

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.5dB) derived from $20 \log(\text{dwell time}/100\text{ms})$.


For example: Average level = $45.61\text{dBuV/m} - 24.5 \text{ (dB)} = 21.11\text{dBuV/m}$.

3.9.4 Test Setup


For radiated emissions below 30MHz

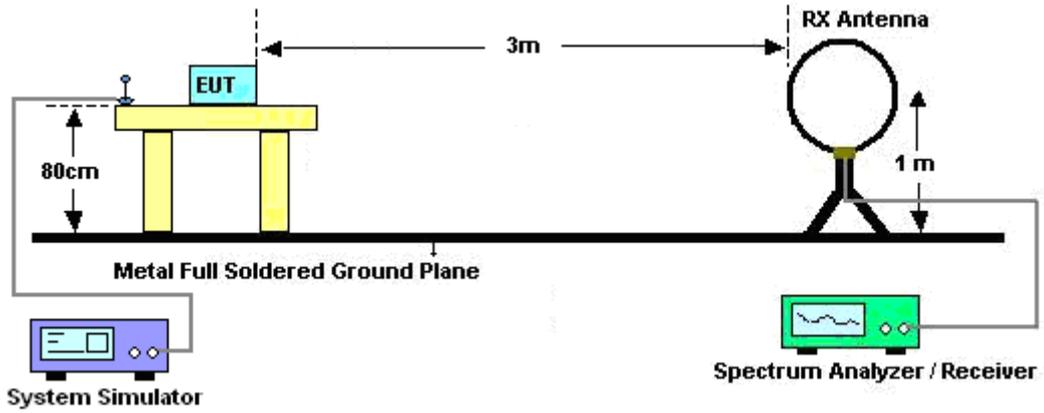

For radiated emissions from 30MHz to 1GHz

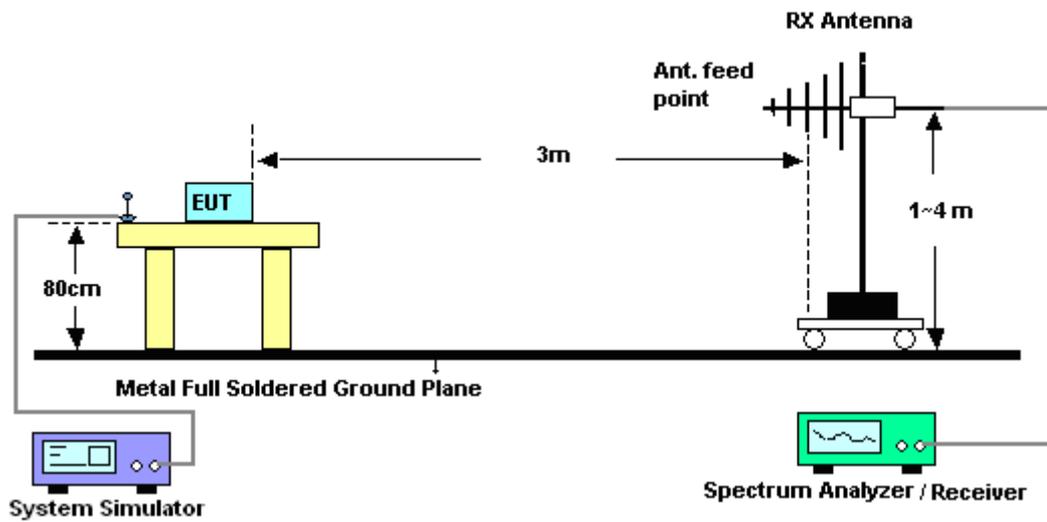

For radiated emissions above 1GHz

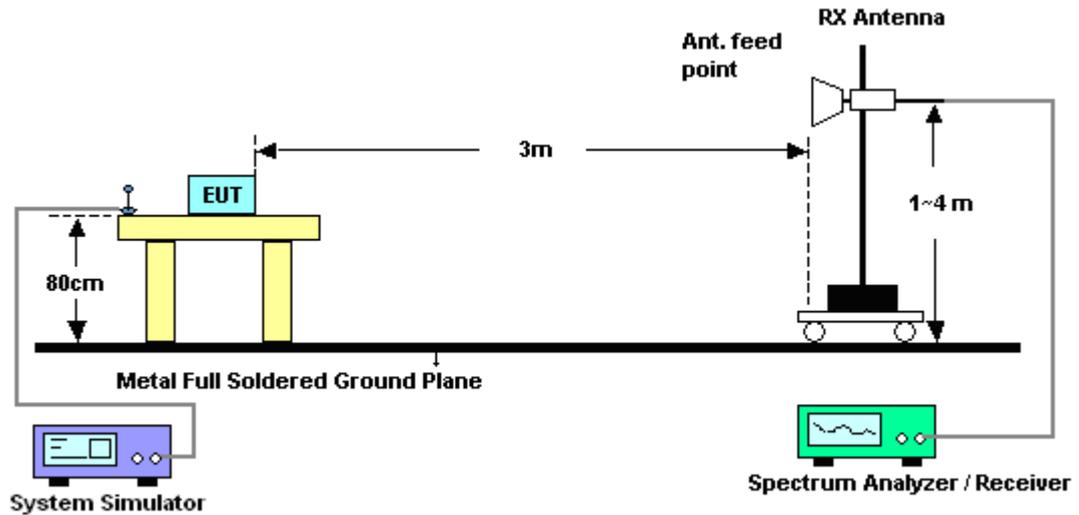


3.9.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.




3.9.6 Duty cycle correction factor for average measurement

DH5 on time/100ms (One Pulse) Plot on Channel 39

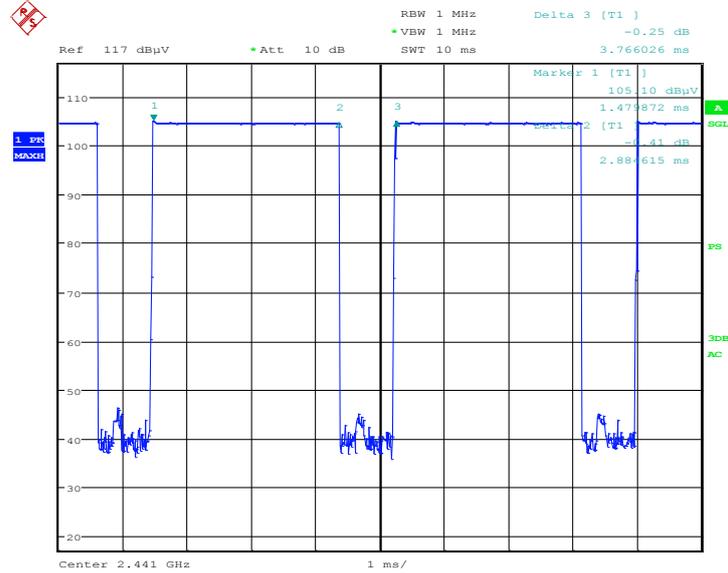

Date: 30.AUG.2012 19:43:07

DH5 on time/100ms (Count Pulses) Plot on Channel 39

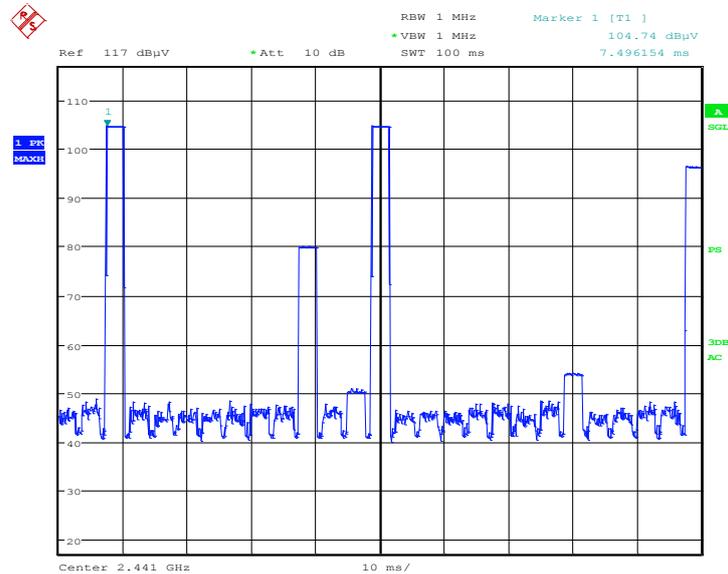

Date: 30.AUG.2012 19:45:59

Note:

1. Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle and is reported.



3.9.7 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

| | | | |
|-----------------|--|---------------------|------------|
| Test Mode : | 1Mbps | Temperature : | 21~23°C |
| Test Channel : | 00 | Relative Humidity : | 49~51% |
| Test Engineer : | David Yang | Polarization : | Horizontal |
| Remark : | 1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 100.53 dBuV/m - 20dB = 80.53 dBuV/m. | | |

| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|-------------------|------------------|-------------------|-----------------------|---------------------|-----------------------|-------------------|----------------------|----------------|-------------------|---------|
| 2402 | 100.53 | - | - | 99.63 | 32.18 | 4.58 | 35.86 | 102 | 184 | Peak |
| 2402 | 75.74 | - | - | - | - | - | - | - | - | Average |
| 4804 | 40.82 | -33.18 | 74 | 59.12 | 34.26 | 6.5 | 59.06 | 100 | 0 | Peak |
| 4804 | 16.03 | -37.97 | 54 | - | - | - | - | - | - | Average |
| 7206 | 43.97 | -36.56 | 80.53 | 57.47 | 36.06 | 8.25 | 57.81 | 100 | 0 | Peak |

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from 20log (dwell time/100ms).

For example: Average level = 100.53dBuV/m – 24.79 (dB) =75.74dBuV/m.



| | | | |
|------------------------|--|----------------------------|----------|
| Test Mode : | 1Mbps | Temperature : | 21~23°C |
| Test Channel : | 00 | Relative Humidity : | 49~51% |
| Test Engineer : | David Yang | Polarization : | Vertical |
| Remark : | 1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. | | |

| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2402 | 98.99 | - | - | 98.09 | 32.18 | 4.58 | 35.86 | 109 | 343 | Peak |
| 2402 | 74.2 | - | - | - | - | - | - | - | - | Average |
| 4804 | 40.03 | -33.97 | 74 | 58.33 | 34.26 | 6.5 | 59.06 | 100 | 0 | Peak |
| 4804 | 15.24 | -38.76 | 54 | - | - | - | - | - | - | Average |
| 7206 | 42.8 | -36.19 | 78.99 | 56.3 | 36.06 | 8.25 | 57.81 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|------------|
| Test Mode : | 1Mbps | Temperature : | 21~23°C |
| Test Channel : | 39 | Relative Humidity : | 49~51% |
| Test Engineer : | David Yang | Polarization : | Horizontal |
| Remark : | 2441 MHz is fundamental signal which can be ignored. | | |

| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2441 | 105.71 | - | - | 104.69 | 32.24 | 4.61 | 35.83 | 100 | 33 | Peak |
| 2441 | 80.92 | - | - | - | - | - | - | - | - | Average |
| 4882 | 39.64 | -34.36 | 74 | 57.7 | 34.28 | 6.54 | 58.88 | 100 | 0 | Peak |
| 4882 | 14.85 | -39.15 | 54 | - | - | - | - | - | - | Average |
| 7323 | 42.44 | -31.56 | 74 | 56 | 36.03 | 8.42 | 58.01 | 100 | 0 | Peak |
| 7323 | 17.65 | -36.35 | 54 | - | - | - | - | - | - | Average |

| | | | |
|------------------------|--|----------------------------|----------|
| Test Mode : | 1Mbps | Temperature : | 21~23°C |
| Test Channel : | 39 | Relative Humidity : | 49~51% |
| Test Engineer : | David Yang | Polarization : | Vertical |
| Remark : | 2441 MHz is fundamental signal which can be ignored. | | |

| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2441 | 102.32 | - | - | 101.3 | 32.24 | 4.61 | 35.83 | 108 | 344 | Peak |
| 2441 | 77.53 | - | - | - | - | - | - | - | - | Average |
| 4882 | 41.25 | -32.75 | 74 | 59.31 | 34.28 | 6.54 | 58.88 | 100 | 0 | Peak |
| 4882 | 16.46 | -37.54 | 54 | - | - | - | - | - | - | Average |
| 7323 | 42.93 | -31.07 | 74 | 56.49 | 36.03 | 8.42 | 58.01 | 100 | 0 | Peak |
| 7323 | 18.14 | -35.86 | 54 | - | - | - | - | - | - | Average |



| | | | |
|------------------------|--|----------------------------|------------|
| Test Mode : | 1Mbps | Temperature : | 21~23°C |
| Test Channel : | 78 | Relative Humidity : | 49~51% |
| Test Engineer : | David Yang | Polarization : | Horizontal |
| Remark : | 2480 MHz is fundamental signal which can be ignored. | | |

| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 31.35 | 23.18 | -16.82 | 40 | 34.99 | 19.12 | 0.71 | 31.64 | - | - | Peak |
| 108.84 | 26.91 | -16.59 | 43.5 | 46.22 | 11.1 | 1.13 | 31.54 | - | - | Peak |
| 215.49 | 31.62 | -11.88 | 43.5 | 51.92 | 9.25 | 1.52 | 31.07 | 100 | 45 | Peak |
| 315.4 | 29 | -17 | 46 | 44.69 | 13.4 | 1.82 | 30.91 | - | - | Peak |
| 620.6 | 22.59 | -23.41 | 46 | 29.87 | 20.51 | 2.49 | 30.28 | - | - | Peak |
| 741 | 24.93 | -21.07 | 46 | 30.08 | 22.31 | 2.73 | 30.19 | - | - | Peak |
| 2480 | 104.74 | - | - | 103.63 | 32.28 | 4.64 | 35.81 | 123 | 59 | Peak |
| 2480 | 79.95 | - | - | - | - | - | - | - | - | Average |
| 4960 | 39.62 | -34.38 | 74 | 57.41 | 34.29 | 6.57 | 58.65 | 100 | 0 | Peak |
| 4960 | 14.83 | -39.17 | 54 | - | - | - | - | - | - | Average |
| 7440 | 43.4 | -30.6 | 74 | 56.97 | 36.01 | 8.63 | 58.21 | 100 | 0 | Peak |
| 7440 | 18.61 | -35.39 | 54 | - | - | - | - | - | - | Average |



| | | | |
|------------------------|--|----------------------------|----------|
| Test Mode : | 1Mbps | Temperature : | 21~23°C |
| Test Channel : | 78 | Relative Humidity : | 49~51% |
| Test Engineer : | David Yang | Polarization : | Vertical |
| Remark : | 2480 MHz is fundamental signal which can be ignored. | | |

| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 32.97 | 33.04 | -6.96 | 40 | 46.19 | 17.76 | 0.72 | 31.63 | 100 | 261 | Peak |
| 108.57 | 34.01 | -9.49 | 43.5 | 53.32 | 11.1 | 1.13 | 31.54 | - | - | Peak |
| 213.6 | 25.29 | -18.21 | 43.5 | 45.67 | 9.23 | 1.51 | 31.12 | - | - | Peak |
| 309.1 | 23.26 | -22.74 | 46 | 39.07 | 13.31 | 1.8 | 30.92 | - | - | Peak |
| 600.3 | 22.86 | -23.14 | 46 | 30.94 | 19.9 | 2.42 | 30.4 | - | - | Peak |
| 754.3 | 24.6 | -21.4 | 46 | 29.65 | 22.35 | 2.76 | 30.16 | - | - | Peak |
| 2480 | 102.02 | - | - | 100.91 | 32.28 | 4.64 | 35.81 | 130 | 5 | Peak |
| 2480 | 77.23 | - | - | - | - | - | - | - | - | Average |
| 4960 | 39.88 | -34.12 | 74 | 57.67 | 34.29 | 6.57 | 58.65 | 100 | 0 | Peak |
| 4960 | 15.09 | -38.91 | 54 | - | - | - | - | - | - | Average |
| 7440 | 42.63 | -31.37 | 74 | 56.2 | 36.01 | 8.63 | 58.21 | 100 | 0 | Peak |
| 7440 | 17.84 | -36.16 | 54 | - | - | - | - | - | - | Average |

3.10 AC Conducted Emission Measurement

3.10.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dBuV) | |
|-----------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.


3.10.2 Measuring Instruments

See list of measuring instruments of this test report.

3.10.3 Test Procedures


1. The test follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009 test site requirement.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.10.4 Test Setup

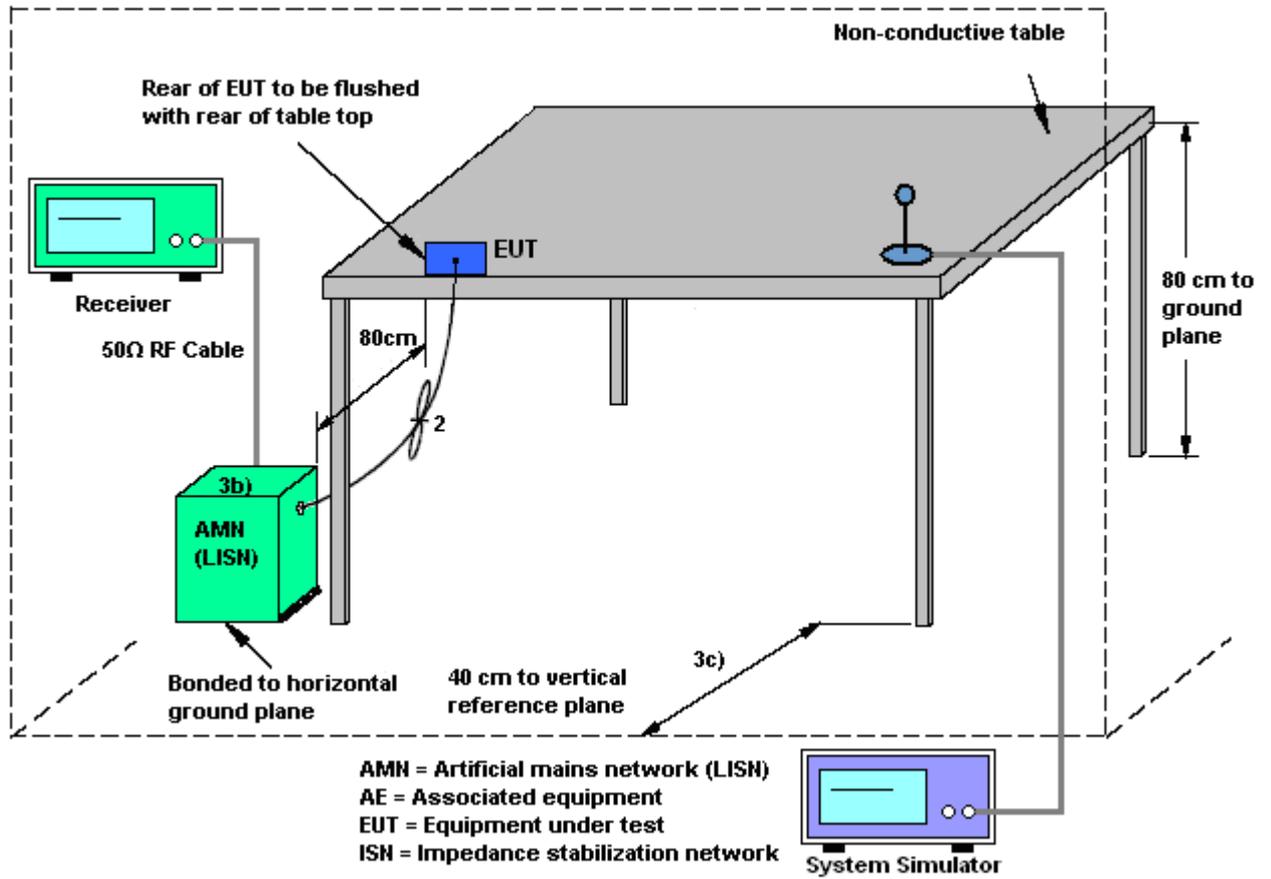

3.10.5 Test Result of AC Conducted Emission

| | | | |
|-----------------|--|---------------------|---------|
| Test Mode : | Mode 3 | Temperature : | 21~22°C |
| Test Engineer : | Kai-Chun Chu | Relative Humidity : | 49~50% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Function Type : | GSM850 Idle + Bluetooth Link + WLAN (5G) Link + GPS Rx + Earphone 1 + Battery + USB Cable 1 (Charging from Adapter 5) for Sample 2 | | |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

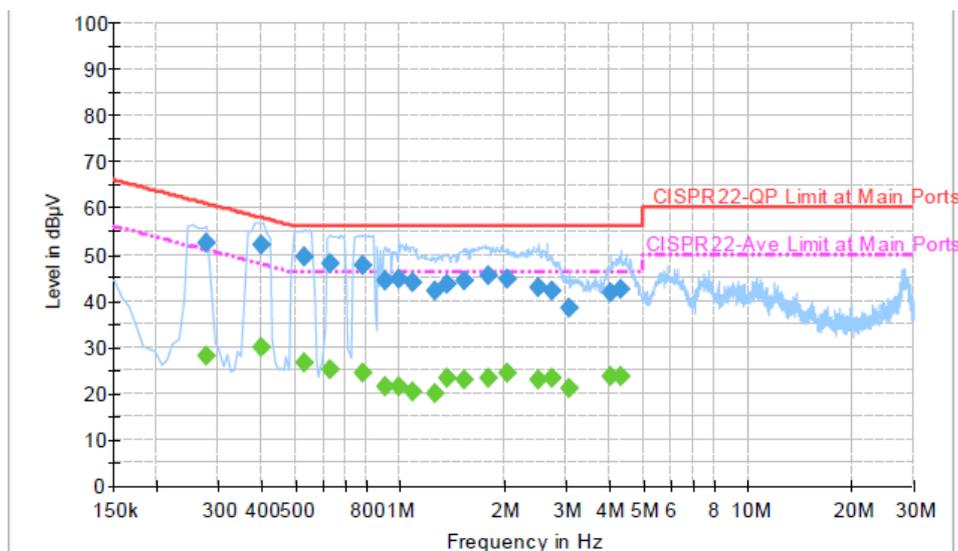


Final Result : Quasi-Peak

| Frequency (MHz) | Quasi-Peak (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|-------------------|--------|------|------------|-------------|--------------|
| 0.278000 | 52.3 | Off | L1 | 19.4 | 8.6 | 60.9 |
| 0.398000 | 52.0 | Off | L1 | 19.4 | 5.9 | 57.9 |
| 0.534000 | 49.5 | Off | L1 | 19.4 | 6.5 | 56.0 |
| 0.630000 | 48.1 | Off | L1 | 19.5 | 7.9 | 56.0 |
| 0.782000 | 47.6 | Off | L1 | 19.4 | 8.4 | 56.0 |
| 0.910000 | 44.1 | Off | L1 | 19.4 | 11.9 | 56.0 |
| 0.990000 | 44.7 | Off | L1 | 19.4 | 11.3 | 56.0 |
| 1.094000 | 44.0 | Off | L1 | 19.4 | 12.0 | 56.0 |
| 1.262000 | 42.1 | Off | L1 | 19.4 | 13.9 | 56.0 |
| 1.366000 | 43.4 | Off | L1 | 19.4 | 12.6 | 56.0 |
| 1.526000 | 44.3 | Off | L1 | 19.4 | 11.7 | 56.0 |
| 1.806000 | 45.4 | Off | L1 | 19.6 | 10.6 | 56.0 |
| 2.030000 | 44.6 | Off | L1 | 19.5 | 11.4 | 56.0 |
| 2.510000 | 42.9 | Off | L1 | 19.6 | 13.1 | 56.0 |
| 2.734000 | 42.0 | Off | L1 | 19.6 | 14.0 | 56.0 |
| 3.070000 | 38.3 | Off | L1 | 19.6 | 17.7 | 56.0 |
| 4.038000 | 41.7 | Off | L1 | 19.6 | 14.3 | 56.0 |
| 4.318000 | 42.3 | Off | L1 | 19.6 | 13.7 | 56.0 |




| | | | |
|-----------------|--|---------------------|---------|
| Test Mode : | Mode 3 | Temperature : | 21~22°C |
| Test Engineer : | Kai-Chun Chu | Relative Humidity : | 49~50% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Function Type : | GSM850 Idle + Bluetooth Link + WLAN (5G) Link + GPS Rx + Earphone 1 + Battery + USB Cable 1 (Charging from Adapter 5) for Sample 2 | | |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

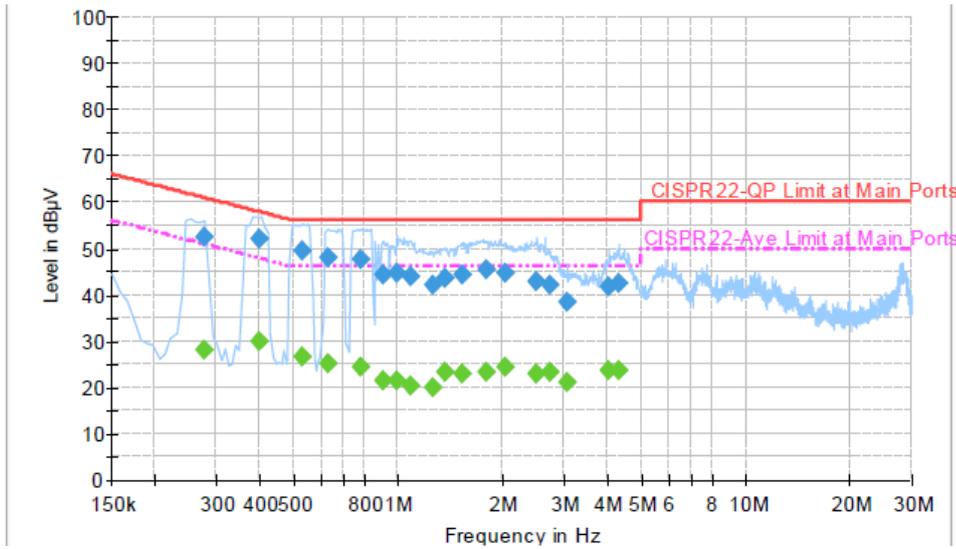

Final Result : Average

| Frequency (MHz) | Average (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.278000 | 27.9 | Off | L1 | 19.4 | 23.0 | 50.9 |
| 0.398000 | 30.0 | Off | L1 | 19.4 | 17.9 | 47.9 |
| 0.534000 | 26.8 | Off | L1 | 19.4 | 19.2 | 46.0 |
| 0.630000 | 25.0 | Off | L1 | 19.5 | 21.0 | 46.0 |
| 0.782000 | 24.3 | Off | L1 | 19.4 | 21.7 | 46.0 |
| 0.910000 | 21.5 | Off | L1 | 19.4 | 24.5 | 46.0 |
| 0.990000 | 21.5 | Off | L1 | 19.4 | 24.5 | 46.0 |
| 1.094000 | 20.4 | Off | L1 | 19.4 | 25.6 | 46.0 |
| 1.262000 | 19.9 | Off | L1 | 19.4 | 26.1 | 46.0 |
| 1.366000 | 23.2 | Off | L1 | 19.4 | 22.8 | 46.0 |
| 1.526000 | 23.0 | Off | L1 | 19.4 | 23.0 | 46.0 |
| 1.806000 | 23.3 | Off | L1 | 19.6 | 22.7 | 46.0 |
| 2.030000 | 24.2 | Off | L1 | 19.5 | 21.8 | 46.0 |
| 2.510000 | 22.7 | Off | L1 | 19.6 | 23.3 | 46.0 |
| 2.734000 | 23.1 | Off | L1 | 19.6 | 22.9 | 46.0 |
| 3.070000 | 21.2 | Off | L1 | 19.6 | 24.8 | 46.0 |
| 4.038000 | 23.6 | Off | L1 | 19.6 | 22.4 | 46.0 |
| 4.318000 | 23.8 | Off | L1 | 19.6 | 22.2 | 46.0 |


| | | | |
|-----------------|--|---------------------|---------|
| Test Mode : | Mode 3 | Temperature : | 21~22°C |
| Test Engineer : | Kai-Chun Chu | Relative Humidity : | 49~50% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Function Type : | GSM850 Idle + Bluetooth Link + WLAN (5G) Link + GPS Rx + Earphone 1 + Battery + USB Cable 1 (Charging from Adapter 5) for Sample 2 | | |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

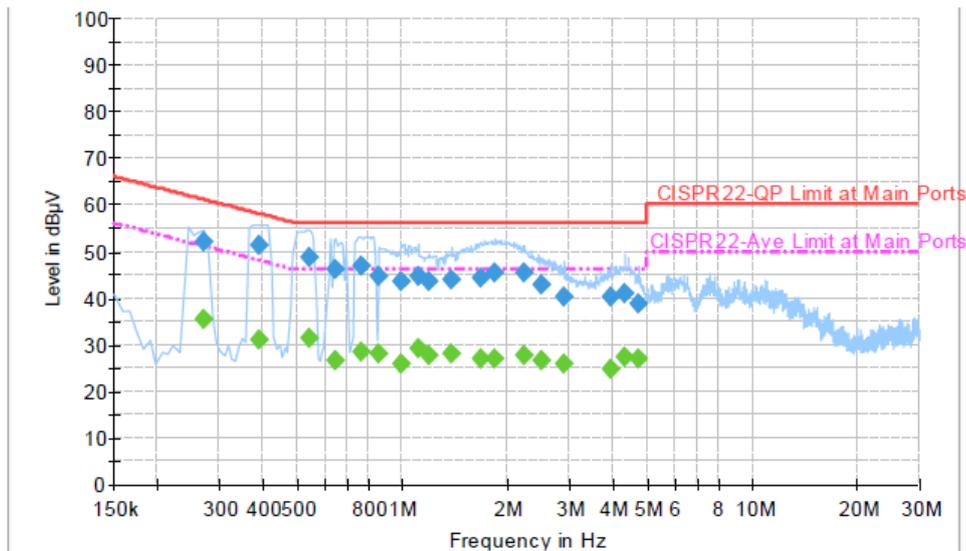

Final Result : Quasi-Peak

| Frequency (MHz) | Quasi-Peak (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|-------------------|--------|------|------------|-------------|--------------|
| 0.270000 | 52.0 | Off | N | 19.4 | 9.1 | 61.1 |
| 0.390000 | 51.2 | Off | N | 19.3 | 6.9 | 58.1 |
| 0.542000 | 48.6 | Off | N | 19.4 | 7.4 | 56.0 |
| 0.646000 | 46.2 | Off | N | 19.4 | 9.8 | 56.0 |
| 0.766000 | 46.7 | Off | N | 19.4 | 9.3 | 56.0 |
| 0.862000 | 44.6 | Off | N | 19.4 | 11.4 | 56.0 |
| 0.990000 | 43.6 | Off | N | 19.5 | 12.4 | 56.0 |
| 1.110000 | 44.7 | Off | N | 19.4 | 11.3 | 56.0 |
| 1.190000 | 43.4 | Off | N | 19.5 | 12.6 | 56.0 |
| 1.390000 | 43.8 | Off | N | 19.5 | 12.2 | 56.0 |
| 1.670000 | 44.1 | Off | N | 19.5 | 11.9 | 56.0 |
| 1.838000 | 45.3 | Off | N | 19.6 | 10.7 | 56.0 |
| 2.222000 | 45.2 | Off | N | 19.6 | 10.8 | 56.0 |
| 2.502000 | 42.7 | Off | N | 19.6 | 13.3 | 56.0 |
| 2.918000 | 40.4 | Off | N | 19.6 | 15.6 | 56.0 |
| 3.950000 | 40.1 | Off | N | 19.6 | 15.9 | 56.0 |
| 4.310000 | 40.9 | Off | N | 19.6 | 15.1 | 56.0 |
| 4.726000 | 38.7 | Off | N | 19.7 | 17.3 | 56.0 |

| | | | |
|-----------------|--|---------------------|---------|
| Test Mode : | Mode 3 | Temperature : | 21~22°C |
| Test Engineer : | Kai-Chun Chu | Relative Humidity : | 49~50% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Function Type : | GSM850 Idle + Bluetooth Link + WLAN (5G) Link + GPS Rx + Earphone 1 + Battery + USB Cable 1 (Charging from Adapter 5) for Sample 2 | | |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

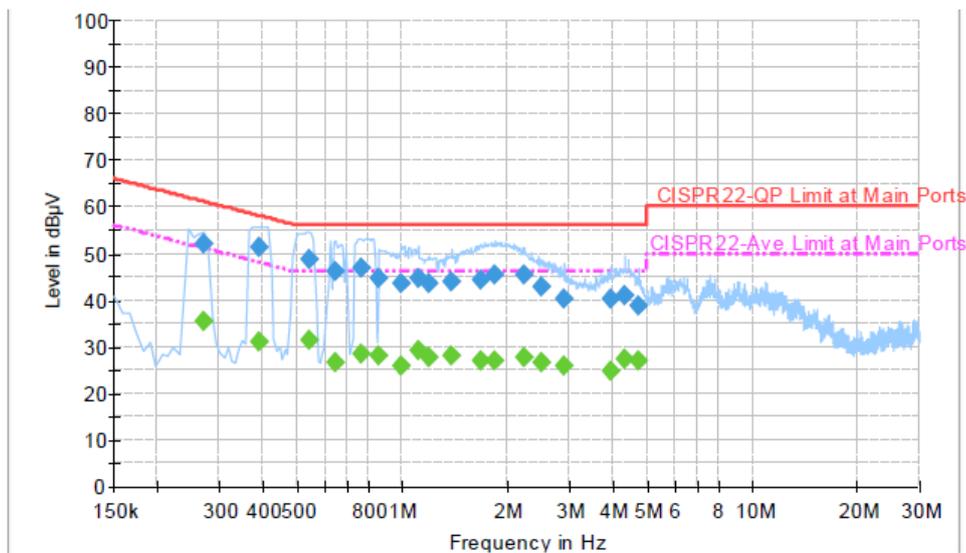

Final Result : Average

| Frequency (MHz) | Average (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.270000 | 35.5 | Off | N | 19.4 | 15.6 | 51.1 |
| 0.390000 | 31.0 | Off | N | 19.3 | 17.1 | 48.1 |
| 0.542000 | 31.5 | Off | N | 19.4 | 14.5 | 46.0 |
| 0.646000 | 26.5 | Off | N | 19.4 | 19.5 | 46.0 |
| 0.766000 | 28.2 | Off | N | 19.4 | 17.8 | 46.0 |
| 0.862000 | 27.9 | Off | N | 19.4 | 18.1 | 46.0 |
| 0.990000 | 25.7 | Off | N | 19.5 | 20.3 | 46.0 |
| 1.110000 | 29.3 | Off | N | 19.4 | 16.7 | 46.0 |
| 1.190000 | 27.7 | Off | N | 19.5 | 18.3 | 46.0 |
| 1.390000 | 28.1 | Off | N | 19.5 | 17.9 | 46.0 |
| 1.670000 | 27.1 | Off | N | 19.5 | 18.9 | 46.0 |
| 1.838000 | 26.9 | Off | N | 19.6 | 19.1 | 46.0 |
| 2.222000 | 27.6 | Off | N | 19.6 | 18.4 | 46.0 |
| 2.502000 | 26.6 | Off | N | 19.6 | 19.4 | 46.0 |
| 2.918000 | 25.7 | Off | N | 19.6 | 20.3 | 46.0 |
| 3.950000 | 24.8 | Off | N | 19.6 | 21.2 | 46.0 |
| 4.310000 | 27.1 | Off | N | 19.6 | 18.9 | 46.0 |
| 4.726000 | 26.9 | Off | N | 19.7 | 19.1 | 46.0 |



3.11 Antenna Requirements

3.11.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.11.2 Antenna Connected Construction

Non-standard connector used.

3.11.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|------------------------|--------------|----------------------------|-----------------|-----------------------------|------------------|-------------------------------|---------------|-----------------------|
| Spectrum Analyzer | R&S | FSP40 | 100055 | 9kHz~40GHz | Jun. 06, 2012 | Aug. 22, 2012 ~ Sep. 12, 2012 | Jun. 05, 2013 | Conducted (TH02-HY) |
| Bluetooth Base Station | R&S | CBT32 | 100519 | N/A | Jun. 05, 2012 | Aug. 22, 2012 ~ Sep. 12, 2012 | Jun. 06, 2013 | Conducted (TH02-HY) |
| Spectrum Analyzer | R&S | ESU26 | 100390 | 20Hz ~ 26.5GHz | Dec. 22, 2011 | Aug. 30, 2012 | Dec. 21, 2012 | Radiation (03CH05-HY) |
| Bilog Antenna | SCHAFFNER | CBL6111C | 2725 | 30MHz ~ 2GHz | Oct. 22, 2011 | Aug. 30, 2012 | Oct. 21, 2012 | Radiation (03CH05-HY) |
| Turn Table | HD | Deis HD 2000 | 420/611 | 0 ~ 360 degree | N/A | Aug. 30, 2012 | N/A | Radiation (03CH05-HY) |
| Antenna Mast | HD | MA 240 | 240/666 | 1 m ~ 4 m | N/A | Aug. 30, 2012 | N/A | Radiation (03CH05-HY) |
| Horn Antenna | ESCO | 3117 | 66584 | 1GHz~18GHz | Aug. 10, 2012 | Aug. 30, 2012 | Aug. 09, 2013 | Radiation (03CH05-HY) |
| Pre Amplifier | COM-POWER | PA-103A | 161075 | 10Hz ~ 1000MHz Gain:32dB | Feb. 27, 2012 | Aug. 30, 2012 | Feb. 26, 2013 | Radiation (03CH05-HY) |
| Pre Amplifier | MITEQ | AMF-7D-0010 1800-30-10P | 159087 | 1GHz~18GHz | Feb. 27, 2012 | Aug. 30, 2012 | Feb. 26, 2013 | Radiation (03CH05-HY) |
| Pre Amplifier | Agilent | 8449B | 3008A019 17 | 1GHz~26.5GHz | Apr. 13, 2012 | Aug. 30, 2012 | Apr. 12, 2013 | Radiation (03CH05-HY) |
| SHF-EHF Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA9170 251 | 15GHz ~ 40GHz | Oct. 21, 2011 | Aug. 30, 2012 | Oct. 20, 2012 | Radiation (03CH05-HY) |
| Bluetooth Base Station | R&S | CBT32 | 100519 | N/A | Jun. 05, 2012 | Aug. 30, 2012 | Jun. 06, 2013 | Radiation (03CH05-HY) |
| Loop Antenna | R&S | HFH2-Z2 | 860004/00 1 | 9KHz ~ 30MHz | Jul. 03, 2012 | Aug. 30, 2012 | Jul. 02, 2014 | Radiation (03CH05-HY) |
| EMI Test Receiver | R&S | ESCS 30 | 100356 | 9KHz ~ 2.75GHz | Oct. 27, 2011 | Aug. 26, 2012 | Oct. 26, 2012 | Conduction (CO05-HY) |
| Two-LISN | R&S | ENV216 | 11-100081 | 9KHz ~ 30MHz | Dec. 09, 2011 | Aug. 26, 2012 | Dec. 08, 2012 | Conduction (CO05-HY) |
| Two-LISN | R&S | ENV216 | 11-100080 | 9KHz ~ 30MHz | Dec. 06, 2011 | Aug. 26, 2012 | Dec. 05, 2012 | Conduction (CO05-HY) |
| AC Power Source | APC | APC-1000W | N/A | N/A | N/A | Aug. 26, 2012 | N/A | Conduction (CO05-HY) |
| GPS Station | Pendulum | GSG-54 | N/A | N/A | N/A | Aug. 26, 2012 | N/A | Conduction (CO05-HY) |
| System Simulator | R&S | CMU200 | 117997 | N/A | Aug. 22, 2011 | Aug. 26, 2012 | Aug. 21, 2013 | Conduction (CO05-HY) |



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 2.26 |
|---|------|

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 2.54 |
|---|------|

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.72 |
|---|------|