


FCC RF Test Report

APPLICANT : HTC Corporation
EQUIPMENT : Windows Phone
MODEL NAME : PM59110
FCC ID : NM8PM59110
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Sep. 20, 2012 and completely tested on Oct. 26, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Feature of Equipment Under Test 5

 1.4 Testing Site 6

 1.5 Applied Standards 6

 1.6 Ancillary Equipment List 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8

 2.1 RF Output Power 8

 2.2 Test Mode..... 9

 2.3 Connection Diagram of Test System..... 10

 2.4 RF Utility 10

3 TEST RESULT 11

 3.1 Number of Channel Measurement 11

 3.2 Hopping Channel Separation Measurement 13

 3.3 Dwell Time Measurement..... 20

 3.4 20dB Bandwidth Measurement 23

 3.5 Peak Output Power Measurement 30

 3.6 Conducted Band Edges Measurement..... 37

 3.7 Conducted Spurious Emission Measurement 40

 3.8 Radiated Band Edges and Spurious Emission Measurement 44

 3.9 AC Conducted Emission Measurement..... 57

 3.10 Antenna Requirements 63

4 LIST OF MEASURING EQUIPMENT..... 64

5 UNCERTAINTY OF EVALUATION..... 65

APPENDIX A. SETUP PHOTOGRAPHS

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	A8.1(b)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	≤ 1 w for 1Mbps ≤ 125 Mw for 2, 3Mbps	Pass	-
3.6	15.247(d)	A8.5	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	A8.5	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.54 dB at 30.270 MHz
3.9	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 11.60 dB at 2.198 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

HTC Corporation

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan.

1.2 Manufacturer

HTC Corporation

No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan.

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Windows Phone
Model Name	PM59110
Sample 1	EUT with LCM, Main Camera 1 and Battery 1
Sample 2	EUT with LCM, Main Camera 2 and Battery 2
FCC ID	NM8PM59110
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/ WLAN 11bgn / Bluetooth
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 1.18 dBm (0.0013 W) Bluetooth EDR (2Mbps) : 2.09 dBm (0.0016 W) Bluetooth EDR (3Mbps) : 2.47 dBm (0.0018 W)
Antenna Type	PIFA Antenna type with gain -0.50 dBi
Type of Modulation	Bluetooth 3.0 EDR : GFSK, $\pi/4$ -DQPSK, 8-DPSK

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.			
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH02-HY	CO05-HY	03CH07-HY	722060/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003 and ANSI C63.10-2009
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
3.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
4.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
5.	Notebook	DELL	Latitude E6320	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	0.51 dBm	1.43 dBm	1.76 dBm
Ch39	2441MHz	1.13 dBm	2.09 dBm	2.45 dBm
Ch78	2480MHz	1.18 dBm	2.07 dBm	2.47 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
2. The data rate was set in 3Mbps for all the test items due to the highest RF output power.
3. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases (Y plane) and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	Pretest	Pretest	Mode 1: CH00_2402 MHz for Sample 1 Mode 2: CH39_2441 MHz for Sample 1 Mode 3: CH78_2480 MHz for Sample 1 Mode 4: CH78_2480 MHz for Sample 2
AC Conducted Emission	Mode 1 :WCDMA Band V Idle + Bluetooth Link + WLAN Link + GPS Rx + Earphone 2 + USB Cable 1 (Charging from Adapter 2) for Sample 1 Mode 2 :WCDMA Band V Idle + Bluetooth Link + WLAN Link + GPS Rx + Earphone 2 + USB Cable 1 (Charging from Adapter 2) for Sample 2		
Remark: <ol style="list-style-type: none"> For Radiated TCs, the test was performance with earphone 1, adaptor 1, and USB cable 1 For radiated TCs, the data rate was set in 3Mbps due to the highest RF output power; only the data of these modes was reported. For conducted emission, the worst case is mode 2; only the test data of this mode was reported. 			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

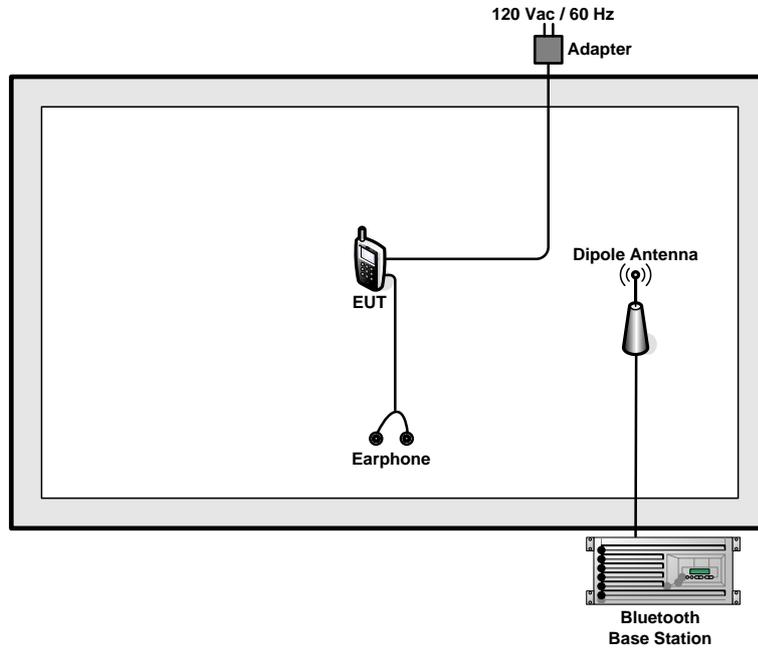

<AC Conducted Emission Mode>

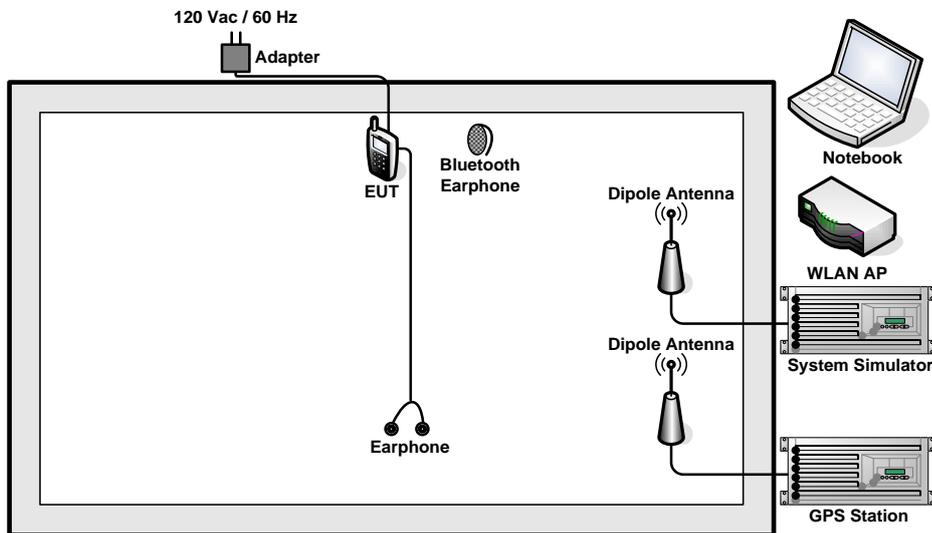

2.4 RF Utility

For Bluetooth function, the RF utility, "QRCT.exe" was installed in the notebook which was programmed in order to make the EUT into the engineering modes to contact with Bluetooth base station for transmitting and receiving signals continuously.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW \geq 1% of the span; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

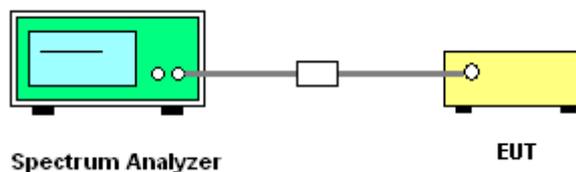


3.1.5 Test Result of Number of Hopping Frequency


Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%
Number of Hopping Channels (Channel)	Limits (Channel)	Pass/Fail	
79	> 15	Pass	



Number of Hopping Channel Plot on Channel 00 - 78

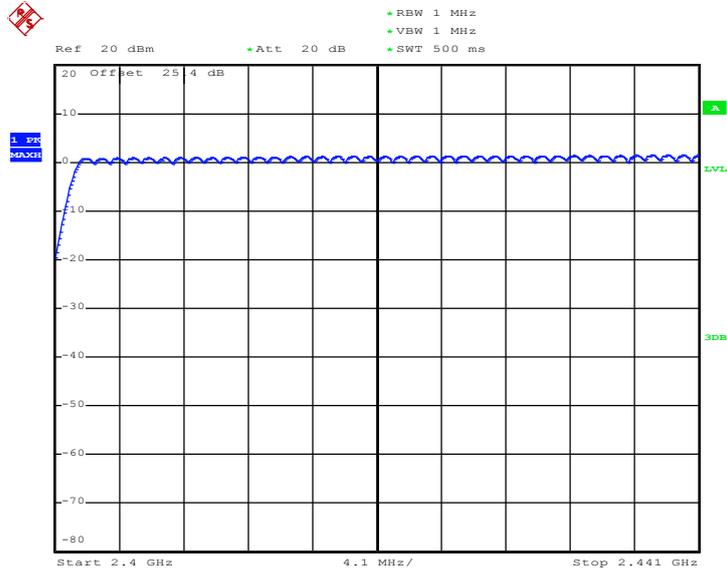

Date: 27.SEP.2012 21:17:02

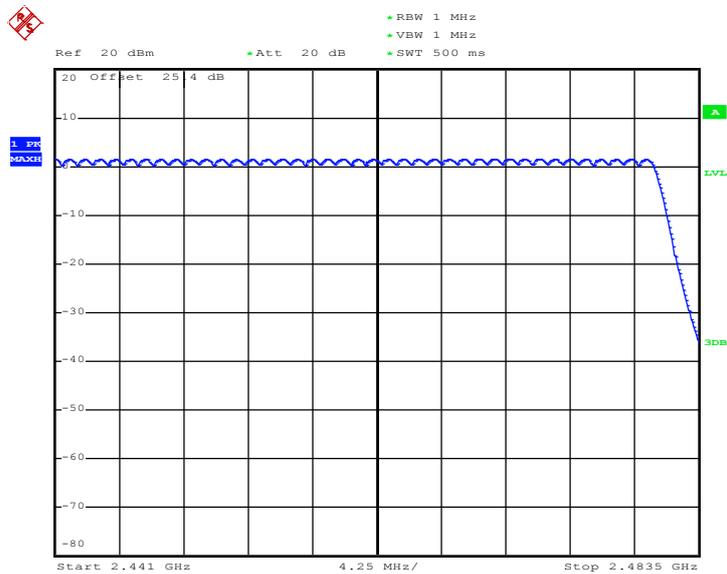

Date: 27.SEP.2012 21:20:49

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

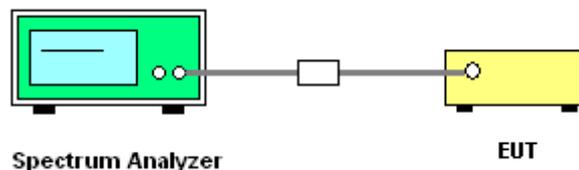




3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6427	Pass
39	2441	1.002	0.6427	Pass
78	2480	1.002	0.6427	Pass


Channel Separation Plot on Channel 00 - 01

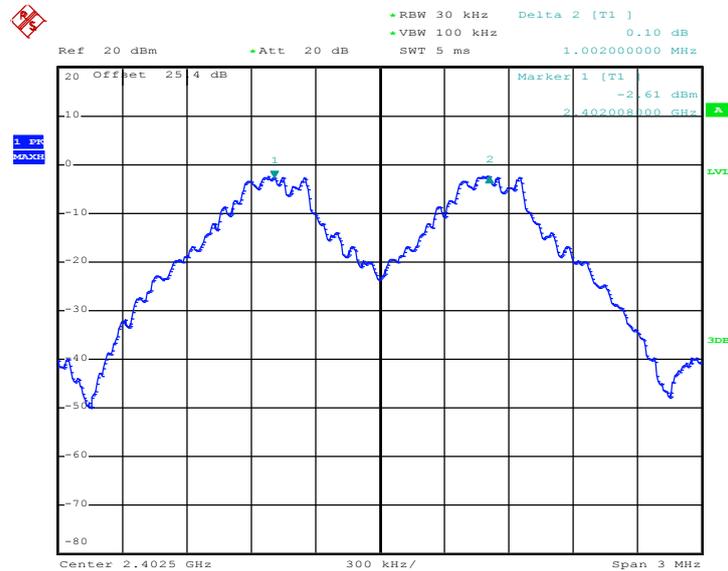

Date: 27.SEP.2012 19:52:31




Channel Separation Plot on Channel 39 - 40

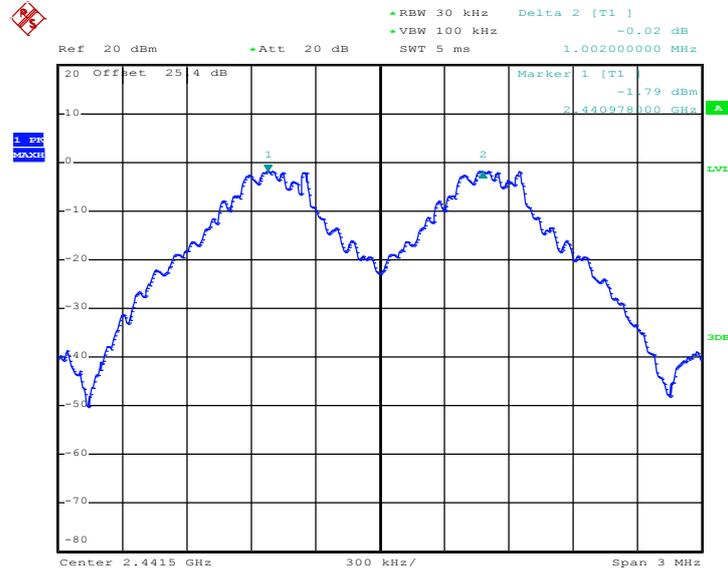

Date: 27.SEP.2012 19:53:15

Channel Separation Plot on Channel 77 - 78

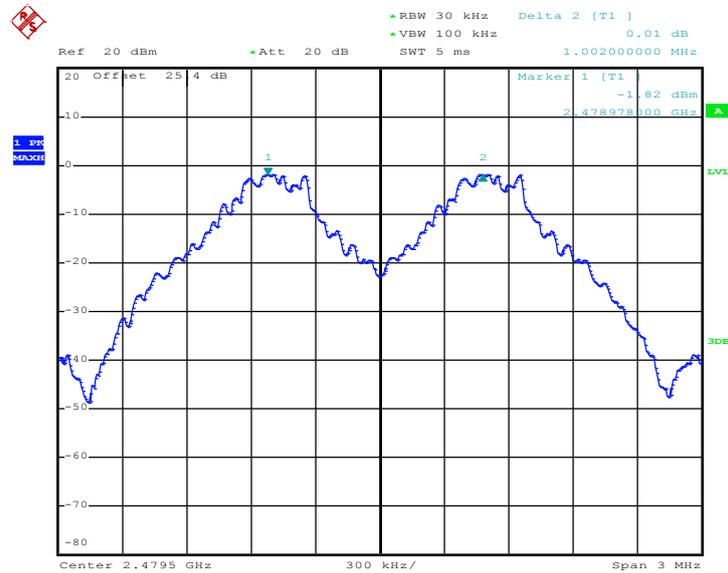


Date: 27.SEP.2012 19:55:11



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8600	Pass
39	2441	1.002	0.8600	Pass
78	2480	1.002	0.8600	Pass


Channel Separation Plot on Channel 00 - 01

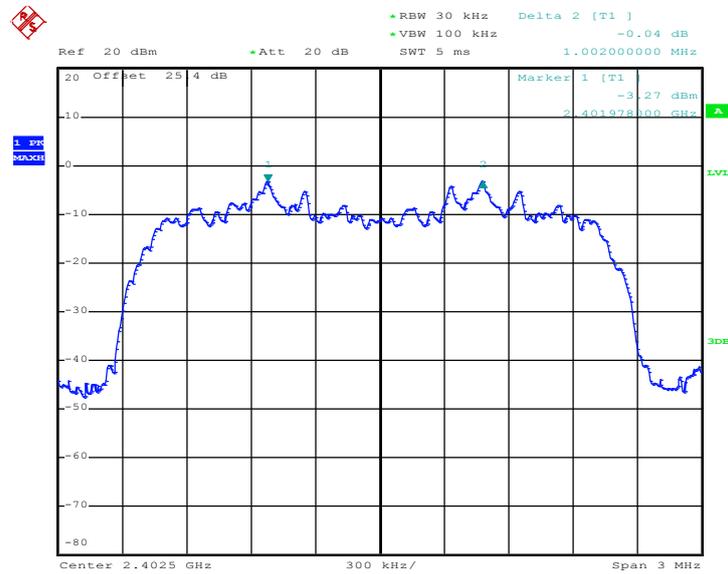

Date: 27.SEP.2012 20:56:37




Channel Separation Plot on Channel 39 - 40

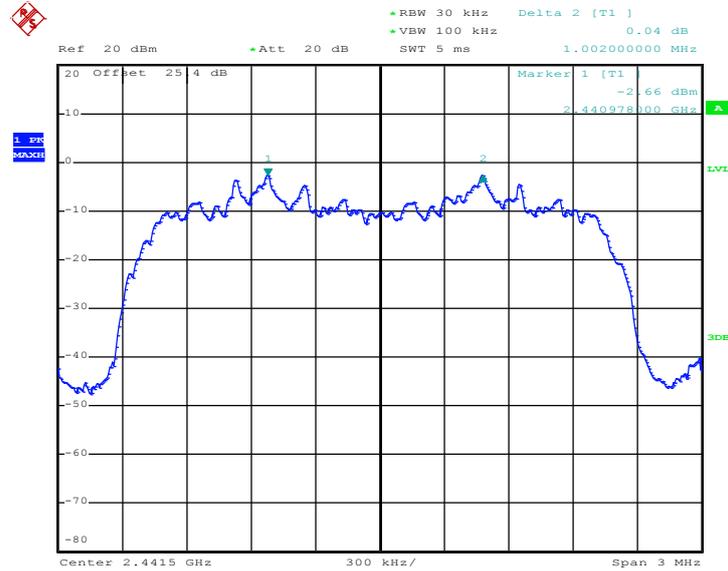

Date: 27.SEP.2012 19:58:09

Channel Separation Plot on Channel 77 - 78

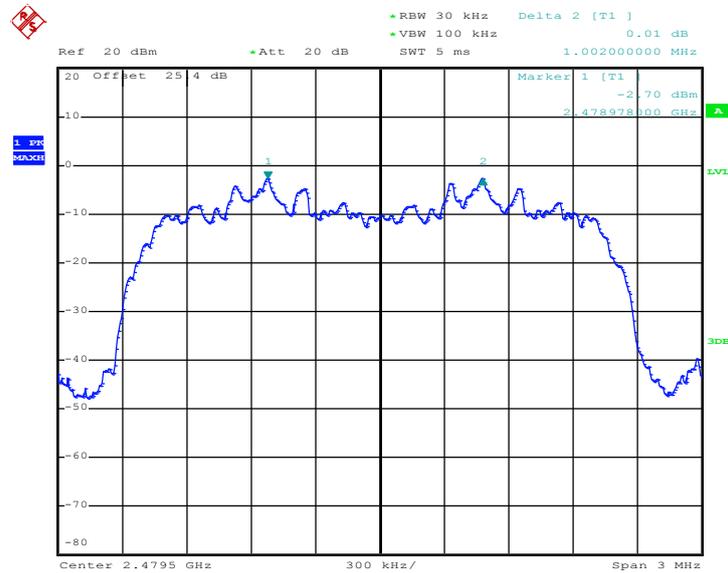


Date: 27.SEP.2012 19:56:18



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8680	Pass
39	2441	1.002	0.8680	Pass
78	2480	1.002	0.8680	Pass


Channel Separation Plot on Channel 00 - 01

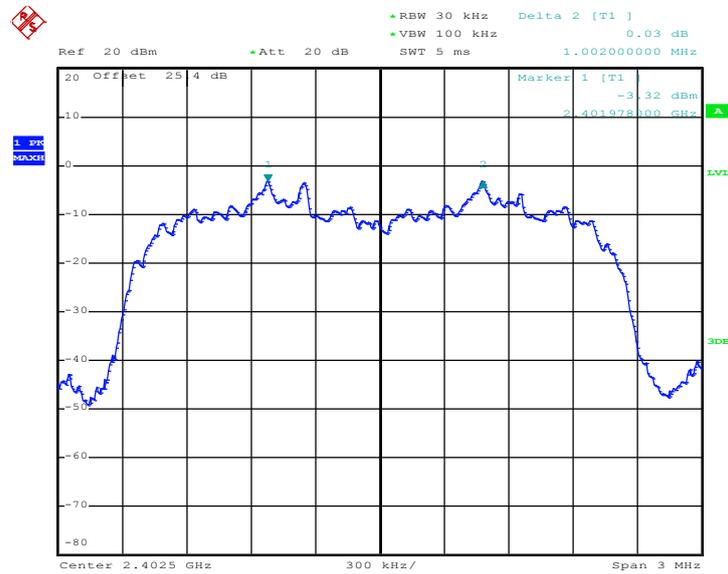

Date: 27.SEP.2012 20:04:28




Channel Separation Plot on Channel 39 - 40

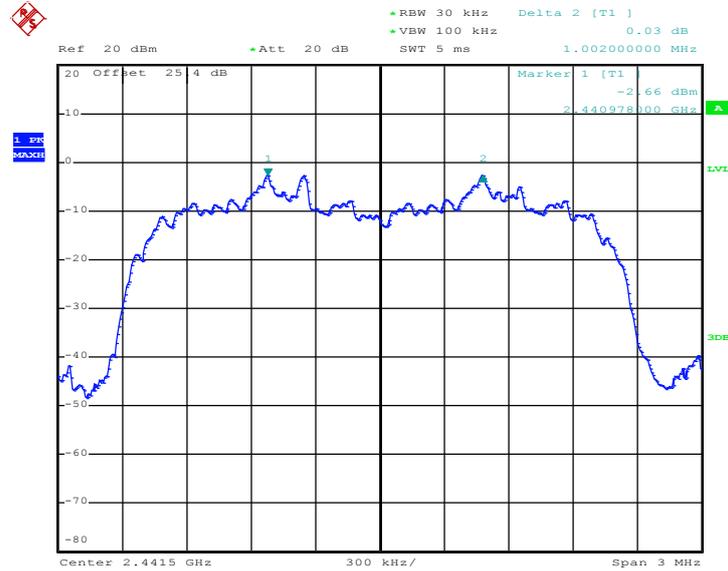

Date: 27.SEP.2012 20:07:17

Channel Separation Plot on Channel 77 - 78

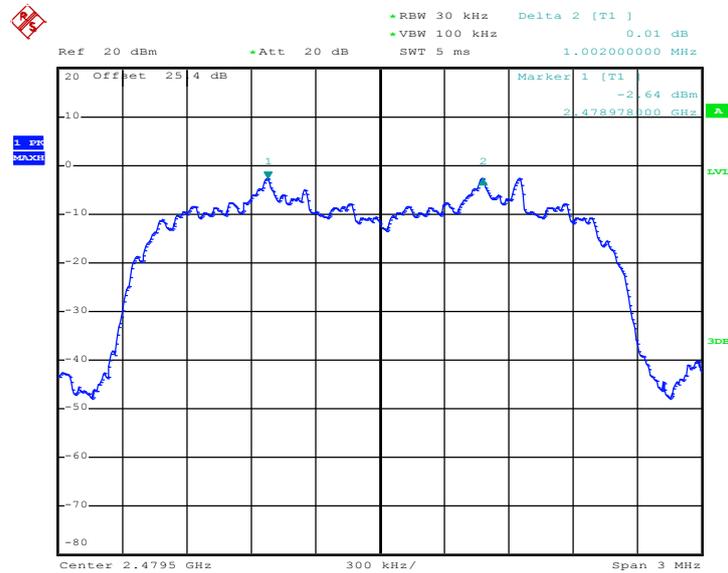

Date: 27.SEP.2012 20:09:40

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

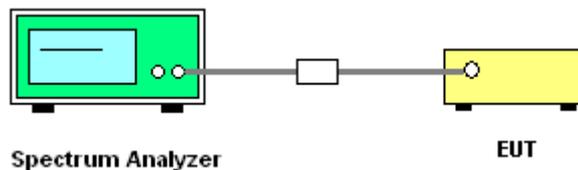



3.3.5 Test Result of Dwell Time

Test Mode :	3DH5	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%


Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
3DH5	4.00	2960.00	0.37	0.4	Pass

Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. T: Package Transfer Time(us)




3DH5 Dwell Time (One Pulse) Plot on Channel 39

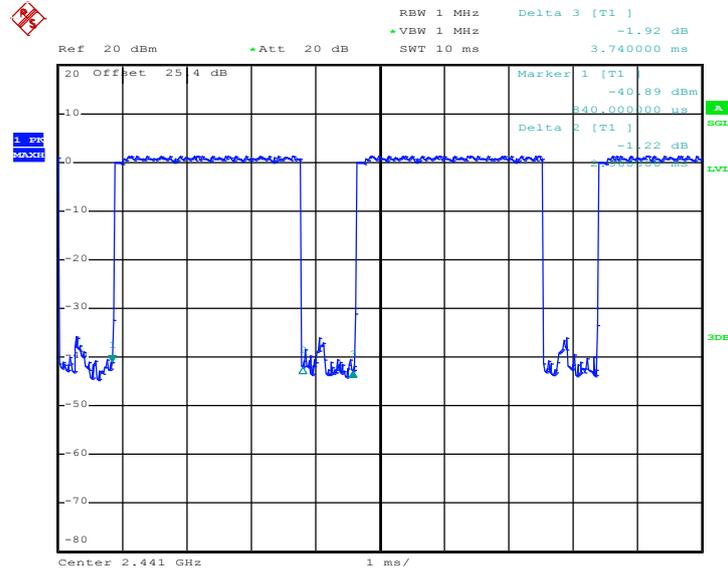

Date: 27.SEP.2012 21:11:06

3DH5 Dwell Time (Count Pulses) Plot on Channel 39

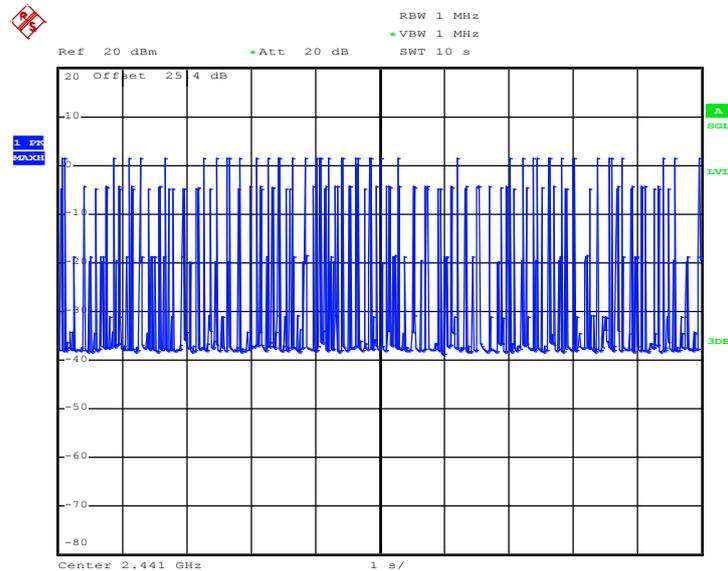

Date: 27.SEP.2012 22:20:55

3.4 20dB Bandwidth Measurement

3.4.1 Limit of 20dB Bandwidth

Reporting only


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Measure and record the results in the test report.

3.4.4 Test Setup

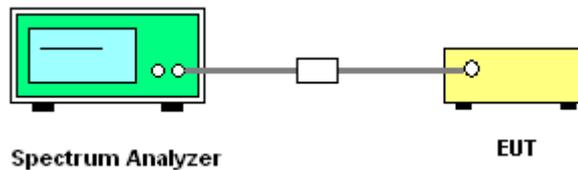




3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.964
39	2441	0.964
78	2480	0.964


20 dB Bandwidth Plot on Channel 00

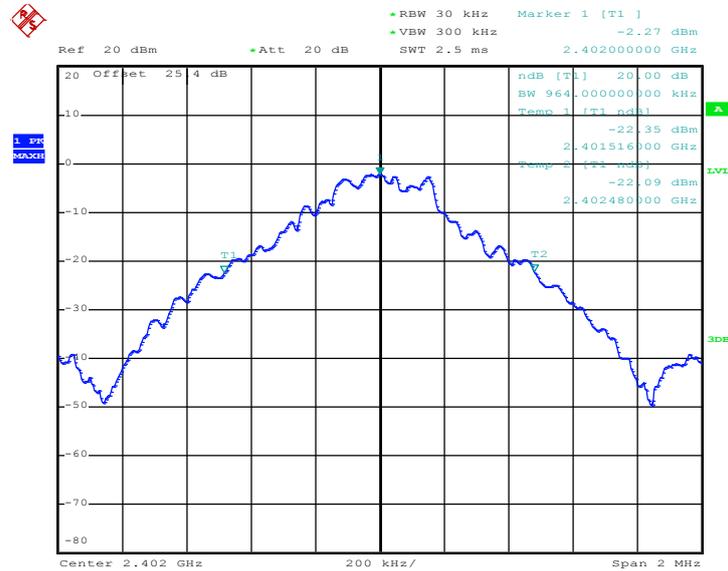

Date: 27.SEP.2012 20:13:23




20 dB Bandwidth Plot on Channel 39

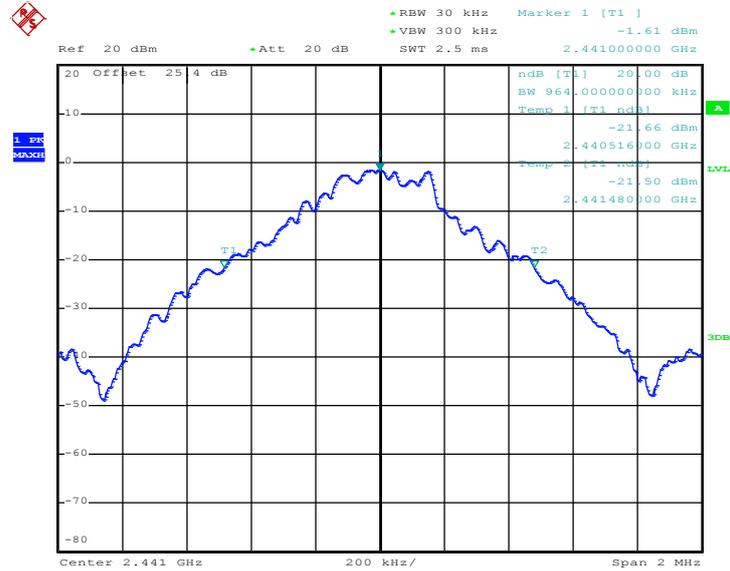

Date: 27.SEP.2012 20:14:29

20 dB Bandwidth Plot on Channel 78

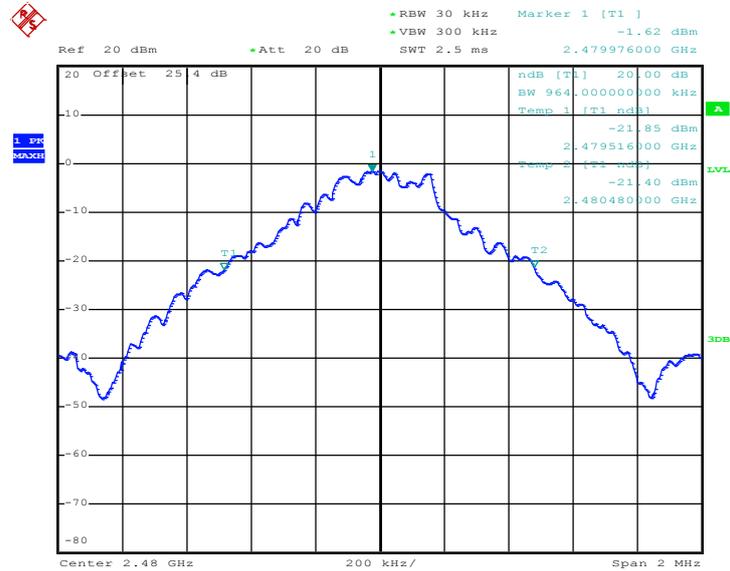


Date: 27.SEP.2012 20:15:14



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.290
39	2441	1.290
78	2480	1.290

20 dB Bandwidth Plot on Channel 00

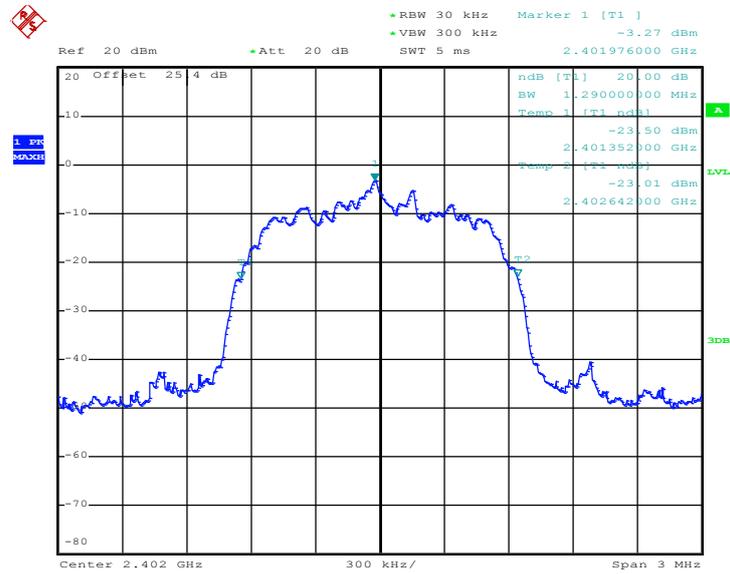


Date: 27.SEP.2012 20:15:45



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.302
39	2441	1.302
78	2480	1.302


20 dB Bandwidth Plot on Channel 00

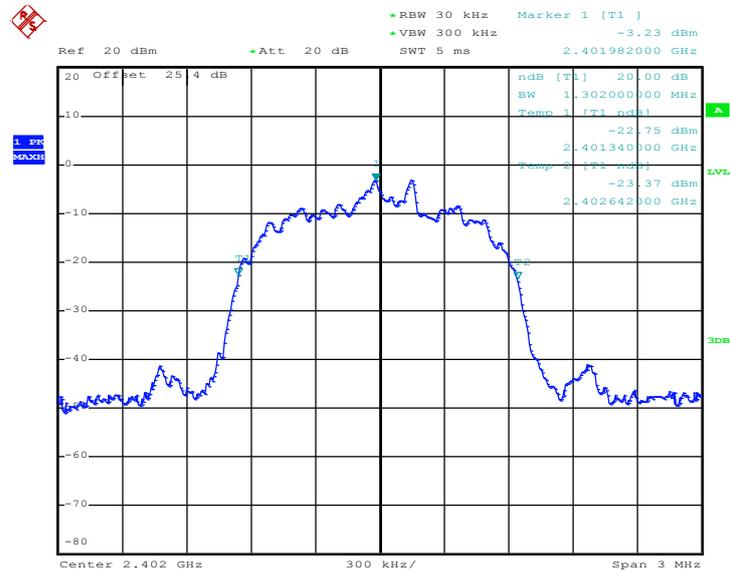

Date: 27.SEP.2012 20:18:29




20 dB Bandwidth Plot on Channel 39

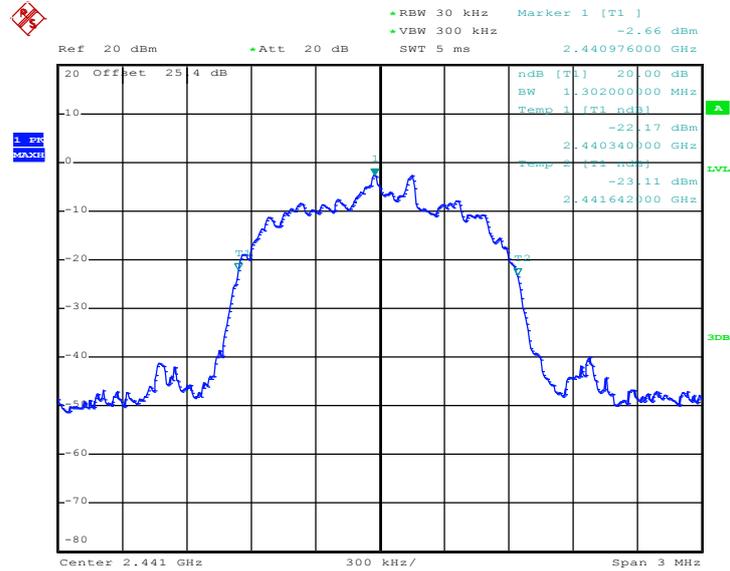

Date: 27.SEP.2012 20:47:00

20 dB Bandwidth Plot on Channel 78

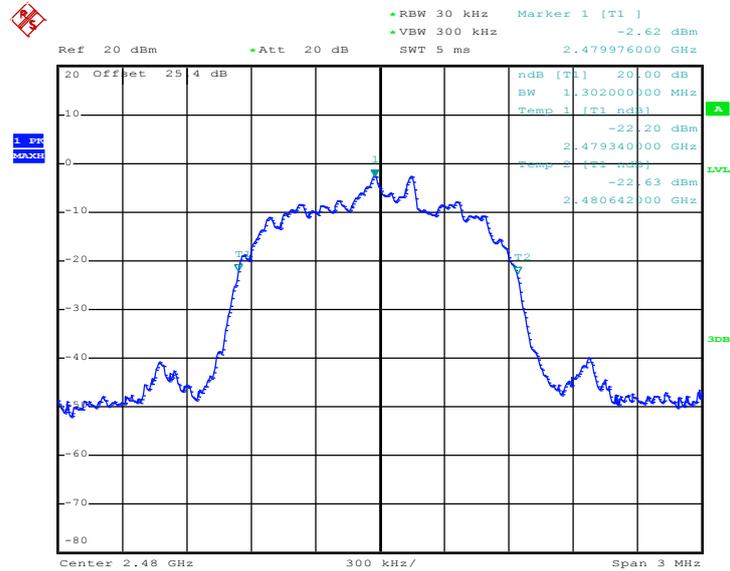

Date: 27.SEP.2012 20:20:18

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, and 3Mbps are 0.125 watts.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

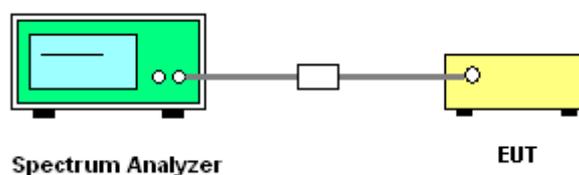




3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	0.51	30.00	Pass
39	2441	1.13	30.00	Pass
78	2480	1.18	30.00	Pass


Peak Output Power Plot on Channel 00

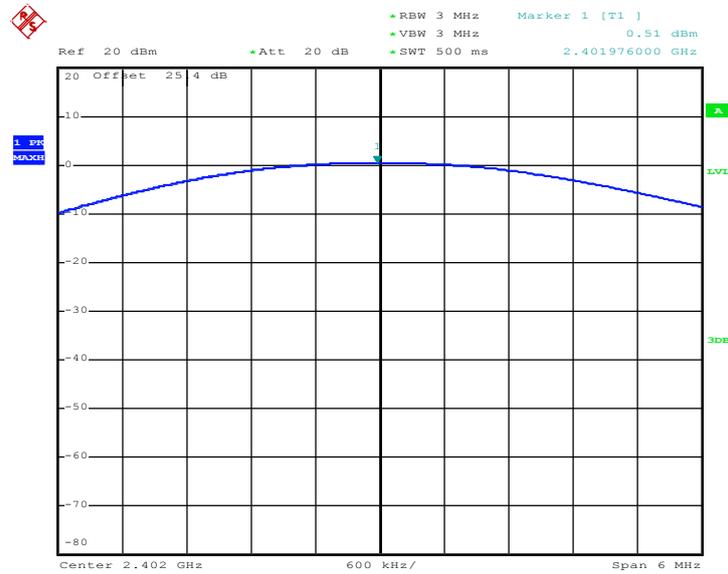

Date: 27.SEP.2012 19:42:03




Peak Output Power Plot on Channel 39

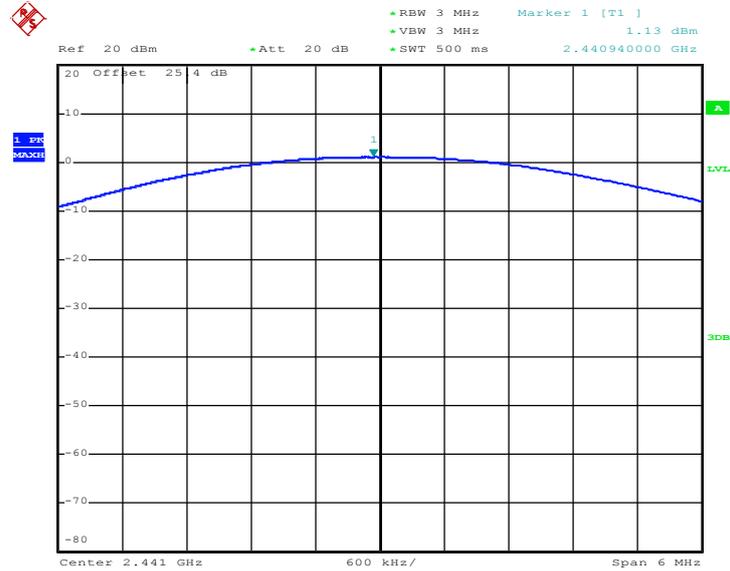

Date: 27.SEP.2012 19:48:31

Peak Output Power Plot on Channel 78

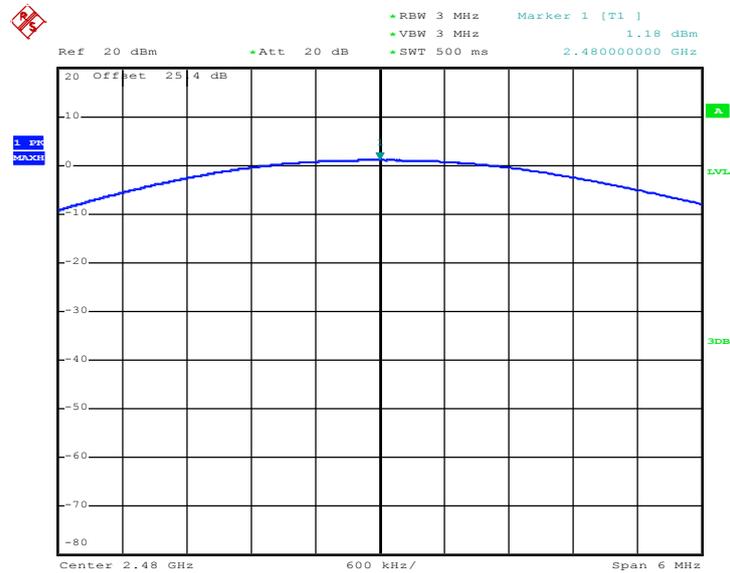


Date: 27.SEP.2012 19:44:34



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	1.43	20.97	Pass
39	2441	2.09	20.97	Pass
78	2480	2.07	20.97	Pass


Peak Output Power Plot on Channel 00

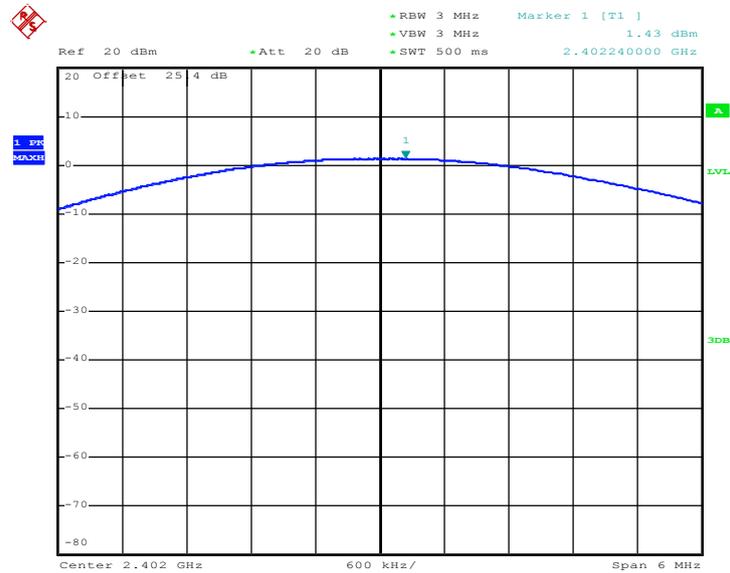

Date: 27.SEP.2012 19:42:37




Peak Output Power Plot on Channel 39

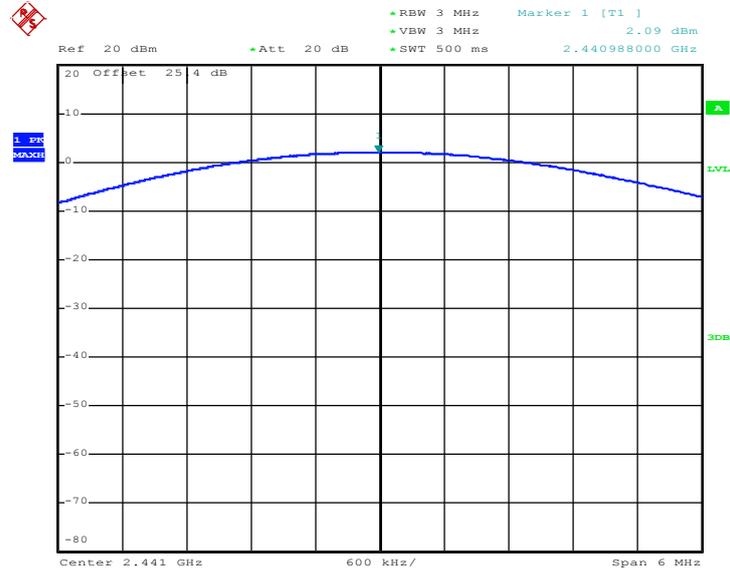

Date: 27.SEP.2012 19:43:52

Peak Output Power Plot on Channel 78

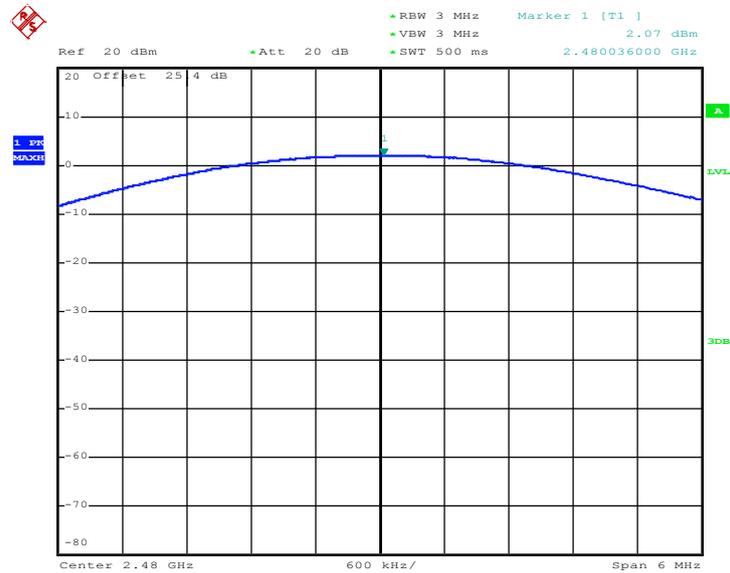


Date: 27.SEP.2012 19:47:42



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	1.76	20.97	Pass
39	2441	2.45	20.97	Pass
78	2480	2.47	20.97	Pass


Peak Output Power Plot on Channel 00

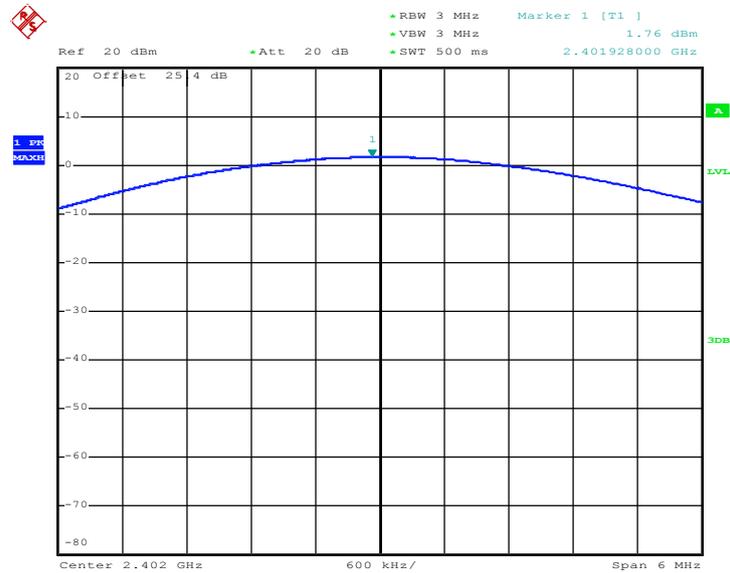

Date: 27.SEP.2012 19:42:53




Peak Output Power Plot on Channel 39

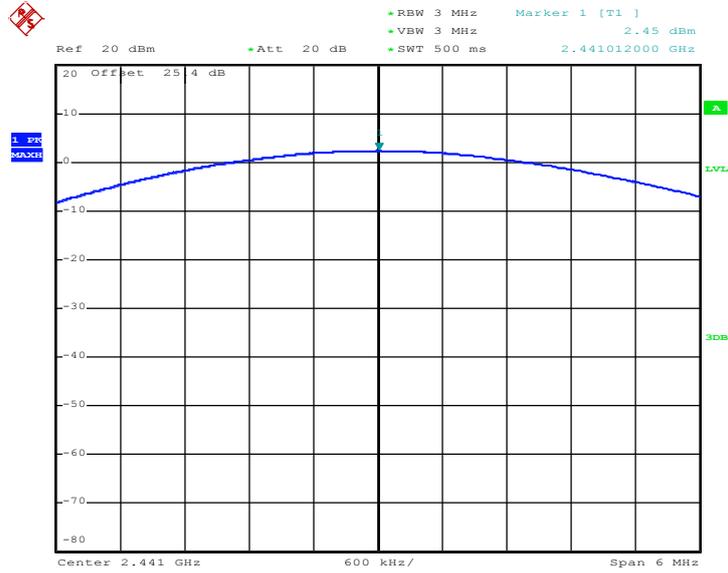

Date: 27.SEP.2012 19:44:09

Peak Output Power Plot on Channel 78

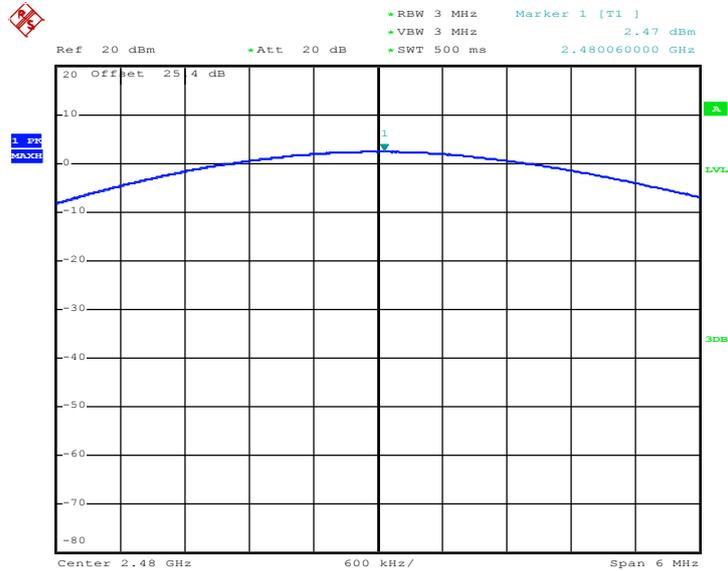

Date: 27.SEP.2012 19:45:24

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 300KHz ($\geq 1\%$ span=30MHz), VBW = 300KHz (\geq RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300KHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

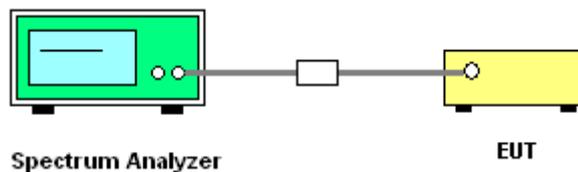




3.6.5 Test Result of Conducted Band Edges


Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

Low Band Edge Plot on Channel 00

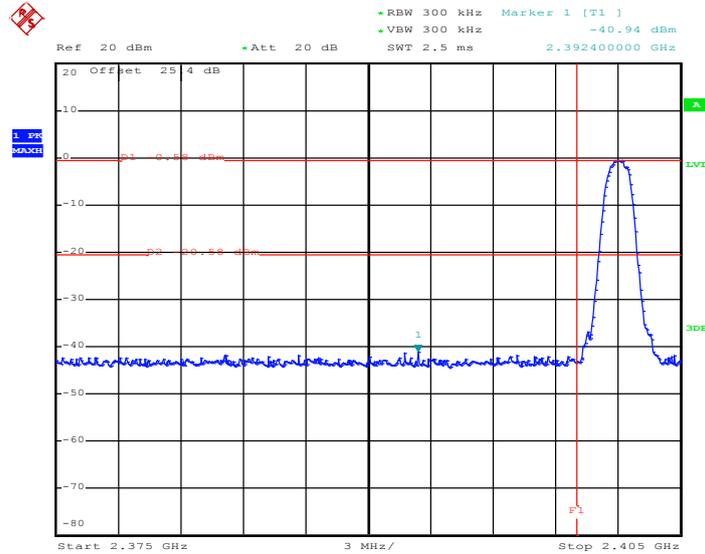

Date: 27.SEP.2012 20:25:01

High Band Edge Plot on Channel 78

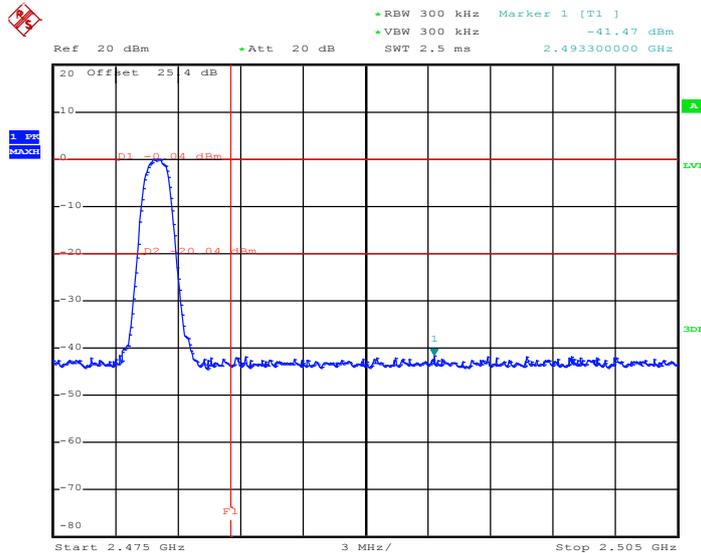


Date: 27.SEP.2012 20:26:04

3.6.6 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Hopping Mode Low Band Edge Plot

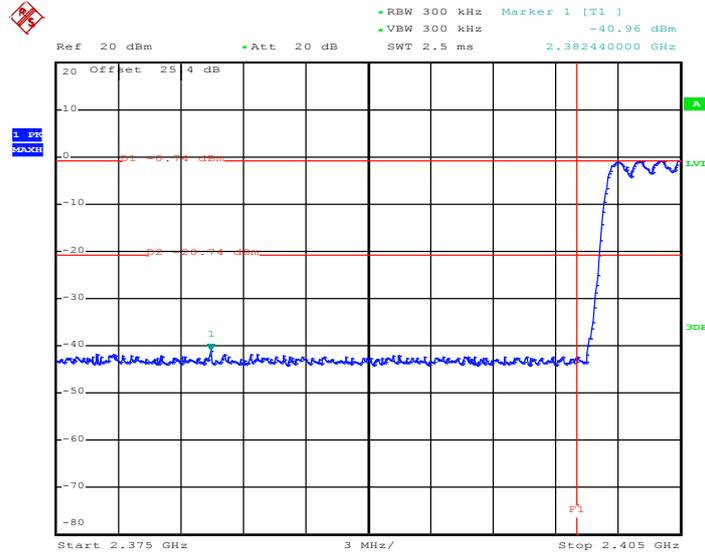

Date: 27.SEP.2012 21:24:35

Hopping Mode High Band Edge Plot

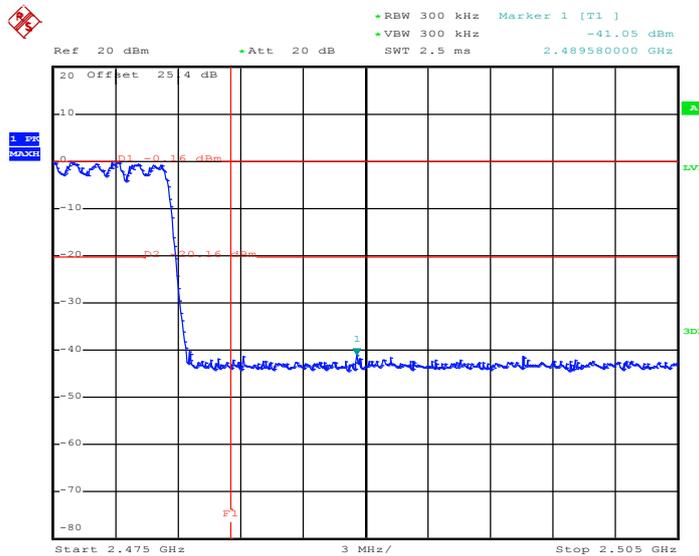

Date: 27.SEP.2012 21:27:52

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW = 300KHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 KHz RBW.
5. Measure and record the results in the test report.

3.7.4 Test Setup

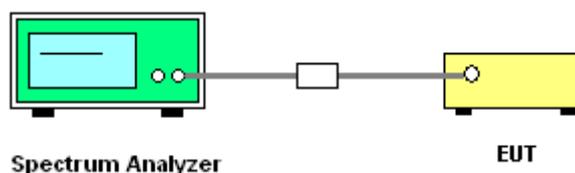




3.7.5 Test Result


Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

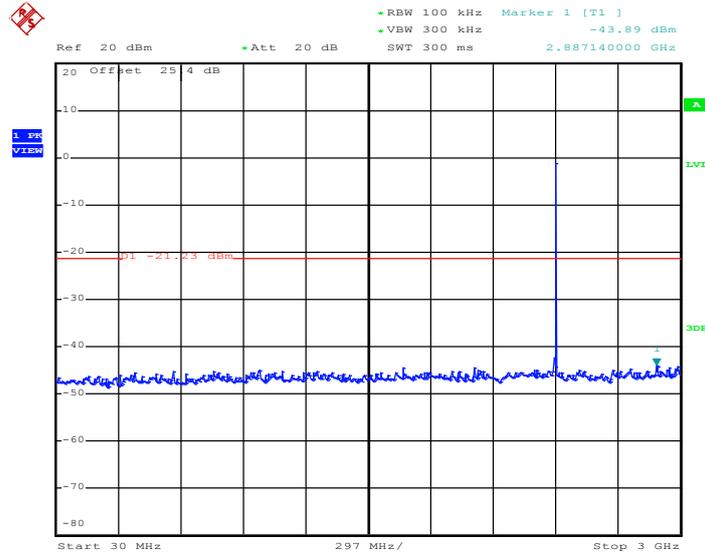

Date: 27.SEP.2012 21:05:06

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

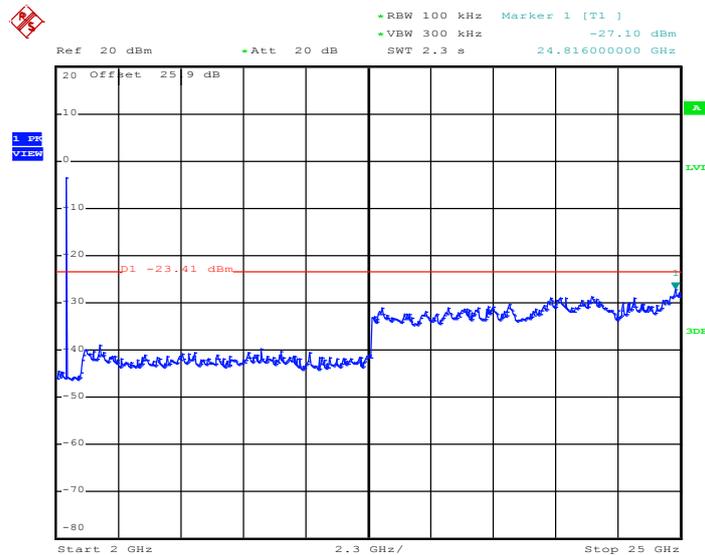


Date: 27.SEP.2012 21:05:28




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

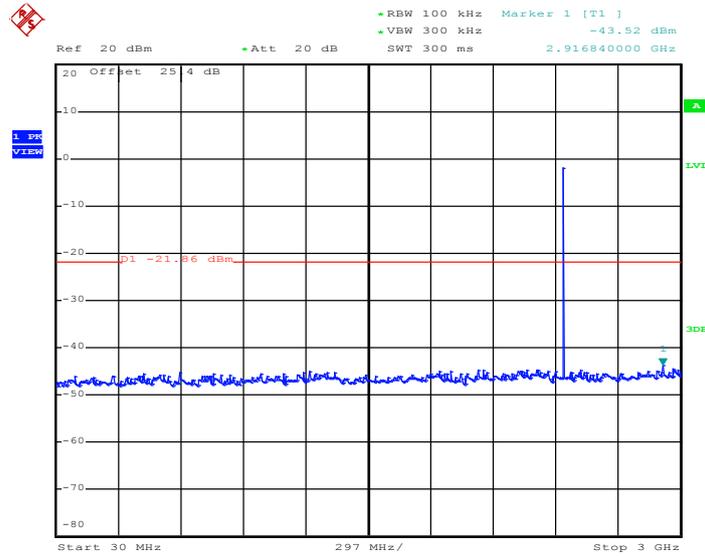

Date: 27.SEP.2012 21:05:54

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

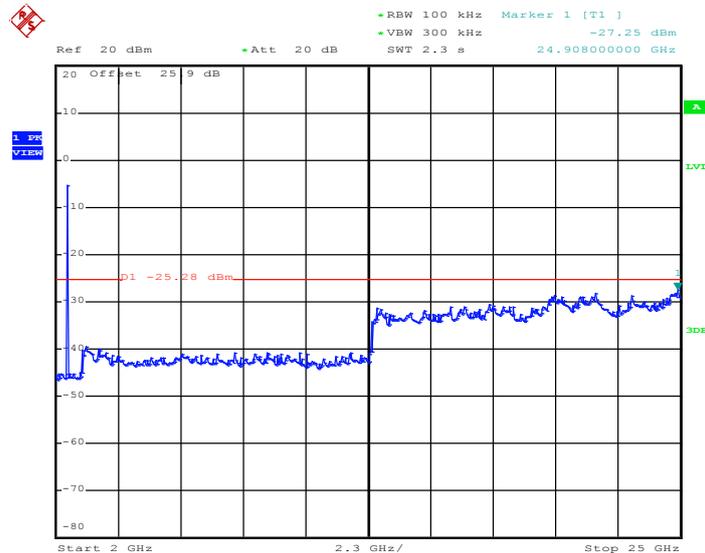


Date: 27.SEP.2012 21:06:15




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

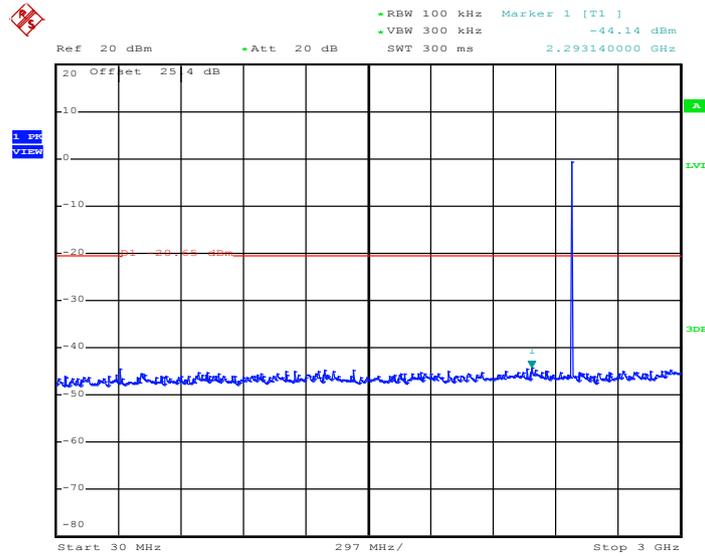

Date: 27.SEP.2012 21:06:43

Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

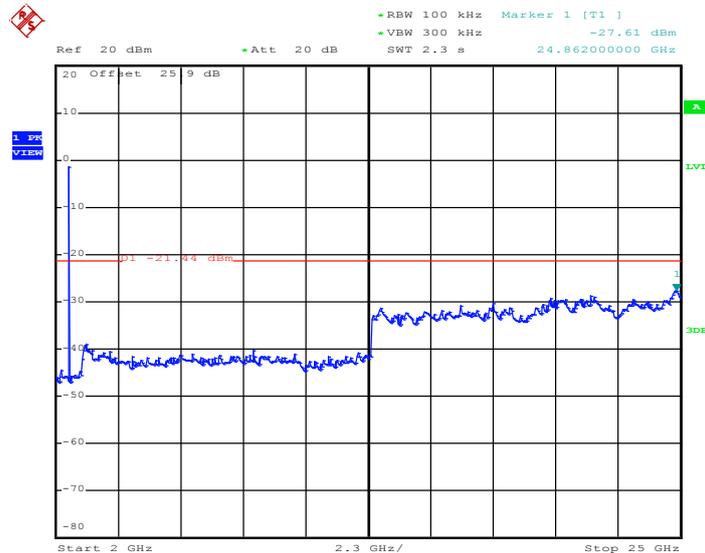

Date: 27.SEP.2012 21:07:05

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

See list of measuring instruments of this test report.



3.8.3 Test Procedures


1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines and fulfills ANSI C63.4-2003 and the guidelines in ANSI C63.10-2009 test site requirement.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Level = Peak Level + $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$.


For example: Average level = 45.58 dBuV/m – 24.79 (dB) = 20.79 dBuV/m.

3.8.4 Test Setup


For radiated emissions below 30MHz

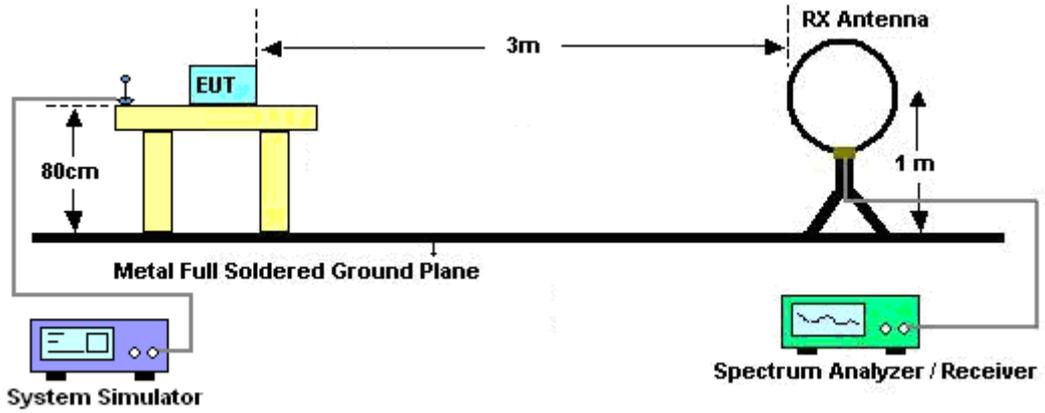

For radiated emissions from 30MHz to 1GHz

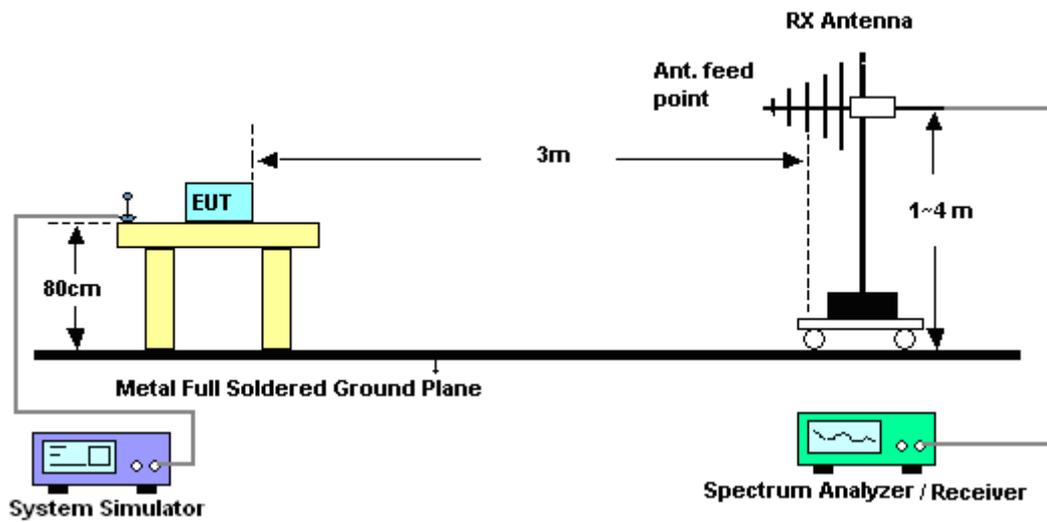

For radiated emissions above 1GHz

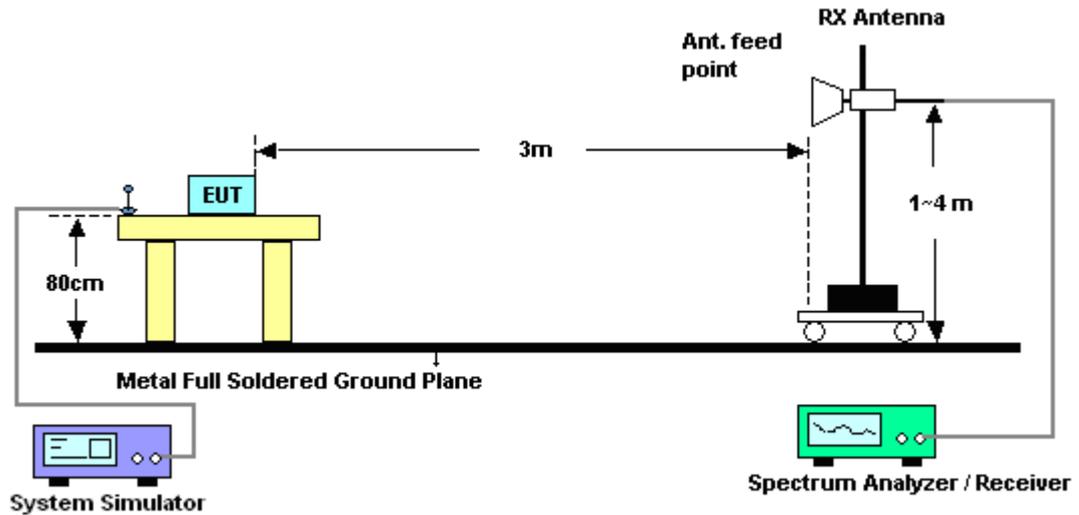


3.8.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


3.8.6 Duty cycle correction factor for average measurement

3DH5 on time/100ms (One Pulse) Plot on Channel 39

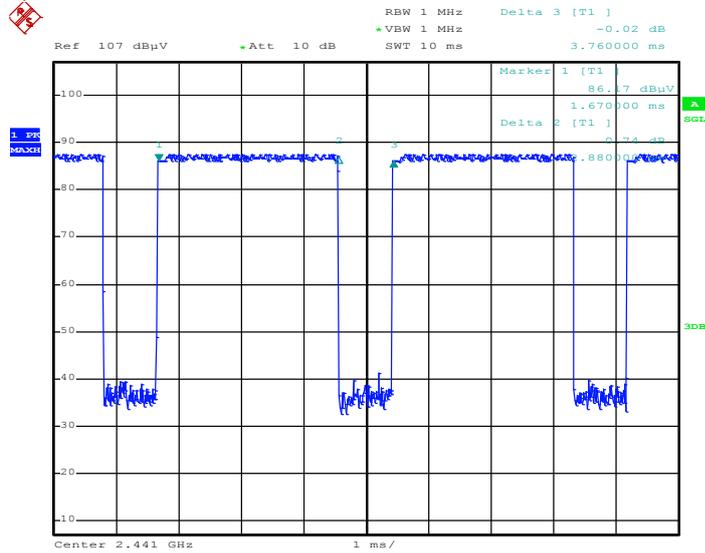

Date: 26.OCT.2012 02:05:22

3DH5 on time/100ms (Count Pulses) Plot on Channel 39

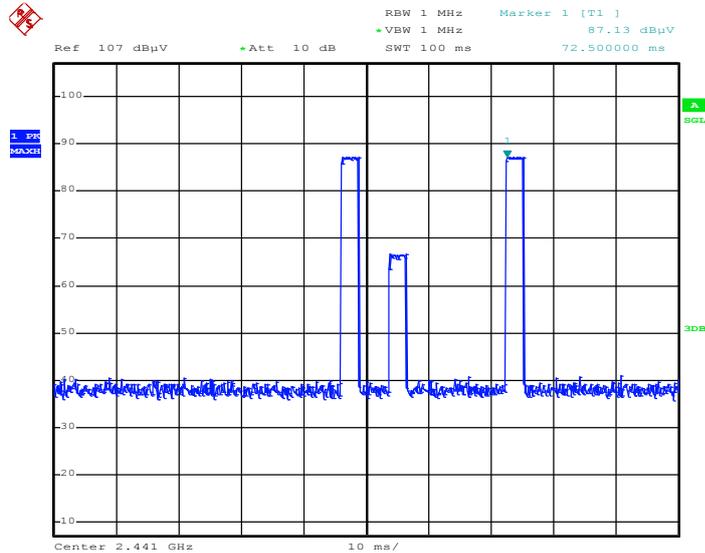

Date: 26.OCT.2012 02:08:16

Note:

1. Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. 3DH5 has the highest duty cycle and is reported.

3.8.7 Test Result of Radiated Band Edges

<Sample 1>

Test Mode :	3Mbps	Temperature :	23~25°C
Test Channel :	00	Relative Humidity :	49~50%
		Test Engineer :	Ivan Chiang, Kyle Jhuang, and Gavin Wu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2344.02	45.58	-28.42	74	41.33	32.24	5.95	33.94	102	44	Peak
2344.02	20.79	-33.21	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2319.27	45.35	-28.65	74	41.13	32.23	5.92	33.93	161	68	Peak
2319.27	20.56	-33.44	54	-	-	-	-	-	-	Average

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from $20\log(\text{dwell time}/100\text{ms})$.

For example: Average level = 45.58 dBuV/m – 24.79 (dB) = 20.79 dBuV/m.

Test Mode :	3Mbps	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	49~50%
		Test Engineer :	Ivan Chiang, Kyle Jhuang, and Gavin Wu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	62.48	-11.52	74	57.92	32.38	6.18	34	100	40	Peak
2483.5	37.69	-16.31	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	52.84	-21.16	74	48.28	32.38	6.18	34	170	17	Peak
2483.5	28.05	-25.95	54	-	-	-	-	-	-	Average



<Sample 2>

Test Mode :	3Mbps	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	49~50%
		Test Engineer :	Ivan Chiang, Kyle Jhuang, and Gavin Wu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	61.08	-12.92	74	56.52	32.38	6.18	34	100	36	Peak
2483.5	36.29	-17.71	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	52.96	-21.04	74	48.4	32.38	6.18	34	100	54	Peak
2483.5	28.17	-25.83	54	-	-	-	-	-	-	Average



3.8.8 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

<Sample 1>

Test Mode :	3Mbps	Temperature :	23~25°C
Test Channel :	00	Relative Humidity :	49~50%
Test Engineer :	Ivan Chiang, Kyle Jhuang, and Gavin Wu	Polarization :	Horizontal
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	97.82	-	-	93.45	32.3	6.03	33.96	102	44	Peak
2402	73.03	-	-	-	-	-	-	-	-	Average
4803	42.49	-31.51	74	56.87	33.98	9.11	57.47	100	0	Peak
4803	17.7	-36.30	54	-	-	-	-	-	-	Average

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.79dB) derived from 20log (dwell time/100ms).

For example: Average level = 97.82dBuV/m – 24.79 (dB) = 73.03dBuV/m.

Test Mode :	3Mbps	Temperature :	23~25°C
Test Channel :	00	Relative Humidity :	49~50%
Test Engineer :	Ivan Chiang, Kyle Jhuang, and Gavin Wu	Polarization :	Vertical
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	89.4	-	-	85.03	32.3	6.03	33.96	161	68	Peak
2402	64.61	-	-	-	-	-	-	-	-	Average
4803	40.93	-33.07	74	55.31	33.98	9.11	57.47	100	0	Peak
4803	16.14	-37.86	54	-	-	-	-	-	-	Average



Test Mode :	3Mbps	Temperature :	23~25°C
Test Channel :	39	Relative Humidity :	49~50%
Test Engineer :	Ivan Chiang, Kyle Jhuang, and Gavin Wu	Polarization :	Horizontal
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2441	98.23	-	-	93.75	32.35	6.11	33.98	101	44	Peak
2441	73.44	-	-	-	-	-	-	-	-	Average
4881	41.47	-32.53	74	55.86	33.95	9.14	57.48	100	0	Peak
4881	16.68	-37.32	54	-	-	-	-	-	-	Average

Test Mode :	3Mbps	Temperature :	23~25°C
Test Channel :	39	Relative Humidity :	49~50%
Test Engineer :	Ivan Chiang, Kyle Jhuang, and Gavin Wu	Polarization :	Vertical
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2441	90.24	-	-	85.76	32.35	6.11	33.98	100	14	Peak
2441	65.45	-	-	-	-	-	-	-	-	Average
4881	41.62	-32.38	74	56.01	33.95	9.14	57.48	100	0	Peak
4881	16.83	-37.17	54	-	-	-	-	-	-	Average



Test Mode :	3Mbps	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	49~50%
Test Engineer :	Ivan Chiang, Kyle Jhuang, and Gavin Wu	Polarization :	Horizontal
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	20.86	-19.14	40	32.2	20	0.53	31.87	-	-	Peak
159.06	29.41	-14.09	43.5	49.01	10.57	1.22	31.39	105	157	Peak
227.37	30.06	-15.94	46	48.83	10.98	1.46	31.21	-	-	Peak
360.2	22.26	-23.74	46	36.68	14.93	2.06	31.41	-	-	Peak
384.7	21.75	-24.25	46	35.38	15.61	2.11	31.35	-	-	Peak
643.7	22.28	-23.72	46	29.68	20.15	2.82	30.37	-	-	Peak
2480	100.88	-	-	96.32	32.38	6.18	34	100	40	Peak
2480	76.09	-	-	-	-	-	-	-	-	Average
4959	40.48	-33.52	74	54.9	33.91	9.16	57.49	100	0	Peak
4959	15.69	-38.31	54	-	-	-	-	-	-	Average



Test Mode :	3Mbps	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	49~50%
Test Engineer :	Ivan Chiang, Kyle Jhuang, and Gavin Wu	Polarization :	Vertical
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.27	33.46	-6.54	40	44.8	20	0.53	31.87	107	224	Peak
49.71	29.91	-10.09	40	52.33	8.5	0.69	31.61	-	-	Peak
160.14	25.87	-17.63	43.5	45.54	10.5	1.22	31.39	-	-	Peak
370.7	22.34	-23.66	46	36.4	15.21	2.08	31.35	-	-	Peak
384.7	22.28	-23.72	46	35.91	15.61	2.11	31.35	-	-	Peak
631.1	22.84	-23.16	46	30.43	20.05	2.78	30.42	-	-	Peak
2480	91.4	-	-	86.84	32.38	6.18	34	170	17	Peak
2480	66.61	-	-	-	-	-	-	-	-	Average
4959	40.96	-33.04	74	55.38	33.91	9.16	57.49	100	0	Peak
4959	16.17	-37.83	54	-	-	-	-	-	-	Average



<Sample 2>

Test Mode :	3Mbps	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	49~50%
Test Engineer :	Ivan Chiang, Kyle Jhuang, and Gavin Wu	Polarization :	Horizontal
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
49.17	32.12	-7.88	40	54.56	8.5	0.69	31.63	100	86	Peak
161.49	29.45	-14.05	43.5	49.3	10.31	1.22	31.38			Peak
227.91	29.85	-16.15	46	48.54	11.05	1.47	31.21			Peak
355.3	21.7	-24.3	46	36.3	14.79	2.02	31.41			Peak
710.9	23.35	-22.65	46	30.12	20.76	2.97	30.5			Peak
958.7	26.51	-19.49	46	29.83	23.97	3.47	30.76			Peak
2480	99.62	-	-	95.06	32.38	6.18	34	100	36	Peak
2480	74.83	-	-	-	-	-	-	-	-	Average
4959	41.69	-32.31	74	56.11	33.91	9.16	57.49	100	0	Peak
4959	16.9	-37.1	54	-	-	-	-	-	-	Average



Test Mode :	3Mbps	Temperature :	23~25°C
Test Channel :	78	Relative Humidity :	49~50%
Test Engineer :	Ivan Chiang, Kyle Jhuang, and Gavin Wu	Polarization :	Vertical
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	32.67	-7.33	40	44.01	20	0.53	31.87	128	212	Peak
49.17	31.9	-8.1	40	54.34	8.5	0.69	31.63			Peak
225.75	29.91	-16.09	46	48.74	10.92	1.46	31.21			Peak
357.4	22.7	-23.3	46	37.2	14.87	2.04	31.41			Peak
612.2	22.06	-23.94	46	29.93	19.89	2.73	30.49			Peak
874	25.09	-20.91	46	29.63	22.84	3.3	30.68			Peak
2480	91.65	-	-	87.09	32.38	6.18	34	100	54	Peak
2480	66.86								-	Average
4959	41.96	-32.04	74	56.38	33.91	9.16	57.49	100	0	Peak
4959	17.17	-36.83	54	-	-	-	-	-	-	Average

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

See list of measuring instruments of this test report.

3.9.3 Test Procedures


1. The test follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009 test site requirement.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.9.4 Test Setup

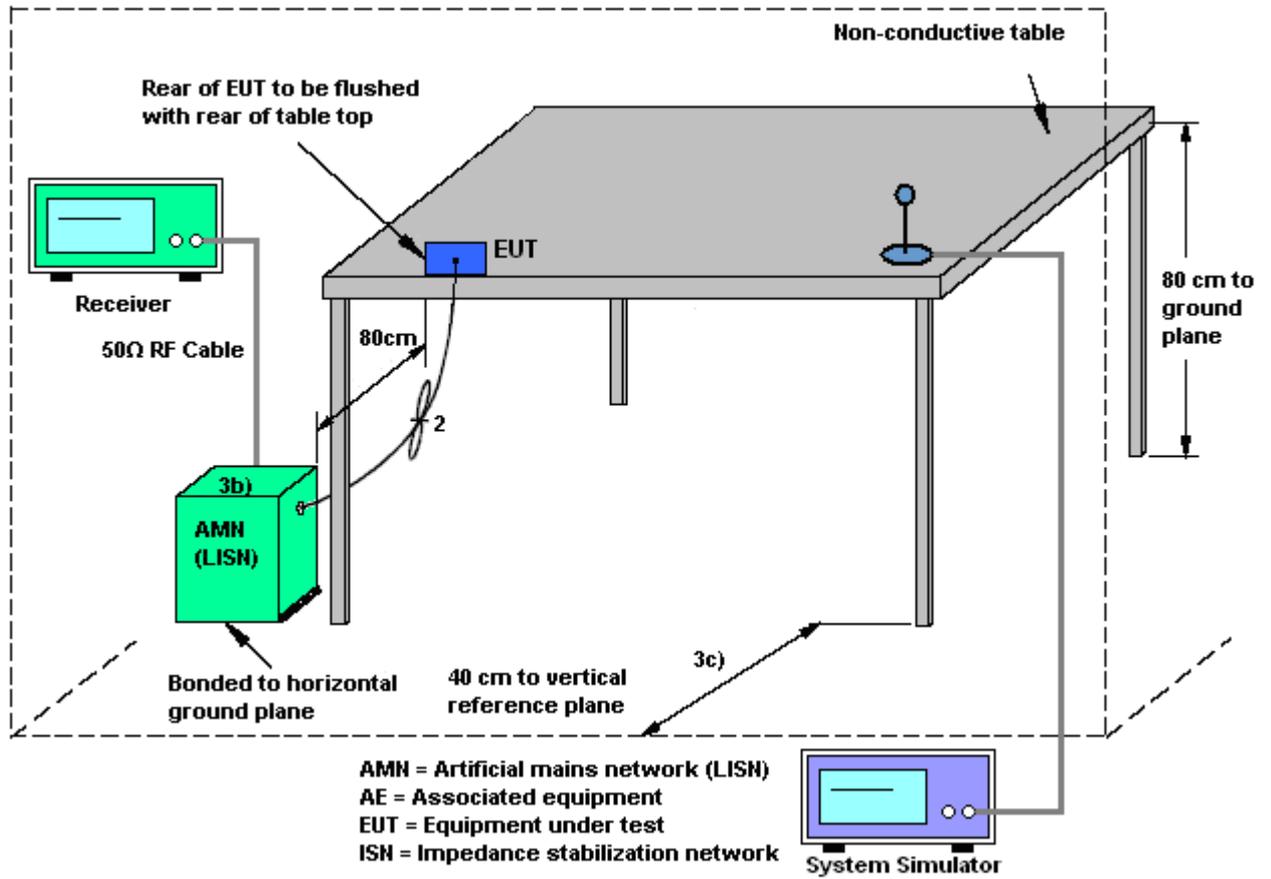

3.9.5 Test Result of AC Conducted Emission


Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN Link + GPS Rx + Earphone 2 + USB Cable 1 (Charging from Adapter 2) for Sample 2		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

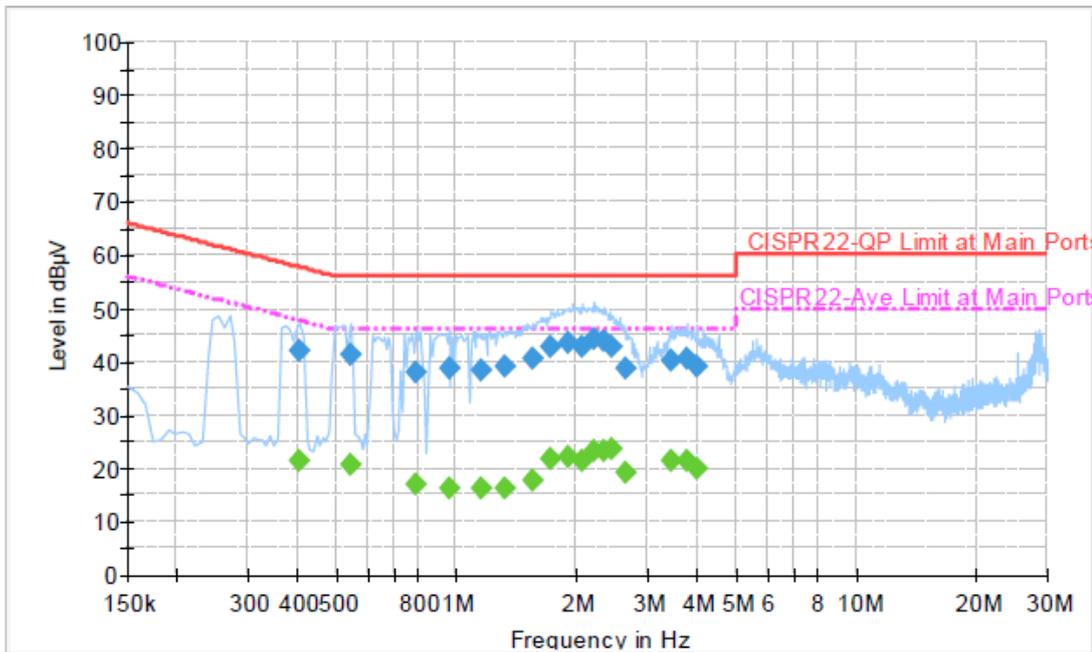

Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.406000	42.0	Off	L1	19.4	15.7	57.7
0.542000	41.2	Off	L1	19.4	14.8	56.0
0.790000	38.1	Off	L1	19.5	17.9	56.0
0.958000	38.9	Off	L1	19.4	17.1	56.0
1.158000	38.5	Off	L1	19.5	17.5	56.0
1.318000	39.1	Off	L1	19.5	16.9	56.0
1.542000	40.5	Off	L1	19.4	15.5	56.0
1.718000	42.9	Off	L1	19.5	13.1	56.0
1.902000	43.4	Off	L1	19.5	12.6	56.0
2.062000	42.7	Off	L1	19.6	13.3	56.0
2.198000	44.4	Off	L1	19.6	11.6	56.0
2.334000	43.8	Off	L1	19.6	12.2	56.0
2.454000	42.7	Off	L1	19.6	13.3	56.0
2.654000	38.6	Off	L1	19.5	17.4	56.0
3.430000	40.2	Off	L1	19.6	15.8	56.0
3.774000	40.5	Off	L1	19.6	15.5	56.0
3.982000	39.1	Off	L1	19.6	16.9	56.0

Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN Link + GPS Rx + Earphone 2 + USB Cable 1 (Charging from Adapter 2) for Sample 2		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

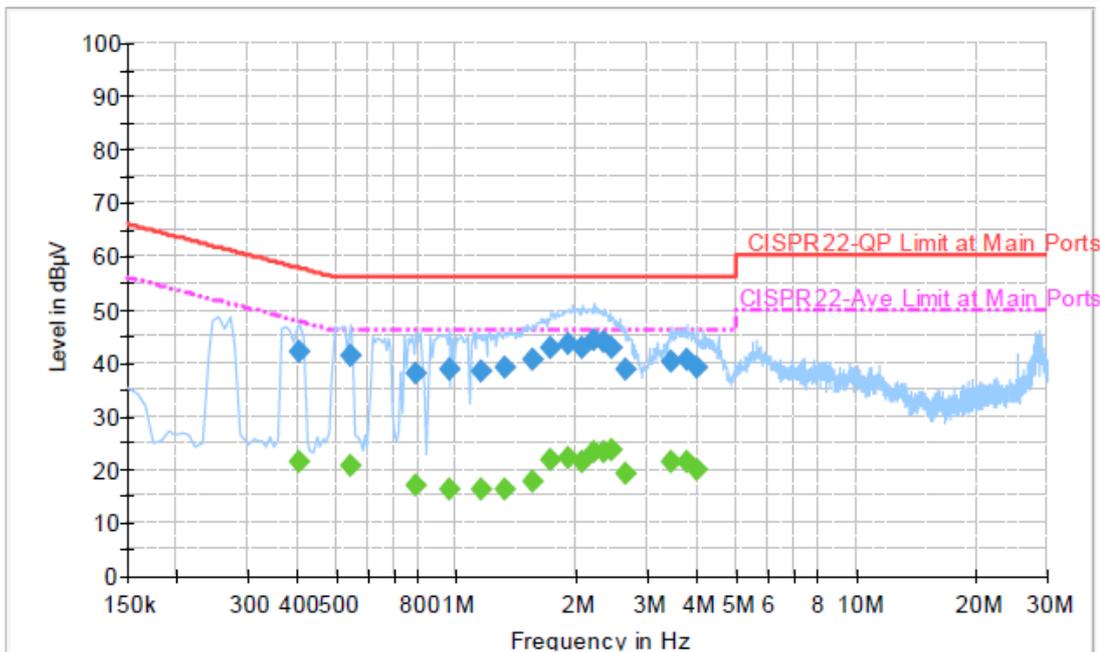


Final Result : Average

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.406000	21.4	Off	L1	19.4	26.3	47.7
0.542000	20.7	Off	L1	19.4	25.3	46.0
0.790000	17.1	Off	L1	19.5	28.9	46.0
0.958000	16.2	Off	L1	19.4	29.8	46.0
1.158000	16.1	Off	L1	19.5	29.9	46.0
1.318000	16.2	Off	L1	19.5	29.8	46.0
1.542000	17.8	Off	L1	19.4	28.2	46.0
1.718000	21.6	Off	L1	19.5	24.4	46.0
1.902000	22.0	Off	L1	19.5	24.0	46.0
2.062000	21.3	Off	L1	19.6	24.7	46.0
2.198000	23.3	Off	L1	19.6	22.7	46.0
2.334000	23.4	Off	L1	19.6	22.6	46.0
2.454000	23.8	Off	L1	19.6	22.2	46.0
2.654000	19.0	Off	L1	19.5	27.0	46.0
3.430000	21.5	Off	L1	19.6	24.5	46.0
3.774000	21.4	Off	L1	19.6	24.6	46.0
3.982000	19.9	Off	L1	19.6	26.1	46.0




Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN Link + GPS Rx + Earphone 2 + USB Cable 1 (Charging from Adapter 2) for Sample 2		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

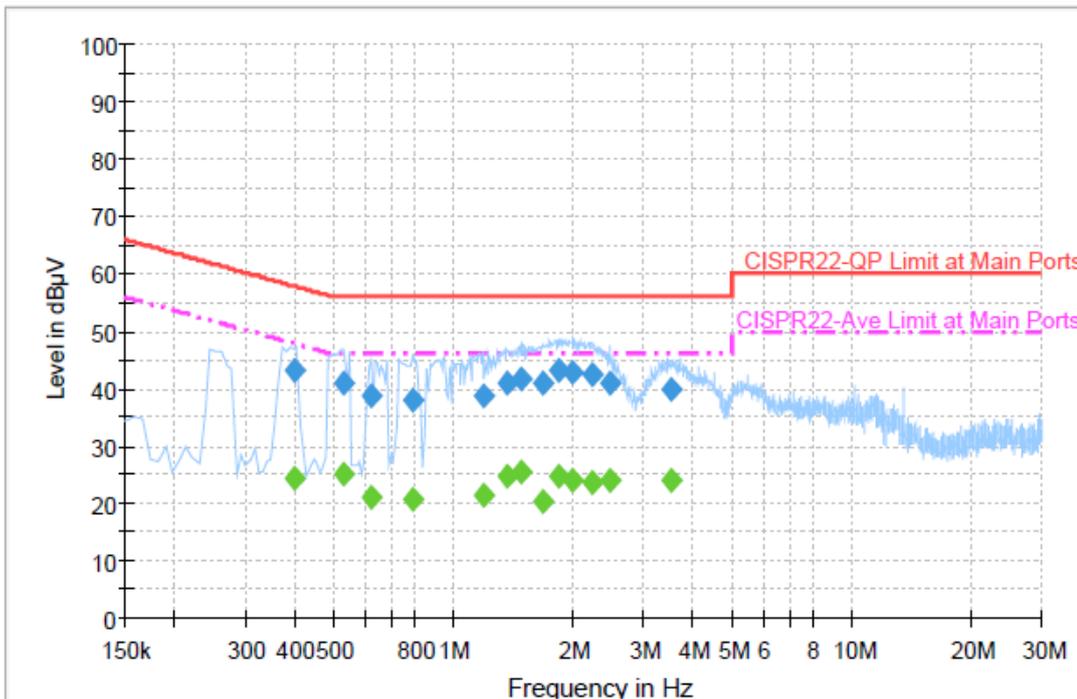

Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.398000	43.0	Off	N	19.5	14.9	57.9
0.534000	41.0	Off	N	19.4	15.0	56.0
0.622000	38.6	Off	N	19.4	17.4	56.0
0.790000	38.0	Off	N	19.5	18.0	56.0
1.190000	38.7	Off	N	19.5	17.3	56.0
1.366000	41.0	Off	N	19.5	15.0	56.0
1.478000	41.7	Off	N	19.4	14.3	56.0
1.670000	40.9	Off	N	19.5	15.1	56.0
1.838000	43.2	Off	N	19.5	12.8	56.0
1.998000	42.9	Off	N	19.5	13.1	56.0
2.222000	42.3	Off	N	19.6	13.7	56.0
2.470000	40.9	Off	N	19.6	15.1	56.0
3.534000	40.0	Off	N	19.6	16.0	56.0

Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN Link + GPS Rx + Earphone 2 + USB Cable 1 (Charging from Adapter 2) for Sample 2		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

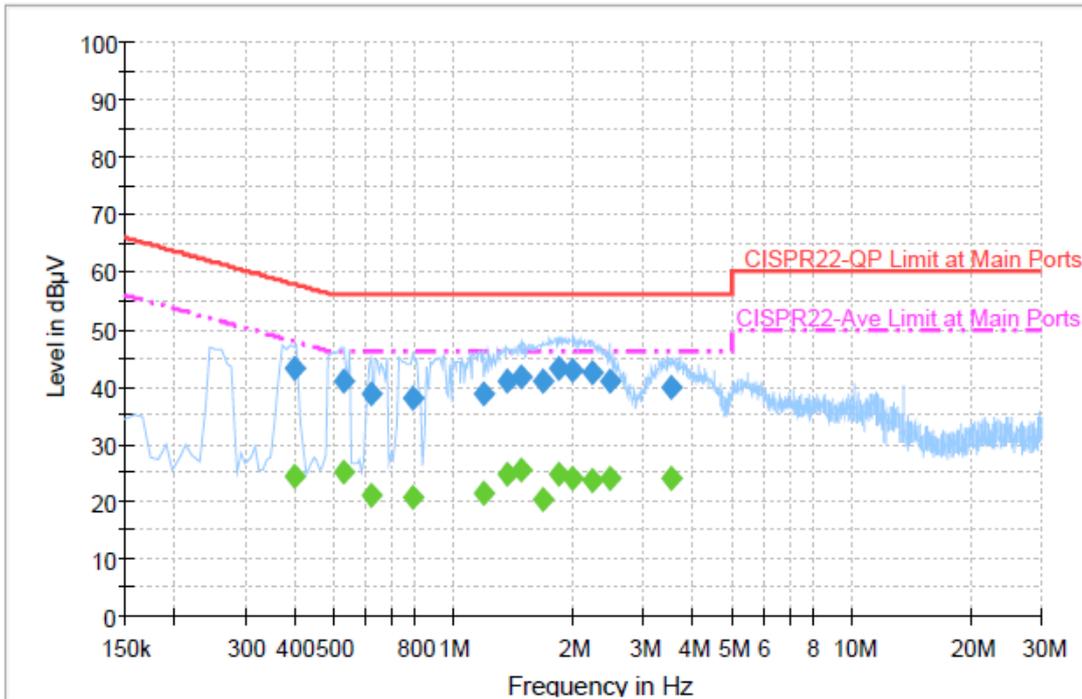

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.398000	24.5	Off	N	19.5	23.4	47.9
0.534000	25.0	Off	N	19.4	21.0	46.0
0.622000	21.0	Off	N	19.4	25.0	46.0
0.790000	20.8	Off	N	19.5	25.2	46.0
1.190000	21.3	Off	N	19.5	24.7	46.0
1.366000	24.8	Off	N	19.5	21.2	46.0
1.478000	25.3	Off	N	19.4	20.7	46.0
1.670000	20.2	Off	N	19.5	25.8	46.0
1.838000	24.7	Off	N	19.5	21.3	46.0
1.998000	24.2	Off	N	19.5	21.8	46.0
2.222000	23.5	Off	N	19.6	22.5	46.0
2.470000	23.9	Off	N	19.6	22.1	46.0
3.534000	23.8	Off	N	19.6	22.2	46.0



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

Non-standard connector used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 06, 2012	Sep. 27, 2012	Jun. 05, 2013	Conducted (TH02-HY)
Bluetooth Base Station	R&S	CBT32	100519	N/A	Jun. 05, 2012	Sep. 27, 2012	Jun. 04, 2013	Conducted (TH02-HY)
EMI Test Receiver	R&S	ESCI 7	100724	9kHz~7GHz	Sep. 03, 2012	Sep. 29, 2012 ~ Oct. 24, 2012	Sep. 02, 2013	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz ~ 30MHz	Dec. 09, 2011	Sep. 29, 2012 ~ Oct. 24, 2012	Dec. 08, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz ~ 30MHz	Dec. 06, 2011	Sep. 29, 2012 ~ Oct. 24, 2012	Dec. 05, 2012	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	Sep. 29, 2012 ~ Oct. 24, 2012	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	117995	N/A	Jul. 28, 2011	Sep. 29, 2012 ~ Oct. 24, 2012	Jul. 27, 2013	Conduction (CO05-HY)
GPS Station	T&E	GS-50	N/A	N/A	N/A	Sep. 29, 2012 ~ Oct. 24, 2012	N/A	Conduction (CO05-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 06, 2012	Oct. 17, 2012 ~ Oct. 26, 2012	Oct. 05, 2013	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9KHz ~ 30GHz	Dec. 06, 2011	Oct. 17, 2012 ~ Oct. 26, 2012	Dec. 05, 2012	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 22, 2012	Oct. 17, 2012 ~ Oct. 26, 2012	Aug. 21, 2013	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz ~ 26.5GHz	Dec. 05, 2011	Oct. 17, 2012 ~ Oct. 26, 2012	Dec. 04, 2012	Radiation (03CH07-HY)
Pre Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	159088	1GHz ~ 18GHz	Mar. 10, 2012	Oct. 17, 2012 ~ Oct. 26, 2012	Mar. 09, 2013	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32dB.GAIN	Feb. 27, 2012	Oct. 17, 2012 ~ Oct. 26, 2012	Feb. 26, 2013	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Sep. 03, 2012	Oct. 17, 2012 ~ Oct. 26, 2012	Sep. 02, 2013	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz ~ 40GHz	Sep. 28, 2012	Oct. 17, 2012 ~ Oct. 26, 2012	Sep. 27, 2013	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz ~ 30MHz	Jul. 03, 2012	Oct. 17, 2012 ~ Oct. 26, 2012	Jul. 02, 2014	Radiation (03CH07-HY)
Bluetooth Base Station	R&S	CBT32	100522	N/A	Feb. 09, 2012	Oct. 17, 2012 ~ Oct. 26, 2012	Feb. 08, 2014	Radiation (03CH07-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------