



A D T

FCC TEST REPORT

(PART 24)

REPORT NO.: RF120626C35-1

MODEL NO.: PM63100

FCC ID: NM8PM63100

RECEIVED: Jun. 26, 2012

TESTED: Jul. 09 ~ Jul. 13, 2012

ISSUED: Jul. 25, 2012

APPLICANT: HTC Corporation

ADDRESS: 23, Xinghua Rd., Taoyuan 330, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist., New
Taipei City, Taiwan (R.O.C.)

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by TAF
or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 CERTIFICATION	4
2 SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY	5
2.2 TEST SITE AND INSTRUMENTS	6
3 GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 CONFIGURATION OF SYSTEM UNDER TEST	8
3.3 DESCRIPTION OF SUPPORT UNITS	8
3.4 TEST ITEM AND TEST CONFIGURATION	9
3.5 EUT OPERATING CONDITIONS	11
3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
4 TEST TYPES AND RESULTS	12
4.1 OUTPUT POWER MEASUREMENT	12
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	12
4.1.2 TEST PROCEDURES	12
4.1.3 TEST SETUP	13
4.1.4 TEST RESULTS	14
4.2 FREQUENCY STABILITY MEASUREMENT	19
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	19
4.2.2 TEST PROCEDURE	19
4.2.3 TEST SETUP	19
4.2.4 TEST RESULTS	20
4.3 OCCUPIED BANDWIDTH MEASUREMENT	21
4.3.1 TEST PROCEDURES	21
4.3.2 TEST SETUP	21
4.3.3 TEST RESULTS	22
4.4 BAND EDGE MEASUREMENT	24
4.4.1 LIMITS OF BAND EDGE MEASUREMENT	24
4.4.2 TEST SETUP	24
4.4.3 TEST PROCEDURES	24
4.4.4 TEST RESULTS	25
4.5 CONDUCTED SPURIOUS EMISSIONS	28
4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	28
4.5.2 TEST PROCEDURE	28
4.5.3 TEST SETUP	28
4.5.4 TEST RESULTS	29
4.6 RADIATED EMISSION MEASUREMENT	34
4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	34
4.6.2 TEST PROCEDURES	34
4.6.3 DEVIATION FROM TEST STANDARD	34
4.6.4 TEST SETUP	35
4.6.5 TEST RESULTS	36
5 PHOTOGRAPHS OF THE TEST CONFIGURATION	57
6 INFORMATION ON THE TESTING LABORATORIES	58
7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	59



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120626C35-1	Original release	Jul. 25, 2012



A D T

1 CERTIFICATION

PRODUCT: Smart Phone

MODEL: PM63100

BRAND: HTC

APPLICANT: HTC Corporation

TESTED: Jul. 09 ~ Jul. 13, 2012

TEST SAMPLE: Production Unit

STANDARDS: FCC Part 24, Subpart E

The above equipment (model: PM63100) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Ivonne Wu , **DATE** : Jul. 25, 2012
Ivonne Wu / Senior Specialist

APPROVED BY : Gary Chang , **DATE** : Jul. 25, 2012
Gary Chang / Technical Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
2.1046 24.232	Equivalent isotropically radiated power	PASS	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -16.55dB at 7537.60MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.2 TEST SITE AND INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver Agilent	N9038A	MY51210203	Dec. 22, 2011	Dec. 21, 2012
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 21, 2011	Dec. 20, 2012
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 20, 2011	Dec. 19, 2012
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Dec. 20, 2011	Dec. 19, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 20, 2011	Dec. 19, 2012
Preamplifier EMCI	EMC 012645	980115	Dec. 30, 2011	Dec. 29, 2012
Preamplifier EMCI	EMC 330H	980112	Dec. 30, 2011	Dec. 29, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4	Oct. 21, 2011	Oct. 20, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Jan. 02, 2012	Jan. 01, 2013
RF signal cable Worken	RG-213	NA	Jan. 02, 2012	Jan. 01, 2013
Software	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Mar. 23, 2012	Mar. 22, 2013
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
Communications Tester-Wireless	E5515C	MY50266653	Sep. 28, 2011	Sep. 27, 2012
Radio Communication Analyzer	MT8820C	6201010284	Aug. 01, 2011	Jul. 31, 2012

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 460141.
5. The IC Site Registration No. is IC 7450F-4.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT


EUT	Smart Phone	
MODEL NO.	PM63100	
POWER SUPPLY	5.0Vdc (adapter or host equipment) 3.8Vdc (battery)	
MODULATION TYPE	GSM/GPRS	GMSK
	EDGE	8PSK
	WCDMA	BPSK
	LTE	QPSK, 16QAM
FREQUENCY RANGE	GSM/GPRS/EDGE	1850.2MHz ~ 1909.8MHz
	WCDMA	1852.4MHz ~ 1907.6MHz
	LTE (Channel Bandwidth: 5MHz)	1852.5MHz ~ 1907.5MHz
	LTE (Channel Bandwidth: 10MHz)	1855MHz ~ 1905MHz
MAX. EIRP POWER	GSM	954.99mW
	EDGE	388.15mW
	WCDMA	185.78mW
	LTE (Channel Bandwidth: 5MHz)	190.11mW
	LTE (Channel Bandwidth: 10MHz)	190.11mW
EMISSION DESIGNATOR	GSM	244KGXW
	EDGE	246KG7W
	WCDMA	4M16F9W
	LTE (Channel Bandwidth: 5MHz)	4M52G7D
	LTE (Channel Bandwidth: 10MHz)	8M95W7D
MULTI-SLOTS CLASS	10	
WCDMA RELEASE VERSION	6	
ANTENNA TYPE	Fixed Internal antenna with -1 dBi gain	
I/O PORTS	Refer to users' manual	
DATA CABLE	Refer to NOTE as below	
ACCESSORY DEVICES	Refer to NOTE as below	

NOTE:


1. The EUT's accessories list refers to Ext Pho.pdf.
2. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

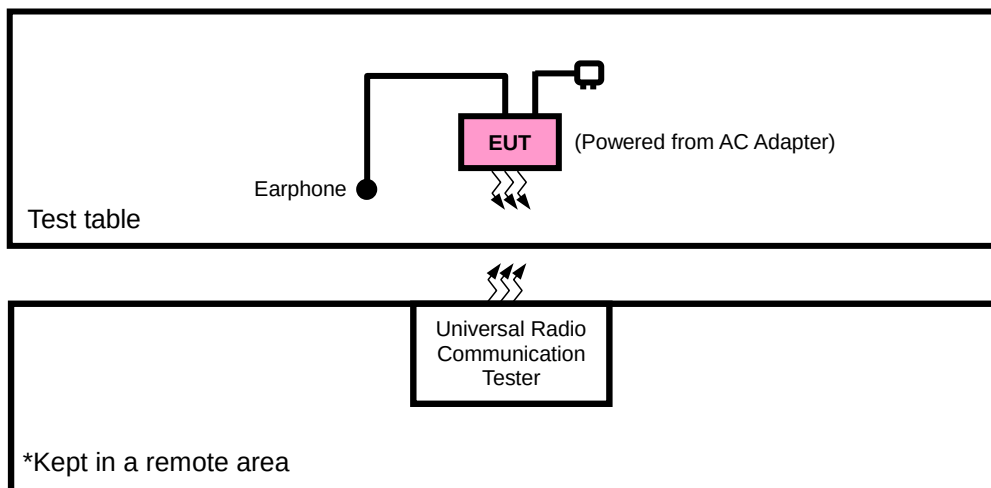

FOR E.I.R.P. TEST

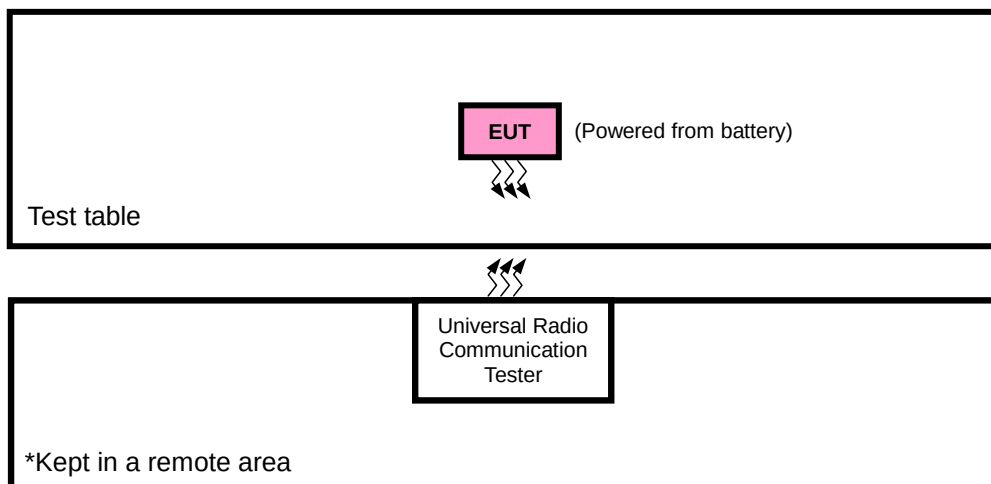

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	EARPHONE	Merry	HS250	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.1m audio cable

NOTE: All power cords of the above support units are non shielded (1.8m).

3.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X-plane for EIRP and X-axis for GSM/EDGE/WCDMA and Z-axis for LTE for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

GSM MODE

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
EIRP	512 to 810	512, 661, 810	GSM, EDGE
FREQUENCY STABILITY	512 to 810	661	GSM, EDGE
OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GSM, EDGE
BAND EDGE	512 to 810	512, 810	GSM, EDGE
CONDUCTED EMISSION	512 to 810	661	GSM
RADIATED EMISSION	512 to 810	661	GSM, EDGE

WCDMA MODE

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
FREQUENCY STABILITY	9262 to 9538	9400	WCDMA
OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA
BAND EDGE	9262 to 9538	9262, 9538	WCDMA
CONDUCTED EMISSION	9262 to 9538	9400	WCDMA
RADIATED EMISSION	9262 to 9538	9400	WCDMA



A D T

LTE BAND 2 MODE

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
EIRP	18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 24 RB Offset
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 49 RB Offset
FREQUENCY STABILITY	18625 to 19175	18900	5MHz	QPSK	1 RB / 24 RB Offset
	18650 to 19150	18900	10MHz	QPSK	1 RB / 49 RB Offset
OCCUPIED BANDWIDTH	18625 to 19175	18900	5MHz	QPSK	25 RB / 0 RB Offset
	18650 to 19150	18900	10MHz	QPSK	50 RB / 0 RB Offset
BAND EDGE	18625 to 19175	18625, 19175	5MHz	QPSK	1 RB, / 24 RB Offset
					25 RB, / 0 RB Offset
	18650 to 19150	18650, 19150	10MHz	QPSK	1 RB / 49 RB Offset
					50 RB / 0 RB Offset
CONDCUDED EMISSION	18625 to 19175	18900	5MHz	QPSK	1 RB / 24 RB Offset
	18650 to 19150	18900	10MHz	QPSK	1 RB / 49 RB Offset
RADIATED EMISSION	18625 to 19175	18900	5MHz	QPSK	1 RB / 24 RB Offset
					25 RB / 0 RB Offset
				16QAM	1 RB / 24 RB Offset
					25 RB / 0 RB Offset
	18650 to 19150	18900	10MHz	QPSK	1 RB / 49 RB Offset
					50 RB / 0 RB Offset
				16QAM	1 RB / 49 RB Offset
					50 RB / 0 RB Offset

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	26deg. C, 58%RH	3.8Vdc	Phoenix Chen
FREQUENCY STABILITY	26deg. C, 58%RH	3.8Vdc	Phoenix Chen
OCCUPIED BANDWIDTH	26deg. C, 58%RH	3.8Vdc	Phoenix Chen
BAND EDGE	26deg. C, 58%RH	3.8Vdc	Phoenix Chen
CONDCUDED EMISSION	26deg. C, 58%RH	3.8Vdc	Phoenix Chen
RADIATED EMISSION	25deg. C, 65%RH	120Vac, 60Hz	Kay Wu

3.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP

4.1.2 TEST PROCEDURES

EIRP MEASUREMENT:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, GPRS & EDGE, 5MHz for WCDMA, and 10MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$

CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with GSM, GPRS, EDGE & WCDMA & LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 TEST SETUP

EIRP MEASUREMENT:

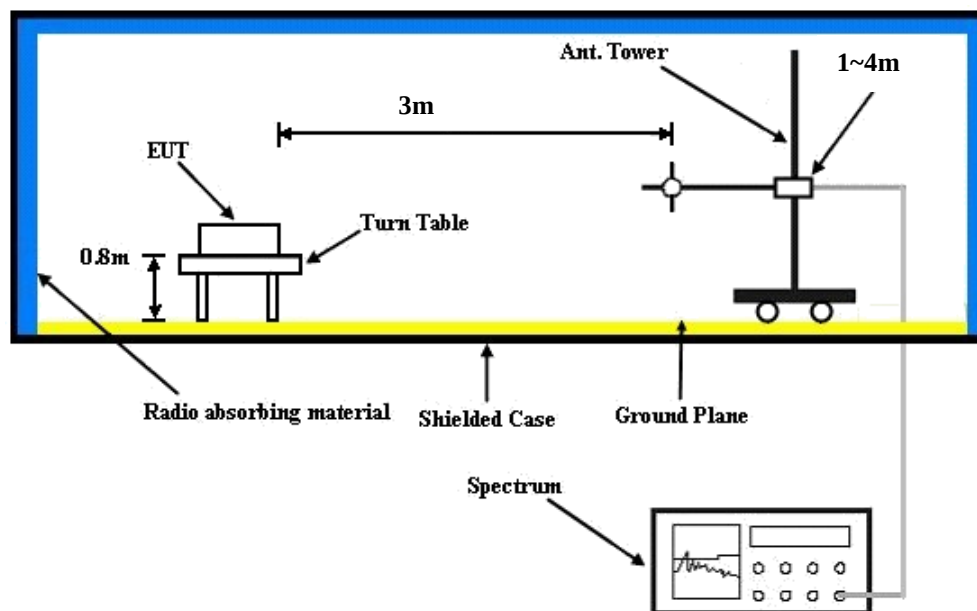

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	GSM1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8
GSM (1 Uplink)	30.29	30.33	30.53
GPRS 8 (1 Uplink)	30.34	30.40	30.52
GPRS 10 (2 Uplink)	28.93	28.98	29.15
EDGE 8 (1 Uplink)	30.24	30.29	30.44
EDGE 10 (2 Uplink)	28.84	28.89	29.07
EDGE 8 (8PSK, 1 slot)	26.35	26.36	26.48
EDGE 10 (8PSK, 2 slot)	26.16	26.11	26.18

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	23.67	23.89	23.46
HSDPA Subtest-1	23.68	23.82	23.59
HSDPA Subtest-2	23.66	23.85	23.48
HSDPA Subtest-3	22.32	22.38	22.05
HSDPA Subtest-4	22.28	22.32	21.95
HSUPA Subtest-1	22.76	23.54	23.20
HSUPA Subtest-2	21.63	21.78	21.51
HSUPA Subtest-3	21.92	22.21	21.68
HSUPA Subtest-4	22.14	21.83	21.66
HSUPA Subtest-5	23.75	23.65	23.56

LTE Band 2								
BW	Modulation	CH	Frequency	RB	RB Offset	MPR	Target	Measured
			(MHz)				Power	Power
5 MHz	QPSK	18625	1852.5	1	0	0	23.5	23.01
		18900	1880	1	0	0	23.5	23.11
		19175	1907.5	1	0	0	23.5	22.78
		18625	1852.5	1	24	0	23.5	23.02
		18900	1880	1	24	0	23.5	23.21
		19175	1907.5	1	24	0	23.5	22.89
		18625	1852.5	12	6	1	23.5	22.13
		18900	1880	12	6	1	23.5	22.26
		19175	1907.5	12	6	1	23.5	21.79
		18625	1852.5	25	0	1	23.5	22.03
		18900	1880	25	0	1	23.5	22.13
		19175	1907.5	25	0	1	23.5	21.57
	16QAM	18625	1852.5	1	0	1	23.5	21.98
		18900	1880	1	0	1	23.5	22.11
		19175	1907.5	1	0	1	23.5	21.82
		18625	1852.5	1	24	1	23.5	22.05
		18900	1880	1	24	1	23.5	22.25
		19175	1907.5	1	24	1	23.5	21.89
		18625	1852.5	12	6	2	23.5	21.2
		18900	1880	12	6	2	23.5	21.3
		19175	1907.5	12	6	2	23.5	20.94
		18625	1852.5	25	0	2	23.5	21.02
		18900	1880	25	0	2	23.5	21.1
		19175	1907.5	25	0	2	23.5	20.67

LTE Band 2								
BW	Modulation	CH	Frequency	RB	RB Offset	MPR	Target	Measured
			(MHz)				Power	Power
10MHz	QPSK	18650	1855	1	0	0	23.5	23.28
		18900	1880	1	0	0	23.5	23.37
		19150	1905	1	0	0	23.5	23.13
		18650	1855	1	49	0	23.5	23.21
		18900	1880	1	49	0	23.5	23.42
		19150	1905	1	49	0	23.5	22.8
		18650	1855	25	12	1	23.5	22.35
		18900	1880	25	12	1	23.5	22.41
		19150	1905	25	12	1	23.5	22.03
		18650	1855	50	0	1	23.5	22.17
		18900	1880	50	0	1	23.5	22.19
		19150	1905	50	0	1	23.5	21.98
	16QAM	18650	1855	1	0	1	23.5	22.3
		18900	1880	1	0	1	23.5	22.43
		19150	1905	1	0	1	23.5	22.2
		18650	1855	1	49	1	23.5	22.19
		18900	1880	1	49	1	23.5	22.49
		19150	1905	1	49	1	23.5	21.8
		18650	1855	25	12	2	23.5	21.34
		18900	1880	25	12	2	23.5	21.44
		19150	1905	25	12	2	23.5	21.1
		18650	1855	50	0	2	23.5	21.22
		18900	1880	50	0	2	23.5	21.27
		19150	1905	50	0	2	23.5	21

EIRP POWER (dBm)

GSM

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	512	1850.2	-8.83	38.19	29.36	862.98	H
	661	1880.0	-8.90	38.70	29.80	954.99	H
	810	1909.8	-9.92	39.35	29.43	877.00	H
	512	1850.2	-14.71	38.48	23.77	238.23	V
	661	1880.0	-14.80	38.59	23.79	239.33	V
	810	1909.8	-14.68	38.87	24.19	262.42	V

EDGE

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	512	1850.2	-12.77	38.19	25.42	348.34	H
	661	1880.0	-12.81	38.70	25.89	388.15	H
	810	1909.8	-13.93	39.35	25.42	348.34	H
	512	1850.2	-18.34	38.48	20.14	103.28	V
	661	1880.0	-18.51	38.59	20.08	101.86	V
	810	1909.8	-18.77	38.87	20.10	102.33	V

WCDMA

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	9262	1852.4	-15.50	38.19	22.69	185.78	H
	9400	1880.0	-16.58	38.70	22.12	162.93	H
	9538	1907.6	-16.88	39.35	22.47	176.60	H
	9262	1852.4	-21.09	38.48	17.39	54.83	V
	9400	1880.0	-21.23	38.59	17.36	54.45	V
	9538	1907.6	-21.82	38.87	17.05	50.70	V

LTE BAND 2

CHANNEL BANDWIDTH: 5MHz QPSK (1 RB / 24 RB Offset)

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	18625	1852.5	-15.40	38.19	22.79	190.11	H
	18900	1880.0	-16.32	38.70	22.38	172.98	H
	19175	1907.5	-16.99	39.35	22.36	172.19	H
	18625	1852.5	-21.17	38.48	17.31	53.83	V
	18900	1880.0	-20.46	38.59	18.13	65.01	V
	19175	1907.5	-20.99	38.87	17.88	61.38	V

LTE BAND 2

CHANNEL BANDWIDTH: 10MHz QPSK (1 RB / 49 RB Offset)

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
X	18625	1855.0	-15.40	38.19	22.79	190.11	H
	18900	1880.0	-16.62	38.70	22.08	161.44	H
	19175	1905.0	-16.62	39.35	22.73	187.50	H
	18625	1855.0	-20.64	38.48	17.84	60.81	V
	18900	1880.0	-20.18	38.59	18.41	69.34	V
	19175	1905.0	-20.68	38.87	18.19	65.92	V

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 TEST SETUP

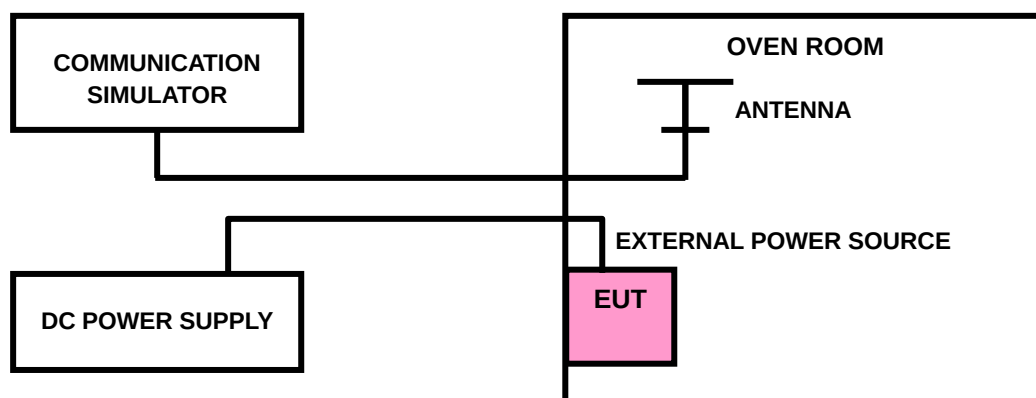

4.2.4 TEST RESULTS

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)					LIMIT (ppm)
	GPRS	EDGE	WCDMA	LTE Band 5		
				5MHz	10MHz	
3.8	0.02	0.02	-0.01	-0.01	-0.01	2.5
3.6	0.02	0.02	-0.01	-0.01	-0.01	2.5
4.2	0.02	0.02	-0.01	-0.01	-0.01	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.2Vdc.

FREQUENCY ERROR vs. TEMPERATURE.


TEMP. (°C)	FREQUENCY ERROR (ppm)					LIMIT (ppm)
	GPRS	EDGE	WCDMA	LTE Band 5		
				5MHz	10MHz	
-10	0.02	0.03	-0.01	0.01	-0.01	2.5
0	0.02	0.02	-0.01	-0.01	-0.01	2.5
10	0.02	0.02	0.00	-0.01	-0.01	2.5
20	0.02	0.03	-0.01	-0.01	-0.01	2.5
30	0.02	0.02	-0.01	0.01	-0.01	2.5
40	-0.03	0.02	0.00	-0.01	-0.01	2.5
50	-0.02	0.02	-0.01	-0.01	-0.01	2.5
55	0.02	0.02	-0.01	-0.01	-0.01	2.5

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 TEST PROCEDURES


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.2 TEST SETUP

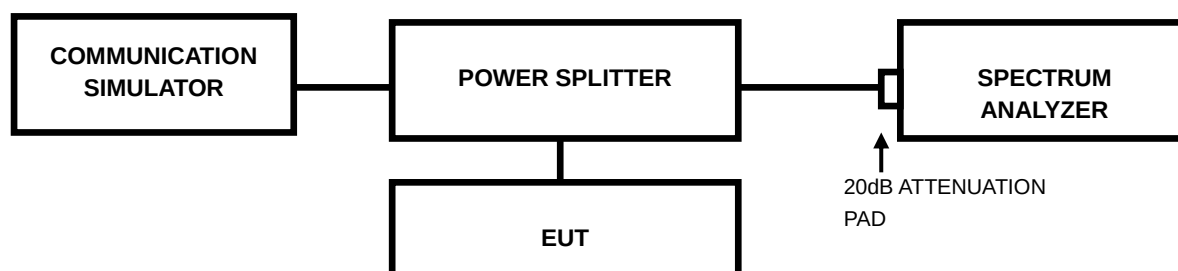

4.3.3 TEST RESULTS


CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (kHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)
		GSM	EDGE			
512	1850.2	242.0	240.0	9262	1852.4	4.16
661	1880.0	244.0	246.0	9400	1880.0	4.16
810	1909.8	244.0	242.0	9538	1907.6	4.16

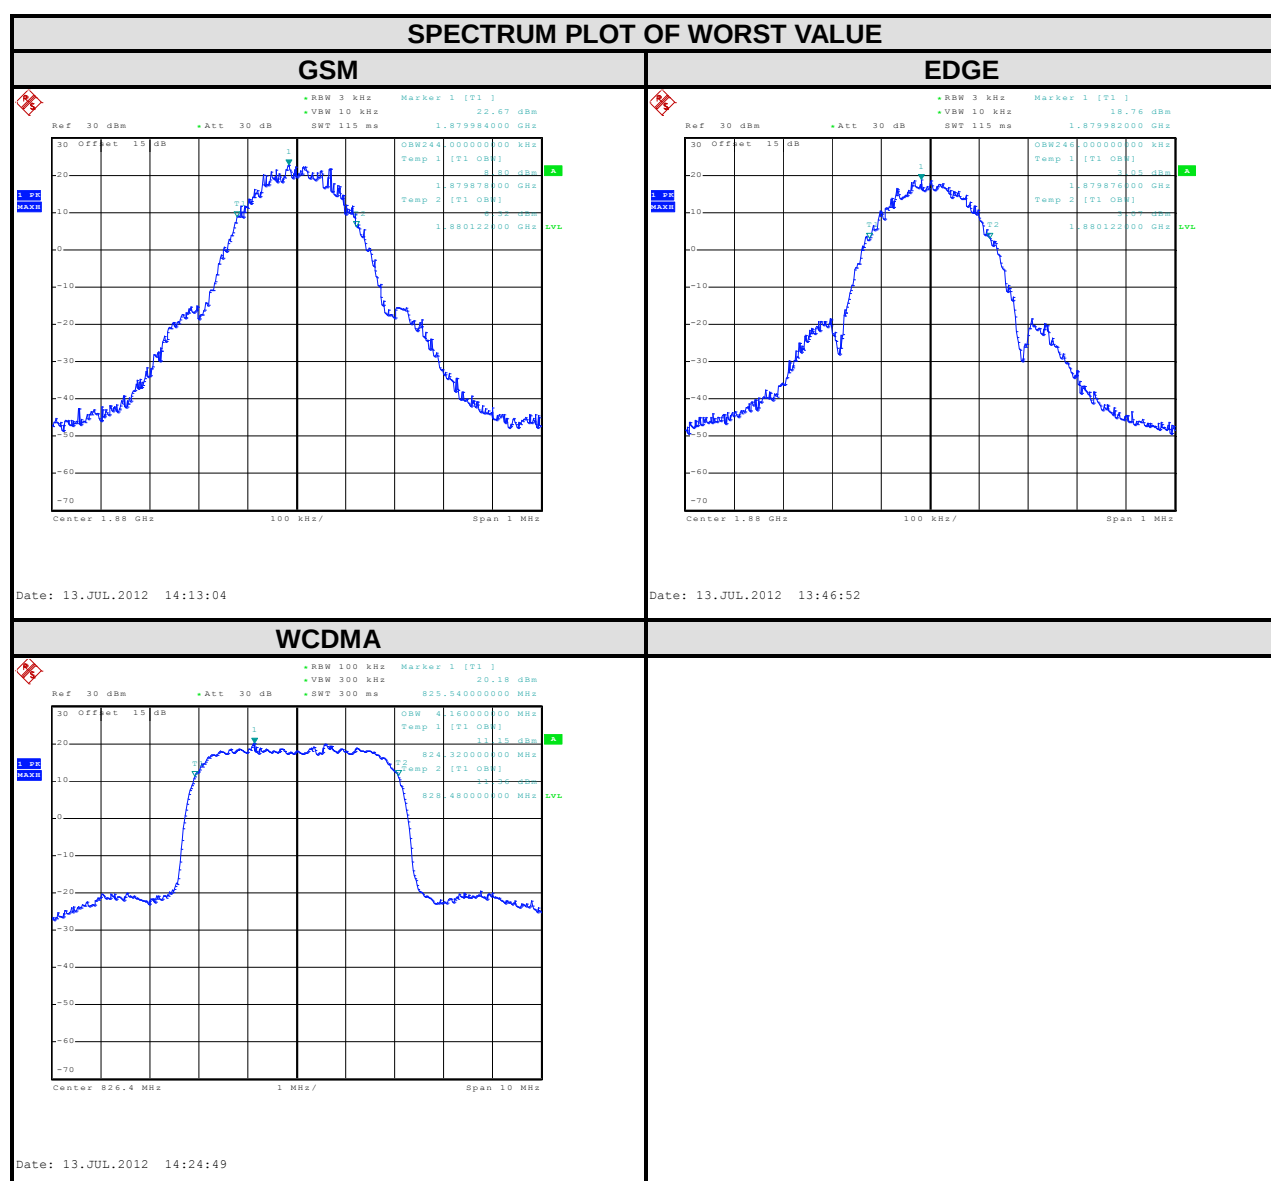



A D T

LTE BAND 2					
CHANNEL BANDWIDTH: 5MHz			CHANNEL BANDWIDTH: 10MHz		
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)
18625	1852.5	4.52	18650	1855	8.95
18900	1880	4.52	18900	1880	8.95
19175	1907.5	4.51	19150	1905	8.94

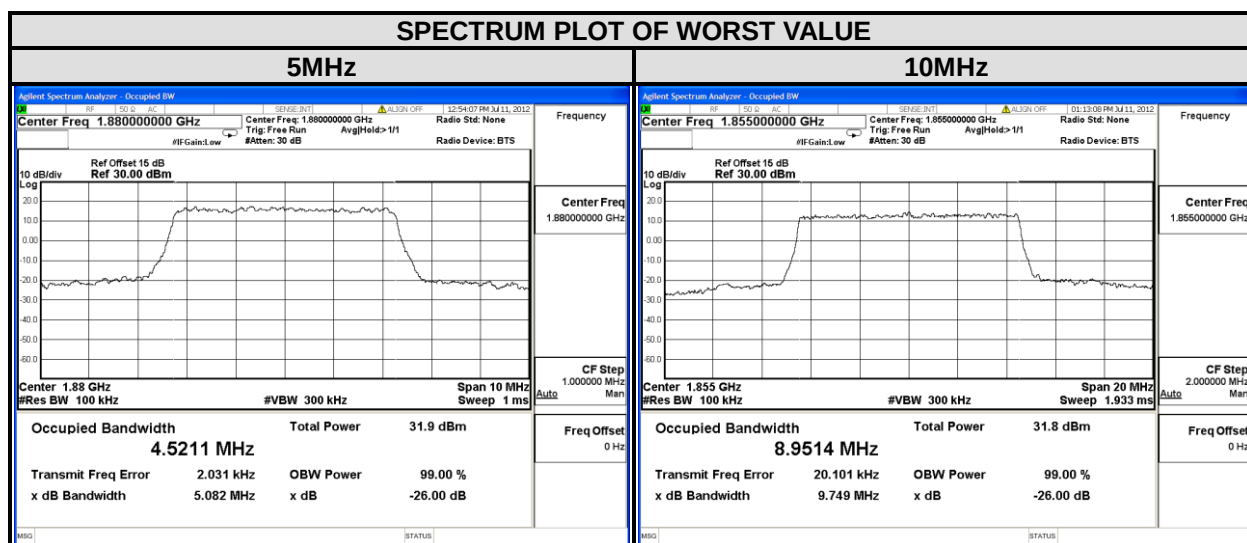


4.4 BAND EDGE MEASUREMENT

4.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.4.2 TEST SETUP

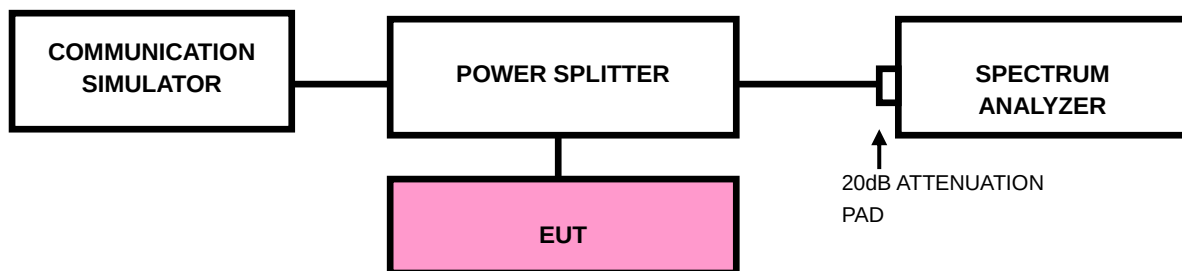


4.4.3 TEST PROCEDURES

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/GPRS/ EDGE).
- The center frequency of spectrum is the band edge frequency and span is 10MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA/LTE).
- Record the max trace plot into the test report.



A D T

4.4.4 TEST RESULTS

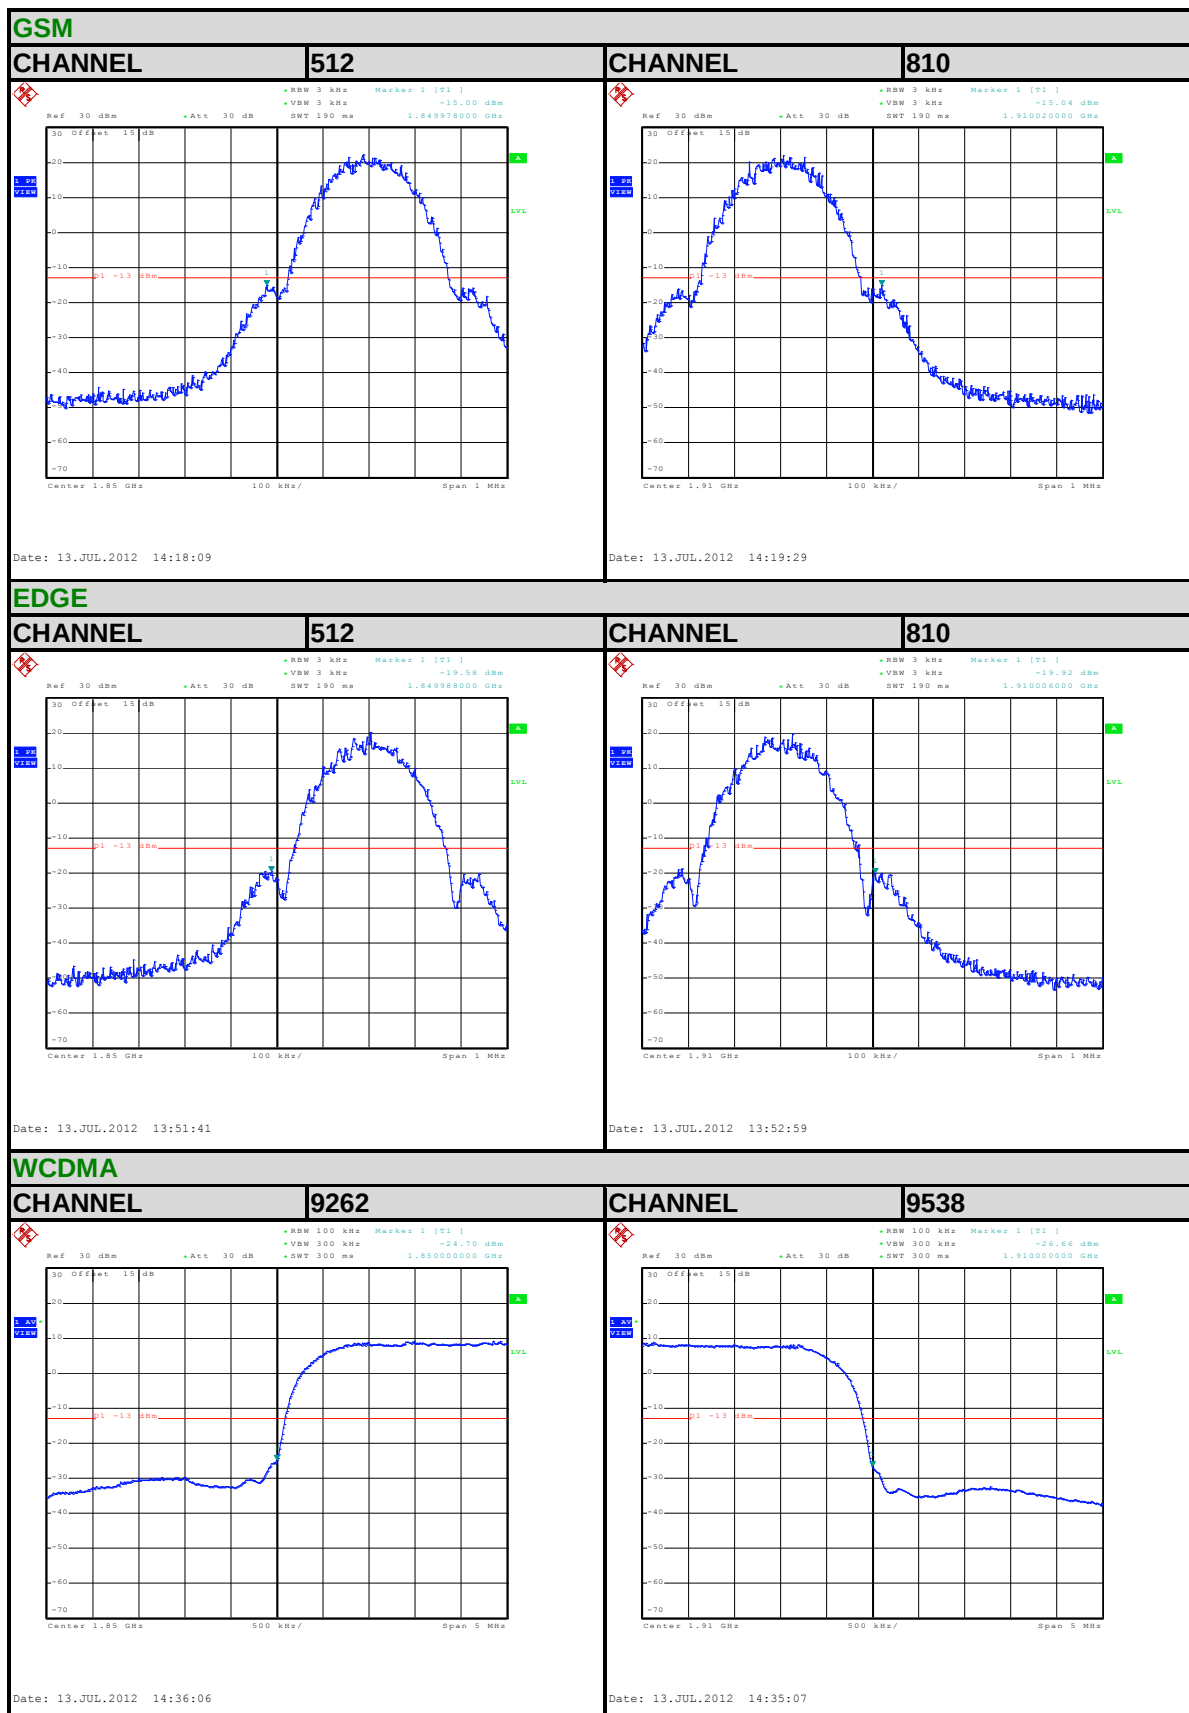




A D T

LTE Band 2

Channel Bandwidth: 5MHz

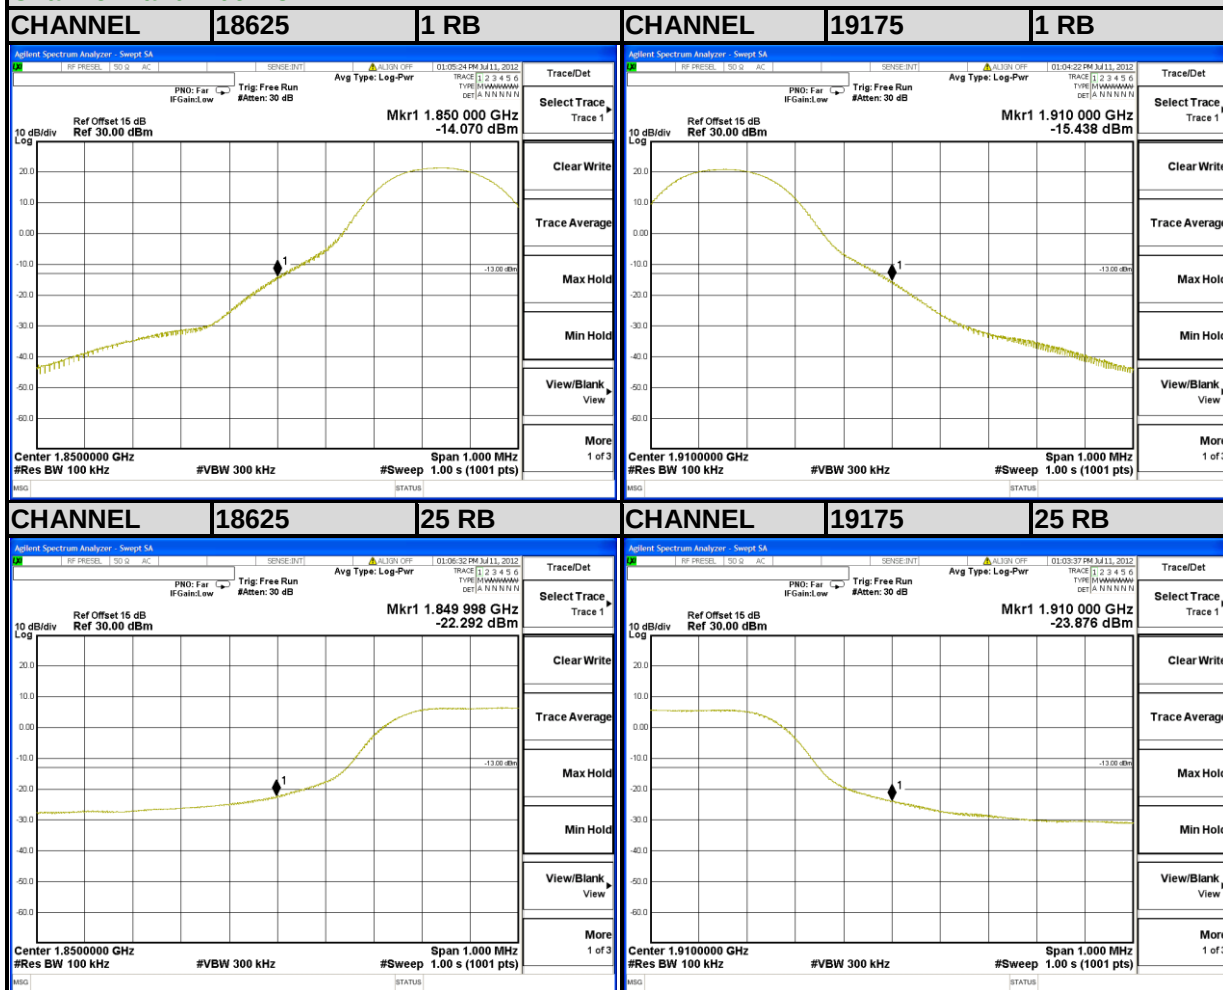




A D T

LTE Band 2

Channel Bandwidth: 10MHz

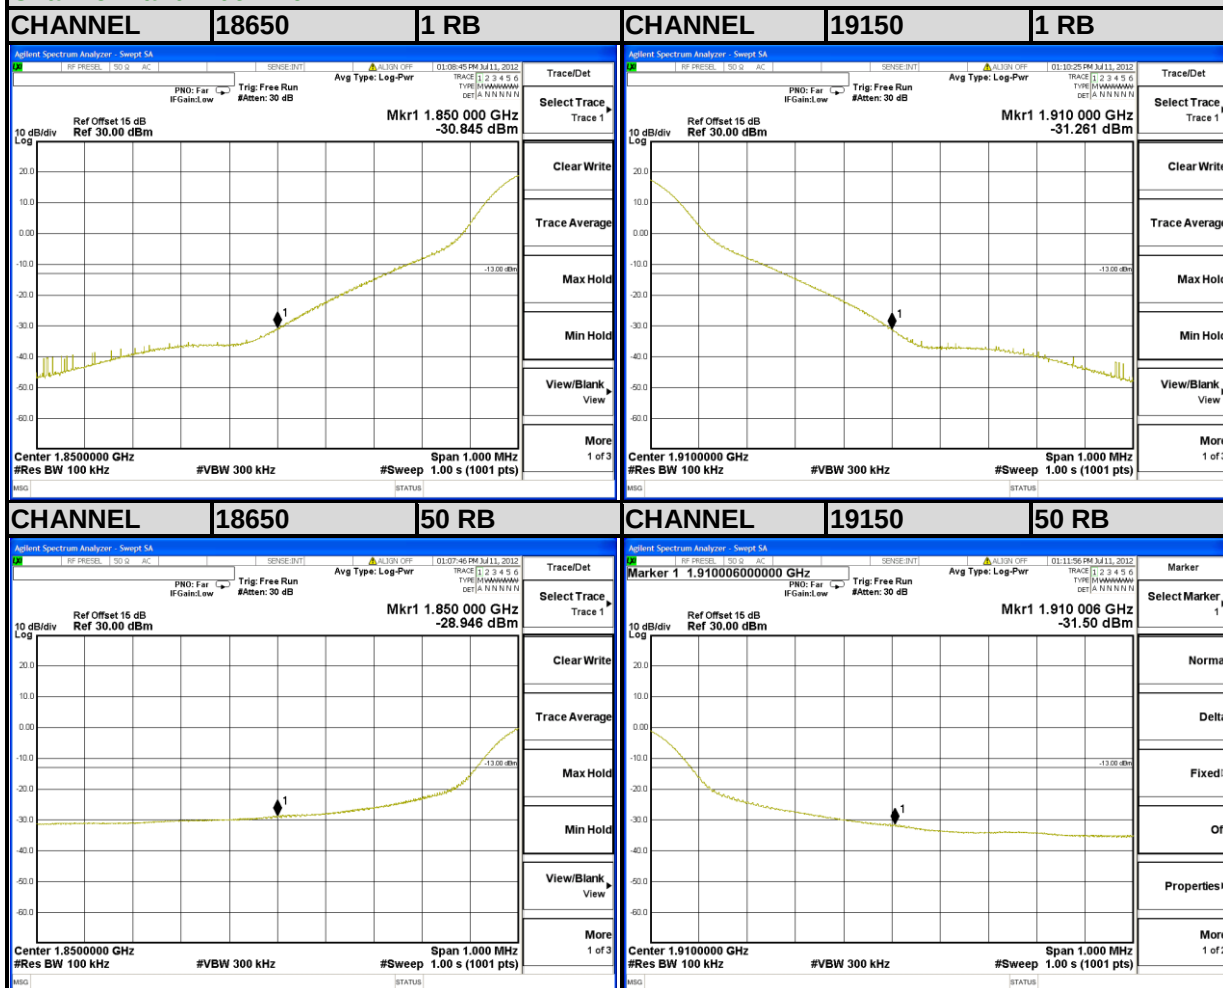

4.5 CONDUCTED SPURIOUS EMISSIONS


4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .


4.5.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 19.1GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

4.5.3 TEST SETUP

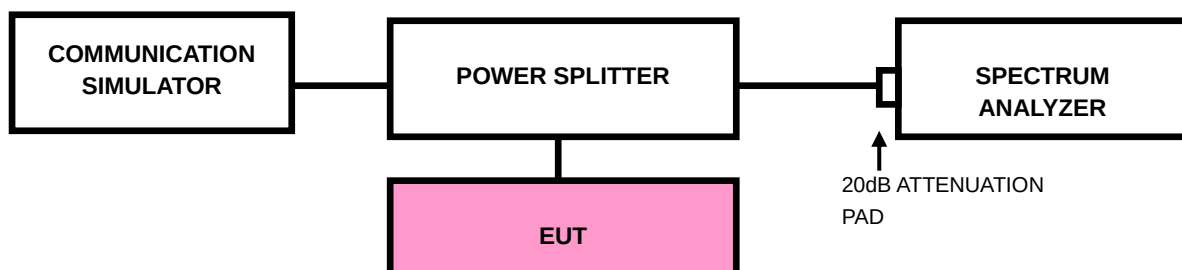

4.5.4 TEST RESULTS

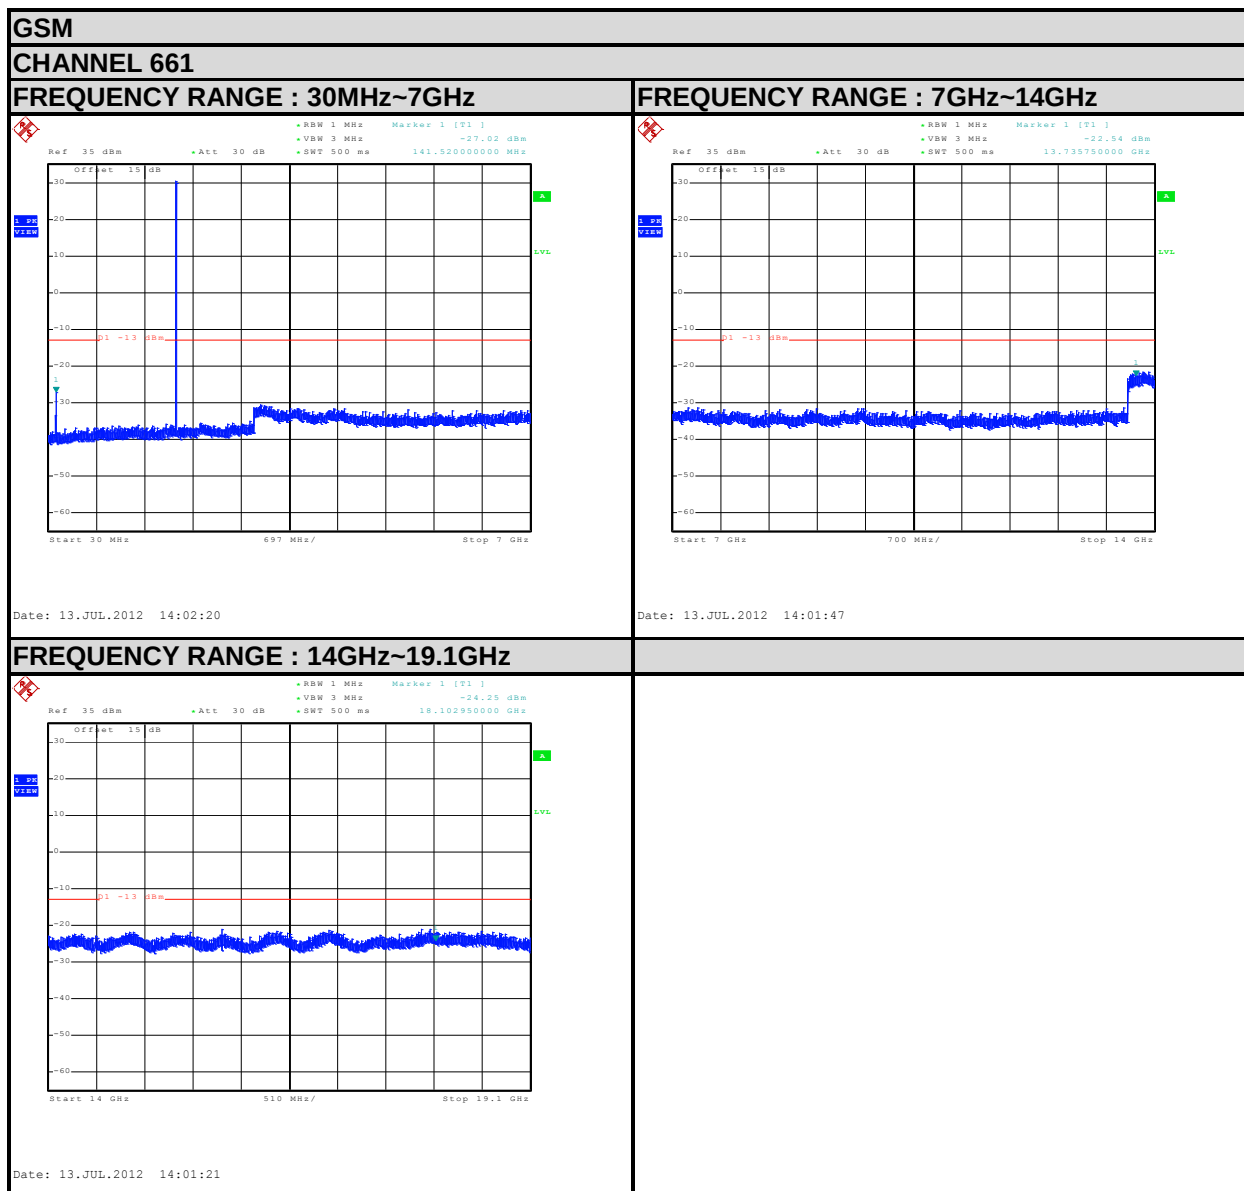




A D T

EDGE


CHANNEL 661

FREQUENCY RANGE : 30MHz~7GHz

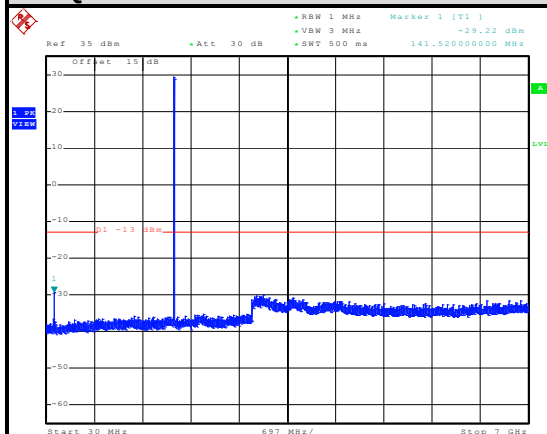


Date: 13.JUL.2012 13:55:02

FREQUENCY RANGE : 7GHz~14GHz

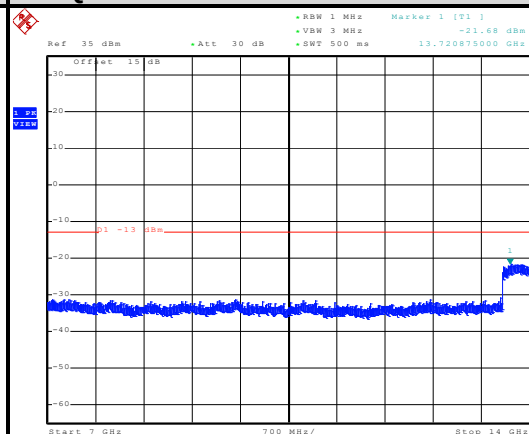

Date: 13.JUL.2012 13:55:40

FREQUENCY RANGE : 14GHz~19.1GHz

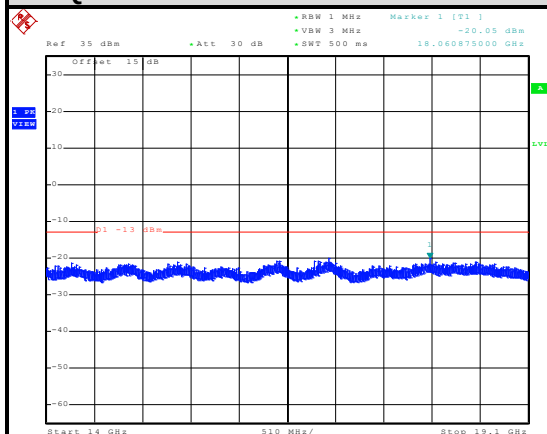

Date: 13.JUL.2012 13:56:27




A D T

WCDMA


CHANNEL 9400

FREQUENCY RANGE : 30MHz~7GHz

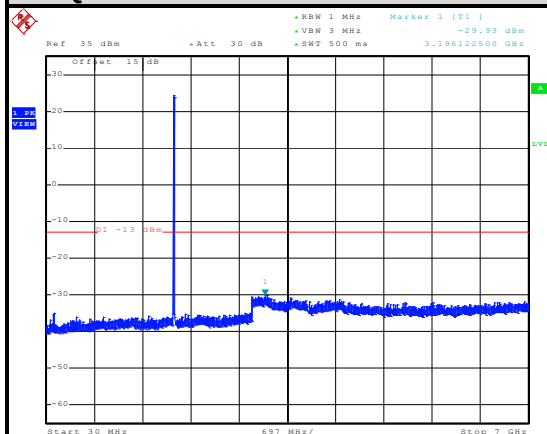


Date: 13.JUL.2012 14:42:33

FREQUENCY RANGE : 7GHz~14GHz

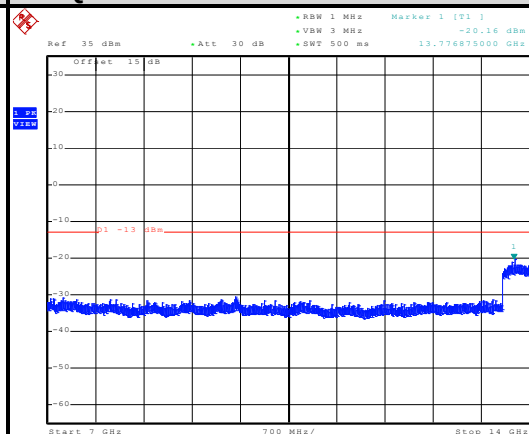

Date: 13.JUL.2012 14:41:29




FREQUENCY RANGE : 14GHz~19.1GHz

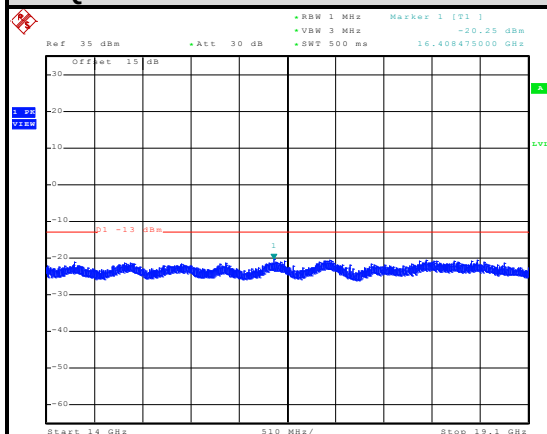

Date: 13.JUL.2012 14:40:55



A D T

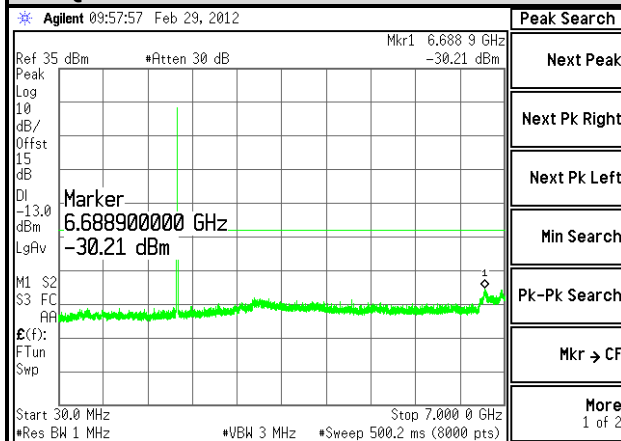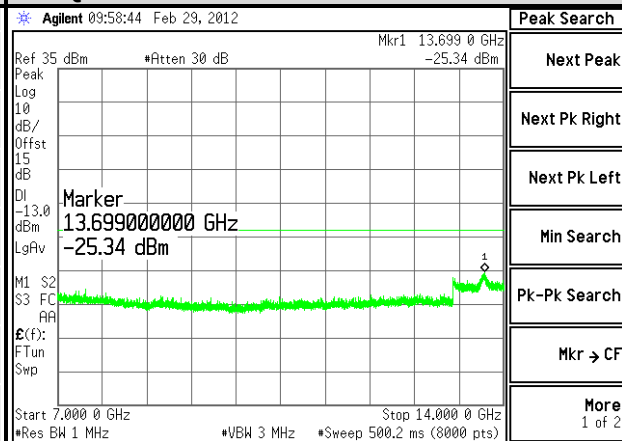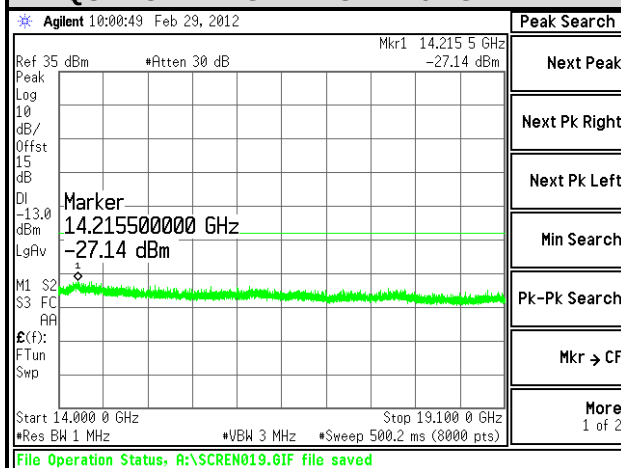LTE Band 2 (Channel Bandwidth: 5MHz)**CHANNEL 18900****FREQUENCY RANGE : 30MHz~7GHz****FREQUENCY RANGE : 7GHz~14GHz****FREQUENCY RANGE : 14GHz~19.1GHz**




A D T

LTE Band 2 (Channel Bandwidth: 10MHz)

CHANNEL 18900

FREQUENCY RANGE : 30MHz~7GHz

* Agilent 10:07:52 Feb 29, 2012

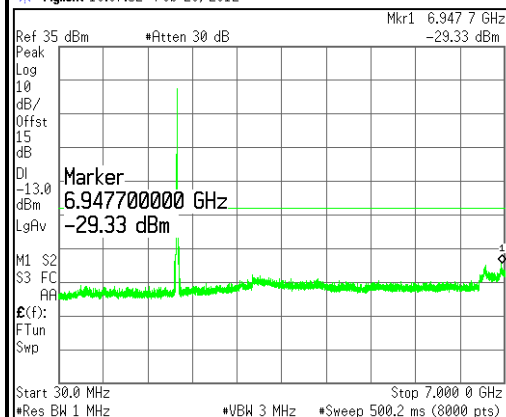

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More 1 of 2

File Operation Status, A:\SCREEN022.GIF file saved

FREQUENCY RANGE : 7GHz~14GHz

* Agilent 10:06:39 Feb 29, 2012

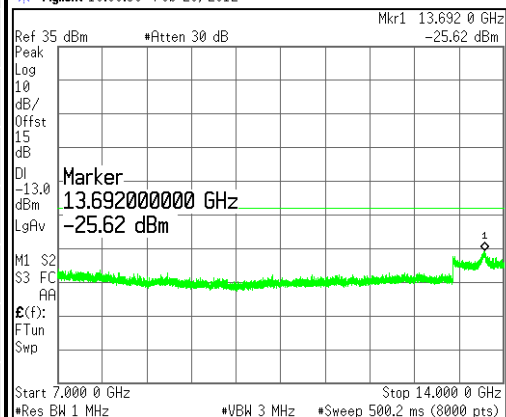

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More 1 of 2

File Operation Status, A:\SCREEN021.GIF file saved

FREQUENCY RANGE : 14GHz~19.1GHz

* Agilent 10:05:43 Feb 29, 2012

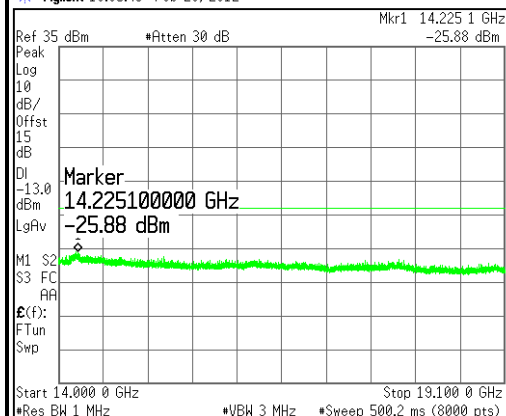

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More 1 of 2

File Operation Status, A:\SCREEN020.GIF file saved

4.6 RADIATED EMISSION MEASUREMENT

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.6.2 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}.$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.6.3 DEVIATION FROM TEST STANDARD

No deviation

4.6.4 TEST SETUP

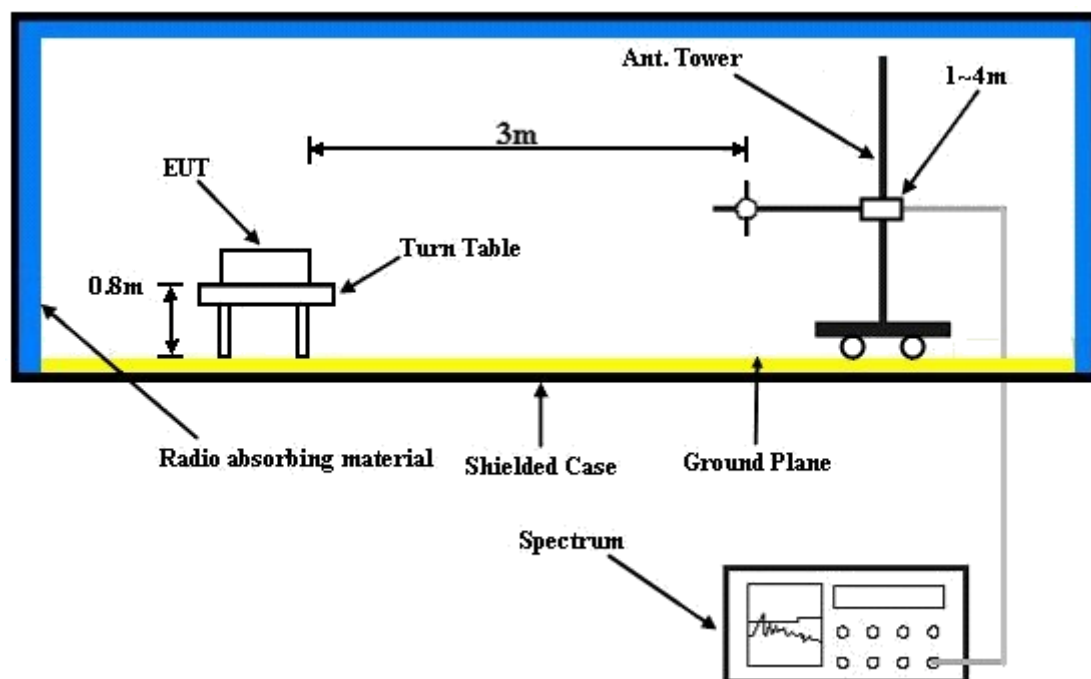

For the actual test configuration, please refer to the attached file (Test Setup Photo).



A D T

4.6.5 TEST RESULTS


GSM:



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

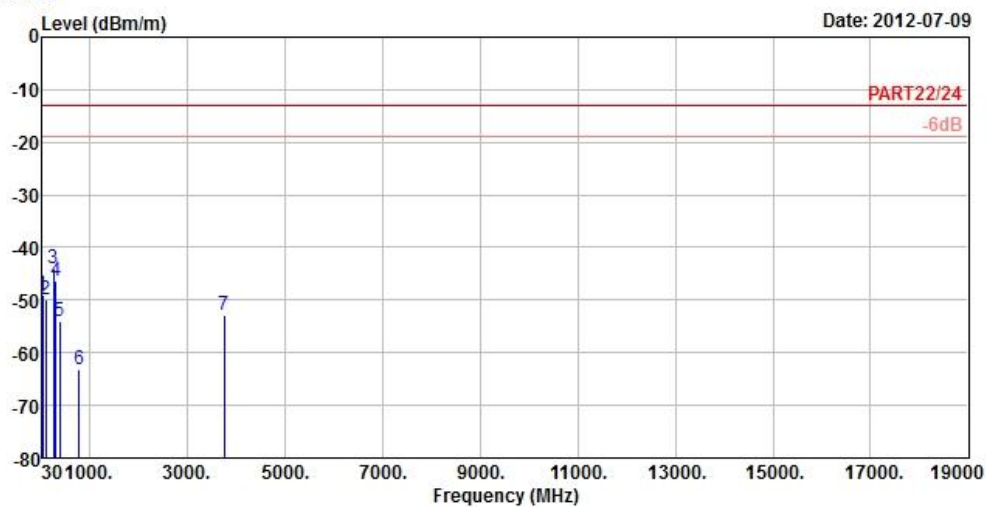

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : PCS1900 Link
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : X

	Freq	Level	Read	Limit	Over		
	MHz	dBm/m	Level	Line	Limit	Factor	Remark
			dBm	dBm/m	dB	dB/m	
1	30.00	-49.00	-50.07	-13.00	-36.00	1.07	Peak
2	98.04	-49.99	-39.55	-13.00	-36.99	-10.44	Peak
3 pp	262.20	-44.10	-38.26	-13.00	-31.10	-5.84	Peak
4	304.90	-46.42	-40.08	-13.00	-33.42	-6.34	Peak
5	378.40	-53.89	-48.09	-13.00	-40.89	-5.80	Peak
6	780.90	-63.03	-65.03	-13.00	-50.03	2.00	Peak
7	3760.00	-52.98	-46.25	-13.00	-39.98	-6.73	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

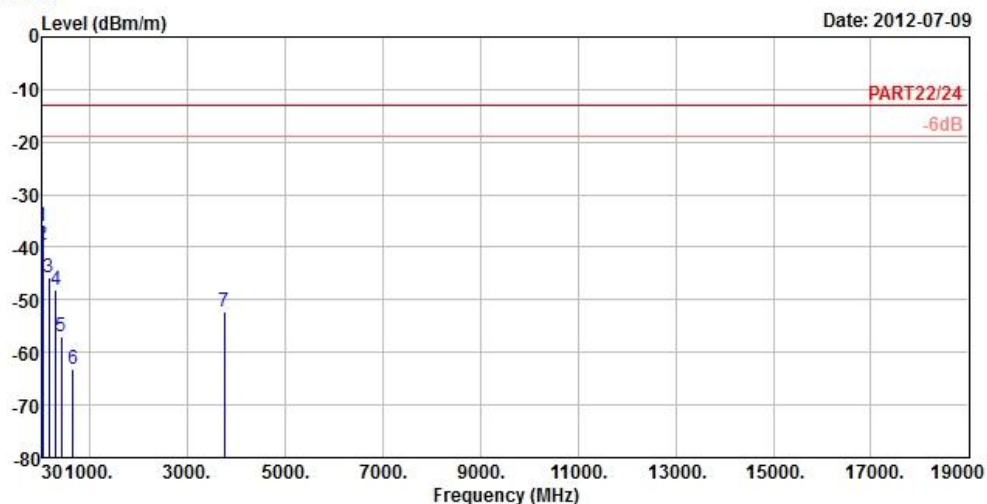

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : PCS1900 Link
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : X

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1 pp	30.00	-36.12	-37.19	-13.00	-23.12	1.07	Peak
2	42.69	-39.41	-38.08	-13.00	-26.41	-1.33	Peak
3	165.54	-45.66	-39.04	-13.00	-32.66	-6.62	Peak
4	300.00	-47.99	-41.61	-13.00	-34.99	-6.38	Peak
5	409.90	-56.91	-51.54	-13.00	-43.91	-5.37	Peak
6	659.10	-63.25	-63.97	-13.00	-50.25	0.72	Peak
7	3760.00	-52.23	-45.50	-13.00	-39.23	-6.73	Peak

EDGE:




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

Date: 2012-07-09

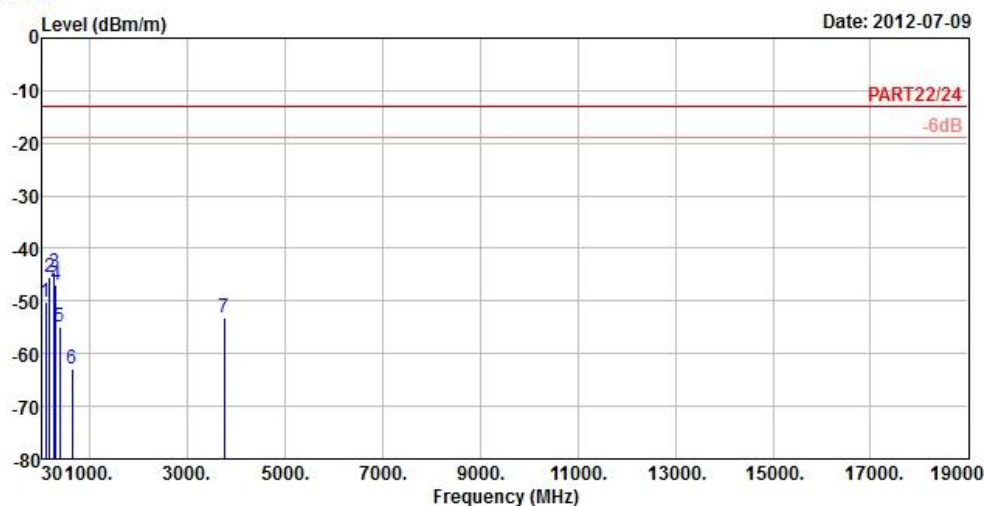

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : EDGE1900 Link
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : X

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	98.31	-50.04	-39.60	-13.00	-37.04	-10.44	Peak
2	170.94	-45.34	-38.62	-13.00	-32.34	-6.72	Peak
3 pp	268.68	-44.61	-38.67	-13.00	-31.61	-5.94	Peak
4	304.90	-47.06	-40.72	-13.00	-34.06	-6.34	Peak
5	387.50	-54.93	-49.20	-13.00	-41.93	-5.73	Peak
6	631.10	-62.97	-63.18	-13.00	-49.97	0.21	Peak
7	3760.00	-53.07	-46.34	-13.00	-40.07	-6.73	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

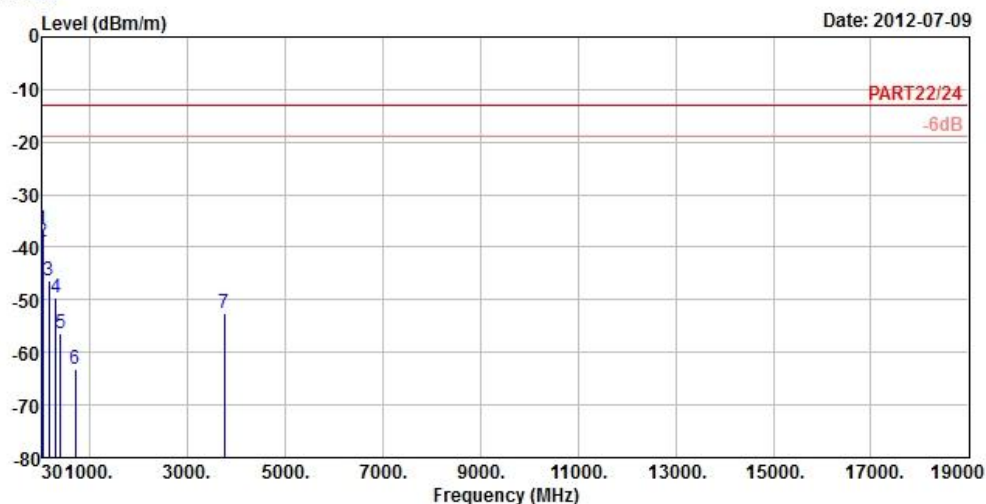

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : EDGE1900 Link
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : X

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1 pp	30.00	-36.46	-37.53	-13.00	-23.46	1.07	Peak
2	42.15	-39.09	-37.76	-13.00	-26.09	-1.33	Peak
3	166.08	-46.33	-39.71	-13.00	-33.33	-6.62	Peak
4	300.00	-49.48	-43.10	-13.00	-36.48	-6.38	Peak
5	398.70	-56.44	-50.79	-13.00	-43.44	-5.65	Peak
6	709.50	-63.23	-64.75	-13.00	-50.23	1.52	Peak
7	3760.00	-52.49	-45.76	-13.00	-39.49	-6.73	Peak

WCDMA:




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

Date: 2012-07-10

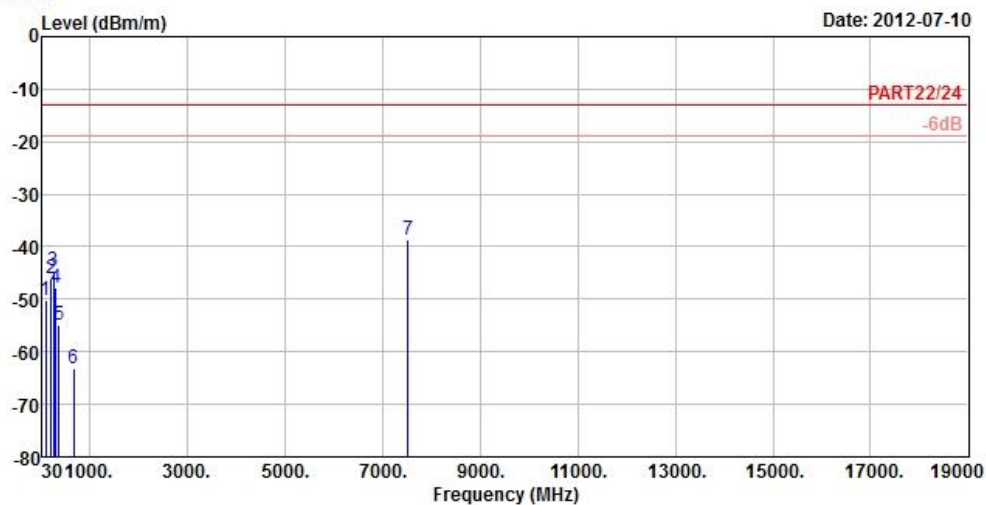

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : Band II Link
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : X

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	98.58	-50.08	-39.66	-13.00	-37.08	-10.42	Peak
2	204.69	-46.20	-38.47	-13.00	-33.20	-7.73	Peak
3	262.20	-44.55	-38.71	-13.00	-31.55	-5.84	Peak
4	302.10	-47.93	-41.57	-13.00	-34.93	-6.36	Peak
5	370.00	-54.87	-49.01	-13.00	-41.87	-5.86	Peak
6	671.00	-63.17	-64.10	-13.00	-50.17	0.93	Peak
7 pp	7520.00	-38.71	-45.68	-13.00	-25.71	6.97	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

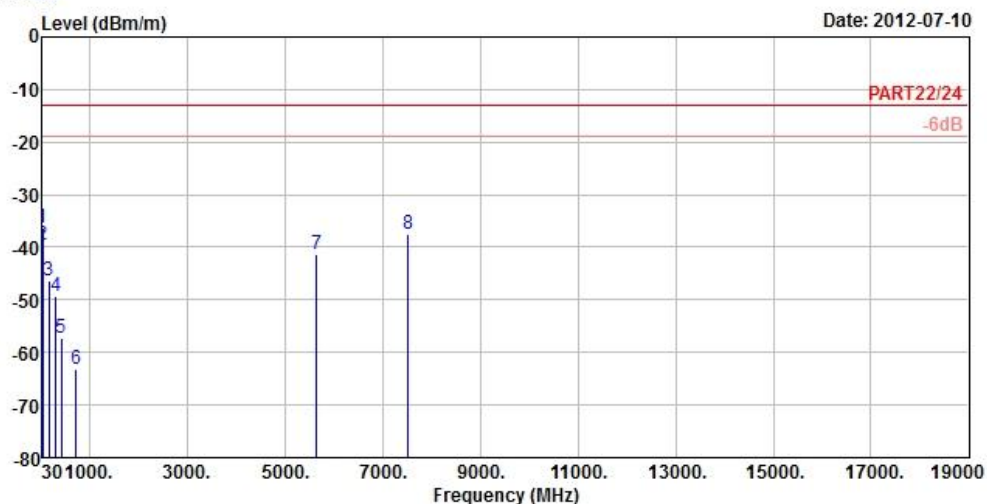

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : Band II Link
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : X

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	pp	30.00	-36.44	-37.51	-13.00	-23.44	1.07 Peak
2		42.42	-39.44	-38.11	-13.00	-26.44	-1.33 Peak
3		165.81	-46.25	-39.63	-13.00	-33.25	-6.62 Peak
4		300.00	-49.28	-42.90	-13.00	-36.28	-6.38 Peak
5		409.20	-57.41	-52.02	-13.00	-44.41	-5.39 Peak
6		724.90	-63.18	-64.80	-13.00	-50.18	1.62 Peak
7		5640.00	-41.34	-41.55	-13.00	-28.34	0.21 Peak
8		7520.00	-37.41	-44.38	-13.00	-24.41	6.97 Peak



A D T

LTE BAND 2


CHANNEL BANDWIDTH: 5MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

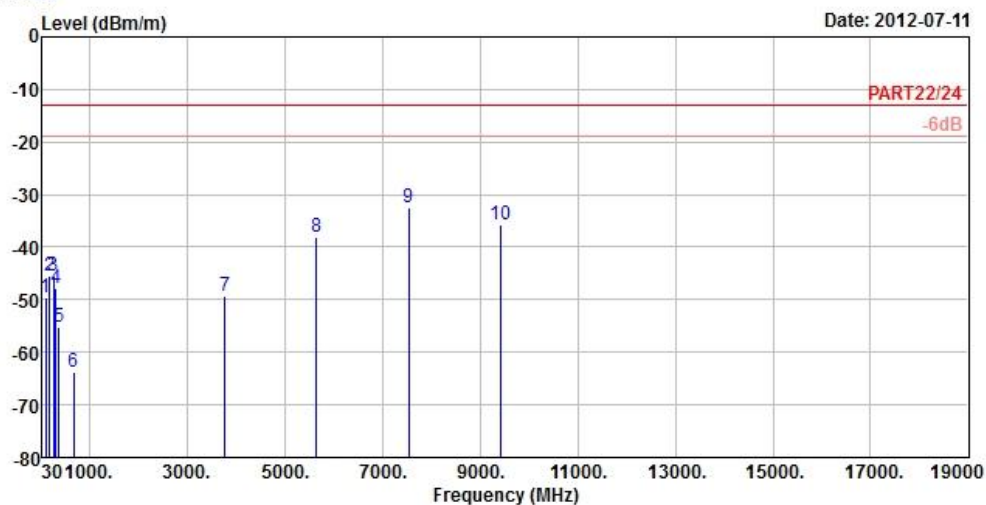

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 2_5M_(QPSK1,24)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Z

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	98.31	-49.74	-39.30	-13.00	-36.74	-10.44	Peak
2	171.48	-45.45	-38.72	-13.00	-32.45	-6.73	Peak
3	263.01	-45.35	-39.49	-13.00	-32.35	-5.86	Peak
4	302.10	-47.92	-41.56	-13.00	-34.92	-6.36	Peak
5	367.20	-55.29	-49.41	-13.00	-42.29	-5.88	Peak
6	671.70	-63.72	-64.66	-13.00	-50.72	0.94	Peak
7	3764.32	-49.16	-42.55	-13.00	-36.16	-6.61	Peak
8	5646.48	-37.99	-38.20	-13.00	-24.99	0.21	Peak
9 pp	7528.64	-32.42	-39.26	-13.00	-19.42	6.84	Peak
10	9410.80	-35.78	-45.32	-13.00	-22.78	9.54	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

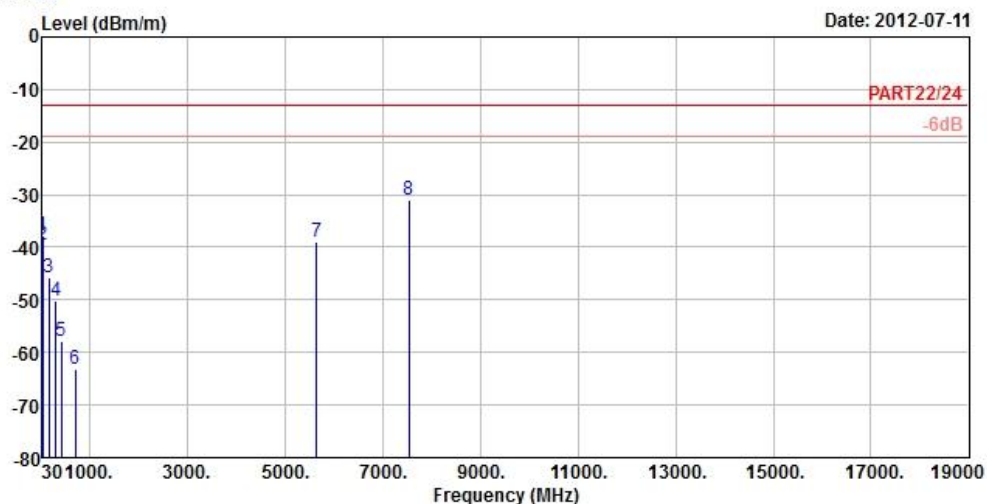

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 2_5M_(QPSK1,24)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	30.00	-37.79	-38.86	-13.00	-24.79	1.07	Peak
2	42.15	-39.70	-38.37	-13.00	-26.70	-1.33	Peak
3	165.54	-45.86	-39.24	-13.00	-32.86	-6.62	Peak
4	300.00	-50.15	-43.77	-13.00	-37.15	-6.38	Peak
5	409.90	-57.72	-52.35	-13.00	-44.72	-5.37	Peak
6	707.40	-63.31	-64.81	-13.00	-50.31	1.50	Peak
7	5646.48	-38.98	-39.19	-13.00	-25.98	0.21	Peak
8 pp	7528.64	-30.87	-37.71	-13.00	-17.87	6.84	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

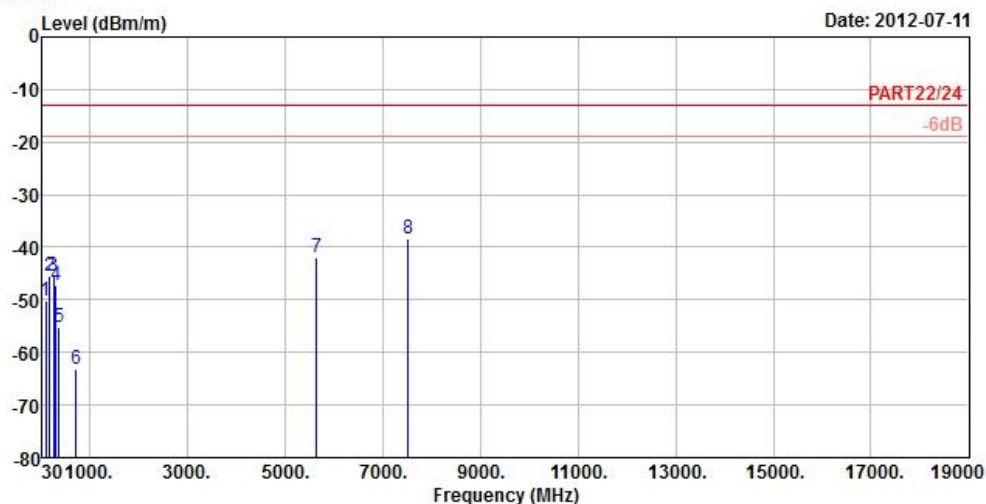

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 2_5M_(QPSK25,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	97.77	-50.13	-39.69	-13.00	-37.13	-10.44	Peak
2	171.75	-45.47	-38.74	-13.00	-32.47	-6.73	Peak
3	262.20	-45.54	-39.70	-13.00	-32.54	-5.84	Peak
4	300.00	-47.29	-40.91	-13.00	-34.29	-6.38	Peak
5	367.20	-55.14	-49.26	-13.00	-42.14	-5.88	Peak
6	719.30	-63.21	-64.79	-13.00	-50.21	1.58	Peak
7	5640.00	-42.00	-42.21	-13.00	-29.00	0.21	Peak
8 pp	7520.00	-38.26	-45.23	-13.00	-25.26	6.97	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

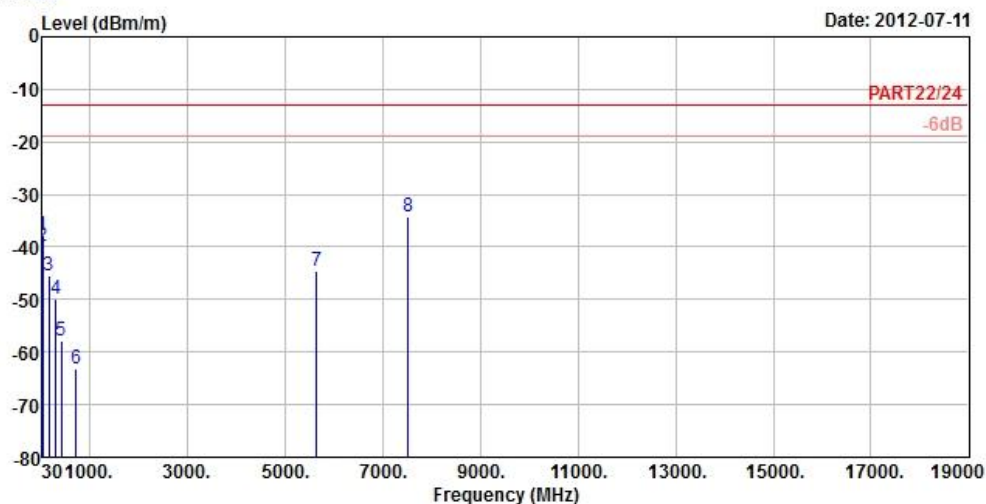

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 2_5M_(QPSK25,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	30.00	-37.72	-38.79	-13.00	-24.72	1.07	Peak
2	42.15	-39.89	-38.56	-13.00	-26.89	-1.33	Peak
3	165.54	-45.61	-38.99	-13.00	-32.61	-6.62	Peak
4	300.00	-49.97	-43.59	-13.00	-36.97	-6.38	Peak
5	410.60	-57.74	-52.37	-13.00	-44.74	-5.37	Peak
6	715.80	-63.22	-64.78	-13.00	-50.22	1.56	Peak
7	5640.00	-44.59	-44.80	-13.00	-31.59	0.21	Peak
8 pp	7520.00	-34.35	-41.32	-13.00	-21.35	6.97	Peak



A D T

LTE BAND 2


CHANNEL BANDWIDTH: 5MHz / 16QAM



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

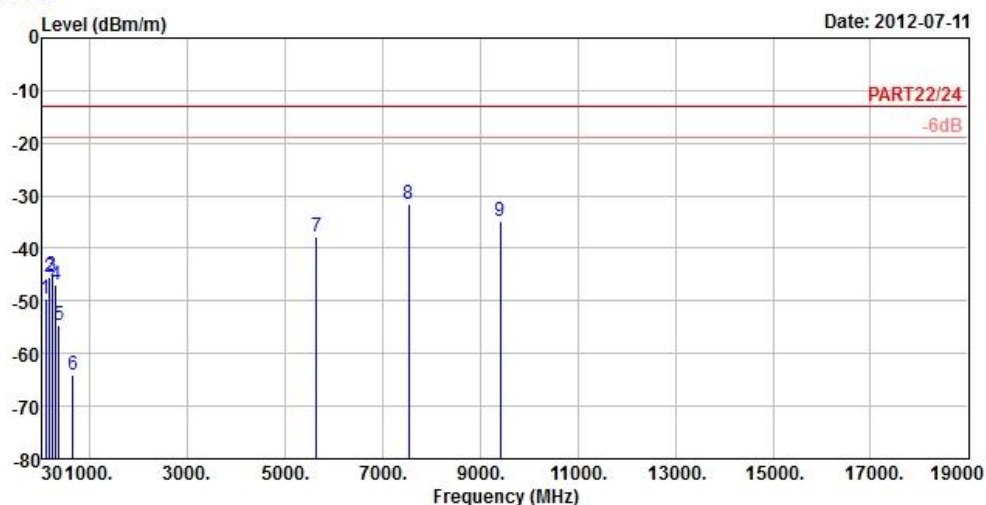

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 2_5M_(16QAM1,24)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read	Limit	Over		
	MHz	dBm/m	Level	Line	Limit	Factor	Remark
			dBm	dBm/m	dB	dB/m	
1	98.58	-49.68	-39.26	-13.00	-36.68	-10.42	Peak
2	170.13	-45.40	-38.70	-13.00	-32.40	-6.70	Peak
3	224.94	-45.27	-38.46	-13.00	-32.27	-6.81	Peak
4	300.00	-46.91	-40.53	-13.00	-33.91	-6.38	Peak
5	365.80	-54.74	-48.85	-13.00	-41.74	-5.89	Peak
6	647.20	-64.17	-64.66	-13.00	-51.17	0.49	Peak
7	5646.48	-37.67	-37.88	-13.00	-24.67	0.21	Peak
8 pp	7528.64	-31.65	-38.49	-13.00	-18.65	6.84	Peak
9	9410.80	-34.82	-44.36	-13.00	-21.82	9.54	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

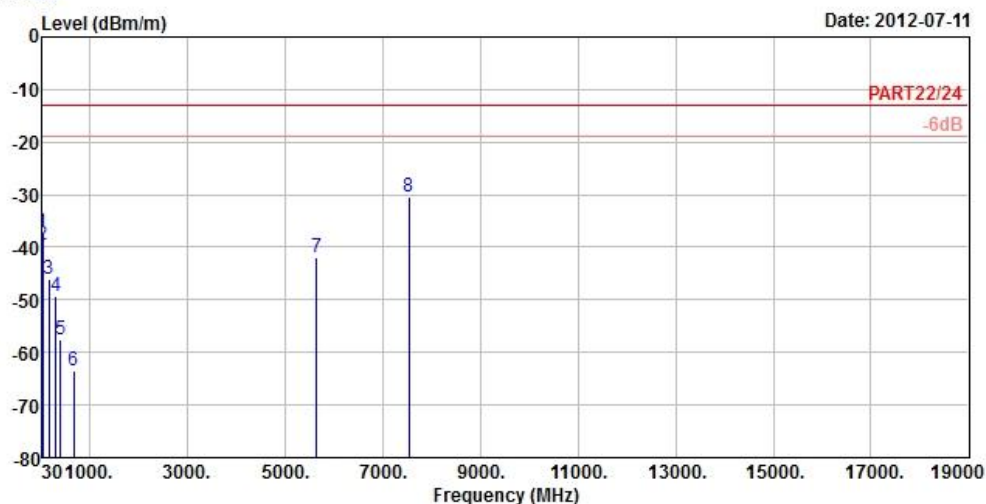

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 2_5M_(16QAM1,24)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	30.00	-37.11	-38.18	-13.00	-24.11	1.07	Peak
2	42.15	-39.50	-38.17	-13.00	-26.50	-1.33	Peak
3	165.81	-46.09	-39.47	-13.00	-33.09	-6.62	Peak
4	300.00	-49.39	-43.01	-13.00	-36.39	-6.38	Peak
5	406.40	-57.64	-52.17	-13.00	-44.64	-5.47	Peak
6	663.30	-63.56	-64.35	-13.00	-50.56	0.79	Peak
7	5646.48	-41.88	-42.09	-13.00	-28.88	0.21	Peak
8 pp	7528.64	-30.55	-37.39	-13.00	-17.55	6.84	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

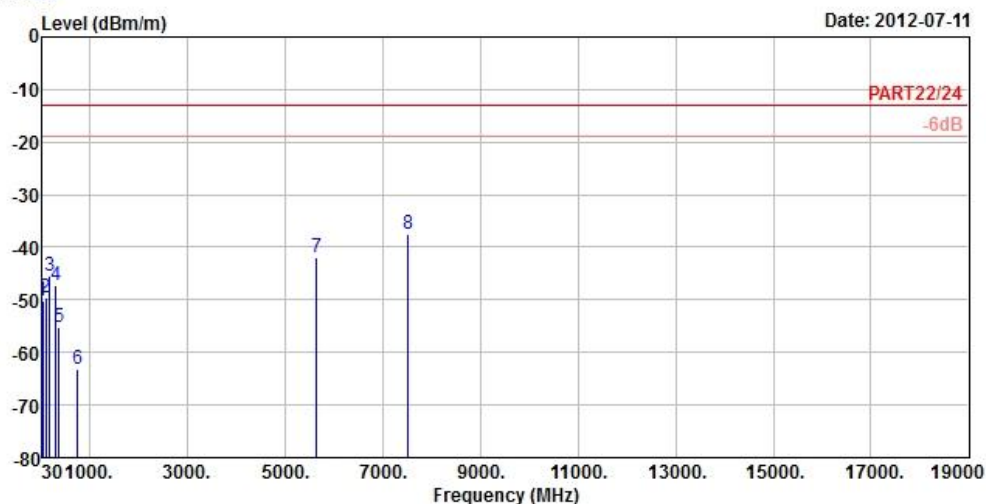

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 2_5M_(16QAM25,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	30.00	-50.23	-51.30	-13.00	-37.23	1.07	Peak
2	98.58	-49.61	-39.19	-13.00	-36.61	-10.42	Peak
3	170.94	-45.59	-38.87	-13.00	-32.59	-6.72	Peak
4	307.70	-47.21	-40.89	-13.00	-34.21	-6.32	Peak
5	367.90	-55.09	-49.21	-13.00	-42.09	-5.88	Peak
6	753.60	-63.20	-65.01	-13.00	-50.20	1.81	Peak
7	5640.00	-41.83	-42.04	-13.00	-28.83	0.21	Peak
8 pp	7520.00	-37.57	-44.54	-13.00	-24.57	6.97	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

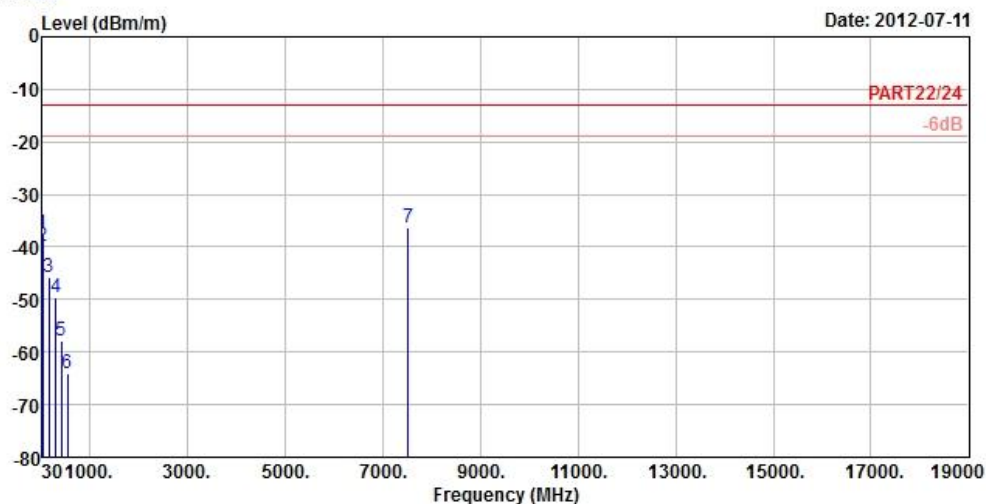

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 2_5M_(16QAM25,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	30.00	-37.56	-38.63	-13.00	-24.56	1.07	Peak
2	42.42	-39.75	-38.42	-13.00	-26.75	-1.33	Peak
3	165.27	-45.74	-39.14	-13.00	-32.74	-6.60	Peak
4	300.00	-49.74	-43.36	-13.00	-36.74	-6.38	Peak
5	409.20	-57.83	-52.44	-13.00	-44.83	-5.39	Peak
6	545.70	-63.95	-62.11	-13.00	-50.95	-1.84	Peak
7 pp	7520.00	-36.33	-43.30	-13.00	-23.33	6.97	Peak



A D T

LTE BAND 2


CHANNEL BANDWIDTH: 10MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

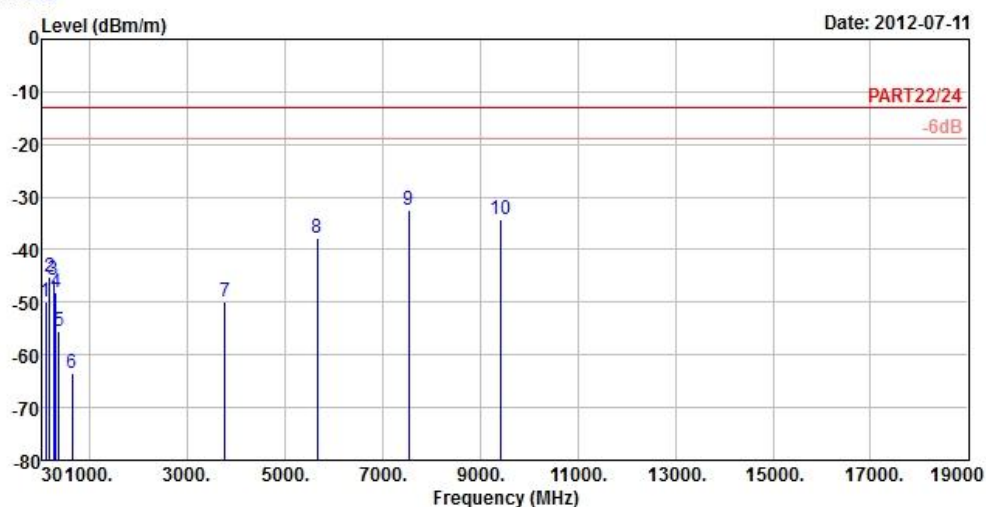

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 2_10M_(QPSK1,49)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Z

		Read	Limit	Over			
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	98.31	-49.87	-39.43	-13.00	-36.87	-10.44	Peak
2	171.21	-45.19	-38.46	-13.00	-32.19	-6.73	Peak
3	263.55	-45.79	-39.92	-13.00	-32.79	-5.87	Peak
4	300.70	-48.03	-41.66	-13.00	-35.03	-6.37	Peak
5	373.50	-55.63	-49.80	-13.00	-42.63	-5.83	Peak
6	636.70	-63.54	-63.84	-13.00	-50.54	0.30	Peak
7	3768.80	-49.78	-43.17	-13.00	-36.78	-6.61	Peak
8	5653.20	-37.92	-38.11	-13.00	-24.92	0.19	Peak
9 pp	7537.60	-32.36	-39.20	-13.00	-19.36	6.84	Peak
10	9422.00	-34.18	-43.58	-13.00	-21.18	9.40	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

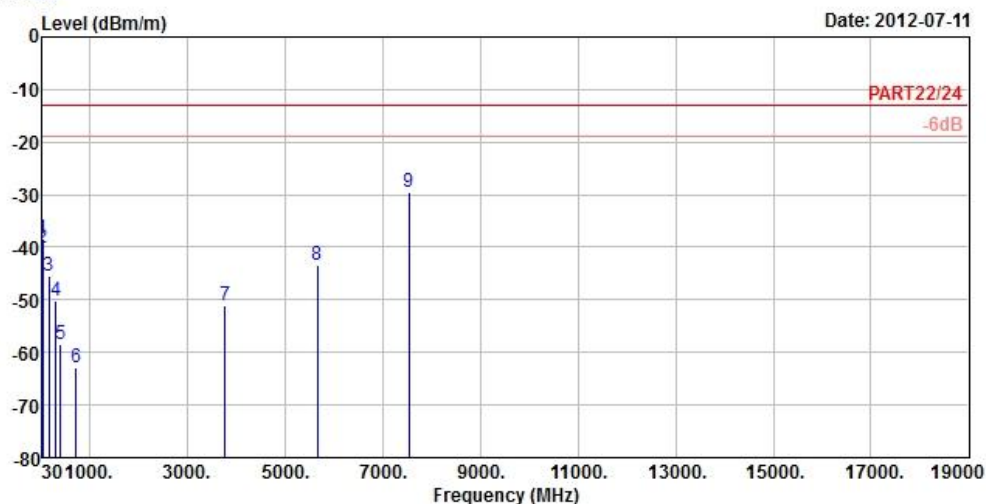

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 2_10M_(QPSK1,49)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	30.00	-38.42	-39.49	-13.00	-25.42	1.07	Peak
2	42.15	-40.09	-38.76	-13.00	-27.09	-1.33	Peak
3	165.00	-45.45	-38.85	-13.00	-32.45	-6.60	Peak
4	300.00	-50.29	-43.91	-13.00	-37.29	-6.38	Peak
5	407.80	-58.40	-52.96	-13.00	-45.40	-5.44	Peak
6	716.50	-62.99	-64.55	-13.00	-49.99	1.56	Peak
7	3768.80	-50.98	-44.37	-13.00	-37.98	-6.61	Peak
8	5653.20	-43.39	-43.58	-13.00	-30.39	0.19	Peak
9 pp	7537.60	-29.55	-36.39	-13.00	-16.55	6.84	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

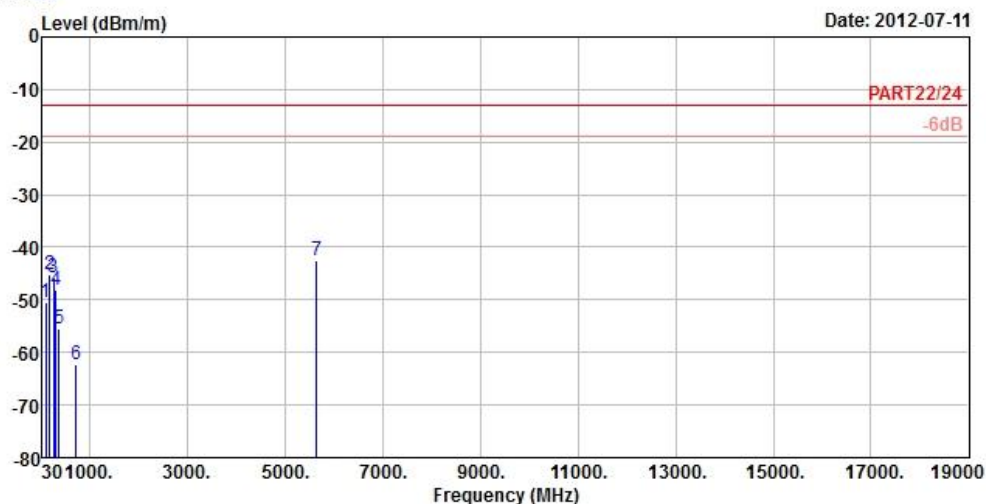

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 2_10M_(QPSK50,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	98.31	-50.62	-40.18	-13.00	-37.62	-10.44	Peak
2	170.67	-45.27	-38.55	-13.00	-32.27	-6.72	Peak
3	263.55	-45.71	-39.84	-13.00	-32.71	-5.87	Peak
4	300.70	-48.14	-41.77	-13.00	-35.14	-6.37	Peak
5	370.00	-55.55	-49.69	-13.00	-42.55	-5.86	Peak
6	718.60	-62.34	-63.92	-13.00	-49.34	1.58	Peak
7 pp	5640.00	-42.59	-42.80	-13.00	-29.59	0.21	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

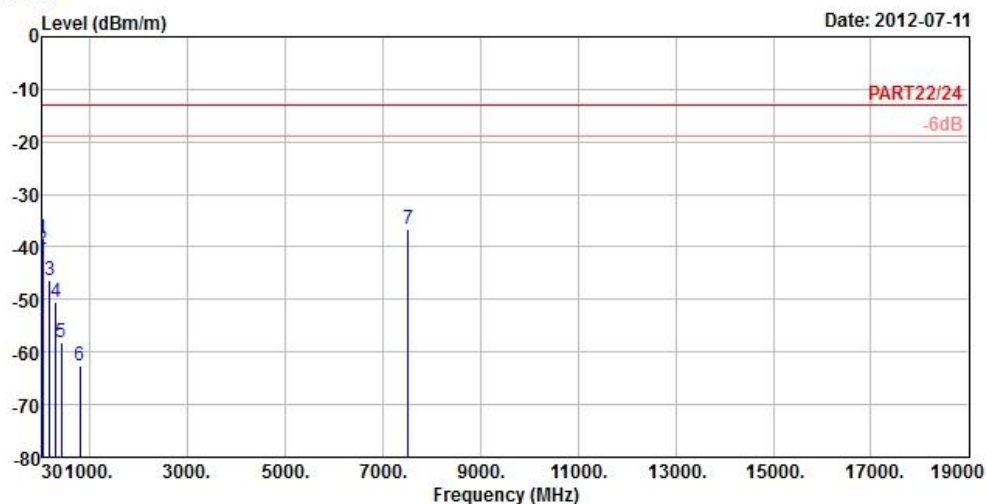

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 2_10M_(QPSK50,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	30.00	-38.42	-39.49	-13.00	-25.42	1.07	Peak
2	42.42	-40.35	-39.02	-13.00	-27.35	-1.33	Peak
3	170.40	-46.33	-39.61	-13.00	-33.33	-6.72	Peak
4	300.00	-50.39	-44.01	-13.00	-37.39	-6.38	Peak
5	416.20	-58.20	-52.98	-13.00	-45.20	-5.22	Peak
6	792.80	-62.62	-64.70	-13.00	-49.62	2.08	Peak
7 pp	7520.00	-36.72	-43.69	-13.00	-23.72	6.97	Peak



A D T

LTE BAND 2


CHANNEL BANDWIDTH: 10MHz / 16QAM



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

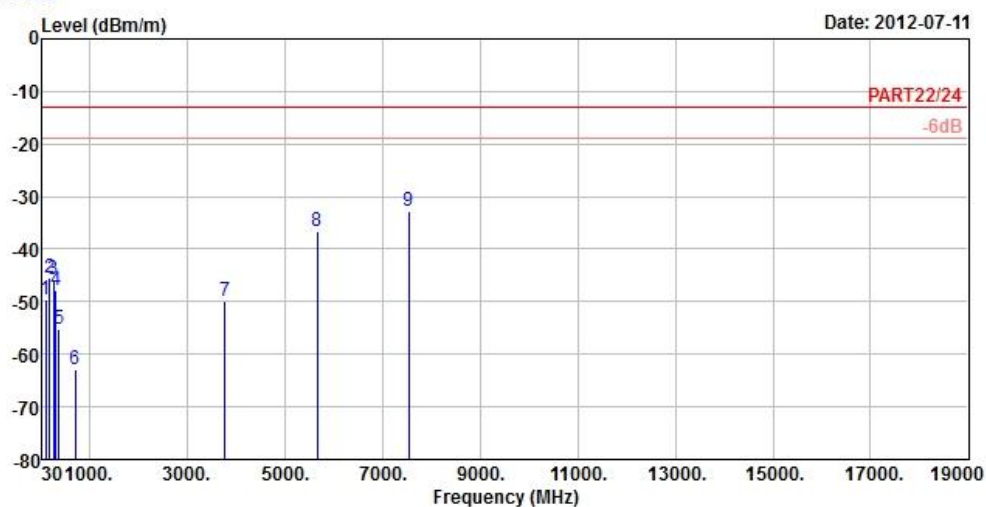

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 2_10M_(16QAM1,49)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Z

		Read	Limit	Over			
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	98.58	-49.70	-39.28	-13.00	-36.70	-10.42	Peak
2	171.75	-45.42	-38.69	-13.00	-32.42	-6.73	Peak
3	263.82	-45.65	-39.78	-13.00	-32.65	-5.87	Peak
4	306.30	-47.95	-41.62	-13.00	-34.95	-6.33	Peak
5	370.00	-55.08	-49.22	-13.00	-42.08	-5.86	Peak
6	699.70	-62.99	-64.42	-13.00	-49.99	1.43	Peak
7	3768.80	-49.78	-43.17	-13.00	-36.78	-6.61	Peak
8	5653.20	-36.69	-36.88	-13.00	-23.69	0.19	Peak
9 pp	7537.60	-32.75	-39.59	-13.00	-19.75	6.84	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

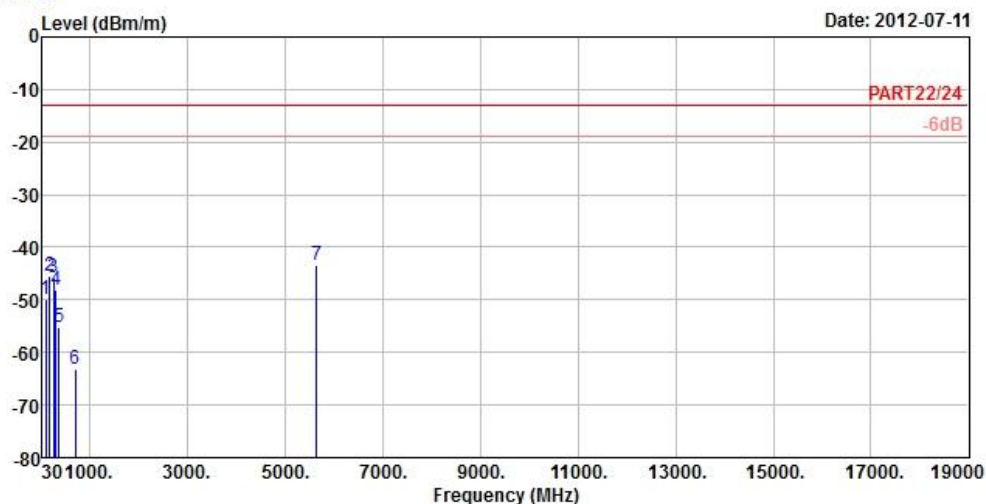

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 HORIZONTAL
Brand/Model: PM63100
Remark : LTE Band 2_10M_(16QAM50,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	98.31	-49.97	-39.53	-13.00	-36.97	-10.44	Peak
2	171.21	-45.38	-38.65	-13.00	-32.38	-6.73	Peak
3	263.55	-45.72	-39.85	-13.00	-32.72	-5.87	Peak
4	305.60	-47.99	-41.65	-13.00	-34.99	-6.34	Peak
5	365.80	-55.10	-49.21	-13.00	-42.10	-5.89	Peak
6	694.80	-63.16	-64.51	-13.00	-50.16	1.35	Peak
7 pp	5640.00	-43.50	-43.71	-13.00	-30.50	0.21	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

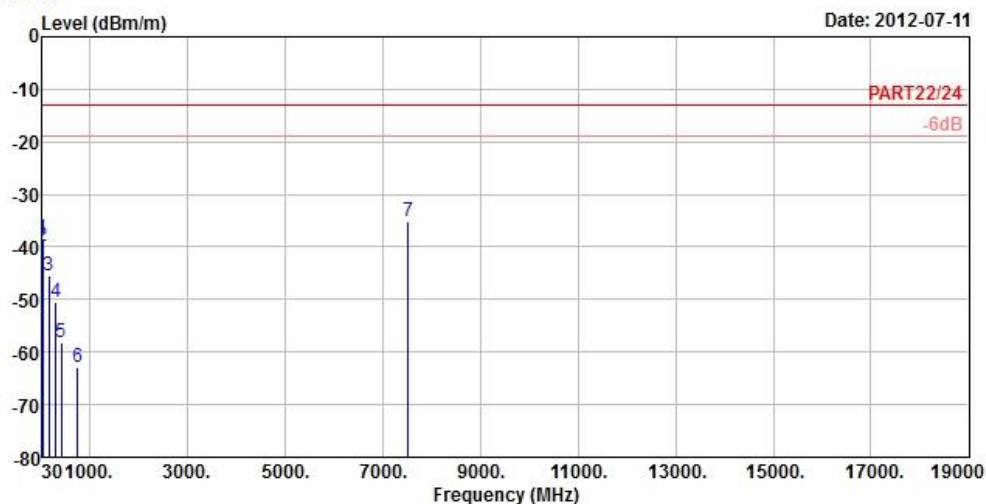

Site : 966 Chamber 5
Condition : PART22/24 3m EIRP_RSE_1G~19G_3 VERTICAL
Brand/Model: PM63100
Remark : LTE Band 2_10M_(16QAM50,0)
Tested by : Kay Wu
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	30.00	-38.27	-39.34	-13.00	-25.27	1.07	Peak
2	42.42	-39.82	-38.49	-13.00	-26.82	-1.33	Peak
3	165.54	-45.46	-38.84	-13.00	-32.46	-6.62	Peak
4	300.00	-50.46	-44.08	-13.00	-37.46	-6.38	Peak
5	408.50	-58.02	-52.60	-13.00	-45.02	-5.42	Peak
6	747.30	-62.83	-64.60	-13.00	-49.83	1.77	Peak
7 pp	7520.00	-35.10	-42.07	-13.00	-22.10	6.97	Peak



A D T

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END---