



FCC TEST REPORT (15.407)

REPORT NO.: RF130402C20-6
MODEL NO.: PO88100
FCC ID: NM8PO88100
RECEIVED: Apr. 02, 2013
TESTED: May 17, 2013 ~ May 27, 2013
ISSUED: May 30, 2013

APPLICANT: HTC Corporation

ADDRESS: 23, Xinghua Rd., Taoyuan 330, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan (R.O.C)

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT uncertainty	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.2.1 Test Mode Applicability and tested channel detail	9
3.3 DESCRIPTION OF SUPPORT UNITS	11
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST	11
3.4 Duty cycle of test signal	12
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	12
4. TEST TYPES AND RESULTS	13
4.1 Radiated Emission AND BANDEDGE Measurement	13
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	13
4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	13
4.1.3 TEST INSTRUMENTS	14
4.1.4 TEST PROCEDURES	15
4.1.5 DEVIATION FROM TEST STANDARD	15
4.1.6 TEST SETUP	16
4.1.7 EUT OPERATING CONDITION	16
4.1.8 Test RESULTS	17
4.2 CONDUCTED EMISSION MEASUREMENT	43
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	43
4.2.2 TEST INSTRUMENTS	43
4.2.3 TEST PROCEDURES	44
4.2.4 DEVIATION FROM TEST STANDARD	44
4.2.5 TEST SETUP	44
4.2.6 EUT OPERATING CONDITIONS	44
4.2.7 TEST RESULTS	45
4.3 Peak transmit power MEASUREMENT	47
4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	47
4.3.2 TEST SETUP	47
4.3.3 TEST INSTRUMENTS	47
4.3.4 TEST PROCEDURE	48
4.3.5 DEVIATION FROM TEST STANDARD	48
4.3.6 EUT OPERATING CONDITIONS	48
4.3.7 TEST RESULTS	49
4.4 PEAK power spectral density measurement	51
4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	51
4.4.2 TEST SETUP	51



A D T

4.4.3	TEST INSTRUMENTS	51
4.4.4	TEST PROCEDURES	52
4.4.5	DEVIATION FROM TEST STANDARD	52
4.4.6	EUT OPERATING CONDITIONS	52
4.4.7	TEST RESULTS	53
4.5	Peak power EXCURSION MEASUREMENT	55
4.5.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	55
4.5.2	TEST SETUP	55
4.5.3	TEST INSTRUMENTS	55
4.5.4	TEST PROCEDURE	55
4.5.5	DEVIATION FROM TEST STANDARD	55
4.5.6	EUT OPERATING CONDITIONS	55
4.5.7	TEST RESULTS	56
4.6	FREQUENCY STABILITY	59
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	59
4.6.2	TEST SETUP	59
4.6.3	TEST INSTRUMENTS	59
4.6.4	TEST PROCEDURE	60
4.6.5	DEVIATION FROM TEST STANDARD	60
4.6.6	EUT OPERATING CONDITION	60
4.6.7	TEST RESULTS	61
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	62
6.	INFORMATION ON THE TESTING LABORATORIES	63
7.	APPENDIX A - Modifications recorders for engineering changes to the eut BY THE LAB	64



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130402C20-6	Original release	May 30, 2013



1. CERTIFICATION

PRODUCT: Windows Phone
MODEL NO.: PO88100
BRAND: HTC
APPLICANT: HTC Corporation
TESTED: May 17, 2013 ~ May 27, 2013
TEST SAMPLE: PRODUCTION UNIT
STANDARDS: **FCC Part 15, Subpart E (Section 15.407)**
ANSI C63.10-2009

The above equipment (model: PO88100) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Ivonne Wu , **DATE** : May 30, 2013
Ivonne Wu / Senior Specialist

APPROVED BY : Sam Chen , **DATE** : May 30, 2013
Sam Chen / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.96dB at 13.55859MHz.
15.407(b/1/2/3) (b)(6)	Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -5.29dB at 30.27MHz.
15.407(a/1/2)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Windows Phone
MODEL NO.	PO88100
POWER SUPPLY	5.0Vdc (adapter or host equipment) 3.75Vdc (Li-ion battery)
MODULATION TYPE	64QAM, 16QAM, QPSK, BPSK
MODULATION TECHNOLOGY	OFDM
TRANSFER RATE	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to MCS7
OPERATING FREQUENCY	5180 ~ 5240MHz, 5260 ~ 5320MHz & 5500 ~ 5700MHz
NUMBER OF CHANNEL	5180 ~ 5240MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 5260 ~ 5320MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 5500 ~ 5700MHz: 8 for 802.11a, 802.11n (20MHz) 3 for 802.11n (40MHz)
OUTPUT POWER	35.810mW for 5180 ~ 5240MHz 35.975mW for 5260 ~ 5320MHz 45.290mW for 5500 ~ 5700MHz
ANTENNA TYPE	PIFA antenna with -3.66dBi gain (5180 ~ 5240MHz) PIFA antenna with -3.42dBi gain (5260 ~ 5320MHz) PIFA antenna with -3.64dBi gain (5500 ~ 5700MHz)
ANTENNA CONNECTOR	NA
DATA CABLE	Refer to Note as below
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Refer to Note as below

NOTE:

1. The EUT's accessories list refers to Ext. Pho.
2. The above EUT information is declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz

FOR 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
54	5270 MHz	62	5310 MHz

FOR 5500 ~ 5700MHz

8 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
100	5500MHz	116	5580MHz
104	5520MHz	132	5660MHz
108	5540MHz	136	5680MHz
112	5560MHz	140	5700MHz

3 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
102	5510MHz	134	5670MHz
110	5550MHz		

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G:** Radiated Emission above 1GHz **RE<1G:** Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM:** Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane** for 5180MHz~5240MHz & 5260MHz~5320MHz and **Z-plane** for 5500MHz~5700MHz.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	5180-5240	36 to 48	36, 44, 48	OFDM	BPSK	6.0
802.11n (20MHz)		36 to 48	36, 44, 48	OFDM	BPSK	MCS0
802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	MCS0
802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	MCS0
802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6.0
802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	MCS0
802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	MCS0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (20MHz)	5500-5700	100 to 140	116	OFDM	BPSK	MCS0

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (20MHz)	5500-5700	100 to 140	116	OFDM	BPSK	MCS0

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	5180-5240	36 to 48	36, 48	OFDM	BPSK	6.0
802.11n (20MHz)		36 to 48	36, 48	OFDM	BPSK	MCS0
802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
802.11a	5260-5320	52 to 64	52, 64	OFDM	BPSK	6.0
802.11n (20MHz)		52 to 64	52, 64	OFDM	BPSK	MCS0
802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	MCS0
802.11a	5500-5700	100 to 140	100, 140	OFDM	BPSK	6.0
802.11n (20MHz)		100 to 140	100, 140	OFDM	BPSK	MCS0
802.11n (40MHz)		102 to 134	102, 134	OFDM	BPSK	MCS0

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	5180-5240	36 to 48	36, 44, 48	OFDM	BPSK	6.0
802.11n (20MHz)		36 to 48	36, 44, 48	OFDM	BPSK	MCS0
802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	MCS0
802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	MCS0
802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6.0
802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	MCS0
802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	MCS0


TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	David Huang
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Kay Wu
PLC	25deg. C, 65%RH	120Vac, 60Hz	David Huang
APCM	25deg. C, 65%RH	120Vac, 60Hz	Phoenix Chen

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

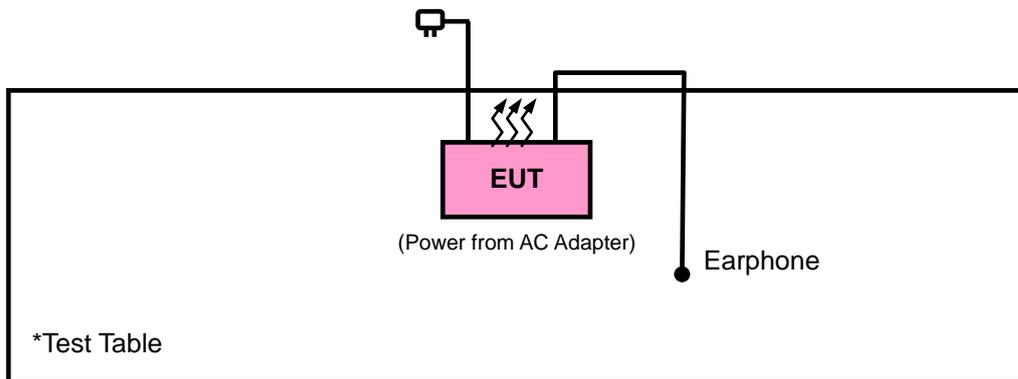

3.4 DUTY CYCLE OF TEST SIGNAL


Duty cycle of test signal is > 98 %, duty factor is not required.

802.11a: Duty cycle = $1.369/1.385 = 0.988$

802.11n (20MHz): Duty cycle = $1.272/1.292 = 0.984$

If duty cycle is < 98%, duty factor shall be considered.

802.11n (40MHz): Duty cycle = $608.97/644.23 = 0.945$, Duty factor = $10 * \log(1/0.945) = 0.24$

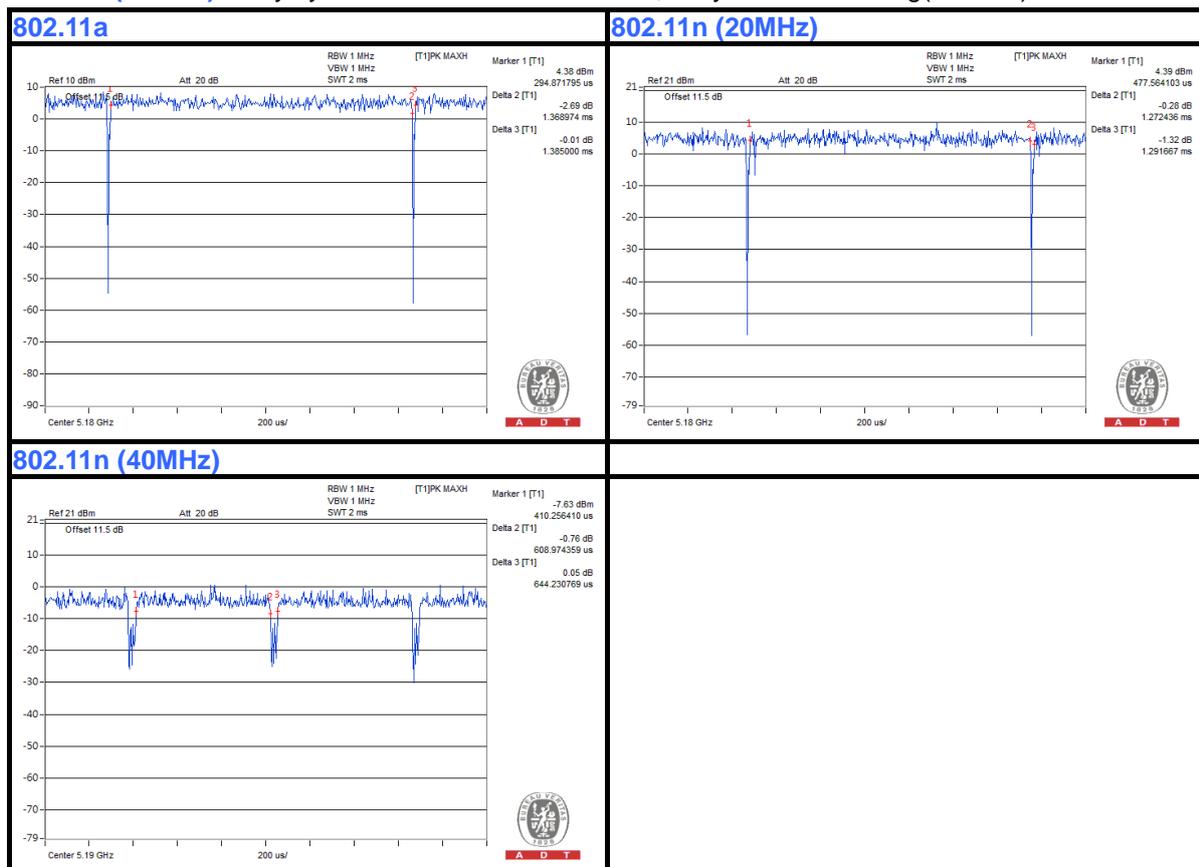

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

ANSI C63.10-2009

KDB 789033 D01 General UNII Test Procedures v01r02

All test items have been performed and recorded as per the above standards.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
	FIELD STRENGTH AT 3m (dBµV/m)	
	PK	AV
	74	54
√	EIRP LIMIT (dBm)	EQUIVALENT FIELD STRENGTH AT 3m (dBµV/m)
	PK	PK
	-27	68.3

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100744	Apr. 15, 2013	Apr. 14, 2014
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 17, 2012	Dec. 16, 2013
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Mar. 25, 2013	Mar. 24, 2014
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Jan. 07, 2013	Jan. 06, 2014
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 25, 2012	Dec. 24, 2013
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier EMCI	EMC 012645	980115	Dec. 28, 2012	Dec. 27, 2013
Preamplifier EMCI	EMC 184045	980116	Dec. 28, 2012	Dec. 27, 2013
Preamplifier EMCI	EMC 330H	980112	Dec. 28, 2012	Dec. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4	Oct. 19, 2012	Oct. 18, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 19, 2012	Oct. 18, 2013
RF signal cable Worken	RG-213	NA	Dec. 29, 2012	Dec. 28, 2013
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Power Meter	ML2495A	1232002	Aug. 10, 2012	Aug. 09, 2013
Power Sensor	MA2411B	1207325	Aug. 15, 2012	Aug. 14, 2013

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. The test was performed in HwaYa Chamber 10.
 4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 5. The FCC Site Registration No. is 690701.
 6. The IC Site Registration No. is IC 7450F-10.

4.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.5 DEVIATION FROM TEST STANDARD

No deviation.

4.1.6 TEST SETUP

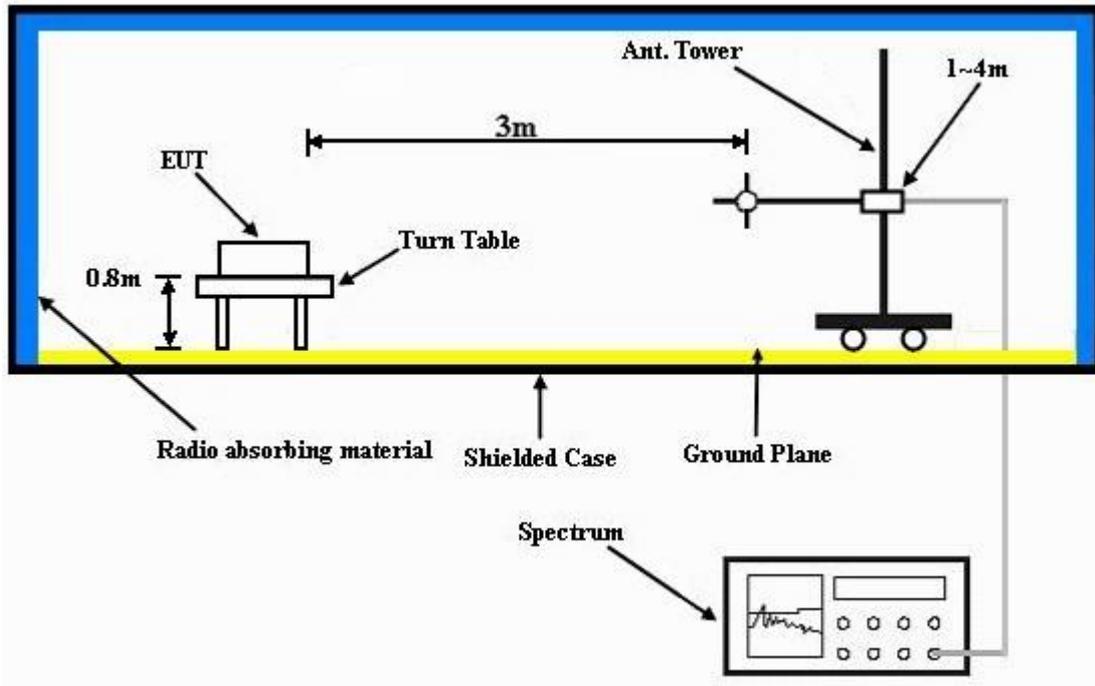

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.7 EUT OPERATING CONDITION

- a. Placed the EUT on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.



A D T

4.1.8 TEST RESULTS

ABOVE 1GHz DATA: 802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	38.33	40.63	54	-15.67	34.46	8.13	44.89	112	4	Average
5150	50.64	52.94	74	-23.36	34.46	8.13	44.89	112	4	Peak
5180	81.49	83.8			34.47	8.16	44.94	112	4	Average
5180	88.09	90.4			34.47	8.16	44.94	112	4	Peak
5414	35.78	37.87	54	-18.22	34.5	8.44	45.03	112	4	Average
5414	49.8	51.89	74	-24.2	34.5	8.44	45.03	112	4	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	42.12	44.42	54	-11.88	34.46	8.13	44.89	123	14	Average
5150	59.08	61.38	74	-14.92	34.46	8.13	44.89	123	14	Peak
5180	87.62	89.93			34.47	8.16	44.94	123	14	Average
5180	94.71	97.02			34.47	8.16	44.94	123	14	Peak
5378	36	38.12	54	-18	34.5	8.41	45.03	123	14	Average
5378	51.03	53.15	74	-22.97	34.5	8.41	45.03	123	14	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5180MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 44	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5094	36.22	38.51	54	-17.78	34.44	8.07	44.8	100	13	Average
5094	49.69	51.98	74	-24.31	34.44	8.07	44.8	100	13	Peak
5220	81.22	83.48			34.49	8.22	44.97	100	13	Average
5220	87.79	90.05			34.49	8.22	44.97	100	13	Peak
5424	35.98	38.03	54	-18.02	34.5	8.48	45.03	100	13	Average
5424	50.02	52.07	74	-23.98	34.5	8.48	45.03	100	13	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5068	36.01	38.41	54	-17.99	34.43	8.03	44.86	105	20	Average
5068	49.75	52.15	74	-24.25	34.43	8.03	44.86	105	20	Peak
5220	87.92	90.18			34.49	8.22	44.97	105	20	Average
5220	94.55	96.81			34.49	8.22	44.97	105	20	Peak
5440	35.83	37.87	54	-18.17	34.5	8.48	45.02	105	20	Average
5440	49.93	51.97	74	-24.07	34.5	8.48	45.02	105	20	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5220MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5088	36.08	38.41	54	-17.92	34.43	8.07	44.83	147	4	Average
5088	50.27	52.6	74	-23.73	34.43	8.07	44.83	147	4	Peak
5240	80.44	82.66			34.49	8.26	44.97	147	4	Average
5240	88.35	90.57			34.49	8.26	44.97	147	4	Peak
5448	36.09	38.09	54	-17.91	34.5	8.51	45.01	147	4	Average
5448	50.24	52.24	74	-23.76	34.5	8.51	45.01	147	4	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5040	36.06	38.53	54	-17.94	34.42	8	44.89	138	17	Average
5040	49.88	52.35	74	-24.12	34.42	8	44.89	138	17	Peak
5240	87.46	89.68			34.49	8.26	44.97	138	17	Average
5240	94.43	96.65			34.49	8.26	44.97	138	17	Peak
5434	36.24	38.28	54	-17.76	34.5	8.48	45.02	138	17	Average
5434	51.14	53.18	74	-22.86	34.5	8.48	45.02	138	17	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5240MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 52	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5112	36.21	38.49	54	-17.79	34.45	8.1	44.83	163	9	Average
5112	49.56	51.84	74	-24.44	34.45	8.1	44.83	163	9	Peak
5260	82.09	84.31			34.5	8.26	44.98	163	9	Average
5260	89.46	91.68			34.5	8.26	44.98	163	9	Peak
5460	36.07	38.07	54	-17.93	34.5	8.51	45.01	163	9	Average
5460	52.16	54.16	74	-21.84	34.5	8.51	45.01	163	9	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5092	36.17	38.46	54	-17.83	34.44	8.07	44.8	100	290	Average
5092	50.44	52.73	74	-23.56	34.44	8.07	44.8	100	290	Peak
5260	86.32	88.54			34.5	8.26	44.98	100	290	Average
5260	93.57	95.79			34.5	8.26	44.98	100	290	Peak
5364	35.98	38.12	54	-18.02	34.5	8.38	45.02	100	290	Average
5364	49.89	52.03	74	-24.11	34.5	8.38	45.02	100	290	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5260MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 60	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5072	36.04	38.41	54	-17.96	34.43	8.03	44.83	159	17	Average
5072	50.69	53.06	74	-23.31	34.43	8.03	44.83	159	17	Peak
5300	80.71	82.87			34.5	8.32	44.98	159	17	Average
5300	89.29	91.45			34.5	8.32	44.98	159	17	Peak
5452	36.25	38.25	54	-17.75	34.5	8.51	45.01	159	17	Average
5452	50.44	52.44	74	-23.56	34.5	8.51	45.01	159	17	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5114	36.22	38.5	54	-17.78	34.45	8.1	44.83	100	170	Average
5114	49.56	51.84	74	-24.44	34.45	8.1	44.83	100	170	Peak
5300	85.81	87.97			34.5	8.32	44.98	100	170	Average
5300	93.25	95.41			34.5	8.32	44.98	100	170	Peak
5354	37.3	39.43	54	-16.7	34.5	8.38	45.01	100	170	Average
5354	51.03	53.16	74	-22.97	34.5	8.38	45.01	100	170	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5300MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 64	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5074	36.03	38.4	54	-17.97	34.43	8.03	44.83	160	17	Average
5074	49.76	52.13	74	-24.24	34.43	8.03	44.83	160	17	Peak
5320	81.06	83.2			34.5	8.35	44.99	160	17	Average
5320	88.06	90.2			34.5	8.35	44.99	160	17	Peak
5420	37.29	39.34	54	-16.71	34.5	8.48	45.03	160	17	Average
5420	49.87	51.92	74	-24.13	34.5	8.48	45.03	160	17	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5066	36.01	38.41	54	-17.99	34.43	8.03	44.86	100	172	Average
5066	50.03	52.43	74	-23.97	34.43	8.03	44.86	100	172	Peak
5320	86.12	88.26			34.5	8.35	44.99	100	172	Average
5320	93.27	95.41			34.5	8.35	44.99	100	172	Peak
5350	40.39	42.52	54	-13.61	34.5	8.38	45.01	100	172	Average
5350	52.51	54.64	74	-21.49	34.5	8.38	45.01	100	172	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5320MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 100	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5450	37.21	39.21	54	-16.79	34.5	8.51	45.01	100	188	Average
5450	50.36	52.36	74	-23.64	34.5	8.51	45.01	100	188	Peak
5470	55.86	57.85	68.3	-12.44	34.5	8.51	45	100	188	Peak
5500	86.61	88.52			34.5	8.57	44.98	100	188	Average
5500	94.65	96.56			34.5	8.57	44.98	100	188	Peak
5725	49.14	50.59	68.3	-19.16	34.67	8.65	44.77	100	188	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	36.6	38.6	54	-17.4	34.5	8.51	45.01	103	193	Average
5460	49.97	51.97	74	-24.03	34.5	8.51	45.01	103	193	Peak
5470	51.56	53.55	68.3	-16.74	34.5	8.51	45	103	193	Peak
5500	86	87.91			34.5	8.57	44.98	103	193	Average
5500	93.16	95.07			34.5	8.57	44.98	103	193	Peak
5725	48.85	50.3	68.3	-19.45	34.67	8.65	44.77	103	193	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5500MHz: Fundamental frequency.
3. 5470MHz & 5725MHz: Out of restricted band



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 116	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5432	35.96	38	54	-18.04	34.5	8.48	45.02	100	186	Average
5432	50.51	52.55	74	-23.49	34.5	8.48	45.02	100	186	Peak
5470	48.12	50.11	68.3	-20.18	34.5	8.51	45	100	186	Peak
5580	87.27	88.99			34.57	8.6	44.89	100	186	Average
5580	94.49	96.21			34.57	8.6	44.89	100	186	Peak
5725	47.7	49.15	68.3	-20.6	34.67	8.65	44.77	100	186	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5350	35.82	37.95	54	-18.18	34.5	8.38	45.01	102	193	Average
5350	49.91	52.04	74	-24.09	34.5	8.38	45.01	102	193	Peak
5470	48.66	50.65	68.3	-19.64	34.5	8.51	45	102	193	Peak
5580	85.83	87.55			34.57	8.6	44.89	102	193	Average
5580	93.8	95.52			34.57	8.6	44.89	102	193	Peak
5725	48.74	50.19	68.3	-19.56	34.67	8.65	44.77	102	193	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5580MHz: Fundamental frequency.
3. 5470MHz & 5725MHz: Out of restricted band



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 140	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5428	36.25	38.3	54	-17.75	34.5	8.48	45.03	106	174	Average
5428	50.88	52.93	74	-23.12	34.5	8.48	45.03	106	174	Peak
5470	49.14	51.13	68.3	-19.16	34.5	8.51	45	106	174	Peak
5700	87.37	88.86			34.66	8.64	44.79	106	174	Average
5700	95.28	96.77			34.66	8.64	44.79	106	174	Peak
5725	59.97	61.42	68.3	-8.33	34.67	8.65	44.77	106	174	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5458	35.96	37.96	54	-18.04	34.5	8.51	45.01	104	221	Average
5458	51.38	53.38	74	-22.62	34.5	8.51	45.01	104	221	Peak
5470	48.32	50.31	68.3	-19.98	34.5	8.51	45	104	221	Peak
5700	85.68	87.17			34.66	8.64	44.79	104	221	Average
5700	93.45	94.94			34.66	8.64	44.79	104	221	Peak
5725	55.93	57.38	68.3	-12.37	34.67	8.65	44.77	104	221	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5700MHz: Fundamental frequency.
3. 5470MHz & 5725MHz: Out of restricted band



802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	39.01	41.31	54	-14.99	34.46	8.13	44.89	112	3	Average
5150	51.44	53.74	74	-22.56	34.46	8.13	44.89	112	3	Peak
5180	81.99	84.3			34.47	8.16	44.94	112	3	Average
5180	88.48	90.79			34.47	8.16	44.94	112	3	Peak
5430	36.1	38.14	54	-17.9	34.5	8.48	45.02	112	3	Average
5430	50.07	52.11	74	-23.93	34.5	8.48	45.02	112	3	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	42.64	44.94	54	-11.36	34.46	8.13	44.89	107	20	Average
5150	54.69	56.99	74	-19.31	34.46	8.13	44.89	107	20	Peak
5180	88.02	90.33			34.47	8.16	44.94	107	20	Average
5180	95.11	97.42			34.47	8.16	44.94	107	20	Peak
5418	36.12	38.21	54	-17.88	34.5	8.44	45.03	107	20	Average
5418	51.24	53.33	74	-22.76	34.5	8.44	45.03	107	20	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5180MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 44	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5140	36.14	38.45	54	-17.86	34.45	8.13	44.89	164	9	Average
5140	49.74	52.05	74	-24.26	34.45	8.13	44.89	164	9	Peak
5220	82.55	84.81			34.49	8.22	44.97	164	9	Average
5220	89.87	92.13			34.49	8.22	44.97	164	9	Peak
5432	35.84	37.88	54	-18.16	34.5	8.48	45.02	164	9	Average
5432	50.46	52.5	74	-23.54	34.5	8.48	45.02	164	9	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5122	36.29	38.57	54	-17.71	34.45	8.1	44.83	106	20	Average
5122	50.22	52.5	74	-23.78	34.45	8.1	44.83	106	20	Peak
5220	87.97	90.23			34.49	8.22	44.97	106	20	Average
5220	94.41	96.67			34.49	8.22	44.97	106	20	Peak
5452	36.08	38.08	54	-17.92	34.5	8.51	45.01	106	20	Average
5452	50.53	52.53	74	-23.47	34.5	8.51	45.01	106	20	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5220MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5066	36	38.4	54	-18	34.43	8.03	44.86	148	0	Average
5066	49.81	52.21	74	-24.19	34.43	8.03	44.86	148	0	Peak
5240	80.62	82.84			34.49	8.26	44.97	148	0	Average
5240	87.07	89.29			34.49	8.26	44.97	148	0	Peak
5408	36.05	38.15	54	-17.95	34.5	8.44	45.04	148	0	Average
5408	50.5	52.6	74	-23.5	34.5	8.44	45.04	148	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5070	36.03	38.43	54	-17.97	34.43	8.03	44.86	107	19	Average
5070	50.38	52.78	74	-23.62	34.43	8.03	44.86	107	19	Peak
5240	87.76	89.98			34.49	8.26	44.97	107	19	Average
5240	94.99	97.21			34.49	8.26	44.97	107	19	Peak
5424	35.89	37.94	54	-18.11	34.5	8.48	45.03	107	19	Average
5424	51.07	53.12	74	-22.93	34.5	8.48	45.03	107	19	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5240MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 52	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5066	35.99	38.39	54	-18.01	34.43	8.03	44.86	100	13	Average
5066	50.78	53.18	74	-23.22	34.43	8.03	44.86	100	13	Peak
5260	80.41	82.63			34.5	8.26	44.98	100	13	Average
5260	87.74	89.96			34.5	8.26	44.98	100	13	Peak
5380	35.99	38.11	54	-18.01	34.5	8.41	45.03	100	13	Average
5380	50.53	52.65	74	-23.47	34.5	8.41	45.03	100	13	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5142	36.24	38.54	54	-17.76	34.46	8.13	44.89	100	291	Average
5142	49.65	51.95	74	-24.35	34.46	8.13	44.89	100	291	Peak
5260	86.37	88.59			34.5	8.26	44.98	100	291	Average
5260	93.59	95.81			34.5	8.26	44.98	100	291	Peak
5422	36.09	38.14	54	-17.91	34.5	8.48	45.03	100	291	Average
5422	50.64	52.69	74	-23.36	34.5	8.48	45.03	100	291	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5260MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 60	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5056	36.14	38.54	54	-17.86	34.43	8.03	44.86	159	7	Average
5056	50.01	52.41	74	-23.99	34.43	8.03	44.86	159	7	Peak
5300	80.56	82.72			34.5	8.32	44.98	159	7	Average
5300	87.7	89.86			34.5	8.32	44.98	159	7	Peak
5392	36.07	38.19	54	-17.93	34.5	8.41	45.03	159	7	Average
5392	50.34	52.46	74	-23.66	34.5	8.41	45.03	159	7	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5050	36.02	38.49	54	-17.98	34.42	8	44.89	101	298	Average
5050	49.71	52.18	74	-24.29	34.42	8	44.89	101	298	Peak
5300	86.31	88.47			34.5	8.32	44.98	101	298	Average
5300	93.59	95.75			34.5	8.32	44.98	101	298	Peak
5456	37.36	39.36	54	-16.64	34.5	8.51	45.01	101	298	Average
5456	50.44	52.44	74	-23.56	34.5	8.51	45.01	101	298	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5300MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 64	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5112	36.1	38.38	54	-17.9	34.45	8.1	44.83	158	18	Average
5112	49.42	51.7	74	-24.58	34.45	8.1	44.83	158	18	Peak
5320	80.68	82.82			34.5	8.35	44.99	158	18	Average
5320	87.6	89.74			34.5	8.35	44.99	158	18	Peak
5388	37.6	39.72	54	-16.4	34.5	8.41	45.03	158	18	Average
5388	50.43	52.55	74	-23.57	34.5	8.41	45.03	158	18	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5098	36.09	38.38	54	-17.91	34.44	8.07	44.8	100	290	Average
5098	49.24	51.53	74	-24.76	34.44	8.07	44.8	100	290	Peak
5320	86.63	88.77			34.5	8.35	44.99	100	290	Average
5320	93.74	95.88			34.5	8.35	44.99	100	290	Peak
5350	40.72	42.85	54	-13.28	34.5	8.38	45.01	100	290	Average
5350	55.4	57.53	74	-18.6	34.5	8.38	45.01	100	290	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5320MHz: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 100	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5450	37.82	39.82	54	-16.18	34.5	8.51	45.01	100	197	Average
5450	50.97	52.97	74	-23.03	34.5	8.51	45.01	100	197	Peak
5470	51.54	53.53	68.3	-16.76	34.5	8.51	45	100	197	Peak
5500	86.44	88.35			34.5	8.57	44.98	100	197	Average
5500	94.19	96.1			34.5	8.57	44.98	100	197	Peak
5725	48.36	49.81	68.3	-19.94	34.67	8.65	44.77	100	197	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	37.1	39.1	54	-16.9	34.5	8.51	45.01	104	194	Average
5460	50.42	52.42	74	-23.58	34.5	8.51	45.01	104	194	Peak
5470	51.75	53.74	68.3	-16.55	34.5	8.51	45	104	194	Peak
5500	85.63	87.54			34.5	8.57	44.98	104	194	Average
5500	93.29	95.2			34.5	8.57	44.98	104	194	Peak
5725	47.86	49.31	68.3	-20.44	34.67	8.65	44.77	104	194	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5500MHz: Fundamental frequency.
3. 5470MHz & 5725MHz: Out of restricted band



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 116	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5350	35.92	38.05	54	-18.08	34.5	8.38	45.01	100	193	Average
5350	47.94	50.07	74	-26.06	34.5	8.38	45.01	100	193	Peak
5470	47.94	49.93	68.3	-20.36	34.5	8.51	45	100	193	Peak
5580	87.01	88.73			34.57	8.6	44.89	100	193	Average
5580	94.53	96.25			34.57	8.6	44.89	100	193	Peak
5725	48.64	50.09	68.3	-19.66	34.67	8.65	44.77	100	193	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5438	35.96	38	54	-18.04	34.5	8.48	45.02	102	196	Average
5438	49.75	51.79	74	-24.25	34.5	8.48	45.02	102	196	Peak
5470	50.63	52.62	68.3	-17.67	34.5	8.51	45	102	196	Peak
5580	86.67	88.39			34.57	8.6	44.89	102	196	Average
5580	94.05	95.77			34.57	8.6	44.89	102	196	Peak
5725	49.73	51.18	68.3	-18.57	34.67	8.65	44.77	102	196	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5580MHz: Fundamental frequency.
3. 5470MHz & 5725MHz: Out of restricted band



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 140	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	36.08	38.08	54	-17.92	34.5	8.51	45.01	106	188	Average
5460	50.39	52.39	74	-23.61	34.5	8.51	45.01	106	188	Peak
5470	49.54	51.53	68.3	-18.76	34.5	8.51	45	106	188	Peak
5700	87.38	88.87			34.66	8.64	44.79	106	188	Average
5700	94.67	96.16			34.66	8.64	44.79	106	188	Peak
5725	61.43	62.88	68.3	-6.87	34.67	8.65	44.77	106	188	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5428	36.14	38.19	54	-17.86	34.5	8.48	45.03	100	201	Average
5428	49.67	51.72	74	-24.33	34.5	8.48	45.03	100	201	Peak
5470	48.63	50.62	68.3	-19.67	34.5	8.51	45	100	201	Peak
5700	85.87	87.36			34.66	8.64	44.79	100	201	Average
5700	93.41	94.9			34.66	8.64	44.79	100	201	Peak
5725	58.98	60.43	68.3	-9.32	34.67	8.65	44.77	100	201	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5700MHz: Fundamental frequency.
3. 5470MHz & 5725MHz: Out of restricted band



802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 38	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	41.42	43.72	54	-12.58	34.46	8.13	44.89	150	10	Average
5150	51.84	54.14	74	-22.16	34.46	8.13	44.89	150	10	Peak
5190	76.92	79.2			34.47	8.19	44.94	150	10	Average
5190	83.74	86.02			34.47	8.19	44.94	150	10	Peak
5460	36.48	38.48	54	-17.52	34.5	8.51	45.01	150	10	Average
5460	50.06	52.06	74	-23.94	34.5	8.51	45.01	150	10	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	46.7	49	54	-7.3	34.46	8.13	44.89	122	14	Average
5150	57.38	59.68	74	-16.62	34.46	8.13	44.89	122	14	Peak
5190	83.25	85.53			34.47	8.19	44.94	122	14	Average
5190	89.75	92.03			34.47	8.19	44.94	122	14	Peak
5428	36.34	38.39	54	-17.66	34.5	8.48	45.03	122	14	Average
5428	50.72	52.77	74	-23.28	34.5	8.48	45.03	122	14	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5190MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5064	36.32	38.72	54	-17.68	34.43	8.03	44.86	165	10	Average
5064	50.51	52.91	74	-23.49	34.43	8.03	44.86	165	10	Peak
5230	77.14	79.4			34.49	8.22	44.97	165	10	Average
5230	83.9	86.16			34.49	8.22	44.97	165	10	Peak
5448	36.48	38.48	54	-17.52	34.5	8.51	45.01	165	10	Average
5448	51.18	53.18	74	-22.82	34.5	8.51	45.01	165	10	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5040	36.72	39.19	54	-17.28	34.42	8	44.89	105	20	Average
5040	49.8	52.27	74	-24.2	34.42	8	44.89	105	20	Peak
5230	82.44	84.7			34.49	8.22	44.97	105	20	Average
5230	89.5	91.76			34.49	8.22	44.97	105	20	Peak
5388	36.26	38.38	54	-17.74	34.5	8.41	45.03	105	20	Average
5388	50.34	52.46	74	-23.66	34.5	8.41	45.03	105	20	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5230MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 54	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5114	36.46	38.74	54	-17.54	34.45	8.1	44.83	145	9	Average
5114	49.28	51.56	74	-24.72	34.45	8.1	44.83	145	9	Peak
5270	75.95	78.14			34.5	8.29	44.98	145	9	Average
5270	83.49	85.68			34.5	8.29	44.98	145	9	Peak
5460	36.49	38.49	54	-17.51	34.5	8.51	45.01	145	9	Average
5460	50.59	52.59	74	-23.41	34.5	8.51	45.01	145	9	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5106	36.61	38.92	54	-17.39	34.45	8.07	44.83	100	289	Average
5106	49.65	51.96	74	-24.35	34.45	8.07	44.83	100	289	Peak
5270	82.19	84.38			34.5	8.29	44.98	100	289	Average
5270	89.77	91.96			34.5	8.29	44.98	100	289	Peak
5436	36.3	38.34	54	-17.7	34.5	8.48	45.02	100	289	Average
5436	50.56	52.6	74	-23.44	34.5	8.48	45.02	100	289	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5270MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 62	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5016	36.25	38.81	54	-17.75	34.41	7.97	44.94	160	18	Average
5016	50.68	53.24	74	-23.32	34.41	7.97	44.94	160	18	Peak
5310	75.9	78.07			34.5	8.32	44.99	160	18	Average
5310	82.59	84.76			34.5	8.32	44.99	160	18	Peak
5352	40.96	43.09	54	-13.04	34.5	8.38	45.01	160	18	Average
5352	52.55	54.68	74	-21.45	34.5	8.38	45.01	160	18	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5110	36.54	38.82	54	-17.46	34.45	8.1	44.83	100	289	Average
5110	50.21	52.49	74	-23.79	34.45	8.1	44.83	100	289	Peak
5310	81.56	83.73			34.5	8.32	44.99	100	289	Average
5310	88.81	90.98			34.5	8.32	44.99	100	289	Peak
5350	46.62	48.75	54	-7.38	34.5	8.38	45.01	100	289	Average
5350	58.85	60.98	74	-15.15	34.5	8.38	45.01	100	289	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5310MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 102	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5430	38.45	40.49	54	-15.55	34.5	8.48	45.02	100	189	Average
5430	50.9	52.94	74	-23.1	34.5	8.48	45.02	100	189	Peak
5470	54.22	56.21	68.3	-14.08	34.5	8.51	45	100	189	Peak
5510	80.65	82.55			34.51	8.57	44.98	100	189	Average
5510	88.33	90.23			34.51	8.57	44.98	100	189	Peak
5725	48.53	49.98	68.3	-19.77	34.67	8.65	44.77	100	189	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5384	37.33	39.45	54	-16.67	34.5	8.41	45.03	103	193	Average
5384	49.87	51.99	74	-24.13	34.5	8.41	45.03	103	193	Peak
5470	53.94	55.93	68.3	-14.36	34.5	8.51	45	103	193	Peak
5510	79.83	81.73			34.51	8.57	44.98	103	193	Average
5510	86.98	88.88			34.51	8.57	44.98	103	193	Peak
5725	47.25	48.7	68.3	-21.05	34.67	8.65	44.77	103	193	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5510MHz: Fundamental frequency.
3. 5470MHz & 5725MHz: Out of restricted band



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 110	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5446	36.66	38.66	54	-17.34	34.5	8.51	45.01	100	201	Average
5446	50.5	52.5	74	-23.5	34.5	8.51	45.01	100	201	Peak
5470	48.99	50.98	68.3	-19.31	34.5	8.51	45	100	201	Peak
5550	80.52	82.3			34.54	8.59	44.91	100	201	Average
5550	88.76	90.54			34.54	8.59	44.91	100	201	Peak
5725	48.67	50.12	68.3	-19.63	34.67	8.65	44.77	100	201	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5412	36.33	38.42	54	-17.67	34.5	8.44	45.03	102	198	Average
5412	50.41	52.5	74	-23.59	34.5	8.44	45.03	102	198	Peak
5470	49.74	51.73	68.3	-18.56	34.5	8.51	45	102	198	Peak
5550	80.22	82			34.54	8.59	44.91	102	198	Average
5550	88.12	89.9			34.54	8.59	44.91	102	198	Peak
5725	49.2	50.65	68.3	-19.1	34.67	8.65	44.77	102	198	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5550MHz: Fundamental frequency.
3. 5470MHz & 5725MHz: Out of restricted band



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 134	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5438	36.49	38.53	54	-17.51	34.5	8.48	45.02	107	175	Average
5438	49.49	51.53	74	-24.51	34.5	8.48	45.02	107	175	Peak
5470	47.38	49.37	68.3	-20.92	34.5	8.51	45	107	175	Peak
5670	82.02	83.56			34.63	8.63	44.8	107	175	Average
5670	88.76	90.3			34.63	8.63	44.8	107	175	Peak
5725	49.37	50.82	68.3	-18.93	34.67	8.65	44.77	107	175	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5448	36.27	38.27	54	-17.73	34.5	8.51	45.01	100	193	Average
5448	50.15	52.15	74	-23.85	34.5	8.51	45.01	100	193	Peak
5470	49.83	51.82	68.3	-18.47	34.5	8.51	45	100	193	Peak
5670	81.66	83.2			34.63	8.63	44.8	100	193	Average
5670	88.03	89.57			34.63	8.63	44.8	100	193	Peak
5725	50.99	52.44	68.3	-17.31	34.67	8.65	44.77	100	193	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 5670MHz: Fundamental frequency.
3. 5470MHz & 5725MHz: Out of restricted band



A D T

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 116	FREQUENCY RANGE	30MHz ~ 1GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
55.65	27.44	45.52	40	-12.56	12.45	0.8	31.33	100	360	Peak
111.81	26.33	46.86	43.5	-17.17	10.18	1.14	31.85	100	360	Peak
172.29	25.9	44.73	43.5	-17.6	11.47	1.46	31.76	100	360	Peak
371.4	26.6	41.55	46	-19.4	14.66	2.31	31.92	100	0	Peak
467.3	27.19	39.76	46	-18.81	16.68	2.67	31.92	100	0	Peak
659.1	27.02	35.36	46	-18.98	20.33	3.28	31.95	100	0	Peak
ANTENNA POLARITY & test distance: VERTICAL at 3 m										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
30.27	34.71	53.3	40	-5.29	11.98	0.57	31.14	100	360	Peak
41.88	34.4	51.21	40	-5.6	13.56	0.68	31.05	100	139	QP
109.11	25.42	46.15	43.5	-18.08	9.99	1.12	31.84	100	360	Peak
393.8	22.33	36.82	46	-23.67	15.19	2.4	32.08	100	0	Peak
479.9	27.59	39.8	46	-18.41	16.93	2.71	31.85	100	0	Peak
563.2	25.68	35.99	46	-20.32	18.77	2.99	32.07	100	0	Peak

REMARKS: Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 09, 2012	Nov. 08, 2013
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 28, 2012	Dec. 27, 2013
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 21, 2012	Dec. 20, 2013
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 06, 2012	Jul. 05, 2013
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

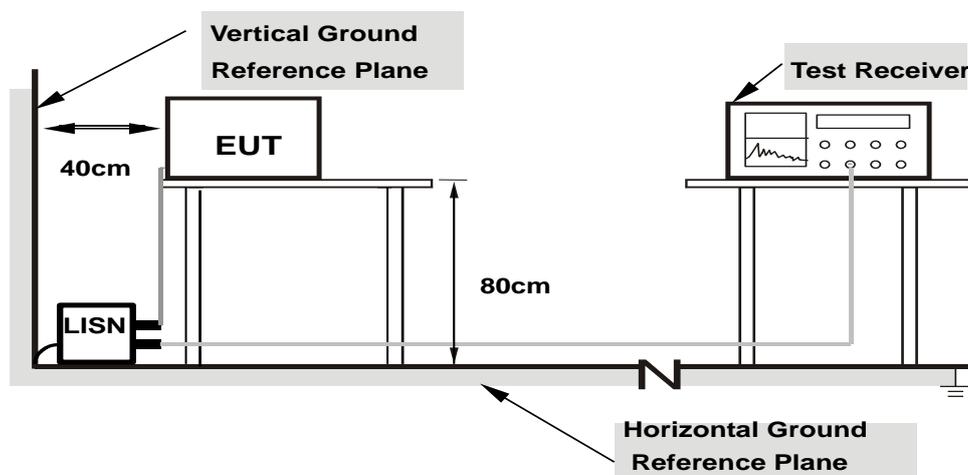

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA : 802.11n (20MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
	[MHz]		[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18125	0.12	36.96	25.70	37.08	25.82	64.43	54.43	-27.35	-28.61
2	0.38047	0.15	40.23	32.92	40.38	33.07	58.27	48.27	-17.89	-15.20
3	0.92344	0.20	42.63	31.80	42.83	32.00	56.00	46.00	-13.17	-14.00
4	2.05469	0.23	43.20	34.41	43.43	34.64	56.00	46.00	-12.57	-11.36
5	8.91406	0.60	37.40	28.12	38.00	28.72	60.00	50.00	-22.00	-21.28
6	13.55859	0.86	41.89	38.18	42.75	39.04	60.00	50.00	-17.25	-10.96

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

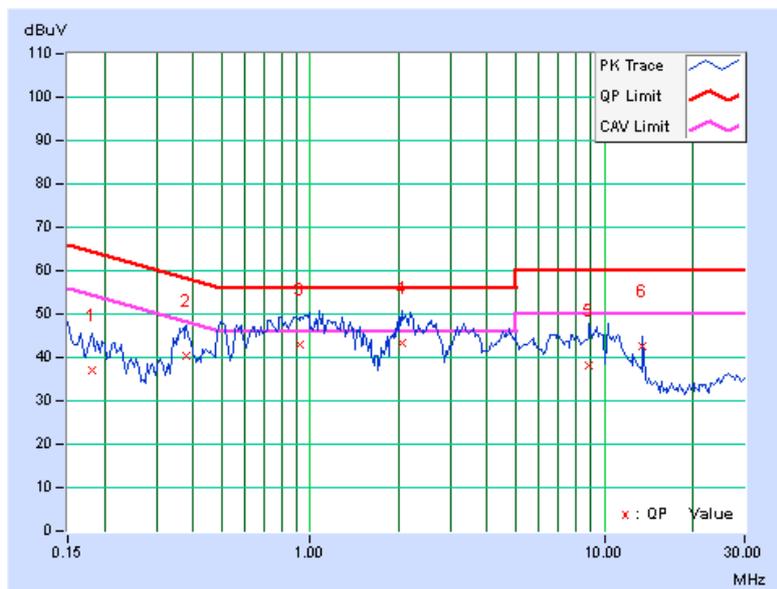




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.18906	0.17	34.76	21.34	34.93	21.51	64.08
2	0.38828	0.21	36.54	26.90	36.75	27.11	58.10	48.10	-21.35	-20.99
3	0.97813	0.25	41.14	31.40	41.39	31.65	56.00	46.00	-14.61	-14.35
4	3.53125	0.36	39.66	31.08	40.02	31.44	56.00	46.00	-15.98	-14.56
5	9.91797	0.59	36.36	28.73	36.95	29.32	60.00	50.00	-23.05	-20.68
6	13.55859	0.71	41.20	37.87	41.91	38.58	60.00	50.00	-18.09	-11.42

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

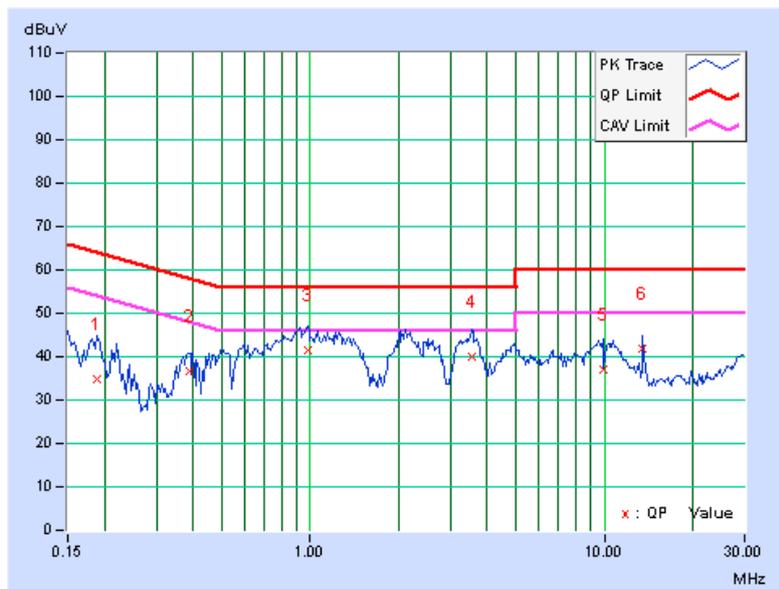

4.3 PEAK TRANSMIT POWER MEASUREMENT


4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

FREQUENCY BAND	LIMIT
5.150 ~ 5.250GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.250 ~ 5.350GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.470 ~ 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB


NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST SETUP

FOR POWER OUTPUT MEASUREMENT

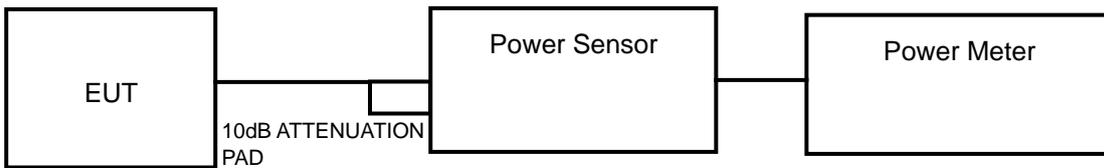

FOR 26dB BANDWIDTH

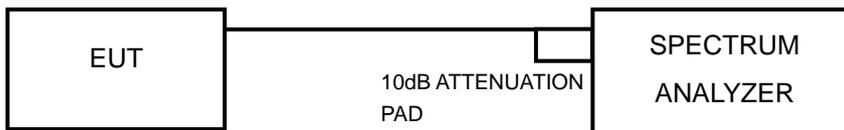

4.3.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.3.4 TEST PROCEDURE

FOR AVERAGE POWER MEASUREMENT

<802.11a, 802.11n (20MHz) >

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

<802.11n (40MHz)>

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is added to measured value.

FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 TEST RESULTS

POWER OUTPUT: 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	35.481	15.50	17	PASS
44	5220	35.237	15.47	17	PASS
48	5240	35.318	15.48	17	PASS
52	5260	35.237	15.47	24	PASS
60	5300	35.563	15.51	24	PASS
64	5320	35.156	15.46	24	PASS
100	5500	41.591	16.19	24	PASS
116	5580	44.875	16.52	24	PASS
140	5700	38.107	15.81	24	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	35.318	15.48	17	PASS
44	5220	35.645	15.52	17	PASS
48	5240	35.810	15.54	17	PASS
52	5260	35.727	15.53	24	PASS
60	5300	35.645	15.52	24	PASS
64	5320	35.975	15.56	24	PASS
100	5500	42.073	16.24	24	PASS
116	5580	45.290	16.56	24	PASS
140	5700	38.282	15.83	24	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
38	5190	19.543	12.91	17	PASS
46	5230	19.364	12.87	17	PASS
54	5270	19.724	12.95	24	PASS
62	5310	19.770	12.96	24	PASS
102	5510	22.131	13.45	24	PASS
110	5550	22.594	13.54	24	PASS
134	5670	21.900	13.40	24	PASS



26dB BANDWIDTH: 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	PASS / FAIL
36	5180	44.11	PASS
44	5220	44.04	PASS
48	5240	42.79	PASS
52	5260	44.12	PASS
60	5300	44.41	PASS
64	5320	44.28	PASS
100	5500	27.82	PASS
116	5580	39.32	PASS
140	5700	46.11	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	PASS / FAIL
36	5180	46.90	PASS
44	5220	47.07	PASS
48	5240	46.91	PASS
52	5260	47.17	PASS
60	5300	47.21	PASS
64	5320	47.18	PASS
100	5500	26.55	PASS
116	5580	43.13	PASS
140	5700	47.88	PASS

802.11n (40MHz)


CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	PASS / FAIL
38	5190	69.46	PASS
46	5230	67.14	PASS
54	5270	68.57	PASS
62	5310	69.97	PASS
102	5510	46.11	PASS
110	5550	46.17	PASS
134	5670	46.21	PASS

4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

FREQUENCY BAND	LIMIT
5.150 ~ 5.250GHz	4dBm
5.250 ~ 5.350GHz	11dBm
5.470 ~ 5.725GHz	11dBm

4.4.2 TEST SETUP

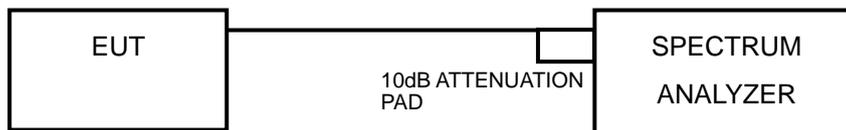

4.4.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.4.4 TEST PROCEDURES

<802.11a, 802.11n (20MHz)>

Using method SA-2 alternative

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- 3) Sweep time = 7second.
- 4) Perform a single sweep.
- 5) Record the max value

<802.11n (40MHz)>

Using method SA-2 alternative

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- 3) Sweep time = 7second.
- 4) Perform a single sweep.
- 5) Record the max value and add $10 \log (1/\text{duty cycle})$

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6.



4.4.7 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
36	5180	3.14	4	PASS
44	5220	3.22	4	PASS
48	5240	3.31	4	PASS
52	5260	3.44	11	PASS
60	5300	3.60	11	PASS
64	5320	3.62	11	PASS
100	5500	0.71	11	PASS
116	5580	1.19	11	PASS
140	5700	3.73	11	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
36	5180	2.86	4	PASS
44	5220	2.93	4	PASS
48	5240	2.98	4	PASS
52	5260	3.14	11	PASS
60	5300	3.30	11	PASS
64	5320	3.38	11	PASS
100	5500	0.39	11	PASS
116	5580	0.94	11	PASS
140	5700	3.44	11	PASS



802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	PSD W/O DUTY FACTOR (dBm)	DUTY FACTOR	PSD WITH DUTY FACTOR (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
38	5190	-2.44	0.24	-2.20	4	PASS
46	5230	-2.43	0.24	-2.19	4	PASS
54	5270	-2.10	0.24	-1.86	11	PASS
62	5310	-1.97	0.24	-1.73	11	PASS
102	5510	-5.76	0.24	-5.52	11	PASS
110	5550	-5.60	0.24	-5.36	11	PASS
134	5670	-6.55	0.24	-6.31	11	PASS


NOTE: Refer to section 3.3 for duty cycle spectrum plot.

4.5 PEAK POWER EXCURSION MEASUREMENT

4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Shall not exceed 13 dB.

4.5.2 TEST SETUP

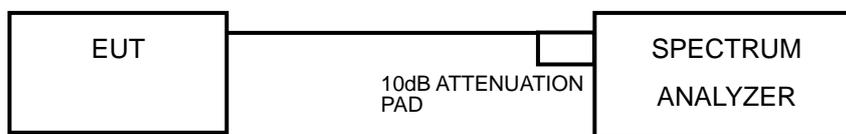

4.5.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.5.4 TEST PROCEDURE

- 1) Set RBW = 1 MHz, VBW \geq 3 MHz, Detector = peak.
- 2) Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
- 3) Use the peak search function to find the peak of the spectrum.
- 4) Measure the PPSD.
- 5) Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.


4.5.6 EUT OPERATING CONDITIONS

Same as 4.2.6

4.5.7 TEST RESULTS

802.11a

CHAN.	CHANNEL FREQUENCY (MHz)	PEAK VALUE (dBm)	PPSD (dBm)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
36	5180	12.55	3.14	9.41	13	PASS
44	5220	12.27	3.22	9.05	13	PASS
48	5240	12.66	3.31	9.35	13	PASS
52	5260	12.90	3.44	9.46	13	PASS
60	5300	12.62	3.60	9.02	13	PASS
64	5320	12.69	3.62	9.07	13	PASS
100	5500	9.96	0.71	9.25	13	PASS
116	5580	10.74	1.19	9.55	13	PASS
140	5700	12.84	3.73	9.11	13	PASS

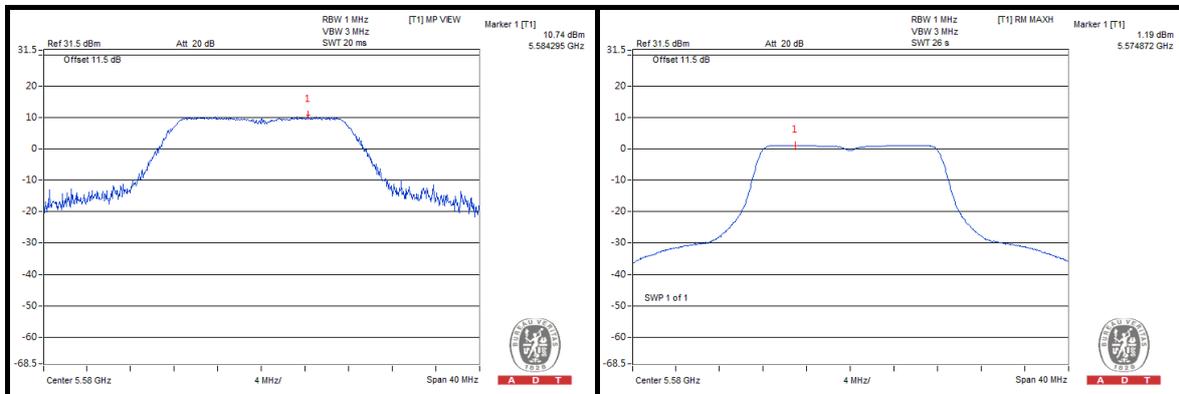




A D T

802.11n (20MHz)

CHAN.	CHANNEL FREQUENCY (MHz)	PEAK VALUE (dBm)	PPSD (dBm)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
36	5180	12.25	2.86	9.39	13	PASS
44	5220	12.67	2.93	9.74	13	PASS
48	5240	12.25	2.98	9.27	13	PASS
52	5260	12.26	3.14	9.12	13	PASS
60	5300	12.92	3.30	9.62	13	PASS
64	5320	12.50	3.38	9.12	13	PASS
100	5500	10.22	0.39	9.83	13	PASS
116	5580	10.34	0.94	9.40	13	PASS
140	5700	12.60	3.44	9.16	13	PASS


NOTE: Refer to section 3.3 for duty cycle spectrum plot.

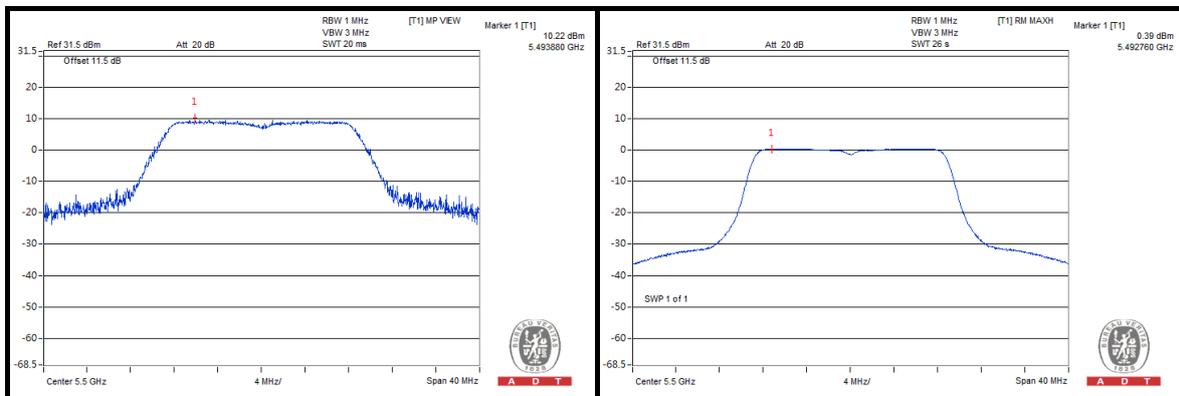

802.11n (40MHz)

CHAN.	CHANNEL FREQUENCY (MHz)	PEAK VALUE (dBm)	PPSD WITHOUT DUTY FACTOR (dBm)	PPSD WITH DUTY FACTOR (dBm)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS /FAIL
38	5190	6.88	-2.44	-2.20	9.08	13	PASS
46	5230	6.94	-2.43	-2.19	9.13	13	PASS
54	5270	7.01	-2.10	-1.86	8.87	13	PASS
62	5310	7.90	-1.97	-1.73	9.63	13	PASS
102	5510	4.03	-5.76	-5.52	9.55	13	PASS
110	5550	3.80	-5.60	-5.36	9.16	13	PASS
134	5670	3.27	-6.55	-6.31	9.58	13	PASS

NOTE: Refer to section 3.3 for duty cycle spectrum plot.

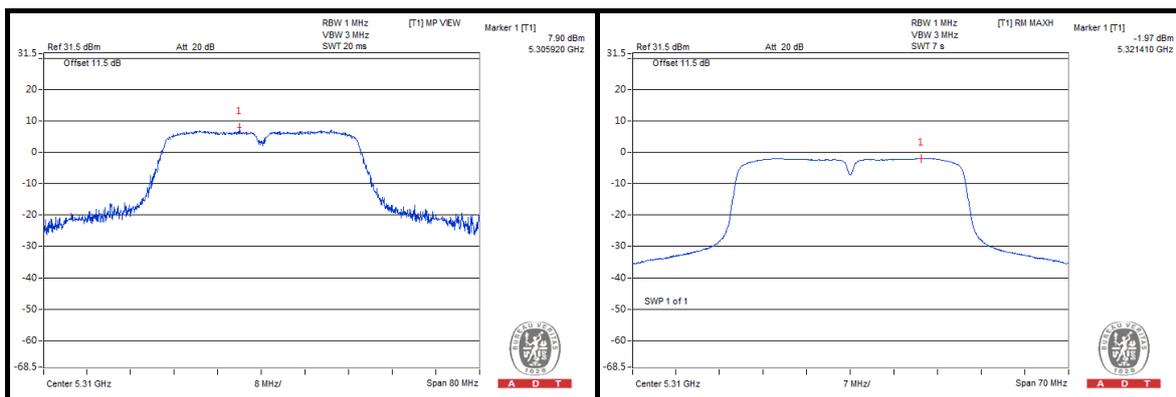


4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 TEST SETUP

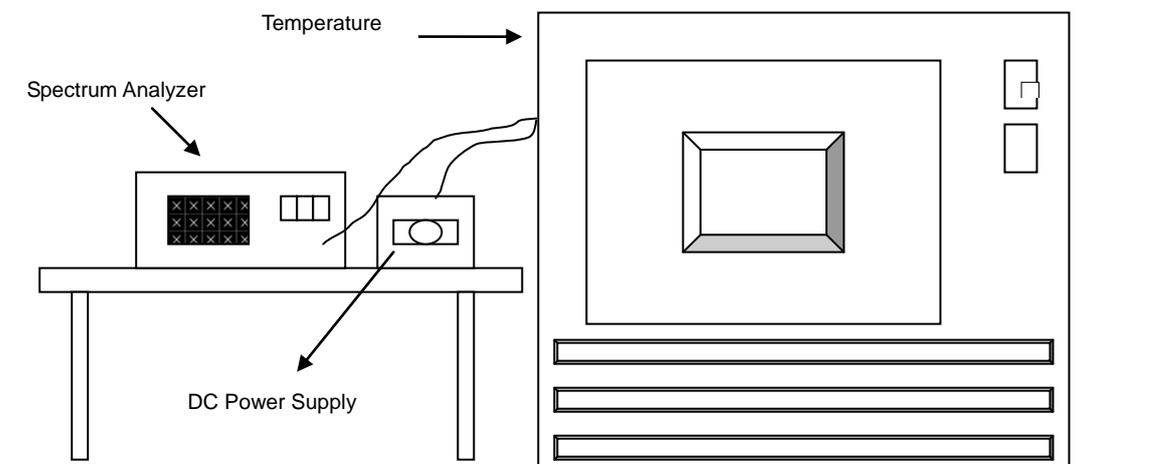

4.6.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.6.4 TEST PROCEDURE

- a. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
- b. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
- c. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5320MHz									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)
60	3.8	5320.041308	7.765	5320.041075	7.721	5320.041317	7.766	5320.041138	7.733
50	3.8	5320.041989	7.893	5320.041695	7.837	5320.041572	7.814	5320.042331	7.957
30	3.8	5320.042870	8.058	5320.043097	8.101	5320.043029	8.088	5320.043162	8.113
20	3.8	5320.044933	8.446	5320.045402	8.534	5320.045064	8.471	5320.044969	8.453
10	3.8	5320.045526	8.558	5320.045448	8.543	5320.045839	8.616	5320.045635	8.578
0	3.8	5320.044468	8.359	5320.044011	8.273	5320.044347	8.336	5320.044331	8.333
-10	3.8	5320.042472	7.983	5320.042368	7.964	5320.042697	8.026	5320.043024	8.087
-20	3.8	5320.041244	7.753	5320.040696	7.650	5320.040866	7.682	5320.040624	7.636

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5320MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)
20	3.6	5320.044917	8.443	5320.044513	8.367	5320.044387	8.343	5320.044651	8.393
	3.8	5320.044933	8.446	5320.045402	8.534	5320.045064	8.471	5320.044969	8.453
	4.35	5320.046466	8.734	5320.045927	8.633	5320.046143	8.673	5320.046099	8.665

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---