


# FCC Test Report

APPLICANT : HTC Corporation  
EQUIPMENT : PDA Phone  
MODEL NAME : TOPA210  
FCC ID : NM8TPZ  
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)  
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)  
Tx/Rx FREQUENCY RANGE : GSM850 : 824.2 ~ 848.8 MHz /  
869.2 ~ 893.8 MHz  
GSM1900 : 1850.2 ~ 1909.8 MHz /  
1930.2 ~ 1989.8 MHz  
WCDMA Band V : 826.4 ~ 846.6 MHz /  
871.4 ~ 891.6 MHz  
WCDMA Band II : 1852.4 ~ 1907.6 MHz /  
1932.4 ~ 1987.6 MHz  
MAX. ERP/EIRP POWER : GSM850 (GSM) : 1.48 W  
GSM850 (EDGE 8) : 0.30 W  
GSM1900 (GSM) : 1.94W  
GSM1900 (EDGE 8) : 0.69 W  
WCDMA Band V (WCDMA) : 0.13 W  
WCDMA Band II (WCDMA) : 0.42 W  
EMISSION DESIGNATOR : GSM/GPRS : 248KGXW  
EDGE : 244KG7W  
WCDMA : 4M16F9W

The product sample received on Jun. 02, 2009 and completely tested on Jun. 30, 2009. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Roy Wu / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



# TABLE OF CONTENTS

**REVISION HISTORY.....3**

**SUMMARY OF TEST RESULT .....4**

**1 GENERAL DESCRIPTION .....5**

    1.1 Applicant.....5

    1.2 Manufacturer .....5

    1.3 Feature of Equipment Under Test.....5

    1.4 Testing Site.....6

    1.5 Applied Standards .....7

    1.6 Ancillary Equipment List.....7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....8**

    2.1 Test Mode.....8

    2.2 Connection Diagram of Test System .....9

**3 TEST RESULT.....10**

    3.1 Conducted Output Power Measurement.....10

    3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement .....12

    3.3 Occupied Bandwidth Measurement .....20

    3.4 Band Edge Measurement.....27

    3.5 Field Strength of Spurious Radiation Measurement .....50

    3.6 Frequency Stability Measurement.....72

**4 LIST OF MEASURING EQUIPMENT .....76**

**5 UNCERTAINTY OF EVALUATION.....77**

**6 CERTIFICATION OF TAF ACCREDITATION .....78**

**APPENDIX A. PHOTOGRAPHS OF EUT**

**APPENDIX B. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result
3.1	§2.1046	N/A	Conducted Output Power	N/A	PASS
3.2	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts for FCC (<6.3 Watts for IC)	PASS
3.2	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS
3.3	§2.1049 §22.917(a) §24.238(a)	N/A	Occupied Bandwidth	N/A	PASS
3.4	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge Measurement	< 43+10log <sub>10</sub> (P[Watts])	PASS
3.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Conducted Emission	< 43+10log <sub>10</sub> (P[Watts])	PASS
3.6	§2.1053 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Field Strength of Spurious Radiation	< 43+10log <sub>10</sub> (P[Watts])	PASS
3.7	§2.1055 §22.355 §24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS



# 1 General Description

## 1.1 Applicant

HTC Corporation  
No. 23, Xinghua Rd., Taoyuan 330, Taiwan

## 1.2 Manufacturer

HTC Corporation  
No. 23, Xinghua Rd., Taoyuan 330, Taiwan

## 1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	PDA Phone
PDA Phone 1	EUT with Camera 1
PDA Phone 2	EUT with Camera 2
Model Name	TOPA210
FCC ID	NM8TPZ
Tx Frequency	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz WCDMA Band V : 824 MHz ~ 849 MHz WCDMA Band II : 1850 MHz ~ 1910 MHz
Rx Frequency	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz WCDMA Band V : 869 MHz ~ 894 MHz WCDMA Band II : 1930 MHz ~ 1990 MHz
Maximum Output Power to Antenna	GSM850 : 33.07 dBm GSM1900 : 30.16 dBm WCDMA Band V : 23.30 dBm WCDMA Band II : 23.19 dBm
Maximum ERP/EIRP	<PDA Phone 1> GSM850 (GSM) : 1.44 W (31.58 dBm) GSM850 (EDGE 8) : 0.29 W (24.69 dBm) GSM1900 (GSM) : 1.91 W (32.82 dBm) GSM1900 (EDGE 8) : 0.69 W (28.38 dBm) WCDMA Band V (WCDMA) : 0.12 W (20.66 dBm) WCDMA Band II (WCDMA) : 0.42 W (26.23 dBm) <PDA Phone 2> GSM850 (GSM) : 1.48 W (31.69 dBm) GSM850 (EDGE 8) : 0.30 W (24.75 dBm) GSM1900 (GSM) : 1.94 W (32.87 dBm) GSM1900 (EDGE 8) : 0.68 W (28.35 dBm) WCDMA Band V (WCDMA) : 0.13 W (20.98 dBm) WCDMA Band II (WCDMA) : 0.41 W (26.17 dBm)

Product Feature & Specification	
Antenna Type	Fixed Internal Antenna
Type of Modulation	GSM / GPRS : GMSK EDGE : 8PSK WCDMA : QPSK HSDPA : QPSK / 16QAM
Type of Emission	GSM/GPRS : 248KGXW EDGE : 244KG7W WCDMA : 4M16F9W
EUT Stage	Identical Prototype

**Remark:**

1. For other wireless features of this EUT, the test report will be issued separately.
2. This test report recorded only product characteristics and test results of PCS Licensed Transmitter Held to Ear (PCE).

## 1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH07-HY	TW1022/4086B-1



### 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- FCC 47 CFR Part 2, 22(H), 24(E)
- ANSI C63.4-2003
- ANSI / TIA / EIA-603-C-2004
- IC RSS-132 Issue 2
- IC RSS-133 Issue 5

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

### 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30MHz to 19000 MHz for GSM1900 and WCDMA Band II.

Test Modes		
Band	Radiated TCs	Conducted TCs
<b>GSM 850</b>	<ul style="list-style-type: none"> <li>■ GSM Link for PDA Phone 1</li> <li>■ EDGE 8 Link for PDA Phone 1</li> <li>■ GSM Link for PDA Phone 2</li> <li>■ GSM Link + 802.11g Tx CH01 for PDA Phone 1</li> <li>■ GSM Link + 802.11g Tx CH01 for PDA Phone 2</li> </ul>	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE 8 Link</li> </ul>
<b>GSM 1900</b>	<ul style="list-style-type: none"> <li>■ GSM Link for PDA Phone 1</li> <li>■ EDGE 8 Link for PDA Phone 1</li> <li>■ GSM Link for PDA Phone 2</li> </ul>	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE 8 Link</li> </ul>
<b>WCDMA Band V</b>	<ul style="list-style-type: none"> <li>■ WCDMA Link for PDA Phone 1</li> </ul>	<ul style="list-style-type: none"> <li>■ WCDMA Link</li> </ul>
<b>WCDMA Band II</b>	<ul style="list-style-type: none"> <li>■ WCDMA Link for PDA Phone 1</li> </ul>	<ul style="list-style-type: none"> <li>■ WCDMA Link</li> </ul>

**Note:** The maximum power levels are GSM mode for GMSK link, EDGE multi-slot class 8 mode for 8PSK link, RMC 12.2Kbps mode for QPSK link, only these modes were used for all tests.

The conducted power tables are as follows:


Conducted Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
<b>GSM</b>	32.88	32.96	<b>33.07</b>	29.94	<b>30.16</b>	30.12
<b>GPRS 8</b>	32.87	32.96	33.06	29.94	30.15	30.13
<b>GPRS 10</b>	32.42	32.51	32.62	29.40	29.61	29.58
<b>EDGE 8</b>	26.13	26.16	<b>26.28</b>	25.58	<b>25.69</b>	25.66
<b>EDGE 10</b>	26.10	26.14	26.25	25.01	25.20	25.07

(\*Unit: dBm)

Conducted Power						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	23.30	23.09	23.18	22.88	22.91	23.19
HSDPA Subtest-1	22.77	22.89	22.71	22.75	22.79	23.17
HSDPA Subtest-2	22.87	23.15	22.90	22.86	22.74	23.07
HSDPA Subtest-3	22.40	22.42	22.35	21.29	21.25	21.74
HSDPA Subtest-4	22.08	22.13	21.99	21.08	21.04	21.68

(\*Unit: dBm)

## 2.2 Connection Diagram of Test System

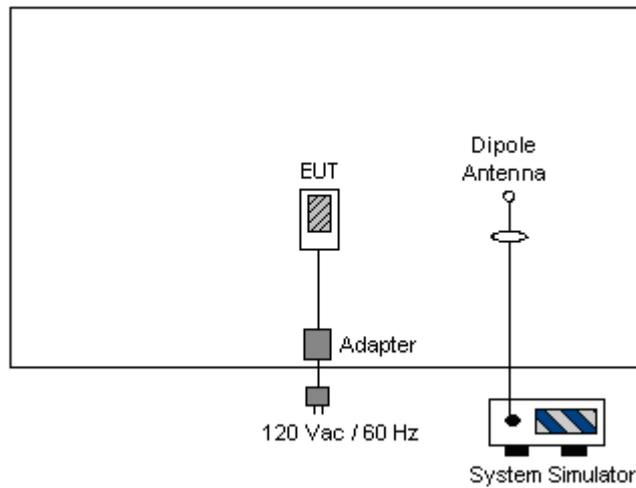

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

##### 3.1.4 Test Setup

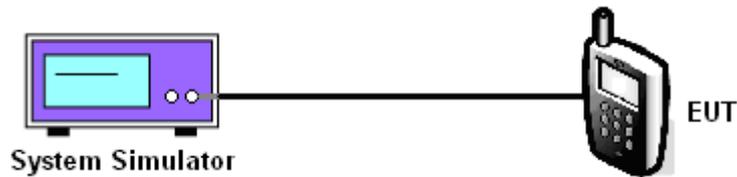



3.1.5 Test Result of Conducted Output Power

Cellular Band				
Modes		Channel	Frequency (MHz)	Conducted Power (dBm)
GSM		128 (Low)	824.2	32.88
		189 (Mid)	836.4	32.96
		251 (High)	848.8	33.07
EDGE 8		128 (Low)	824.2	26.13
		189 (Mid)	836.4	26.16
		251 (High)	848.8	26.28
WCDMA Band V	12.2k bps	4132 (Low)	826.4	23.30
		4182 (Mid)	836.4	23.09
		4233 (High)	846.6	23.18

PCS Band				
Modes		Channel	Frequency (MHz)	Conducted Power (dBm)
GSM		512 (Low)	1850.2	29.94
		661 (Mid)	1880.0	30.16
		810 (High)	1909.8	30.12
EDGE 8		512 (Low)	1850.2	25.58
		661 (Mid)	1880.0	25.69
		810 (High)	1909.8	25.66
WCDMA Band II	12.2k bps	9262 (Low)	1852.4	22.88
		9400 (Mid)	1880.0	22.91
		9538 (High)	1907.6	23.19

## 3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

### 3.2.1 Description of the ERP/EIRP Measurement

ERP/EIRP is measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The EUT was placed on a turntable with 1.0 meter height in a fully anechoic chamber.
2. The EUT was set at 1.2 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiated power.
4. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
5. Taking the record of maximum ERP/EIRP.
6. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
7. The conducted power at the terminal of the dipole antenna is measured.
8. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
9.  $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$   
Ps (dBm) : Input power to substitution antenna.  
Gs (dBi or dBd) : Substitution antenna Gain.  
 $E_t = R_t + AF$   
 $E_s = R_s + AF$   
AF (dB/m) : Receive antenna factor  
Rt : The highest received signal in spectrum analyzer for EUT.  
Rs : The highest received signal in spectrum analyzer for substitution antenna.

### 3.2.4 Test Setup

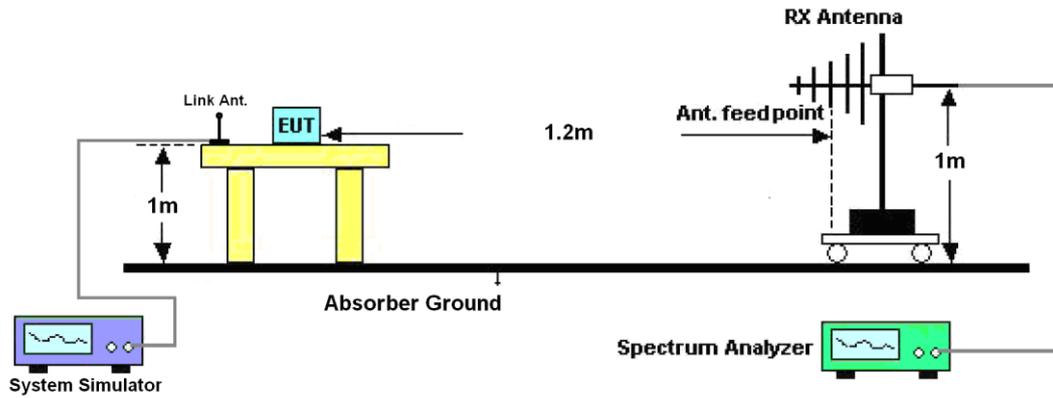



3.2.5 Test Result of ERP

<PDA Phone 1>

GSM850 (GSM) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-15.46	-48.12	0.00	-1.08	31.58	1.44
836.40	-16.52	-48.28	0.00	-0.93	30.83	1.21
848.80	-18.37	-48.35	0.00	-0.76	29.22	0.84
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-30.04	-47.97	0.00	-1.08	16.85	0.05
836.40	-31.26	-48.01	0.00	-0.93	15.82	0.04
848.80	-32.64	-48.05	0.00	-0.76	14.65	0.03

GSM850 (EDGE 8) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-22.35	-48.12	0.00	-1.08	24.69	0.29
836.40	-23.16	-48.28	0.00	-0.93	24.19	0.26
848.80	-25.51	-48.35	0.00	-0.76	22.08	0.16
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-36.43	-47.97	0.00	-1.08	10.46	0.01
836.40	-37.68	-48.01	0.00	-0.93	9.40	0.01
848.80	-39.75	-48.05	0.00	-0.76	7.54	0.01



WCDMA Band V (WCDMA) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-26.92	-48.12	0.00	-1.08	20.12	0.10
836.40	-26.69	-48.28	0.00	-0.93	20.66	0.12
846.60	-27.49	-48.35	0.00	-0.76	20.10	0.10
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-41.96	-47.97	0.00	-1.08	4.93	0.00
836.40	-41.64	-48.01	0.00	-0.93	5.44	0.00
846.60	-42.18	-48.05	0.00	-0.76	5.11	0.00

<PDA Phone 2>

GSM850 (GSM) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-15.71	-48.12	0.00	-1.08	31.33	1.36
836.40	-15.66	-48.28	0.00	-0.93	31.69	1.48
848.80	-17.61	-48.35	0.00	-0.76	29.98	1.00
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-30.19	-47.97	0.00	-1.08	16.70	0.05
836.40	-30.18	-48.01	0.00	-0.93	16.90	0.05
848.80	-31.65	-48.05	0.00	-0.76	15.64	0.04



GSM850 (EDGE 8) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-22.67	-48.12	0.00	-1.08	24.37	0.27
836.40	-22.60	-48.28	0.00	-0.93	24.75	0.30
848.80	-24.40	-48.35	0.00	-0.76	23.19	0.21
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-37.09	-47.97	0.00	-1.08	9.80	0.01
836.40	-37.07	-48.01	0.00	-0.93	10.01	0.01
848.80	-38.45	-48.05	0.00	-0.76	8.84	0.01

WCDMA Band V (WCDMA) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-26.75	-48.12	0.00	-1.08	20.29	0.11
836.40	-26.37	-48.28	0.00	-0.93	20.98	0.13
846.60	-27.13	-48.35	0.00	-0.76	20.46	0.11
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-41.24	-47.97	0.00	-1.08	5.65	0.00
836.40	-40.58	-48.01	0.00	-0.93	6.50	0.00
846.60	-40.96	-48.05	0.00	-0.76	6.33	0.00



3.2.6 Test Result of EIRP

<PDA Phone 1>

GSM1900 (GSM) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-21.41	-51.88	0.00	1.96	32.43	1.75
1880.00	-22.17	-52.99	0.00	2.00	32.82	1.91
1909.80	-23.45	-54.28	0.00	1.98	32.81	1.91
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-24.21	-52.13	0.00	1.96	29.88	0.97
1880.00	-25.32	-53.17	0.00	2.00	29.85	0.97
1909.80	-26.33	-54.13	0.00	1.98	29.78	0.95

GSM1900 (EDGE 8) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-26.25	-51.88	0.00	1.96	27.59	0.57
1880.00	-26.61	-52.99	0.00	2.00	28.38	0.69
1909.80	-28.76	-54.28	0.00	1.98	27.50	0.56
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-29.03	-52.13	0.00	1.96	25.06	0.32
1880.00	-29.69	-53.17	0.00	2.00	25.48	0.35
1909.80	-31.52	-54.13	0.00	1.98	24.59	0.29



WCDMA Band II (WCDMA) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-28.21	-51.88	0.00	1.96	25.63	0.37
1880.00	-28.76	-52.99	0.00	2.00	26.23	0.42
1907.60	-30.35	-54.28	0.00	1.98	25.91	0.39
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-30.86	-52.13	0.00	1.96	23.23	0.21
1880.00	-31.82	-53.17	0.00	2.00	23.35	0.22
1907.60	-33.32	-54.13	0.00	1.98	22.79	0.19

<PDA Phone 2>

GSM1900 (GSM) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-21.45	-51.88	0.00	1.96	32.39	1.73
1880.00	-22.22	-52.99	0.00	2.00	32.77	1.89
1909.80	-23.39	-54.28	0.00	1.98	32.87	1.94
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-24.23	-52.13	0.00	1.96	29.86	0.97
1880.00	-25.35	-53.17	0.00	2.00	29.82	0.96
1909.80	-26.27	-54.13	0.00	1.98	29.84	0.96



GSM1900 (EDGE 8) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-25.90	-51.88	0.00	1.96	27.94	0.62
1880.00	-26.74	-52.99	0.00	2.00	28.25	0.67
1909.80	-27.91	-54.28	0.00	1.98	28.35	0.68
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-28.65	-52.13	0.00	1.96	25.44	0.35
1880.00	-29.85	-53.17	0.00	2.00	25.32	0.34
1909.80	-30.77	-54.13	0.00	1.98	25.34	0.34

WCDMA Band II (WCDMA) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-28.69	-51.88	0.00	1.96	25.15	0.33
1880.00	-28.82	-52.99	0.00	2.00	26.17	0.41
1907.60	-30.37	-54.28	0.00	1.98	25.89	0.39
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-31.41	-52.13	0.00	1.96	22.68	0.19
1880.00	-32.01	-53.17	0.00	2.00	23.16	0.21
1907.60	-33.53	-54.13	0.00	1.98	22.58	0.18

### 3.3 Occupied Bandwidth Measurement

#### 3.3.1 Description of Occupied Bandwidth Measurement

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers were measured.
3. The RBW was replaced by 10 kHz, due to the spectrum analyzer IF-Filter including an excess of the limit. A worst case correction factor of  $10 \log (1\% \text{ BW/measurement RBW})$  was implemented.

#### 3.3.4 Test Setup

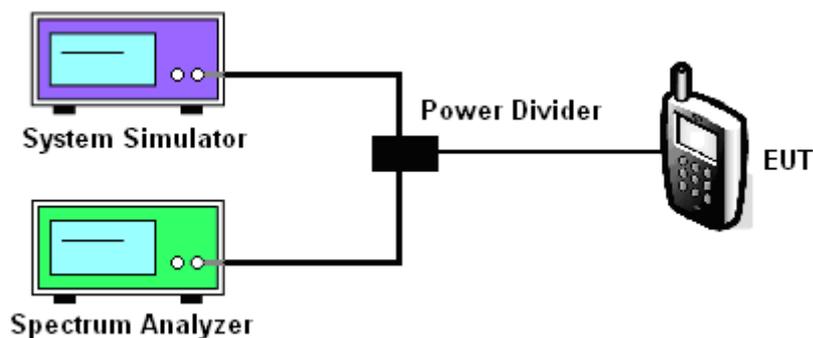




3.3.5 Test Result (Plots) of Occupied Bandwidth


Band :	GSM 850	Power Stage :	High
Test Mode :	GSM Link		

99% Occupied Bandwidth Plot on Channel 189

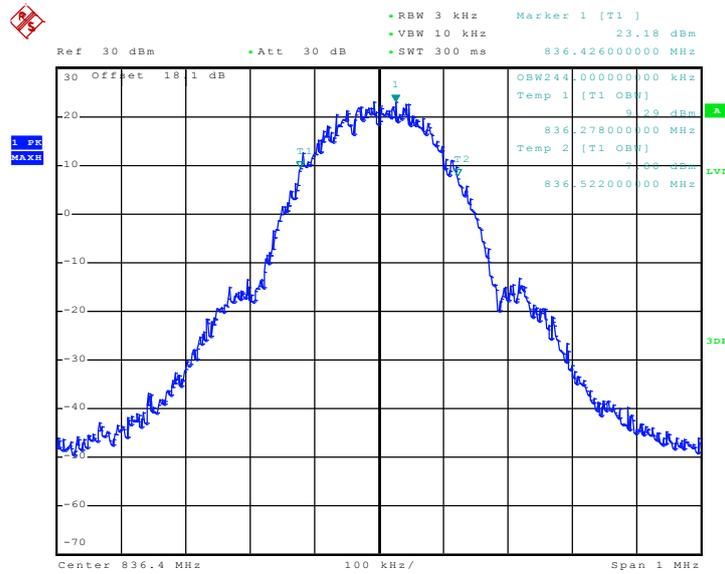

Date: 4..JUN.2009 22:55:01

26dB Bandwidth Plot on Channel 189

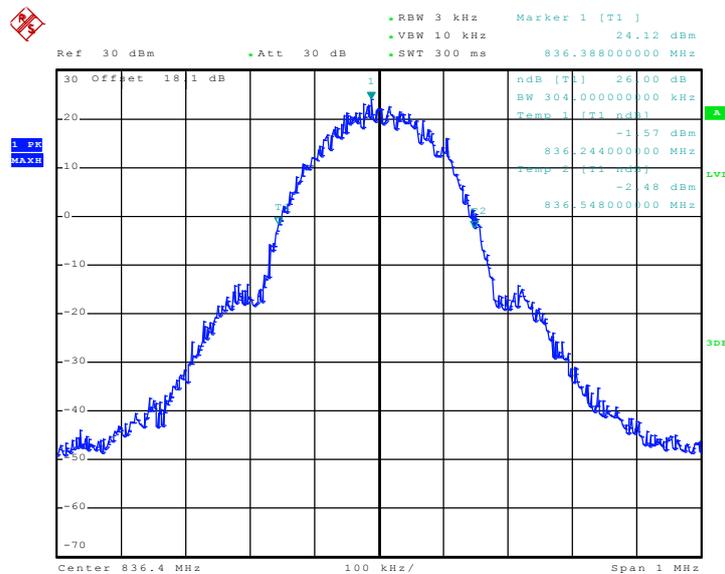


Date: 4..JUN.2009 22:53:26




<b>Band :</b>	GSM 850	<b>Power Stage :</b>	High
<b>Test Mode :</b>	EDGE 8 Link		

99% Occupied Bandwidth Plot on Channel 189

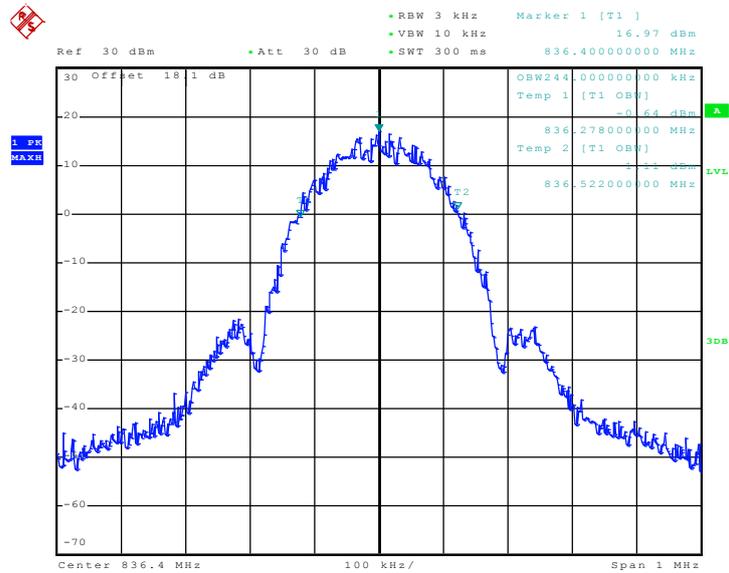

Date: 4.JUN.2009 23:25:41

26dB Bandwidth Plot on Channel 189

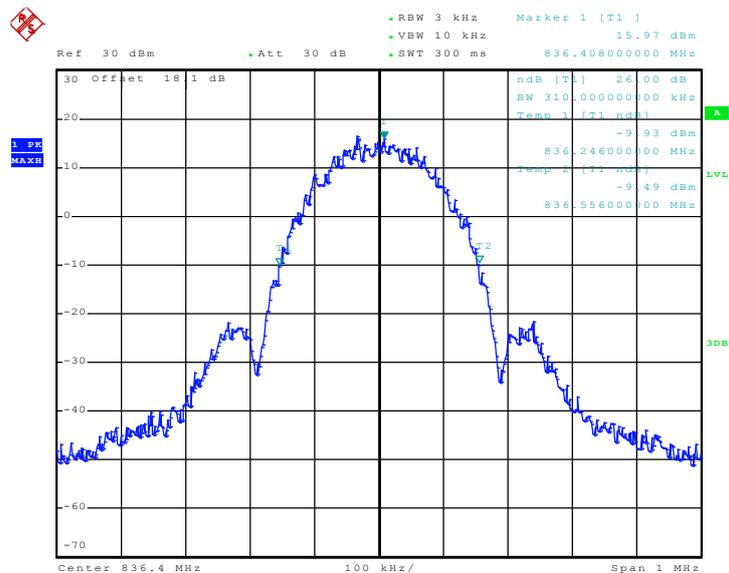


Date: 4.JUN.2009 23:24:04




<b>Band :</b>	GSM 1900	<b>Power Stage :</b>	High
<b>Test Mode :</b>	GSM Link		

99% Occupied Bandwidth Plot on Channel 661

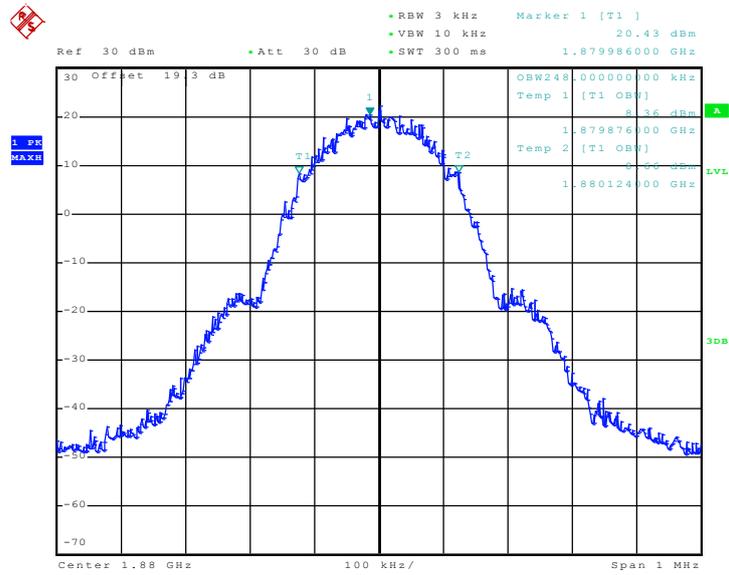

Date: 4.JUL.2009 23:46:48

26dB Bandwidth Plot on Channel 661

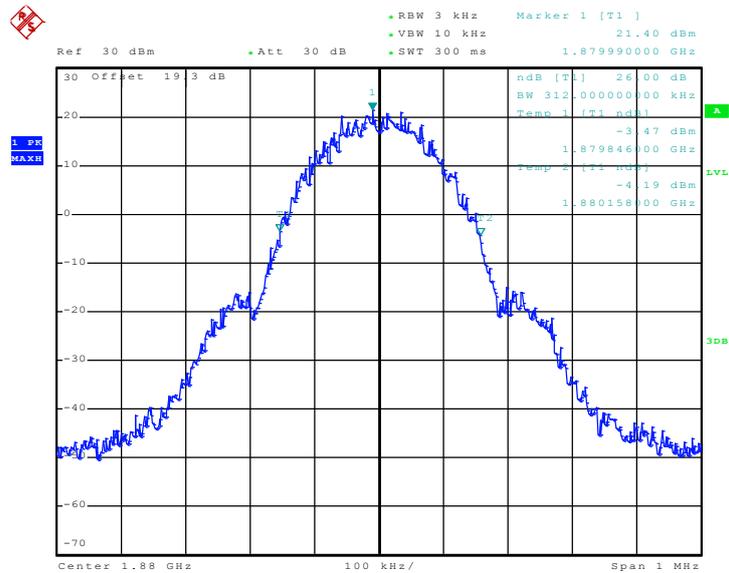


Date: 4.JUL.2009 23:44:51




<b>Band :</b>	GSM 1900	<b>Power Stage :</b>	High
<b>Test Mode :</b>	EDGE 8 Link		

99% Occupied Bandwidth Plot on Channel 661

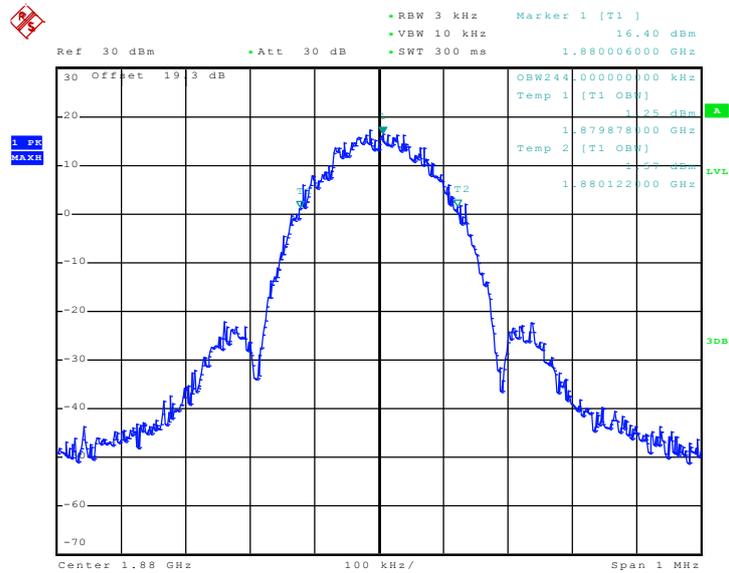

Date: 5..JUN.2009 00:15:49

26dB Bandwidth Plot on Channel 661

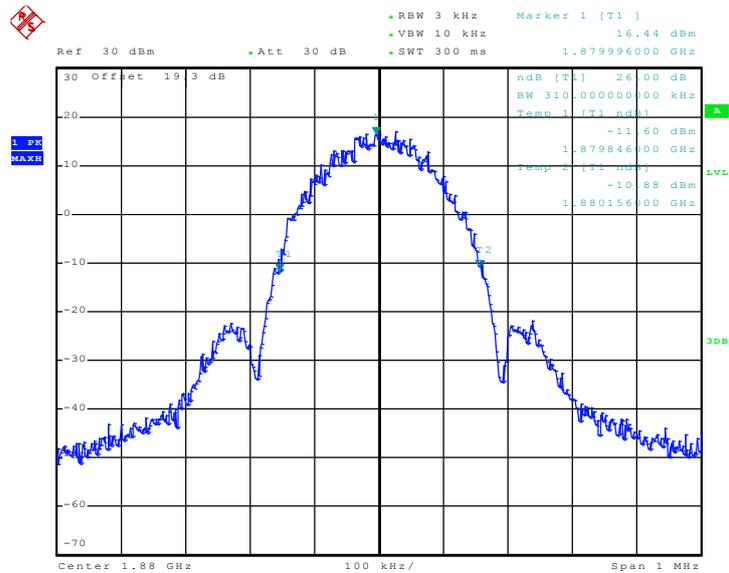


Date: 5..JUN.2009 00:13:45




<b>Band :</b>	WCDMA Band V	<b>Power Stage :</b>	High
<b>Test Mode :</b>	WCDMA Link		

99% Occupied Bandwidth Plot on Channel 4182

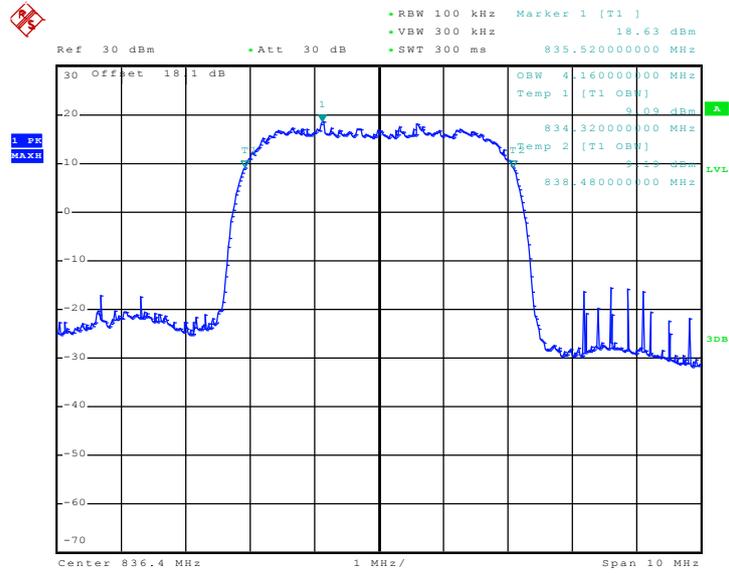

Date: 5..JUN.2009 09:41:55

26dB Bandwidth Plot on Channel 4182

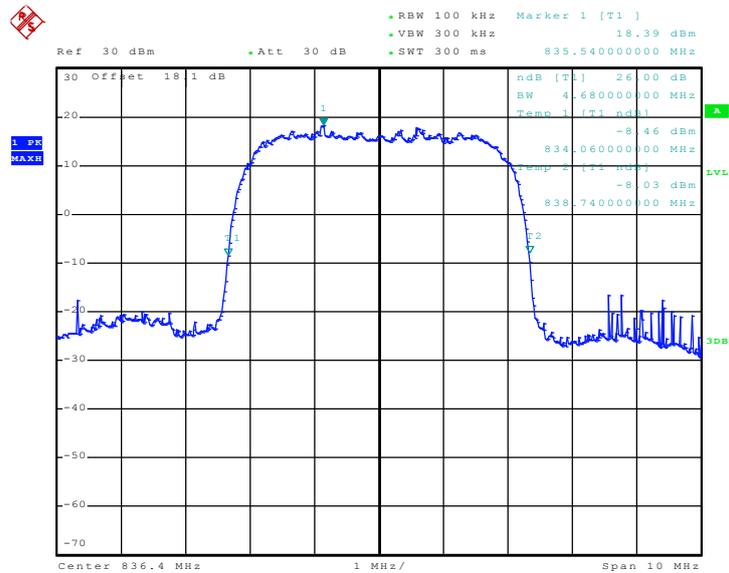


Date: 5..JUN.2009 09:38:40




Band :	WCDMA Band II	Power Stage :	High
Test Mode :	WCDMA Link		

99% Occupied Bandwidth Plot on Channel 9400

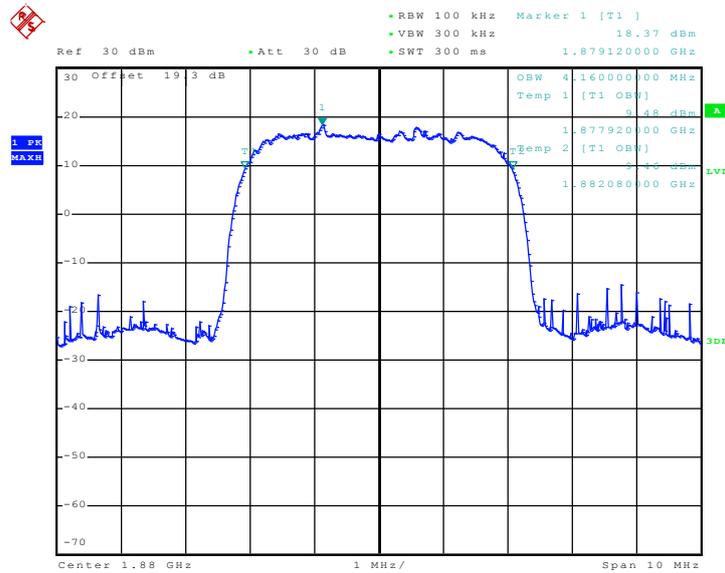

Date: 5..JUN.2009 10:22:41

26dB Bandwidth Plot on Channel 9400

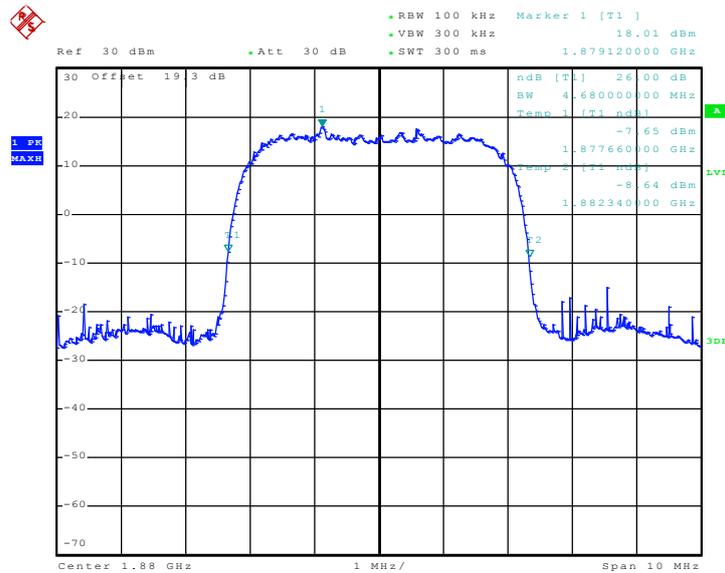

Date: 5..JUN.2009 10:20:24

## 3.4 Band Edge Measurement

### 3.4.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.


### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.

### 3.4.4 Test Setup

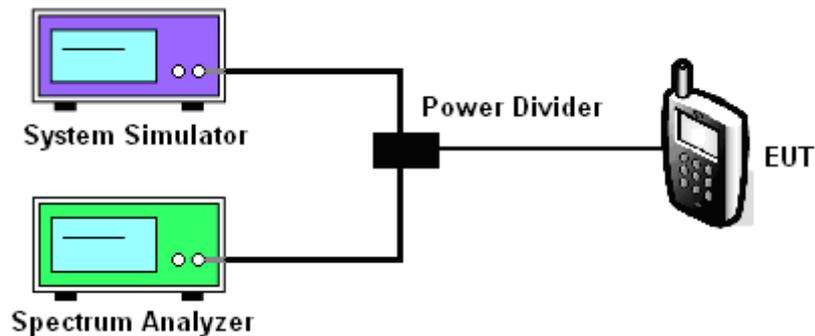




### 3.4.5 Test Result (Plots) of Conducted Band Edge


Band :	GSM850	Power Stage :	High
Test Mode :	GSM Link		

Lower Band Edge Plot on Channel 128

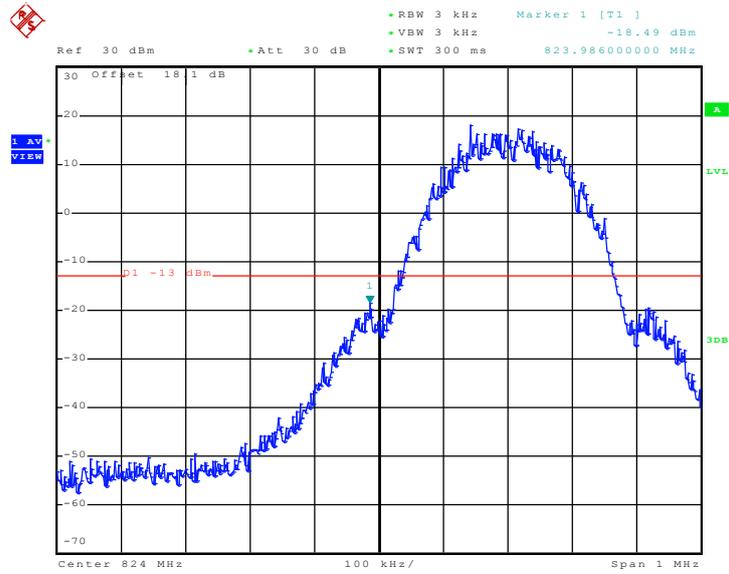

Date: 4.JUN.2009 22:58:09

Higher Band Edge Plot on Channel 251

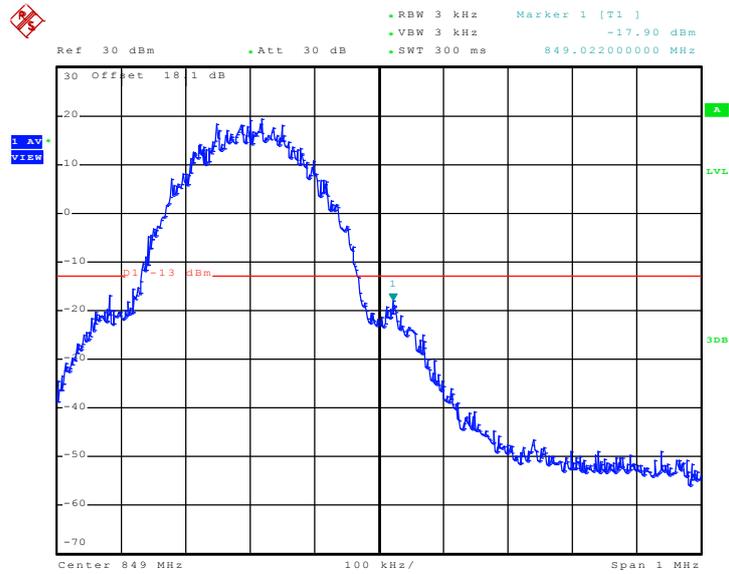


Date: 4.JUN.2009 23:01:11




Band :	GSM850	Power Stage :	High
Test Mode :	EDGE 8 Link		

Lower Band Edge Plot on Channel 128

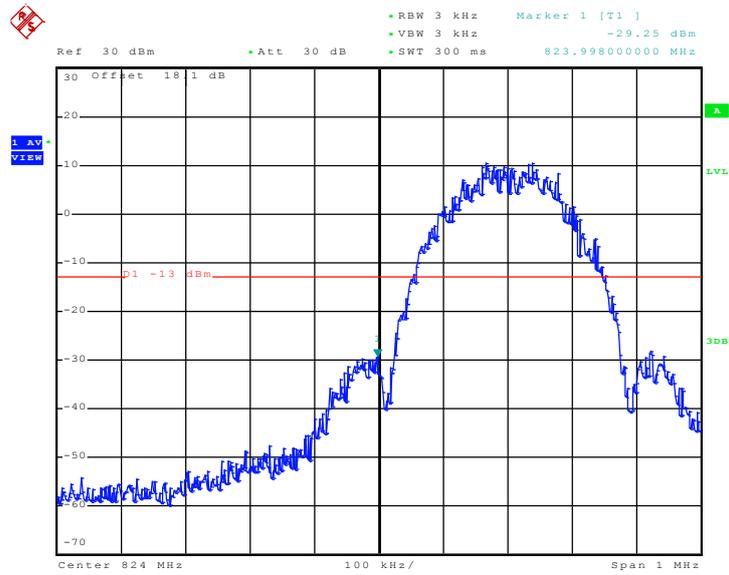

Date: 4..JUN.2009 23:28:13

Higher Band Edge Plot on Channel 251

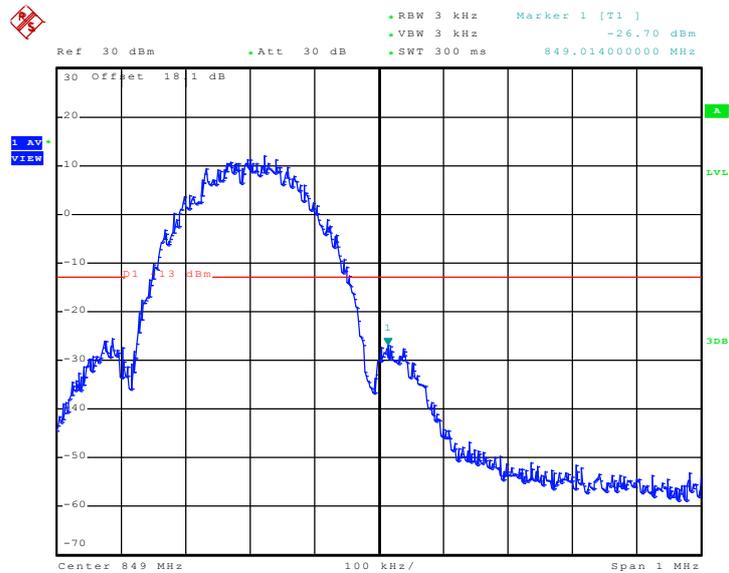


Date: 4..JUN.2009 23:31:29




Band :	GSM1900	Power Stage :	High
Test Mode :	GSM Link		

Lower Band Edge Plot on Channel 512

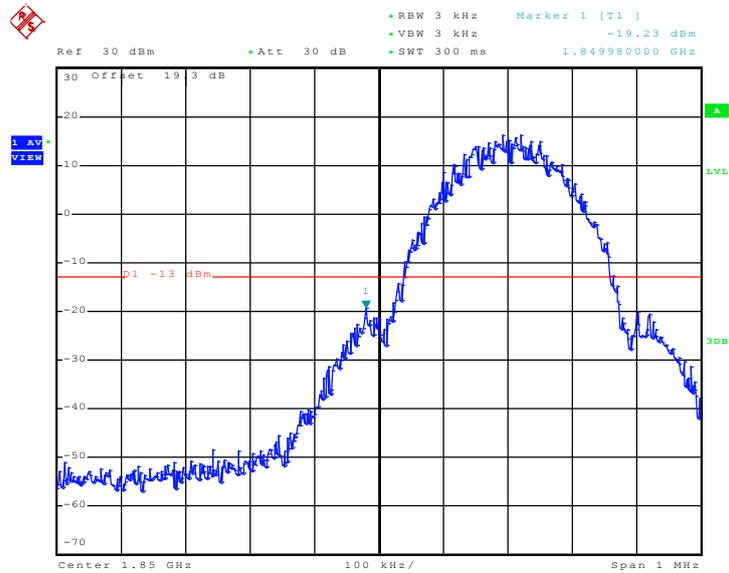

Date: 4..JUN.2009 23:49:11

Higher Band Edge Plot on Channel 810

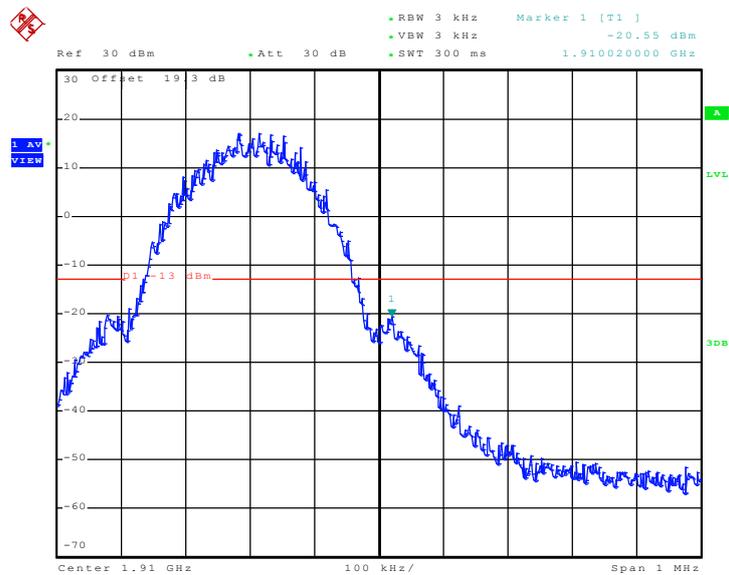


Date: 4..JUN.2009 23:52:10




Band :	GSM1900	Power Stage :	High
Test Mode :	EDGE 8 Link		

Lower Band Edge Plot on Channel 512

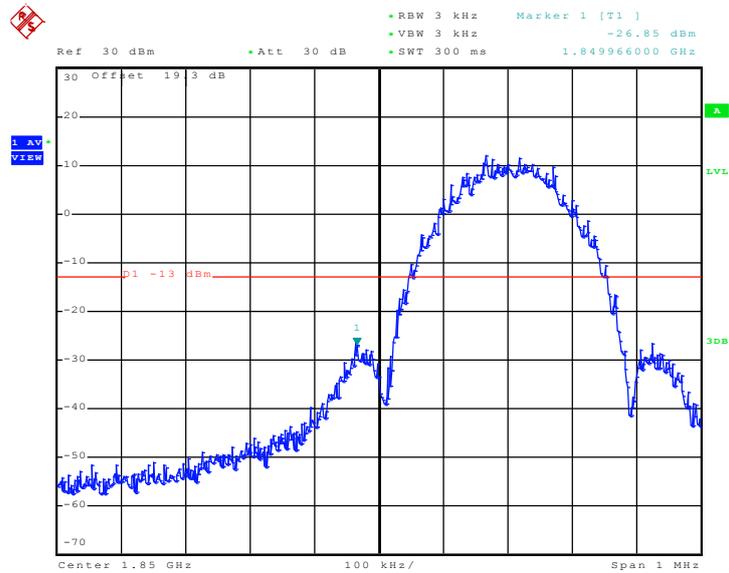

Date: 5..JUN.2009 00:18:20

Higher Band Edge Plot on Channel 810

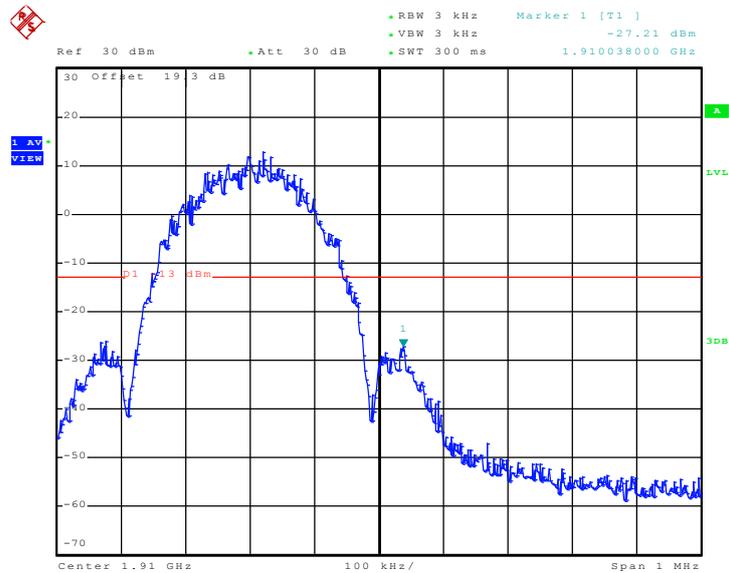


Date: 5..JUN.2009 00:21:05




Band :	WCDMA Band V	Power Stage :	High
Test Mode :	WCDMA Link		

Lower Band Edge Plot on Channel 4132

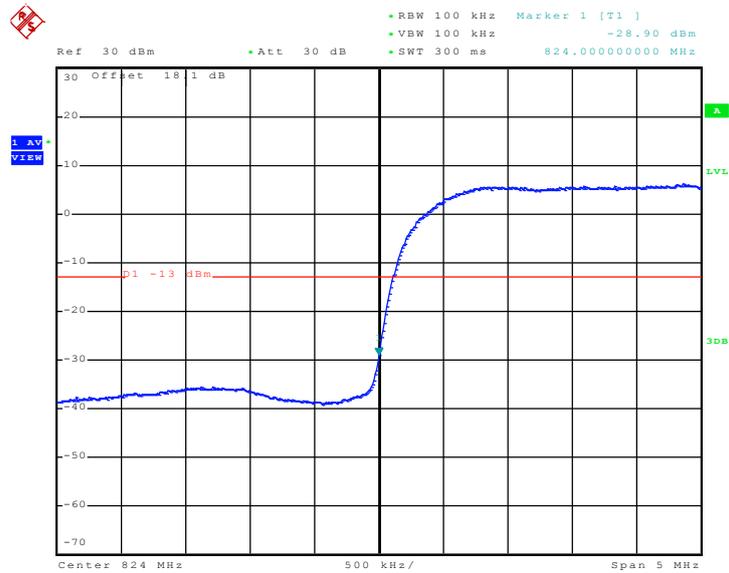

Date: 5..JUN.2009 09:44:41

Higher Band Edge Plot on Channel 4233

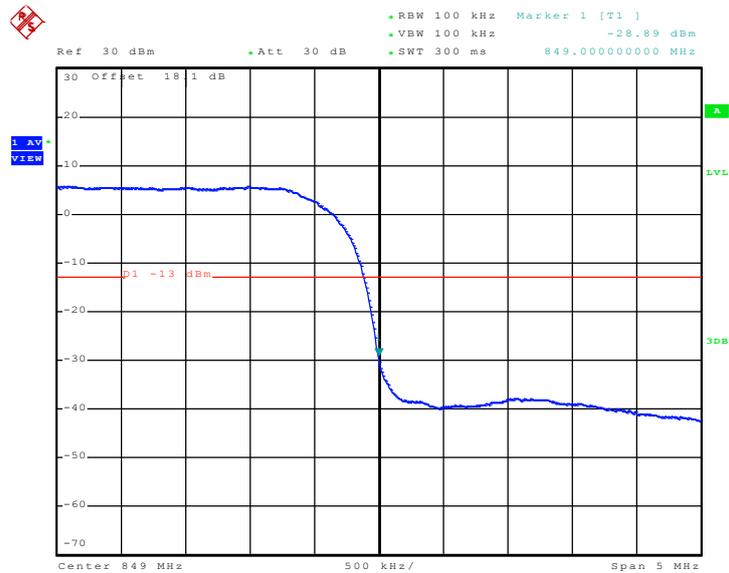


Date: 5..JUN.2009 09:47:47




Band :	WCDMA Band II	Power Stage :	High
Test Mode :	WCDMA Link		

Lower Band Edge Plot on Channel 9262

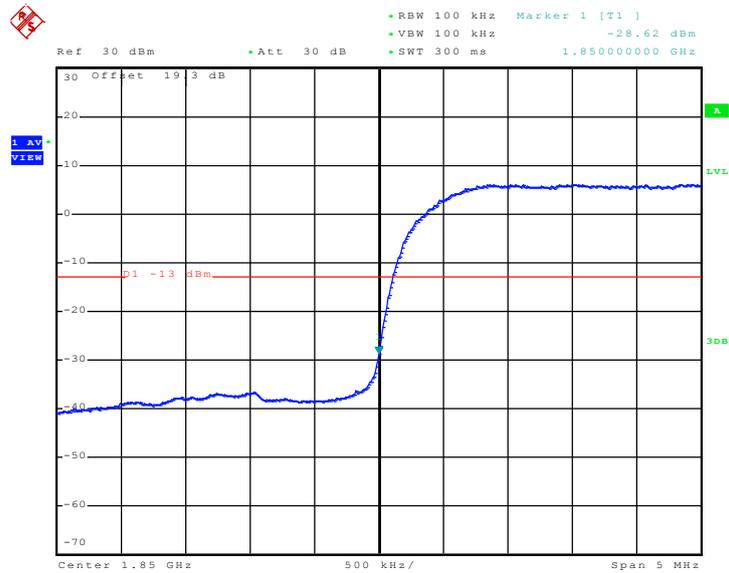

Date: 5..JUN.2009 10:26:43

Higher Band Edge Plot on Channel 9538

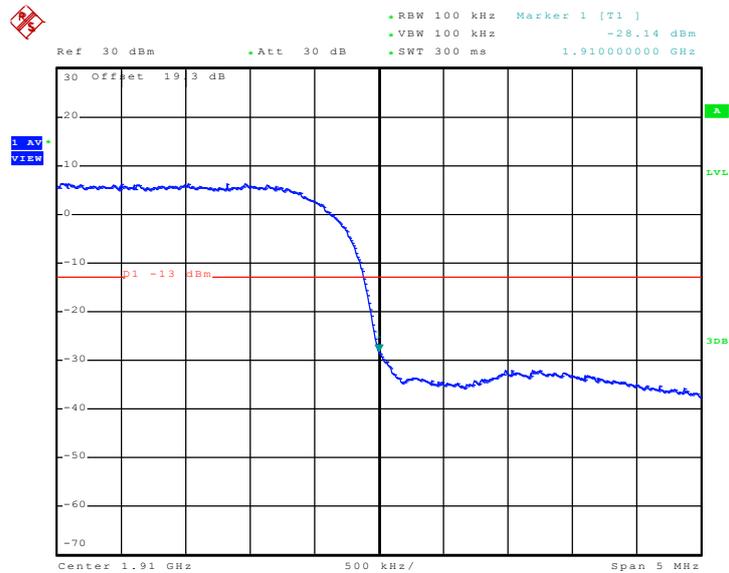

Date: 5..JUN.2009 10:29:35

### 3.4.6 Conducted Emission Measurement

### 3.4.7 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


### 3.4.8 Measuring Instruments

See list of measuring instruments of this test report.

### 3.4.9 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.

### 3.4.10 Test Setup

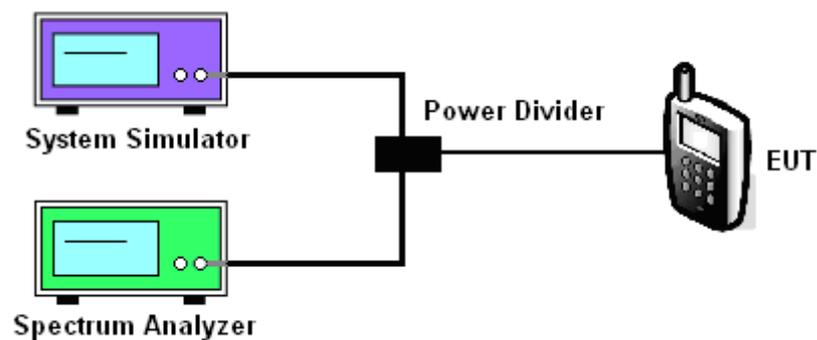




3.4.11 Test Result (Plots) of Conducted Emission


Band :	GSM850	Channel :	CH189
Test Mode :	GSM Link		

Conducted Emission Plot between 30MHz ~ 1GHz

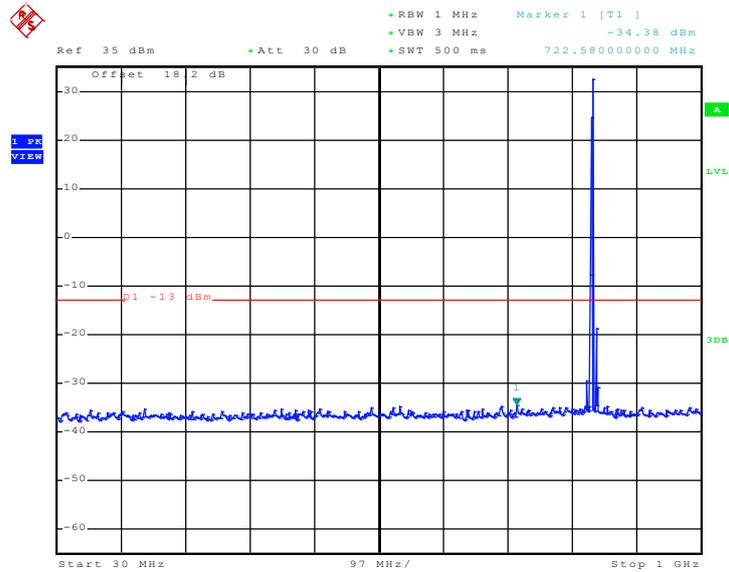

Date: 4..JUN.2009 23:11:17


Conducted Emission Plot between 1GHz ~ 3GHz

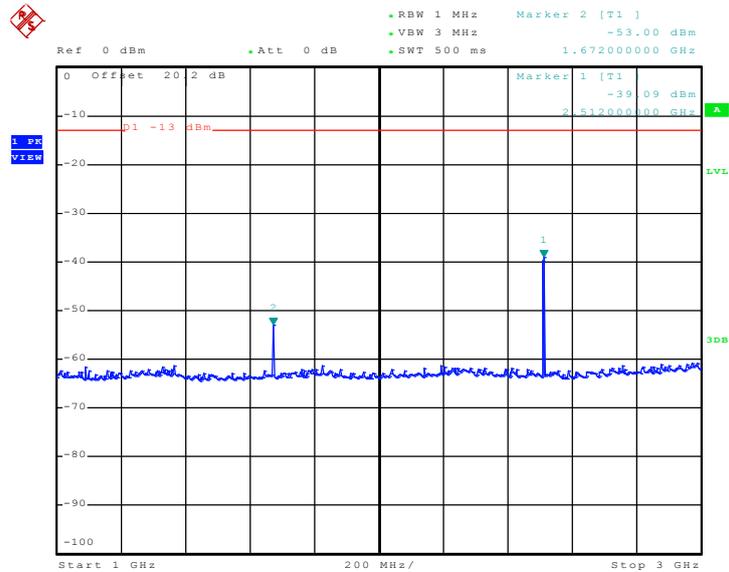

Date: 4..JUN.2009 23:13:17




Conducted Emission Plot between 3GHz ~ 7GHz

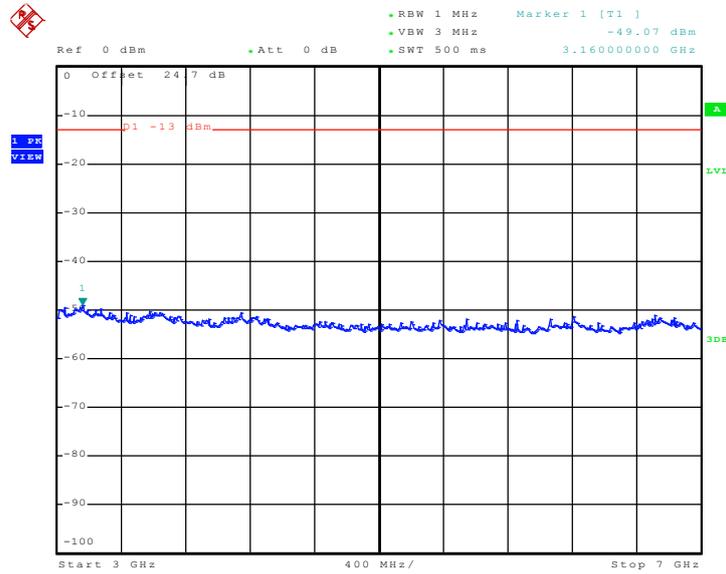

Date: 4.JUN.2009 23:13:55

Conducted Emission Plot between 7GHz ~ 9GHz

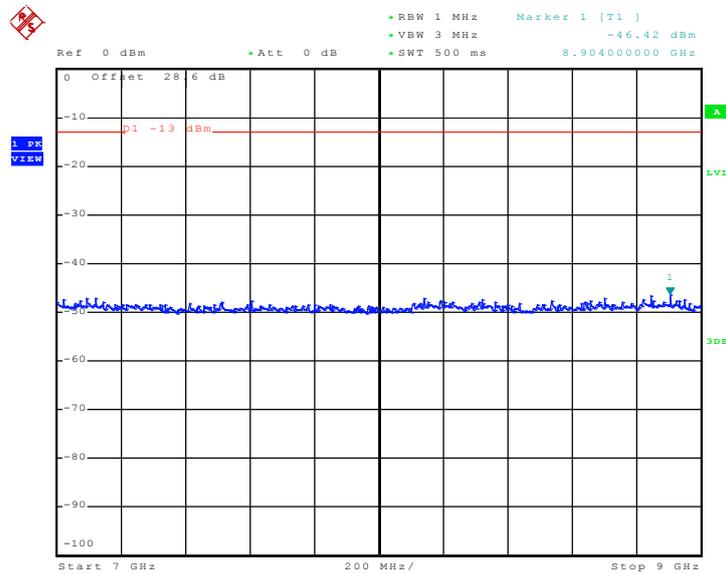


Date: 4.JUN.2009 23:14:30




Band :	GSM850	Channel :	CH189
Test Mode :	EDGE 8 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

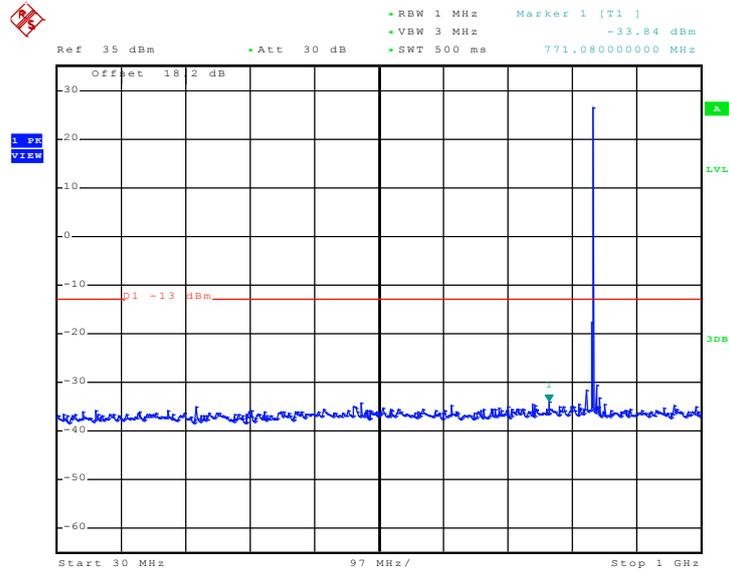

Date: 4..JUN.2009 23:18:28


Conducted Emission Plot between 1GHz ~ 3GHz

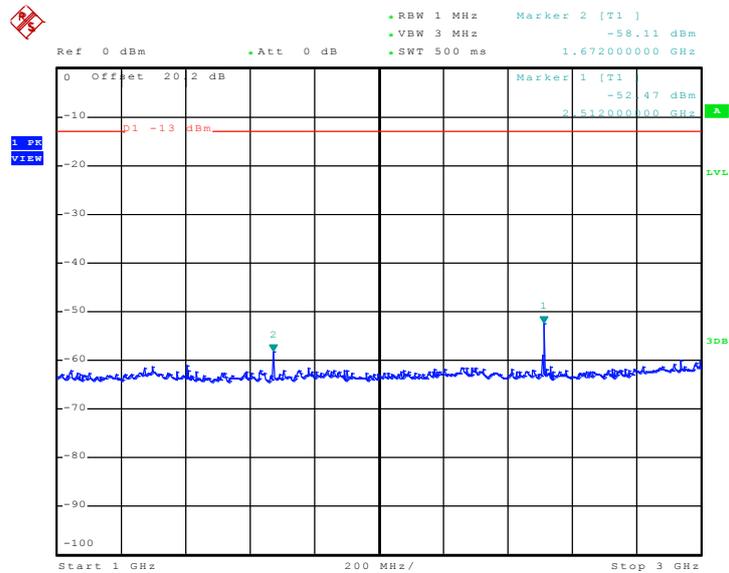

Date: 4..JUN.2009 23:19:43




Conducted Emission Plot between 3GHz ~ 7GHz

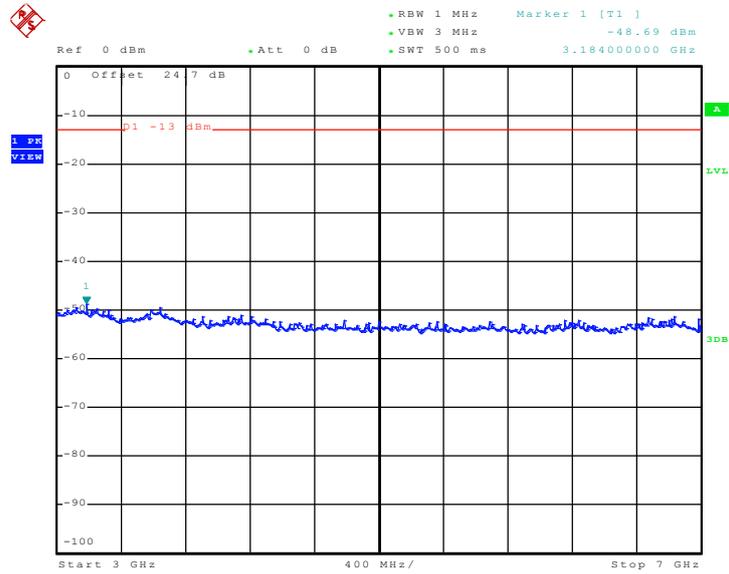

Date: 4.JUN.2009 23:20:25

Conducted Emission Plot between 7GHz ~ 9GHz

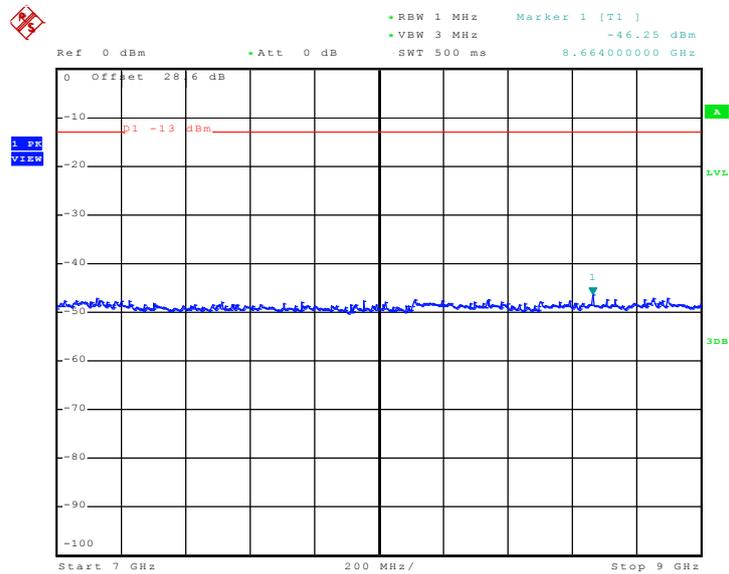


Date: 4.JUN.2009 23:39:59




Band :	GSM1900	Channel :	CH661
Test Mode :	GSM Link		

Conducted Emission Plot between 30MHz ~ 1GHz

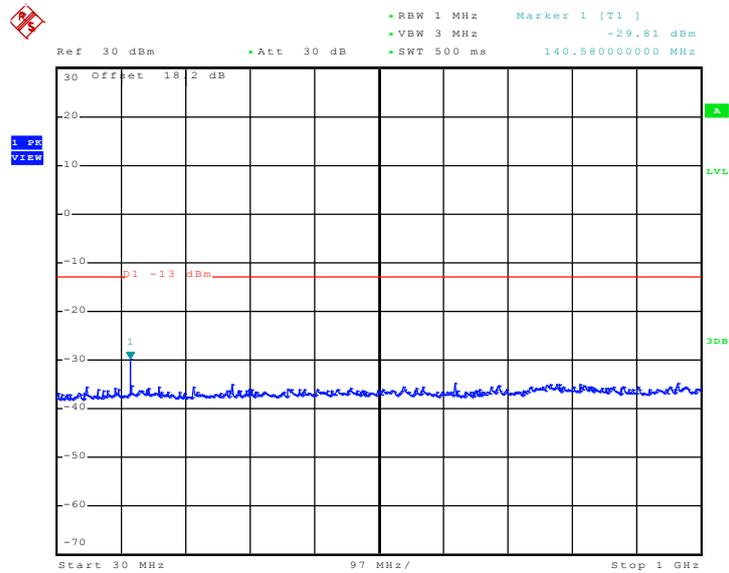

Date: 5..JUN.2009 10:55:16


Conducted Emission Plot between 1GHz ~ 3GHz

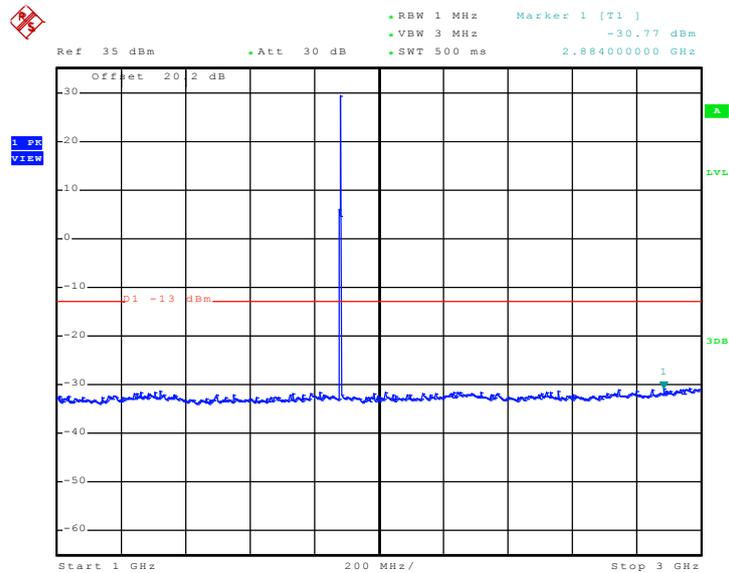

Date: 5..JUN.2009 10:59:10




Conducted Emission Plot between 3GHz ~ 7GHz

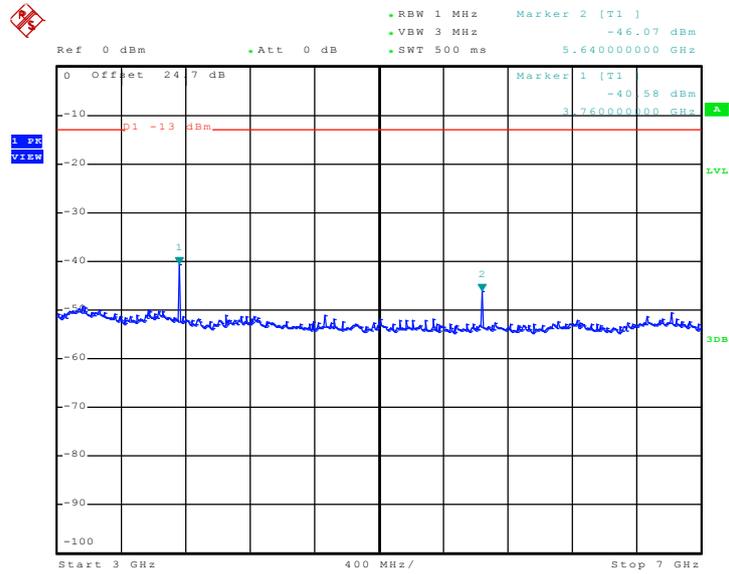

Date: 4.JUN.2009 23:58:35


Conducted Emission Plot between 7GHz ~ 13.6GHz

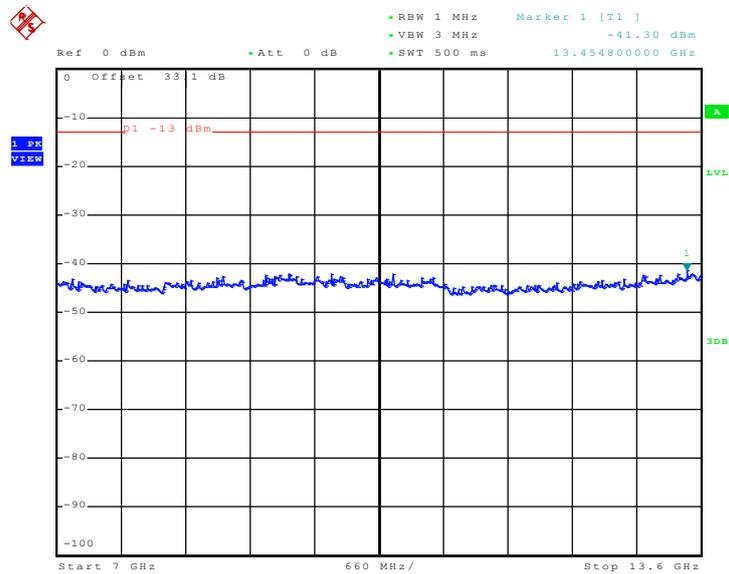

Date: 4.JUN.2009 23:59:10



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

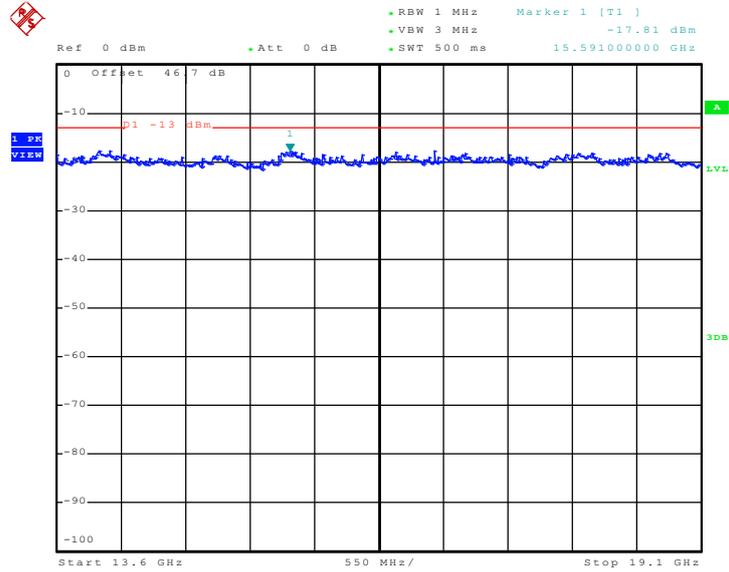


Date: 4..JUN.2009 23:59:46




Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE 8 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

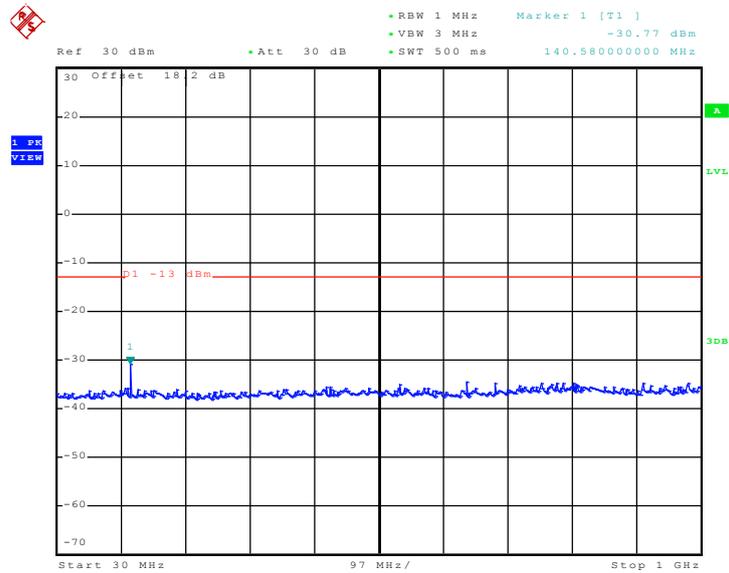

Date: 5..JUN.2009 00:07:46


Conducted Emission Plot between 1GHz ~ 3GHz

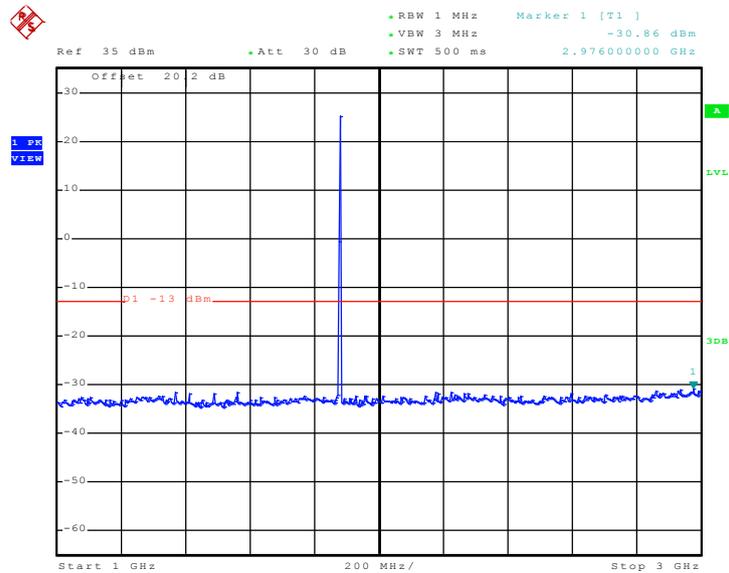

Date: 5..JUN.2009 00:09:58




Conducted Emission Plot between 3GHz ~ 7GHz

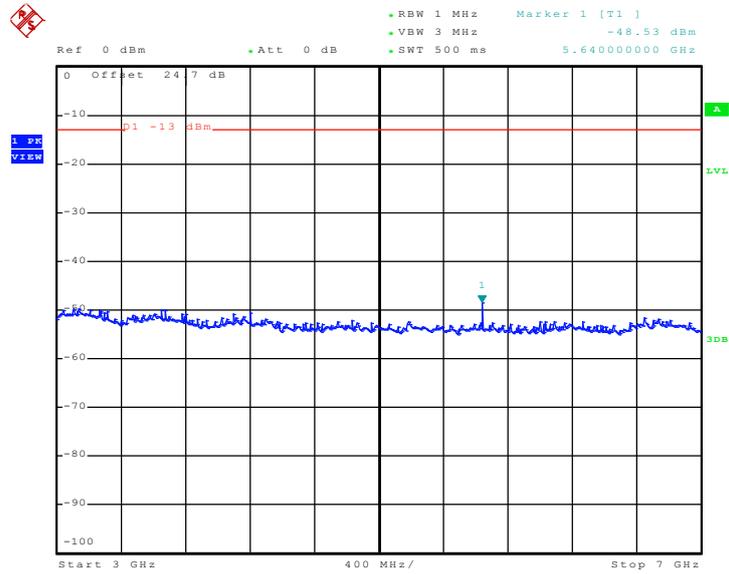

Date: 5.JUN.2009 00:10:39


Conducted Emission Plot between 7GHz ~ 13.6GHz

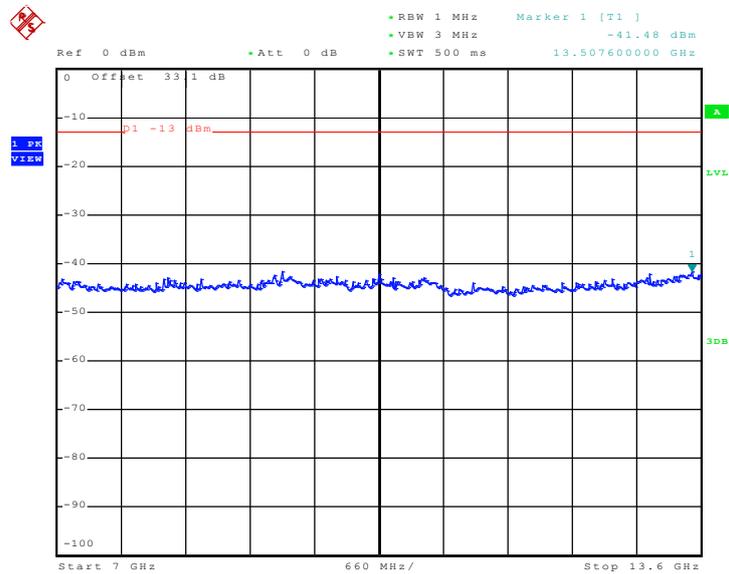

Date: 5.JUN.2009 00:11:11



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

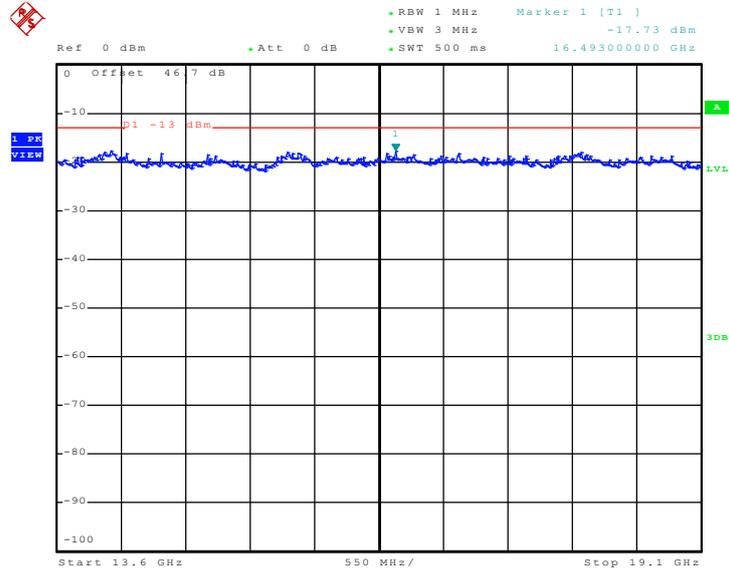


Date: 5..JUN.2009 00:11:40




Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	WCDMA Link		

Conducted Emission Plot between 30MHz ~ 1GHz

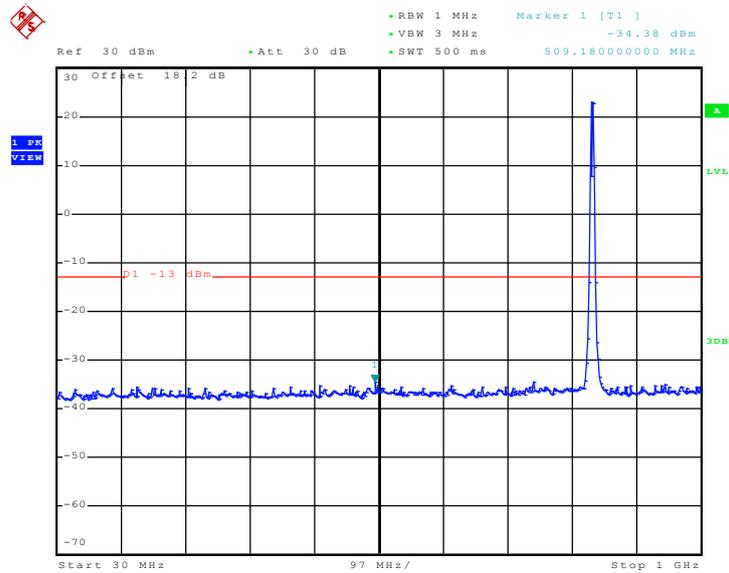

Date: 5..JUN.2009 10:00:16


Conducted Emission Plot between 1GHz ~ 3GHz

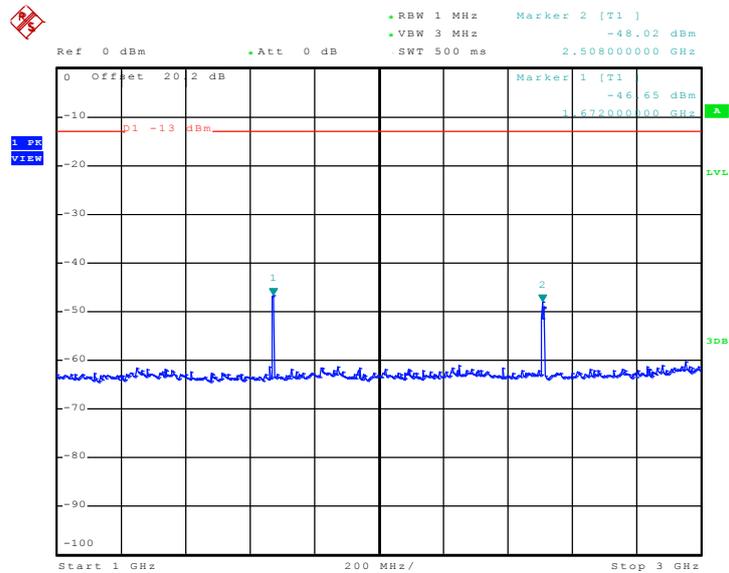

Date: 5..JUN.2009 10:03:24




Conducted Emission Plot between 3GHz ~ 7GHz

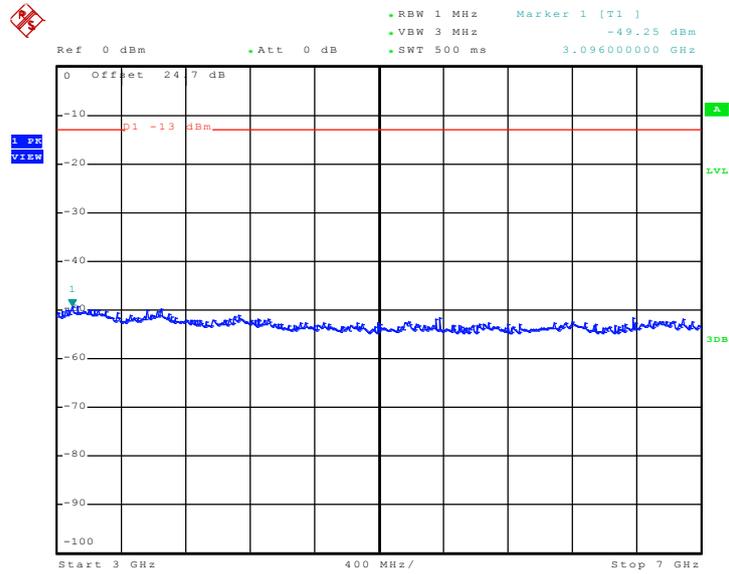

Date: 5.JUN.2009 10:03:56

Conducted Emission Plot between 7GHz ~ 9GHz

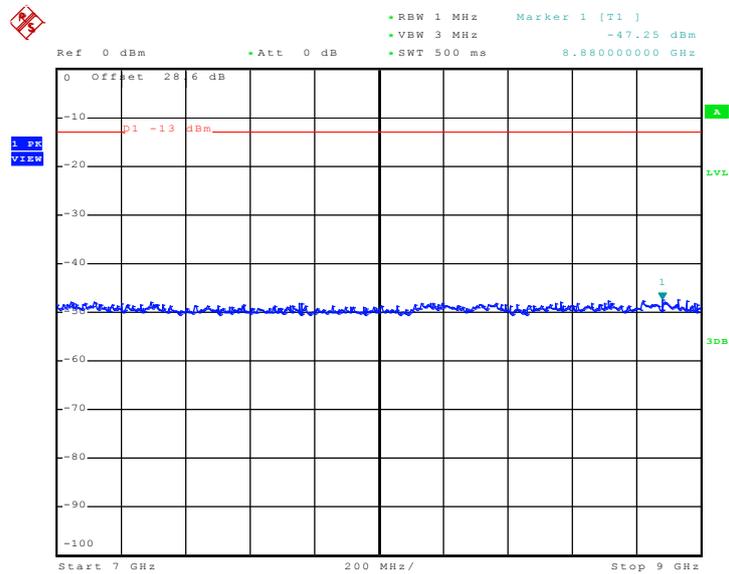


Date: 5.JUN.2009 10:04:28




Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	WCDMA Link		

Conducted Emission Plot between 30MHz ~ 1GHz

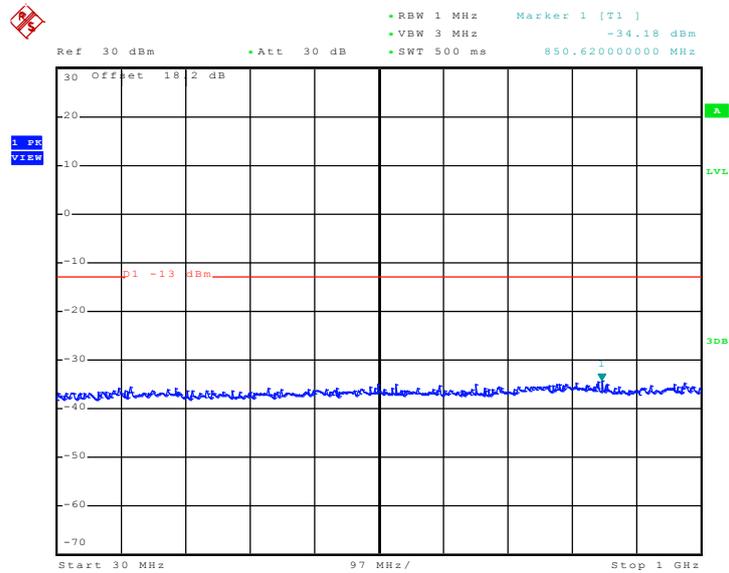

Date: 5..JUN.2009 10:36:39


Conducted Emission Plot between 1GHz ~ 3GHz

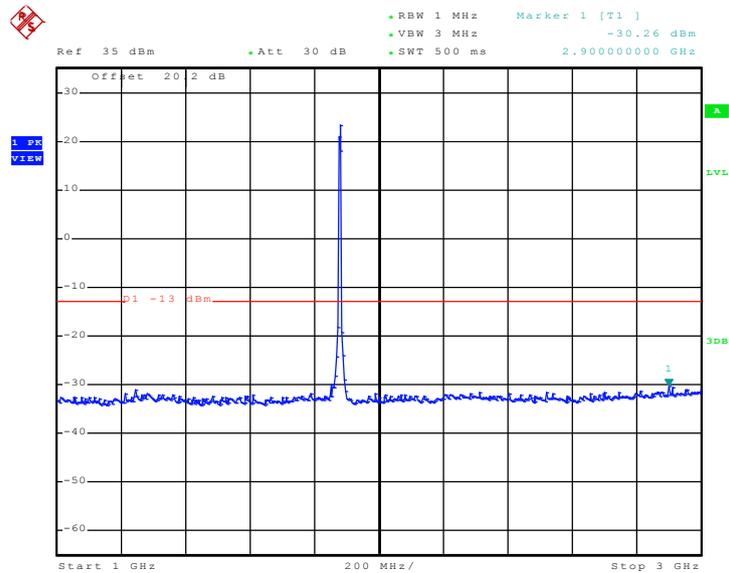

Date: 5..JUN.2009 10:37:26




Conducted Emission Plot between 3GHz ~ 7GHz

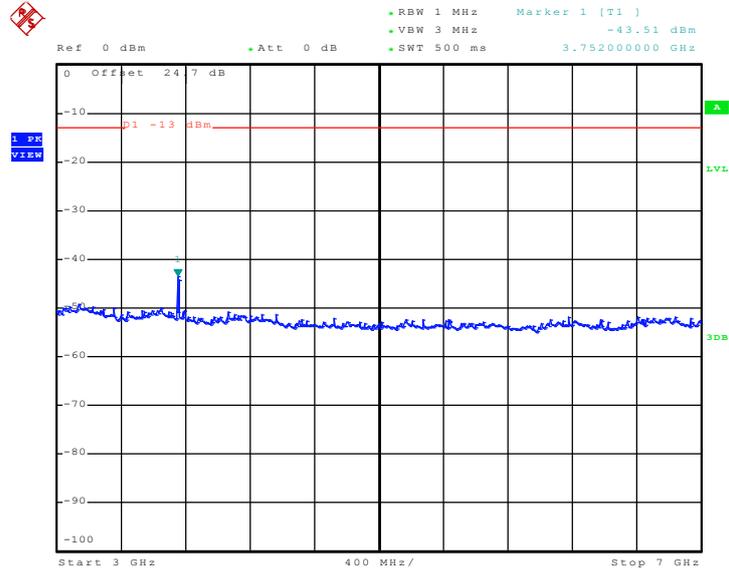

Date: 5.JUN.2009 10:39:12


Conducted Emission Plot between 7GHz ~ 13.6GHz

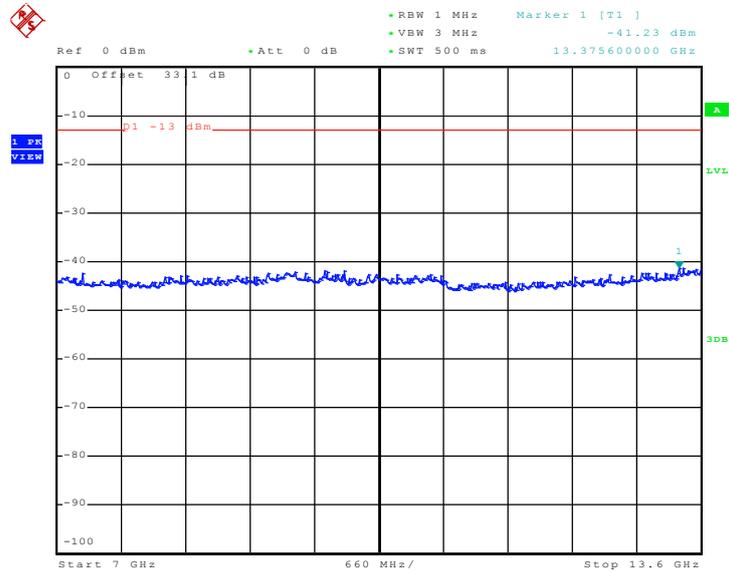

Date: 5.JUN.2009 10:40:10



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

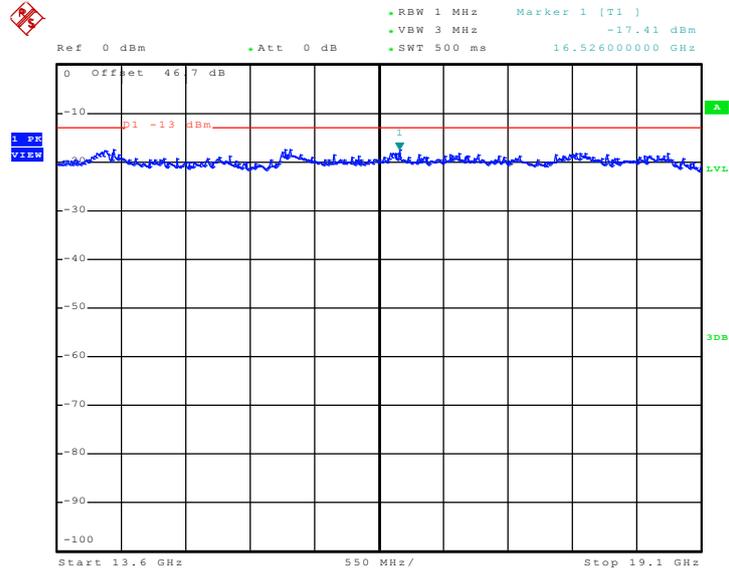

Date: 5..JUN.2009 10:41:05

## 3.5 Field Strength of Spurious Radiation Measurement

### 3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.5.3 Test Procedures

1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. Emission level (dBm) = output power + substitution Gain.


### 3.5.4 Test Setup

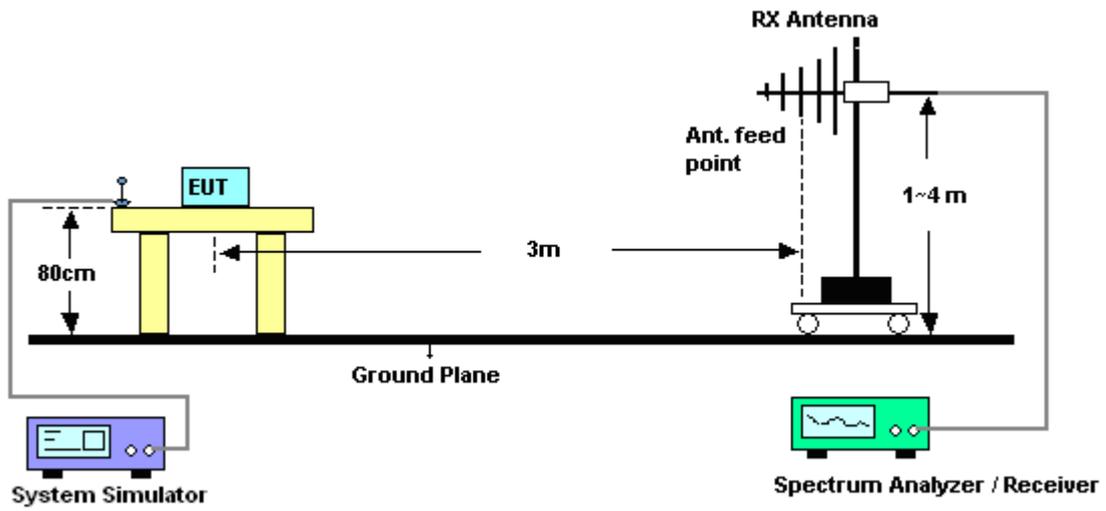



3.5.5 Test Result of Field Strength of Spurious Radiated

Band :	GSM850	Temperature :	28~31°C
Test Mode :	GSM Link for PDA Phone 1	Relative Humidity :	30~31%
Test Engineer :	Nadir Wang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

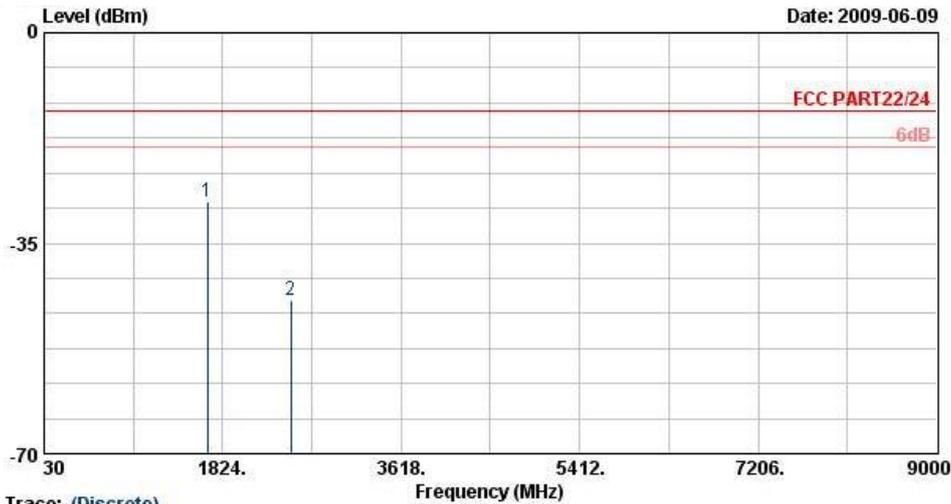


Trace: (Discrete)  
 Site : 03CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL  
 Project : FG 8D3104-08  
 Mode : Mode 1

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1669	-28.14	-13	-15.14	-37.62	-27.99	3.39	5.39	H	Pass
2509	-44.48	-13	-31.48	-52.2	-44.74	3.71	6.12	H	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	GSM Link for PDA Phone 1	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

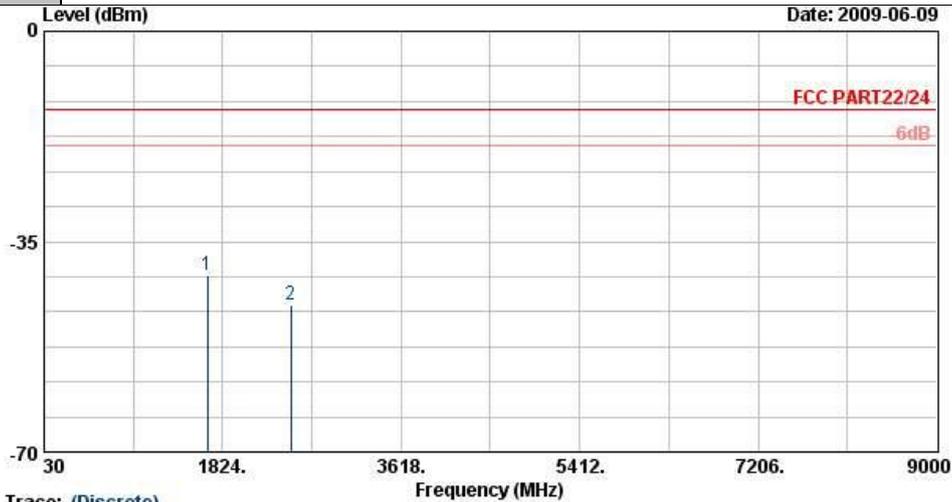


Trace: (Discrete)  
 Site : D3CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL  
 Project : FG 8D3104-08  
 Mode : Mode 1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-40.55	-13	-27.55	-47.43	-40.4	3.39	5.39	V	Pass
2509	-45.51	-13	-32.51	-56.05	-45.77	3.71	6.12	V	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	EDGE 8 Link for PDA Phone 1	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

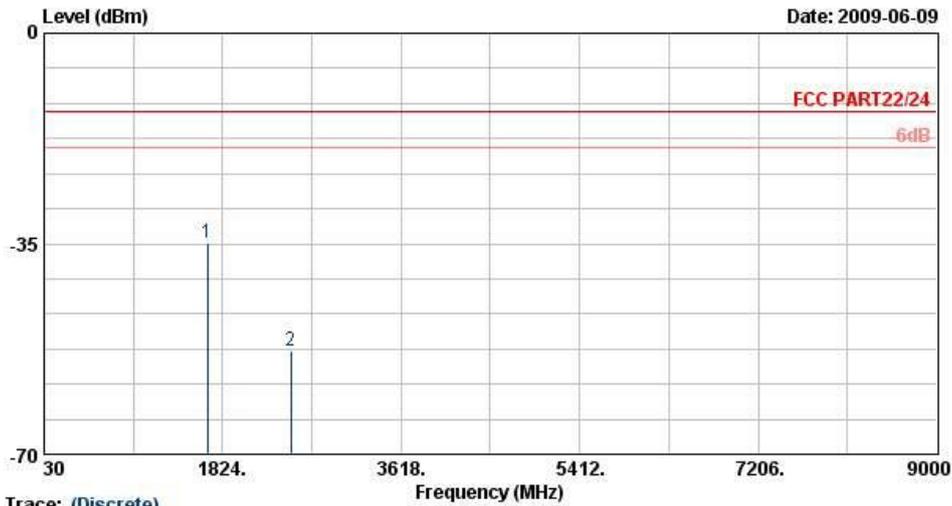


Trace: (Discrete)  
 Site : D3CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL  
 Project : FG 8D3104-08  
 Mode : Mode 2

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-34.88	-13	-21.88	-44	-34.73	3.39	5.39	H	Pass
2509	-52.85	-13	-39.85	-62.99	-53.11	3.71	6.12	H	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	EDGE 8 Link for PDA Phone 1	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

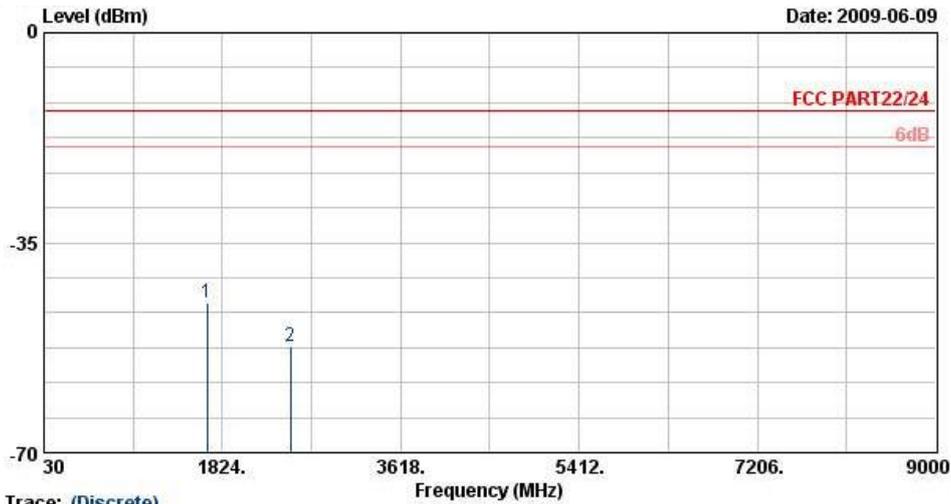


Trace: (Discrete)  
 Site : 03CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL  
 Project : FG 8D3104-08  
 Mode : Mode 2

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-44.94	-13	-31.94	-51.29	-44.79	3.39	5.39	V	Pass
2509	-52.39	-13	-39.39	-62.98	-52.65	3.71	6.12	V	Pass




<b>Band :</b>	GSM850	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	GSM Link for PDA Phone 2	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

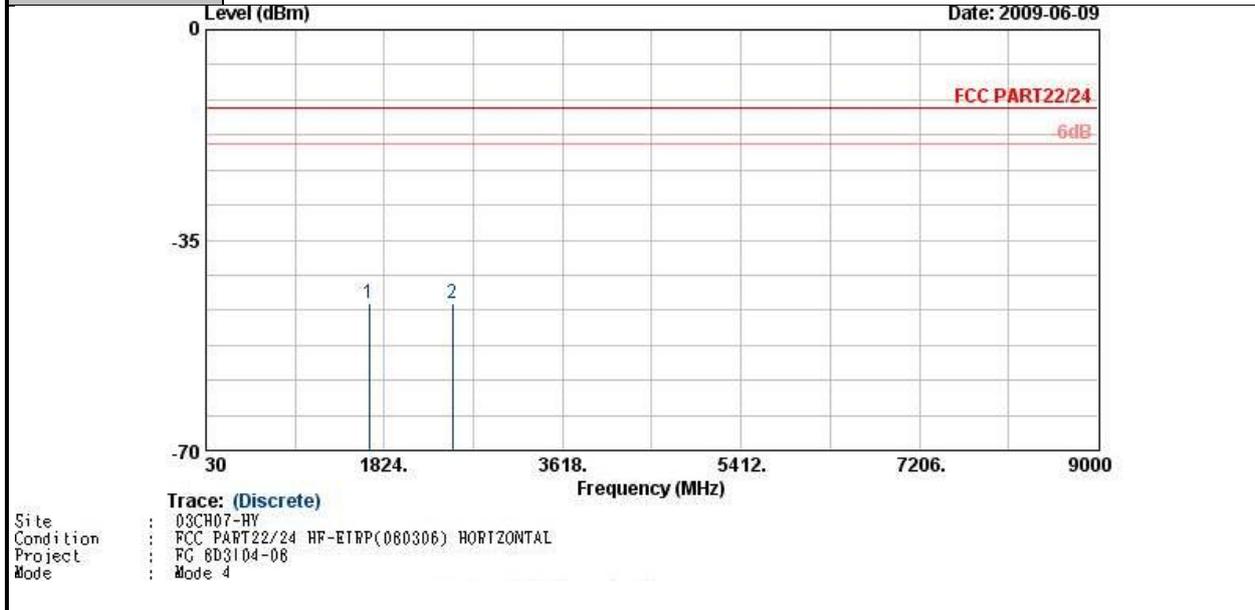

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-45.46	-13	-32.46	-53.17	-45.31	3.39	5.39	H	Pass
2509	-45.53	-13	-32.53	-53.23	-45.79	3.71	6.12	H	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	GSM Link for PDA Phone 2	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

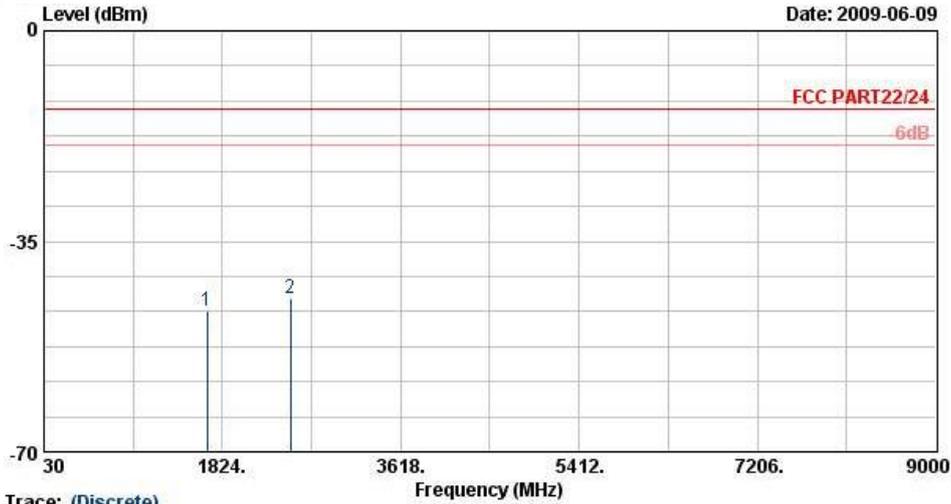


Trace: (Discrete)  
 Site : 03CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL  
 Project : FG 8D3104-08  
 Mode : Mode 4

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-46.68	-13	-33.68	-52.68	-46.53	3.39	5.39	V	Pass
2509	-44.52	-13	-31.52	-55.14	-44.78	3.71	6.12	V	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	GSM Link + 802.11g Tx CH01 for PDA Phone 1	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

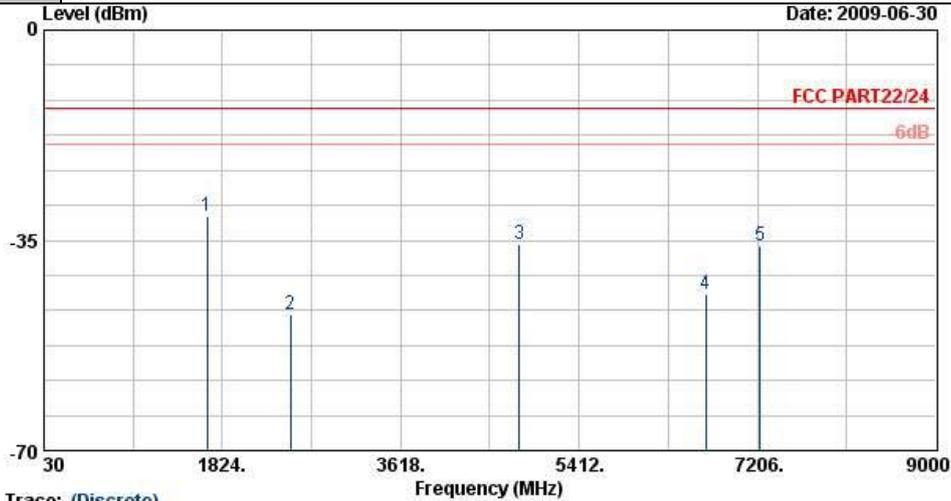


Trace: (Discrete)  
 Site : D3CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL  
 Project : FG 8D3104-08  
 Mode : Mode 1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-30.87	-13	-17.87	-39.93	-30.72	3.39	5.39	H	Pass
2509	-47.30	-13	-34.30	-54.7	-47.56	3.71	6.12	H	Pass
4815	-35.60	-13	-22.60	-49.26	-40.29	2.71	9.55	H	Pass
6690	-43.87	-13	-30.87	-64.15	-47.65	5.22	11.15	H	Pass
7235	-36.00	-13	-23.00	-59.8	-39.78	5.22	11.15	H	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	GSM Link + 802.11g Tx CH01 for PDA Phone 1	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

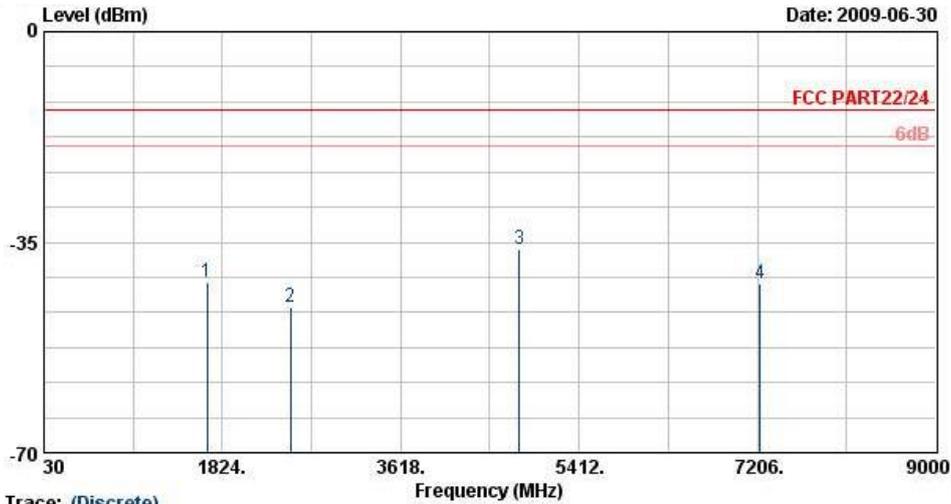


Trace: (Discrete)  
 Site : 03CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL  
 Project : FG 8D3104-08  
 Mode : Mode 1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-41.71	-13	-28.71	-48.52	-41.56	3.39	5.39	V	Pass
2509	-45.71	-13	-32.71	-56.24	-45.97	3.71	6.12	V	Pass
4815	-36.16	-13	-23.16	-50.63	-40.85	2.71	9.55	V	Pass
7235	-41.79	-13	-28.79	-62.63	-45.62	5.87	11.85	V	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	GSM Link + 802.11g Tx CH01 for PDA Phone 2	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

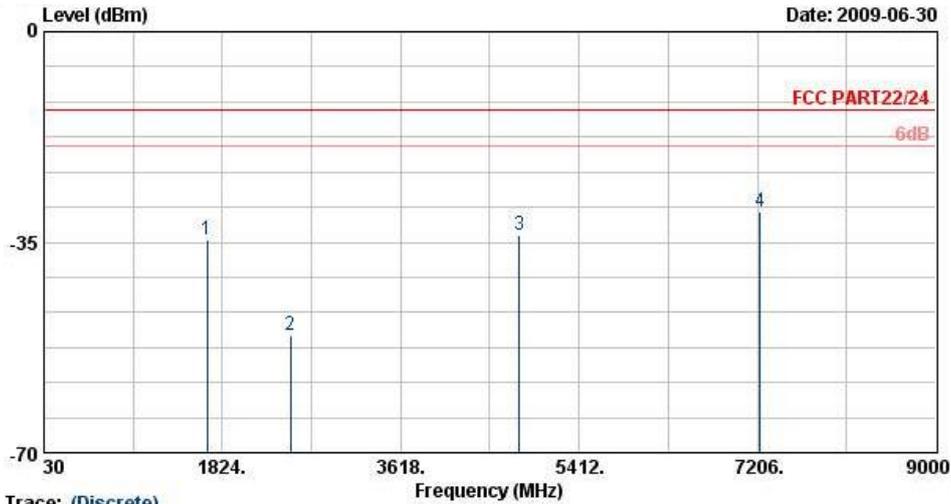


Trace: (Discrete)  
 Site : 03CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL  
 Project : FG 8D3104-08  
 Mode : Mode 2

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1669	-34.54	-13	-21.54	-43.78	-34.39	3.39	5.39	H	Pass
2509	-50.60	-13	-37.60	-57.17	-50.86	3.71	6.12	H	Pass
4815	-33.90	-13	-20.90	-47.07	-38.59	2.71	9.55	H	Pass
7235	-30.04	-13	-17.04	-53.83	-33.82	5.22	11.15	H	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	GSM Link + 802.11g Tx CH01 for PDA Phone 2	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

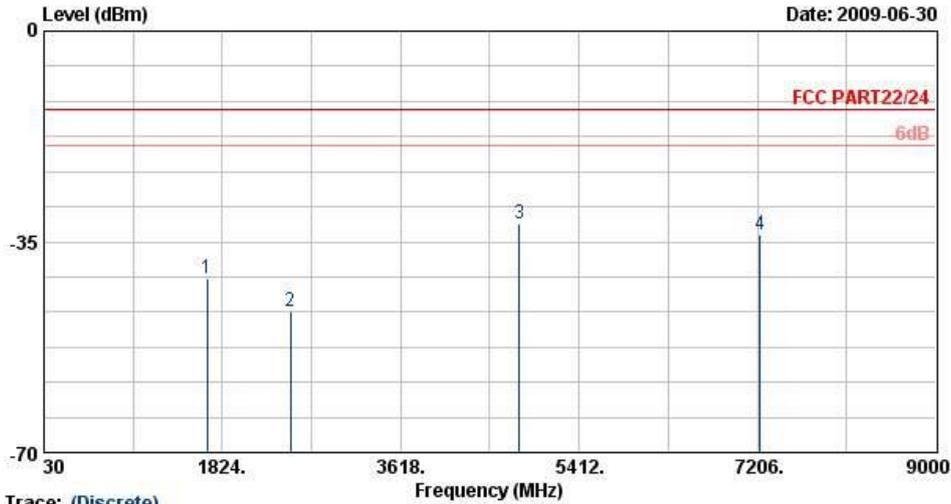


Trace: (Discrete)  
 Site : 03CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(060306) VERTICAL  
 Project : FG 8D3104-08  
 Mode : Mode 2

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1669	-41.00	-13	-28.00	-47.9	-40.85	3.39	5.39	V	Pass
2509	-46.53	-13	-33.53	-56.81	-46.79	3.71	6.12	V	Pass
4815	-32.06	-13	-19.06	-46.53	-36.75	2.71	9.55	V	Pass
7235	-33.82	-13	-20.82	-56.33	-37.65	5.87	11.85	V	Pass



<b>Band :</b>	GSM1900	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	GSM Link for PDA Phone 1	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

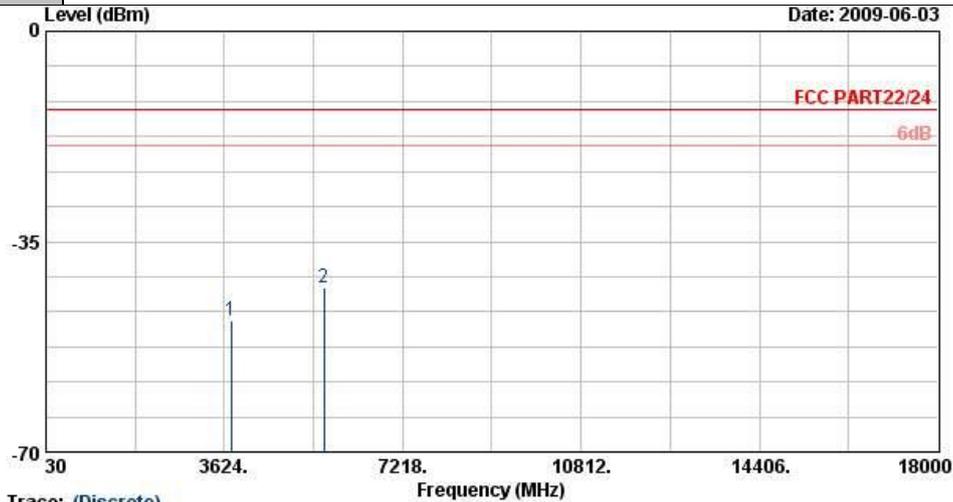


Trace: (Discrete)  
 Site : D3CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL  
 Project : FG 8D3104-08  
 Mode : Mode 1

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-48.04	-13	-35.04	-62.33	-50.56	4.88	7.40	H	Pass
5636	-42.72	-13	-29.72	-62.48	-45.98	5.55	8.81	H	Pass




<b>Band :</b>	GSM1900	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	GSM Link for PDA Phone 1	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line and within 1000MHz-10 <sup>th</sup> harmonic were not found any signal.		

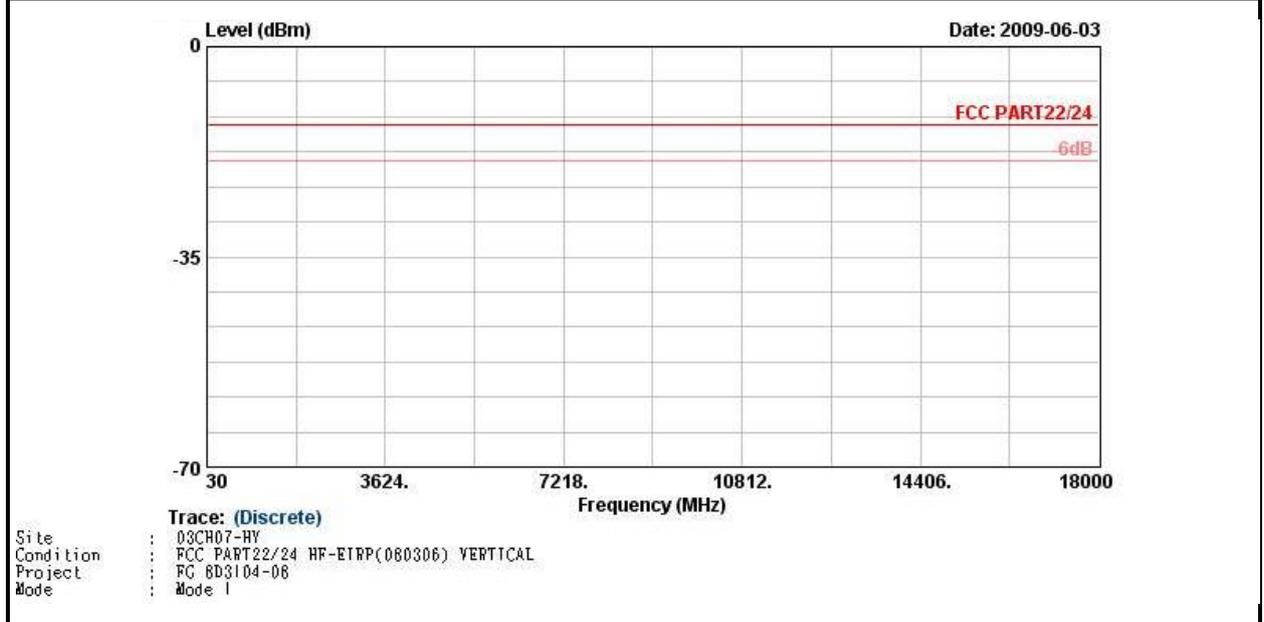




<b>Band :</b>	GSM1900	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	EDGE 8 Link for PDA Phone 1	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line and within 1000MHz-10 <sup>th</sup> harmonic were not found any signal.		

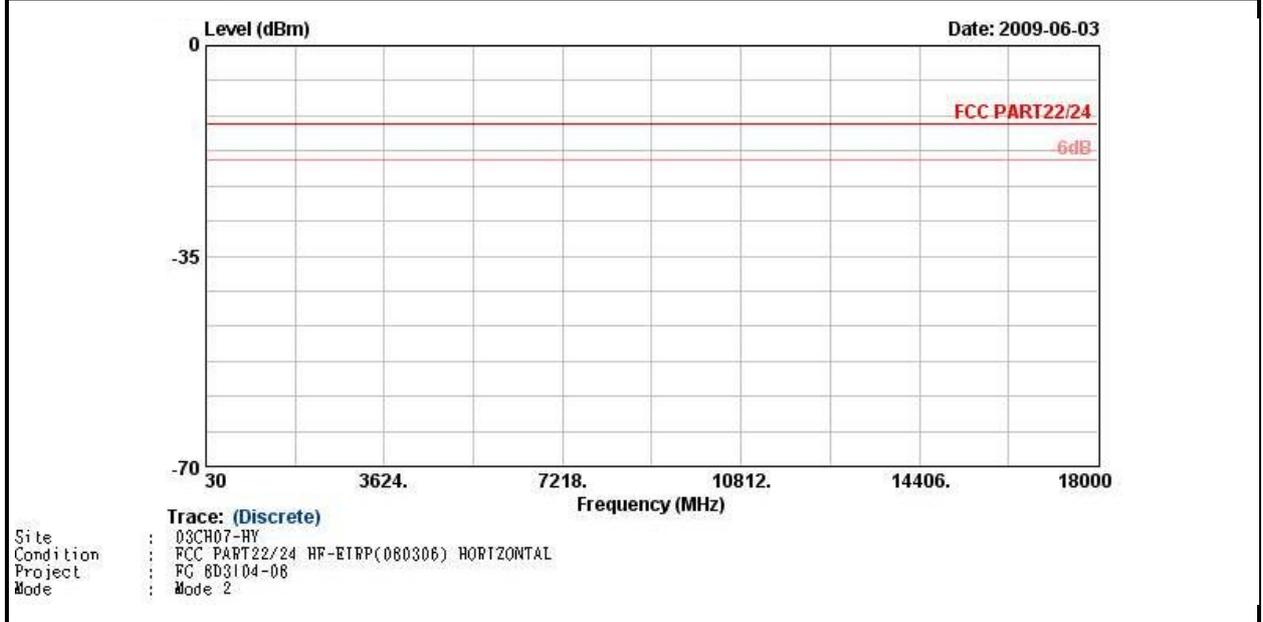




Band :	GSM1900	Temperature :	28~31°C
Test Mode :	EDGE 8 Link for PDA Phone 1	Relative Humidity :	30~31%
Test Engineer :	Nadir Wang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line and within 1000MHz-10 <sup>th</sup> harmonic were not found any signal.		

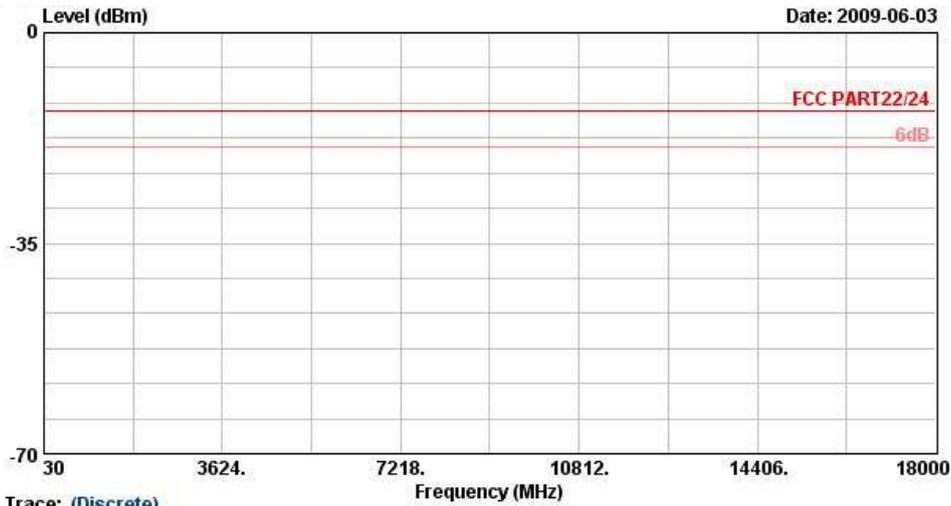

Trace: (Discrete)  
Site : 03CH07-HY  
Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL  
Project : FG 8D3104-08  
Mode : Mode 2



<b>Band :</b>	GSM1900	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	GSM Link for PDA Phone 2	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

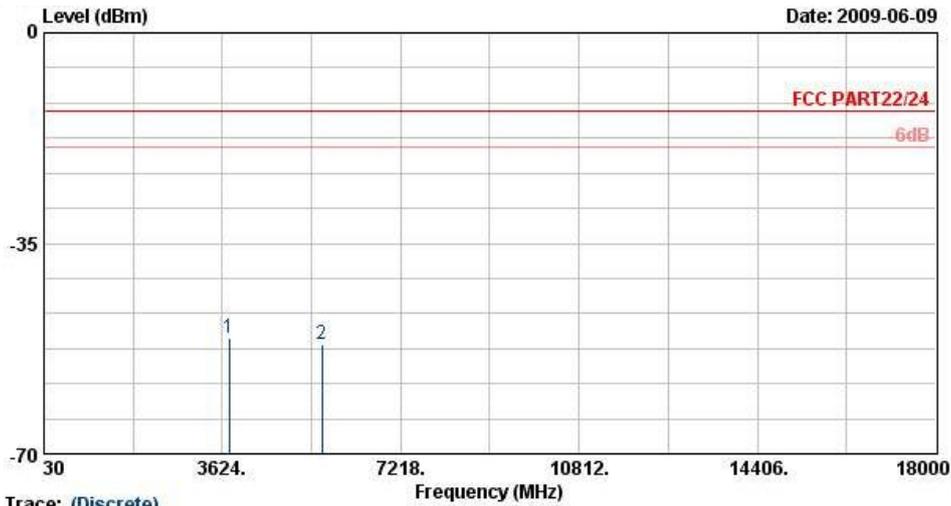


Trace: (Discrete)  
 Site : 03CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL  
 Project : FG 8D3104-08  
 Mode : Mode 4

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-50.85	-13	-37.85	-62.5	-53.37	4.88	7.40	H	Pass
5636	-51.68	-13	-38.68	-64.98	-54.94	5.55	8.81	H	Pass



<b>Band :</b>	GSM1900	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	GSM Link for PDA Phone 2	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

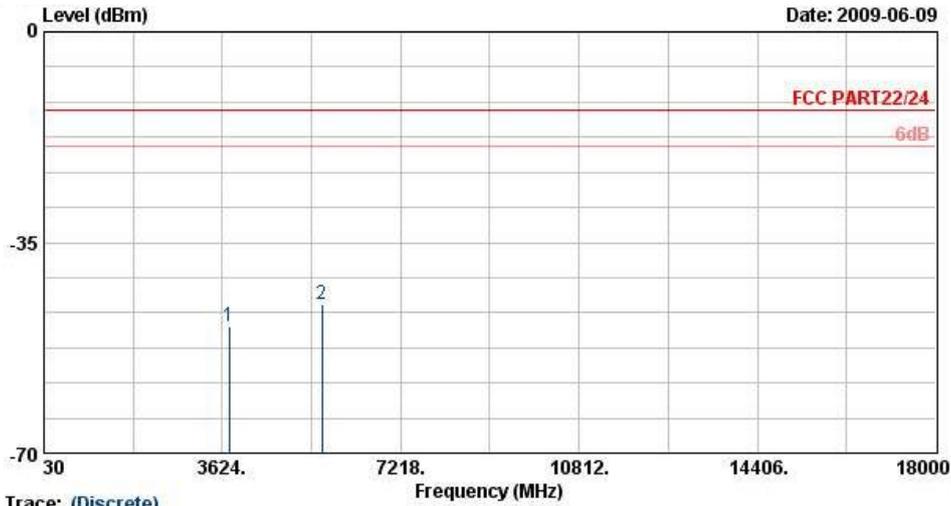


Trace: (Discrete)  
 Site : 03CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL  
 Project : FG 8D3104-08  
 Mode : Mode 4

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-48.90	-13	-35.90	-63.21	-51.93	4.88	7.91	V	Pass
5636	-45.19	-13	-32.19	-63.91	-49.41	5.55	9.77	V	Pass



<b>Band :</b>	WCDMA Band V	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	WCDMA Link for PDA Phone 1	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

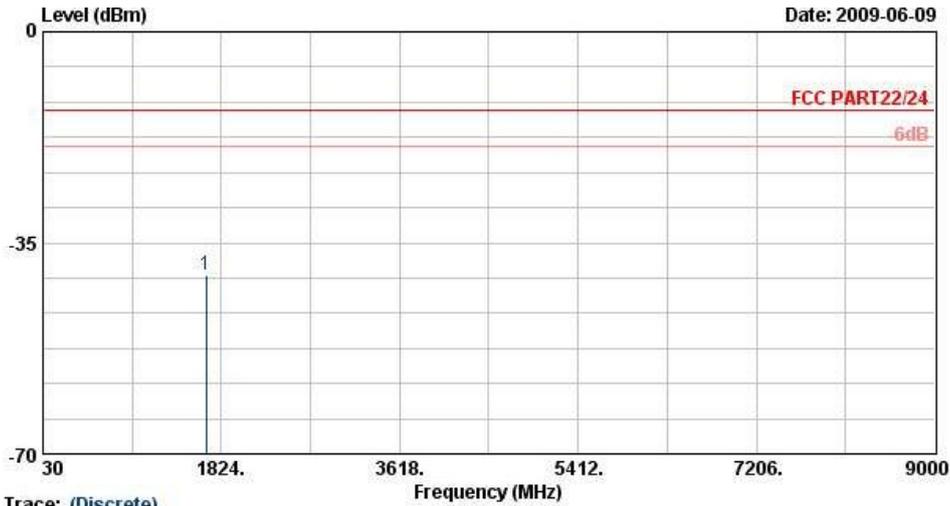


Trace: (Discrete)  
 Site : 03CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL  
 Project : FG 8D3104-08  
 Mode : Mode 3

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1669	-40.44	-13	-27.44	-48.59	-40.29	3.39	5.39	H	Pass




<b>Band :</b>	WCDMA Band V	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	WCDMA Link for PDA Phone 1	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

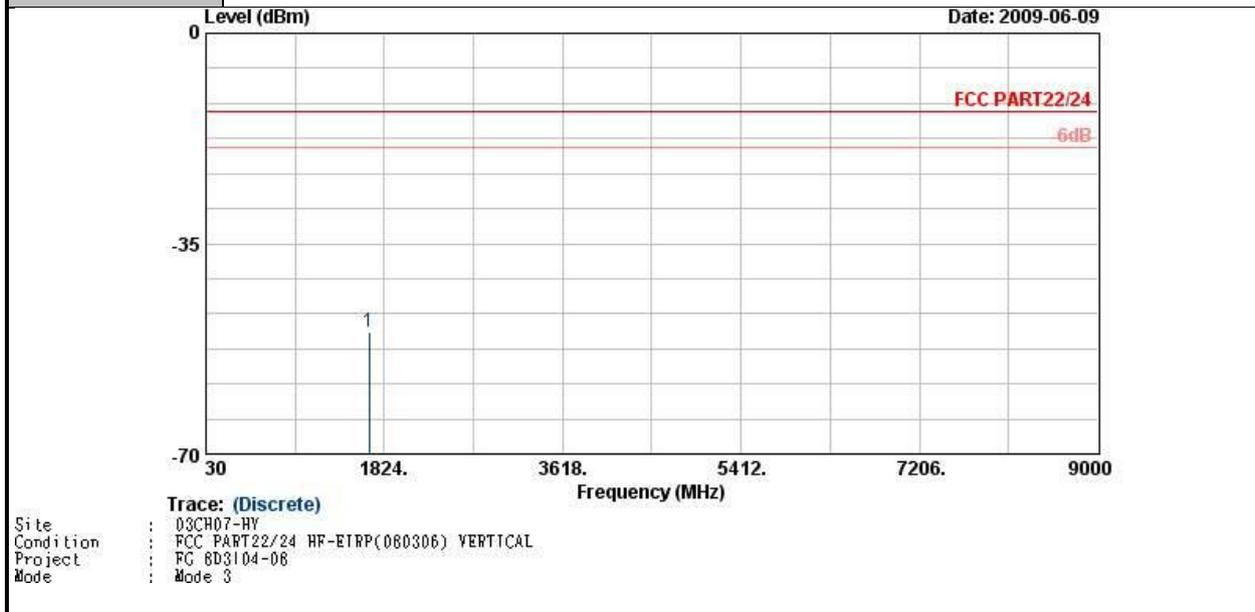

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-49.77	-13	-36.77	-55.32	-49.62	3.39	5.39	V	Pass



<b>Band :</b>	WCDMA Band II	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	WCDMA Link for PDA Phone 1	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

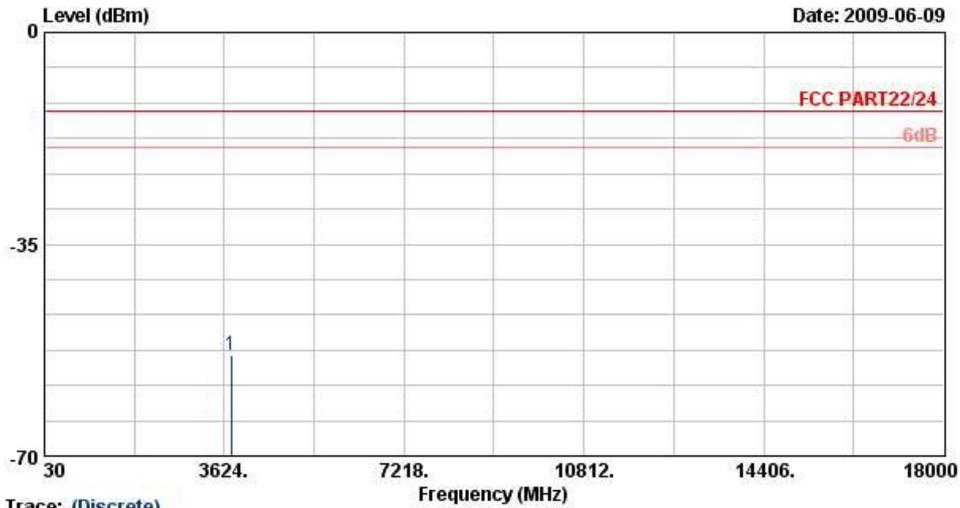


Trace: (Discrete)  
 Site : 03CH07-HY  
 Condition : FCC PART22/24 HF-EIRP(060306) HORIZONTAL  
 Project : FG 8D3104-08  
 Mode : Mode 3

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-53.24	-13	-40.24	-63.76	-55.76	4.88	7.40	H	Pass



<b>Band :</b>	WCDMA Band II	<b>Temperature :</b>	28~31°C
<b>Test Mode :</b>	WCDMA Link for PDA Phone 1	<b>Relative Humidity :</b>	30~31%
<b>Test Engineer :</b>	Nadir Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

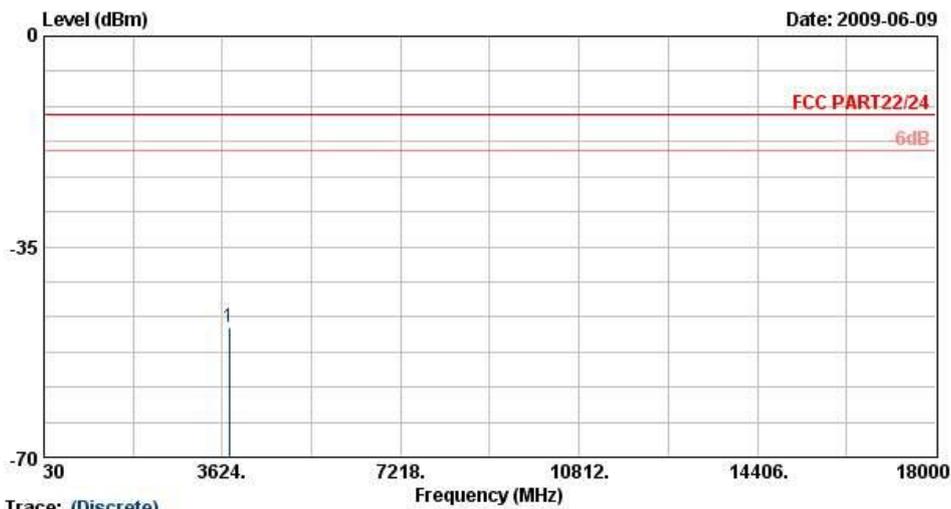

Trace: (Discrete)  
 Site : D3CH07-HY  
 Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL  
 Project : FG 8D3104-08  
 Mode : Mode 3

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-48.35	-13	-35.35	-63.57	-51.38	4.88	7.91	V	Pass

## 3.6 Frequency Stability Measurement

### 3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.


### 3.6.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT can not be turned on at  $-30^{\circ}\text{C}$ , the testing lowest temperature will be raised in  $10^{\circ}\text{C}$  step until the EUT can be turned on.

### 3.6.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

### 3.6.5 Test Setup

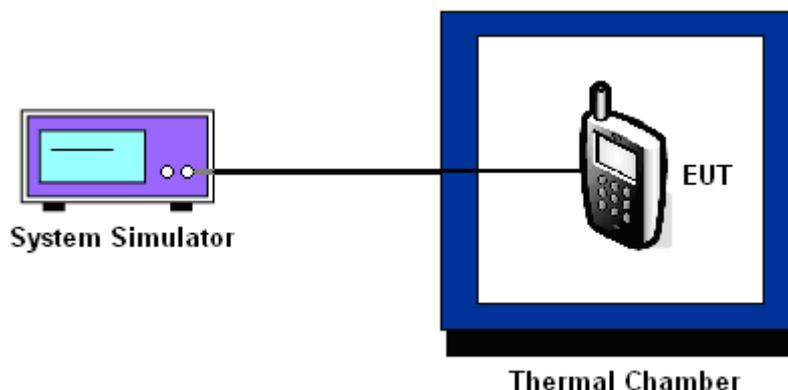



3.6.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5		

Temperature (°C)	GSM		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-36	-0.04	-19	-0.02	PASS
-20	-30	-0.04	-16	-0.02	
-10	-42	-0.05	17	0.02	
0	-48	-0.06	-24	-0.03	
10	-16	-0.02	-32	-0.04	
20	-25	-0.03	-29	-0.03	
30	15	0.02	22	0.03	
40	13	0.02	24	0.03	
50	-39	-0.05	-16	-0.02	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5		

Temperature (°C)	GSM		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-29	-0.02	-21	-0.01	PASS
-20	-21	-0.01	-19	-0.01	
-10	-34	-0.02	-22	-0.01	
0	-55	-0.03	-56	-0.03	
10	-64	-0.03	-59	-0.03	
20	-48	-0.03	-63	-0.03	
30	-23	-0.01	-32	-0.02	
40	-39	-0.02	-36	-0.02	
50	-28	-0.01	-45	-0.02	



<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	4182
<b>Limit (ppm) :</b>	2.5		

Temperature (°C)	WCDMA		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	19	0.02	PASS
-20	16	0.02	
-10	14	0.02	
0	-15	-0.02	
10	-12	-0.01	
20	-17	-0.02	
30	-26	-0.03	
40	-15	-0.02	
50	21	0.02	

<b>Band :</b>	WCDMA Band II	<b>Channel :</b>	9400
<b>Limit (ppm) :</b>	2.5		

Temperature (°C)	WCDMA		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-34	-0.02	PASS
-20	-44	-0.02	
-10	-37	-0.02	
0	27	0.01	
10	-26	-0.01	
20	22	0.01	
30	-29	-0.02	
40	-23	-0.01	
50	-25	-0.01	



3.6.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GSM	3.7	-28	-0.03	2.5	PASS
		BEP	-16	-0.02		
		4.2	-26	-0.03		
	EDGE 8	3.7	-13	-0.02		
		BEP	-21	-0.02		
		4.2	-10	-0.01		
GSM 1900 CH661	GSM	3.7	-42	-0.02		
		BEP	-49	-0.03		
		4.2	-31	-0.02		
	EDGE 8	3.7	-46	-0.02		
		BEP	-52	-0.03		
		4.2	-41	-0.02		
WCDMA Band V CH4182	WCDMA	3.7	-19	-0.02		
		BEP	-16	-0.02		
		4.2	18	0.02		
WCDMA Band II CH9400	WCDMA	3.7	-29	-0.02		
		BEP	-30	-0.02		
		4.2	20	0.01		

Note:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.2 V.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
System Simulator	R&S	CMU200	116456	N/A	Jun. 05, 2008	Jun. 04, 2010	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 23, 2009	Jun. 22, 2010	Conducted (TH02-HY)
Thermal Chamber	TEN BILLION	TTH-D35P	TBN-930701	N/A	Aug. 01, 2008	Jul. 31, 2009	Conducted (TH02-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz~1GHz	Nov. 20, 2008	Nov. 19, 2009	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9kHz~30GHz	Dec. 02, 2008	Dec. 01, 2009	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1G~18GHz	Aug. 18, 2008	Aug. 17, 2009	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1G~26.5GHz	Dec. 17, 2008	Dec. 16, 2009	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10~1000MHz. 32dB.GAIN	Mar. 27, 2009	Mar. 26, 2010	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00066584	1G~18GHz	Aug. 06, 2008	Aug. 05, 2009	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	May 22, 2008	May 21, 2010	Radiation (03CH07-HY)
System Simulator	R&S	CMU200	117591	N/A	Oct. 23, 2008	Oct. 22, 2010	Radiation (03CH07-HY)

## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
<b>Combined standard uncertainty Uc(y)</b>	<b>1.27</b>		
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>2.54</b>		

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$	$C_i$	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 * \Gamma_2)$	+0.34/-0.35	U-shaped	0.244	1	0.244
<b>Combined standard uncertainty Uc(y)</b>	<b>2.36</b>				
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>4.72</b>				

## 6 Certification of TAF Accreditation



Certificate No. : L1190-090417

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

<b>Accreditation Criteria</b>	: ISO/IEC 17025:2005
<b>Accreditation Number</b>	: 1190
<b>Originally Accredited</b>	: December 15, 2003
<b>Effective Period</b>	: January 10, 2007 to January 09, 2010
<b>Accredited Scope</b>	: Testing Field, see described in the Appendix
<b>Specific Accreditation Program</b>	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

  
Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : April 17, 2009

P1, total 20 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP8D3104-08 as below.