


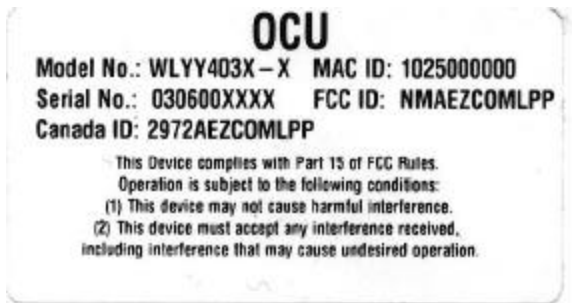

FCC ID Label Information Product Data

DAIRY LABEL/DL-50/40# FS

FACESTOCK

FM Litho: A medium gloss bleached hardwood and softwood kraft stock that is supercalendered and coated one side for high internal strength.

Basis Weight:	60# per ream $\pm$ 10% {500 sheets 25" x 38"}	Tensile:	MD 27# per inch width CD 13# per inch width
Caliper:	0.0034 inches $\pm$ 10%	Tear:	MD 45 grams per sheet CD 50 grams per sheet

ADHESIVE

DL-50 is a permanent adhesive specifically formulated and designed for adhesion to HDPE (high density polyethylene) milk jugs and other applications with similar surfaces.

Minimum Application Temperature:	+25°F	Type:	Hot Melt Rubber
Service Temperature Range:	-65°F to +160°F		

LINER

40# FS: A bleached supercalendered kraft stock featuring high internal strength, toughness and tear resistance.

Basis Weight:	41# per ream $\pm$ 10% {500 sheets 24" x 36"}	Tensile:	MD 35# per inch width CD 16# per inch width
Caliper:	0.0025 inches $\pm$ 10%	Tear:	MD 35 grams per sheet CD 45 grams per sheet

TOTAL CONSTRUCTION CALIPER: 0.0066 inches $\pm$ 10%

SHELF LIFE: One year when stored at 72°F/50% R.H.

As with all pressure-sensitive materials, this product should be tested thoroughly under end-use conditions to make sure it meets the requirements of the specific application.