

Application for FCC Certificate  
On Behalf of  
Ningbo Ledeshi Electrical Equipment Co., Ltd.

Electronic Energy Saving Lamp

Model No.: DEB/13~15W  
DEB/18~20W  
DEB/23~25W

FCC ID : NOG6G07

Prepared For : Ningbo Ledeshi Electrical Equipment Co., Ltd.  
438# Youngor Rd., Ningbo City, Zhejiang, China

Prepared By : Audix Technology (Shanghai) Co., Ltd.  
3 F 34 Bldg 680 Guiping Rd,  
Caohejing Hi-Tech Park,  
Shanghai, China 200233

Tel: +86-21-64955500  
Fax: +86-21-64955491

Report No. : ACI-F01079  
Date of Test : Aug 20-21, 2001  
Date of Report : Sept 30, 2001

## TABLE OF CONTENTS

	Page
<b>1 GENERAL INFORMATION.....</b>	<b>4</b>
1.1    Description of Equipment Under Test .....	4
1.2    Description of Test Facility .....	5
1.3    Measurement Uncertainty.....	5
<b>2 AC POWERLINE CONDUCTED EMISSION TEST.....</b>	<b>6</b>
2.1    Test Equipment .....	6
2.2    Block Diagram of Test Setup.....	6
2.3    Conducted Emission Limits.....	6
2.4    Test Configuration .....	7
2.5    Operating Condition of EUT .....	7
2.6    Test Procedures .....	7
2.7    Test Results .....	8
<b>3 FIELD STRENGTH TEST.....</b>	<b>11</b>
3.1    Test Equipment .....	11
3.2    Block Diagram of Test Setup.....	11
3.3    Test Configuration .....	11
3.4    Operating Condition of EUT .....	11
3.5    Test Procedure .....	12
3.6    Test Result .....	12

## TEST REPORT FOR FCC CERTIFICATE

Applicant : Ningbo Ledeshi Electrical Equipment Co., Ltd.

Manufacturer : Ningbo Ledeshi Electrical Equipment Co., Ltd.

EUT Description : Electronic Energy Saving Lamp

(A) Model No.:

DEB/13~15W  
DEB/18~20W  
DEB/23~25W

(B) Serial No.:

E081003 (1)  
E081004 (1)  
E081005 (1)

(C) Power Supply: 120V/60Hz

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 18 CONSUMER DEVICES (2000)  
AND MP-5/1986*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 18 RF Lighting Device limits both conducted emissions and field strength.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

This report must not be used by the applicant to claim product endorsement by NVLAP or any agency of the U.S. Government.

Date of Test : Aug 20 ~ 21, 2001

Prepared by : Stella Tang Test Engineer : Rain Liang  
**STELLA TANG**  
(Assistant) **RAIN LIANG**  
*For and on behalf of (Engineer)*  
**AUDIX TECHNOLOGY (SHANGHAI) CO., LTD.**

Reviewer : Byronkwo Approved Signatory : Alex chiu  
**BYRON KWO**  
(Supervisor) **ALEX CHIU**  
*(Supervisor/Manager)*

## 1 GENERAL INFORMATION

### 1.1 Description of Equipment Under Test

Description : Electronic Energy Saving Lamp

Type of EUT :  Production  Pre-product  Pro-type

Model Number : DEB/13~15W, DEB/18~20W, DEB/23~25W

Applicant : Ningbo Ledeshi Electrical Equipment Co., Ltd.  
438# Youngor Rd., Ningbo City, Zhejiang, China

Manufacturer : Ningbo Ledeshi Electrical Equipment Co., Ltd.  
438# Youngor Rd., Ningbo City, Zhejiang, China

M/N	INPUT POWER (VA)	OUTPUT POWER (W)
DEB/13~15W	25.0	13.3
DEB/18~20W	32.9	17.6
DEB/23~25W	32.7	17.8

## 1.2 Description of Test Facility

Site Description : Sept. 17, 1998 file on  
(Semi-Anechoic Chamber) Federal Communications Commission  
FCC Engineering Laboratory  
7435 Oakland Mills Road  
Columbia, MD 21046, USA

Name of Firm : Audix Technology (Shanghai) Co., Ltd.

Site Location : 3 F 34 Bldg 680 Guiping Rd,  
Caohejing Hi-Tech Park,  
Shanghai, China 200233

NVLAP Lab Code : 200371-0

## 1.3 Measurement Uncertainty

Conducted Emission Uncertainty :  $U = 2.66\text{dB}$


## 2 AC POWERLINE CONDUCTED EMISSION TEST

### 2.1 Test Equipment

The following test equipment are used during the powerline conducted emission test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	844077/020	Apr 24, 2001	1 Year
2.	Line Impedance Stabilization Network (LISN)	Kyoritsu	KNW-407	8-1280-5	May 08, 2001	1 Year

### 2.2 Block Diagram of Test Setup

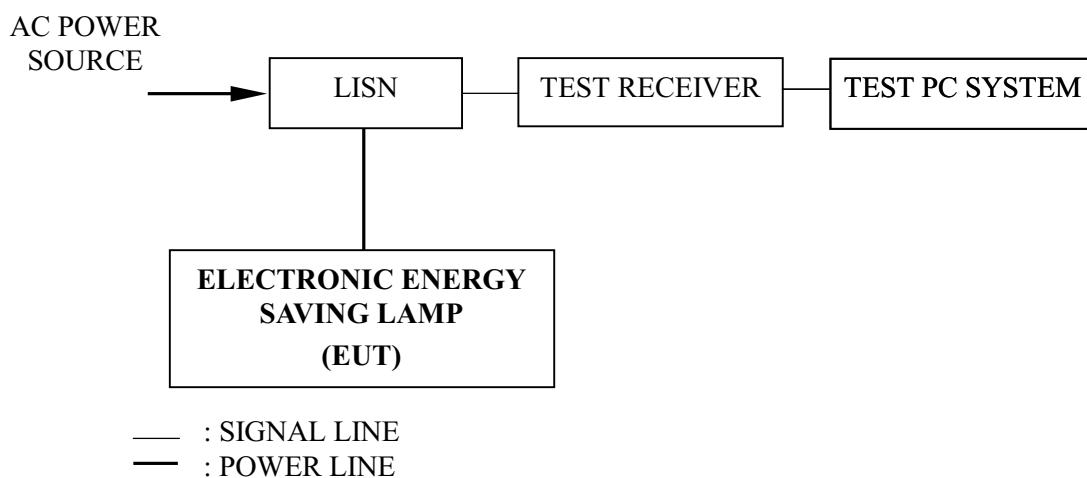

### 2.3 Conducted Emission Limits

Frequency (MHz)	Maximum RF Line Voltage	
	(μV)	dB(μV)
0.45 ~ 2.51	250	48
2.51 ~ 3	3000	70
3 ~ 30	250	48
NOTE 1 – RF Line Voltage dB(μV) = 20 log RF Line Voltage (μV)		

## 2.4 Test Configuration

The EUT (listed in Sec. 1.1) was installed as shown on Sec. 2.2 to meet FCC requirement and operating in a manner, which tends to maximize its emission level in a normal application.

## 2.5 Operating Condition of EUT

The EUT was connected to the power mains through a Line Impedance Stabilization Network (LISN). This provided a 50 ohm coupling impedance for the measuring equipment.

Both sides of AC line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed or manipulated according to MP-5/1986 during conducted emission test.

The bandwidth of Test Receiver ESHS10 was set at 10 kHz.

The frequency range from 450 kHz to 30 MHz was checked. The test mode (ON) was done on conducted test and the test results of the highest emissions are listed in Sec. 2.7.

## 2.6 Test Procedures

- 2.6.1 Setup the EUT as shown in Sec. 2.2.
- 2.6.2 Turn on the power of all equipment.
- 2.6.3 The EUT will be operated normally.

## 2.7 Test Results

< PASS >

The frequency and amplitude of the highest AC powerline conducted emissions relative to the limit is reported. All emissions not reported below are too low against the prescribed limits.

EUT :	<u>Electronic Energy Saving Lamp</u>	Temperature :	<u>22°C</u>
Model No. :	<u>DEB/13~15W</u>	Humidity :	<u>53%</u>
Test Mode :	<u>ON</u>	Date of Test :	<u>Aug 20, 2001</u>

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μV)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.476	0.32	38.20	38.52	48.00	9.48
	0.622	0.30	38.90	39.20	48.00	8.80
	0.671	0.29	39.20	39.49	48.00	8.51
	0.790	0.28	36.60	36.88	48.00	11.12
	1.030	0.27	30.50	30.77	48.00	17.23
	1.430	0.27	31.10	31.37	48.00	16.63
VB	0.482	0.32	34.90	35.22	48.00	12.78
	<b>0.618</b>	<b>0.30</b>	<b>40.80</b>	<b>41.10</b>	<b>48.00</b>	<b>6.90</b>
	0.766	0.28	39.30	39.58	48.00	8.42
	1.050	0.27	28.80	29.07	48.00	18.93
	1.220	0.26	32.00	32.26	48.00	15.74
	1.480	0.25	26.80	27.05	48.00	20.95

NOTE 1 – Emission Level = Meter Reading + Factor

NOTE 2 – Factor = Insertion Loss + Cable Loss

NOTE 3 – All reading are Quasi-Peak Values.

NOTE 4 – The worst emission is detected at 0.618 MHz with corrected signal level of 41.10 dB(μV) (limit is 48.00 dB(μV)), when the VB of the EUT is connected to LISN.

TEST ENGINEER: Ran Liang  
(RAIN LIANG)

EUT : Electronic Energy Saving Lamp Temperature : 22°C

Model No. : DEB/18~20W Humidity : 53%

Test Mode : ON Date of Test : Aug 20, 2001

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μV)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.459	0.33	30.70	31.03	48.00	16.97
	0.530	0.31	31.50	31.81	48.00	16.19
	0.797	0.28	23.60	23.88	48.00	24.12
	0.957	0.27	25.40	25.67	48.00	22.33
	1.100	0.27	24.50	24.77	48.00	23.23
	1.480	0.27	26.90	27.17	48.00	20.83
VB	<b>0.467</b>	<b>0.32</b>	<b>35.40</b>	<b>35.72</b>	<b>48.00</b>	<b>12.28</b>
	0.528	0.31	34.90	35.21	48.00	12.79
	0.714	0.29	33.20	33.49	48.00	14.51
	0.848	0.28	34.20	34.48	48.00	13.52
	0.987	0.27	32.90	33.17	48.00	14.83
	1.130	0.26	34.80	35.06	48.00	12.94
NOTE 1 – Emission Level = Meter Reading + Factor NOTE 2 – Factor = Insertion Loss + Cable Loss NOTE 3 – All reading are Quasi-Peak Values. NOTE 4 – The worst emission is detected at 0.467 MHz with corrected signal level of 35.72 dB (μV) (limit is 48.00 dB(μV)), when the VB of the EUT is connected to LISN.						

TEST ENGINEER: Rain Liang  
 (RAIN LIANG)

EUT : Electronic Energy Saving Lamp Temperature : 22°C

Model No. : DEB/23~25W Humidity : 53%

Test Mode : ON Date of Test : Aug 20, 2001

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(µV)	Emission Level dB(µV)	Limits dB(µV)	Margin (dB)
VA	<b>0.473</b>	<b>0.32</b>	<b>44.50</b>	<b>44.82</b>	<b>48.00</b>	<b>3.18</b>
	0.553	0.30	34.80	35.10	48.00	12.90
	0.623	0.30	39.40	39.70	48.00	8.30
	0.699	0.29	35.30	35.59	48.00	12.41
	0.748	0.29	36.20	36.49	48.00	11.51
	0.979	0.27	33.70	33.97	48.00	14.03
VB	0.511	0.31	42.80	43.11	48.00	4.89
	0.577	0.30	40.10	40.40	48.00	7.60
	0.688	0.29	40.60	40.89	48.00	7.11
	0.781	0.28	44.40	44.68	48.00	3.32
	0.987	0.27	43.80	44.07	48.00	3.93
	1.260	0.26	41.50	41.76	48.00	6.24

NOTE 1 – Emission Level = Meter Reading + Factor

NOTE 2 – Factor = Insertion Loss + Cable Loss

NOTE 3 – All reading are Quasi-Peak Values.

NOTE 4 – The worst emission is detected at 0.473 MHz with corrected signal level of 44.82 dB(µV) (limit is 48.00 dB(µV)), when the VA of the EUT is connected to LISN.

TEST ENGINEER: Rain Liang  
(RAIN LIANG)


### 3 FIELD STRENGTH TEST

#### 3.1 Test Equipment

The following test equipment are used during the field strength test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Loop Antenna	Laplace	RF300	5001	May 5, 2001	1/2 Year
2.	Test Receiver	Rohde & Schwarz	ESHS10	844077/020	Apr 24, 2001	1 Year

#### 3.2 Block Diagram of Test Setup

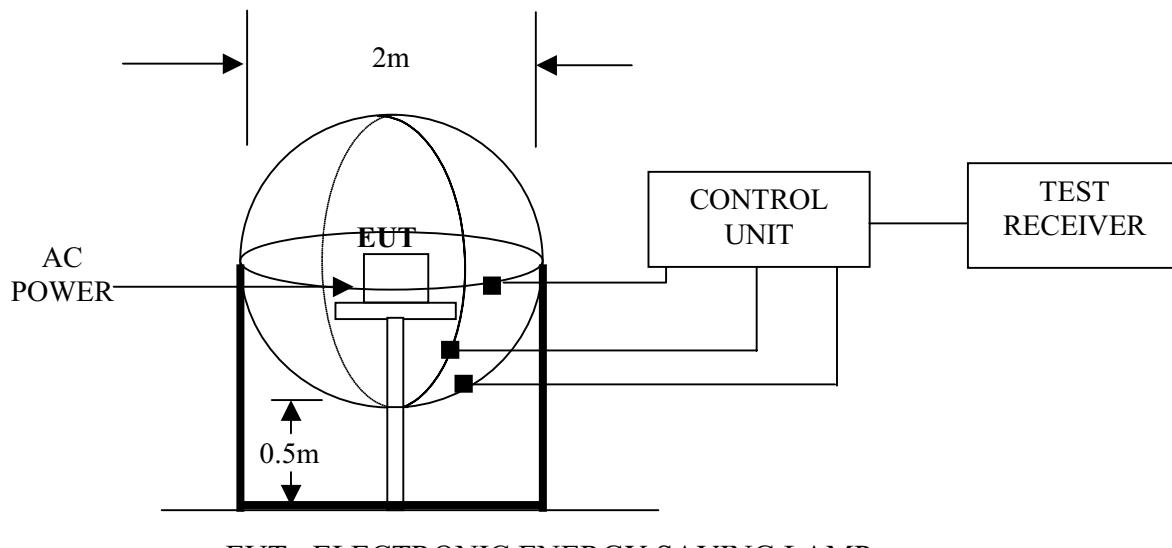

#### 3.3 Test Configuration

The configuration of the EUT is same as those used in conducted emission test.

Refer to Sec. 2.4.

#### 3.4 Operating Condition of EUT

Same as conducted emission test which is listed in Sec. 2.5, except the test setup replaced by Sec. 3.2.

### 3.5 Test Procedure

The EUT was placed on a wooden table, which is in the center of the loop antenna. The loop antenna is 0.5 meters above the ground. Each side had one sensor. The three sensors were through the control unit to connect the Test receiver, which receiving the emission and find out the maximum emission of each side of the loop antenna.

The bandwidth of R&S Test Receiver ESHS10 was set at 200 Hz from 9kHz to 150kHz and 10kHz from 150 kHz to 30 MHz.

The frequency range from 9 kHz to 30 MHz was checked.

The “ON” mode was done on field strength test and all the test results are listed in Sec. 3.6.

### 3.6 Test Result

**<PASS>**


Refer to the following pages.



3F #34Bldg. No.680 GuiPing Rd.,  
CaoHeJing Hi-Tech Park,  
Shanghai, China  
Tel:+86-21-64955500  
Fax:+86-21-64955491  
audixaci@8848.net

Data#: 13 File#: D:\EMIVM\TEST\L\樂德士.EMI

Date: 2001-08-21 Time: 16:58:11

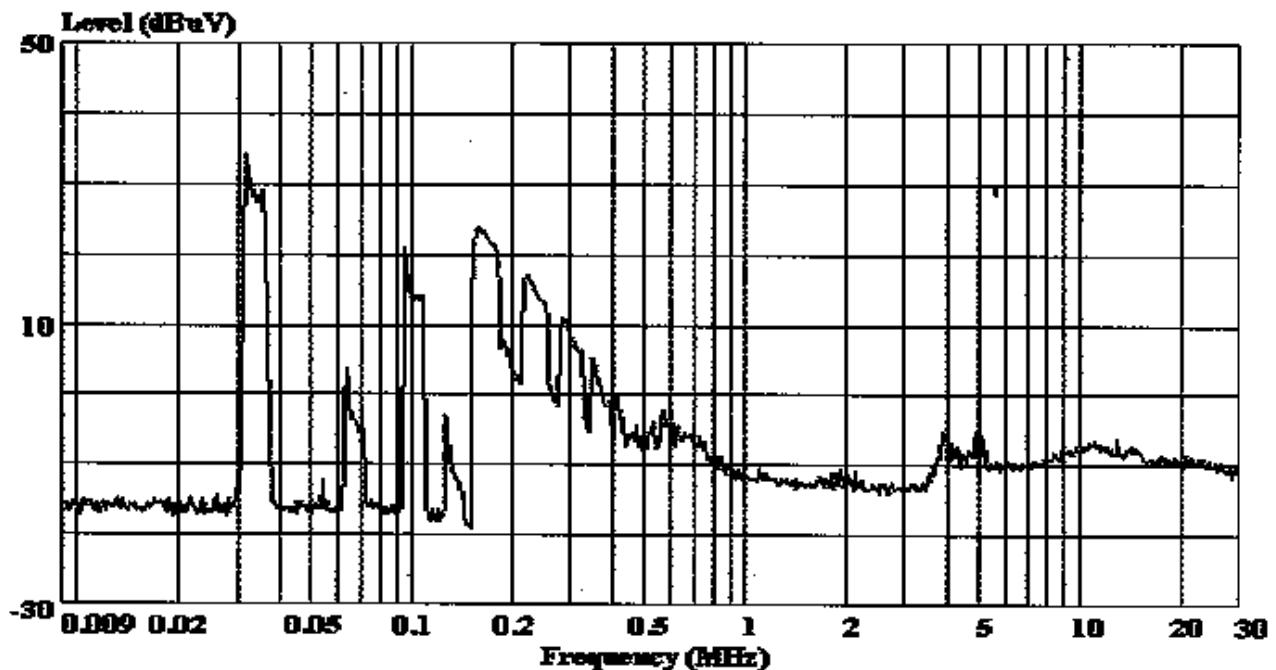


Site : audix-aci  
Condition :  
Project No: : AQE-000095  
Applicant : NINGBO LEDESHI ELECTRICAL  
: EQUIPMENT CO., LTD  
EUT : Electronic energy saving lamp  
M/N : DEB 13-15W  
S/N : E081003(1)  
Power-supply : 120V/60Hz  
Ambient : 22'C 53%  
Test Line : A  
Test Mode : ON  
Test Engineer: Barry



3F #34Bldg. No.680 GuiPing Rd.,  
CaoBeJing Hi-Tech Park,  
Shanghai, China  
Tel:+86-21-64955500  
Fax:+86-21-64955491  
audixaci@88848.net

Data#: 10 File#: D:\EMIVM\TEST\L\樂德士.EMI Date: 2001-08-21 Time: 16:54:03

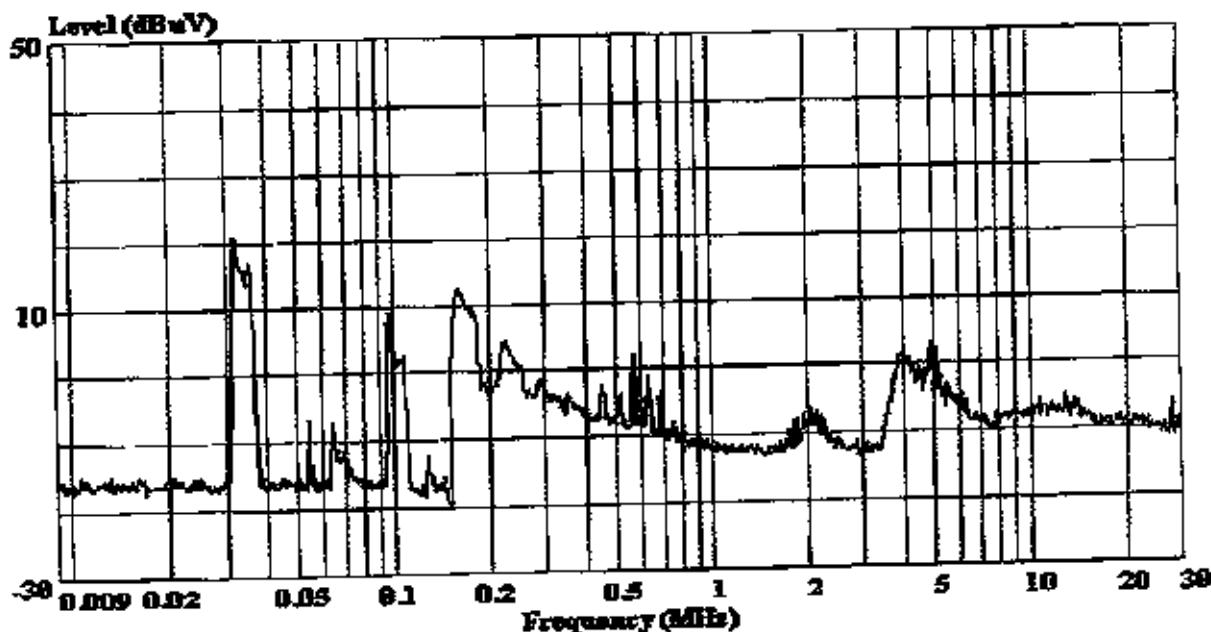


Site : audix-aci  
Condition :  
Project No: : AQE-000095  
Applicant : NINGBO LEDESHI ELECTRICAL  
: EQUIPMENT CO., LTD  
SUT : Electronic energy saving lamp  
M/N : DEB 13-15W  
S/N : E081003(1)  
Power supply : 120V/60Hz  
Ambient : 22'C 53%  
Test Line : B  
Test Mode : ON  
Test Engineer: *Rain*



3F #34Bldg. No.680 GuiPing Rd.,  
CaoHeJing Hi-Tech Park,  
Shanghai, China  
Tel:+86-21-64955300  
Fax:+86-21-64955491  
audixaci@sohu.com

Data# : 7 File# : D:\EMIVM\TEST\L\樂德士.EMI Date: 2001-08-21 Time: 16:49:42

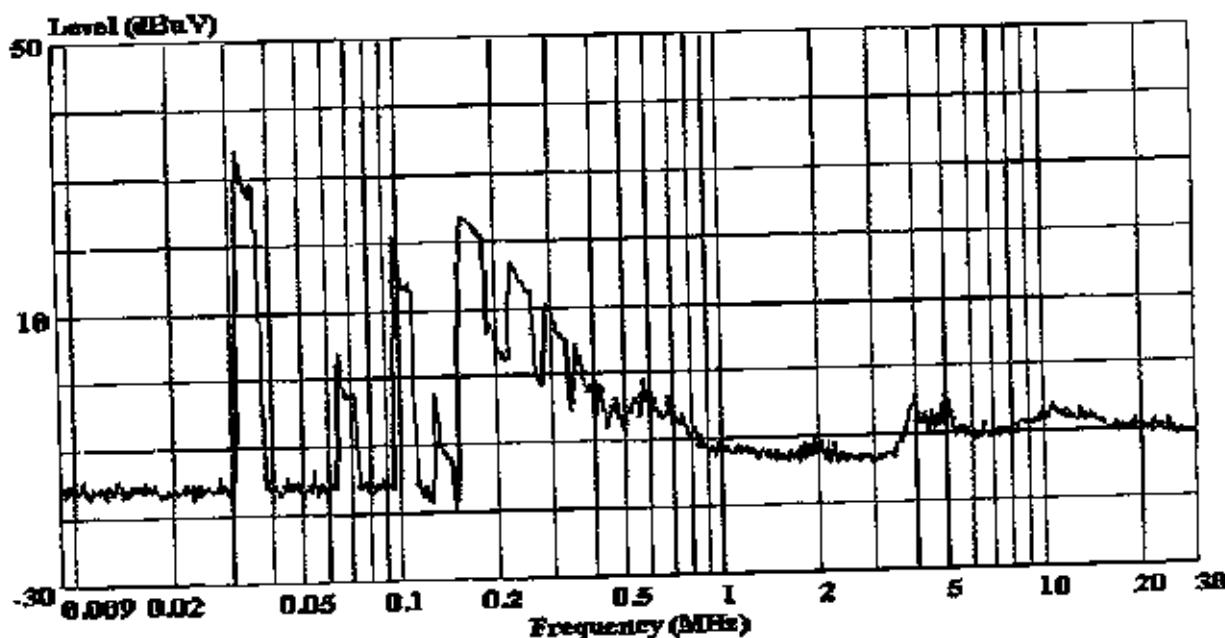

Site : audix-aci  
Condition :  
Project No: AQE-000095  
Applicant : NINGBO LEDESHI ELECTRICAL  
EQUIPMENT CO., LTD  
EUT : Electronic energy saving lamp  
M/N : DEB 13-15W  
S/N : E081003(1)  
Power supply : 120V/60Hz  
Ambient : 22'C 53t  
Test Line : C  
Test Mode : ON  
Test Engineer: *Dawn*




Audix Technology (Shanghai) Co., Ltd.  
敦吉电子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,  
CaoHeJing Hi-Tech Park,  
Shanghai, China  
Tel:+86-21-64955500  
Fax:+86-21-64955491  
audixaci@8848.net

Date#: 176 File#: D:\EMI\VM\TEST\L\ledeshi.emi

Date: 2001-08-21 Time: 12:29:26

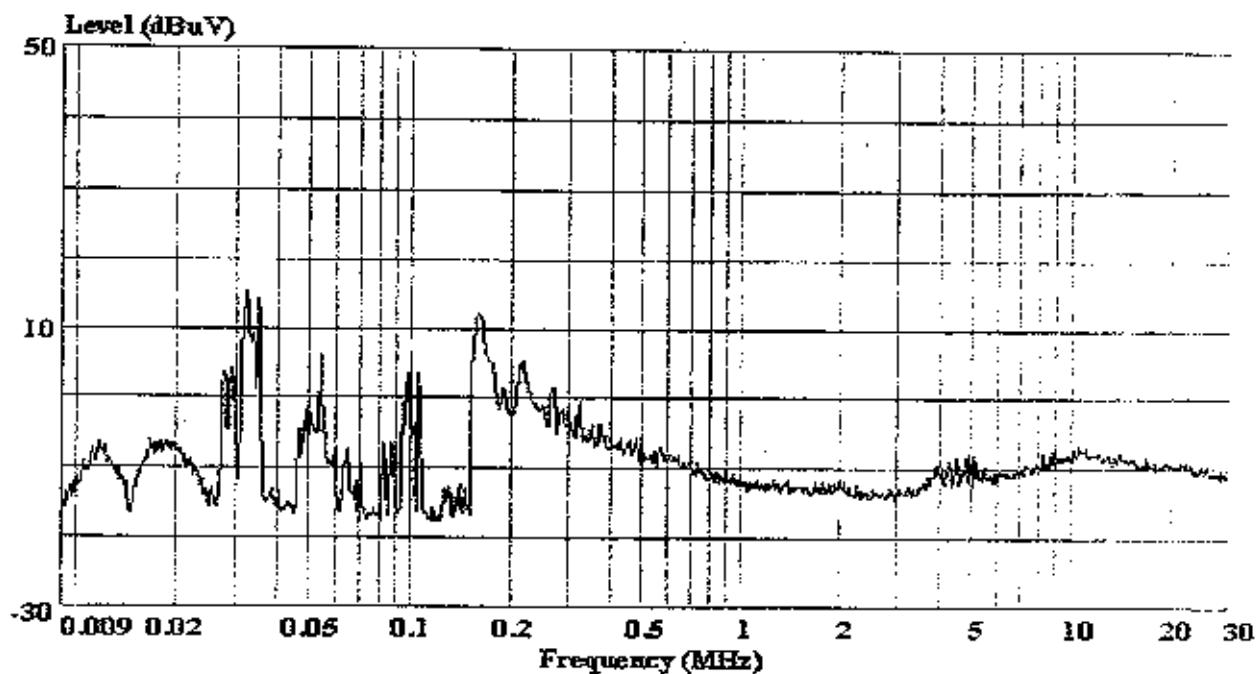


Site : audix-aci  
Condition :  
Project No. : AQE-000095  
Applicant : NINGBO LEDESHI ELECTRICAL  
EQUIPMENT CO., LTD.  
EUT : Electronic energy saving lamp  
M/N : DEB 18-20W  
S/N : E061004(1)  
Power Supply : 120V/60Hz  
Ambient : 22'C 53%  
Test Line : A  
Test Mode : ON  
Test Engineer: *Rain*



3F #348Bldg. No.680 GuiPing Rd.,  
CaoHeJing Hi-Tech Park,  
Shanghai, China  
Tel:+86-21-64955500  
Fax:+86-21-64955491  
audixaci@sohu.com

Data#: 179 File#: D:\EMIVM\TEST\L\ledeshi.ami

Date: 2001-08-21 Time: 12:32:05

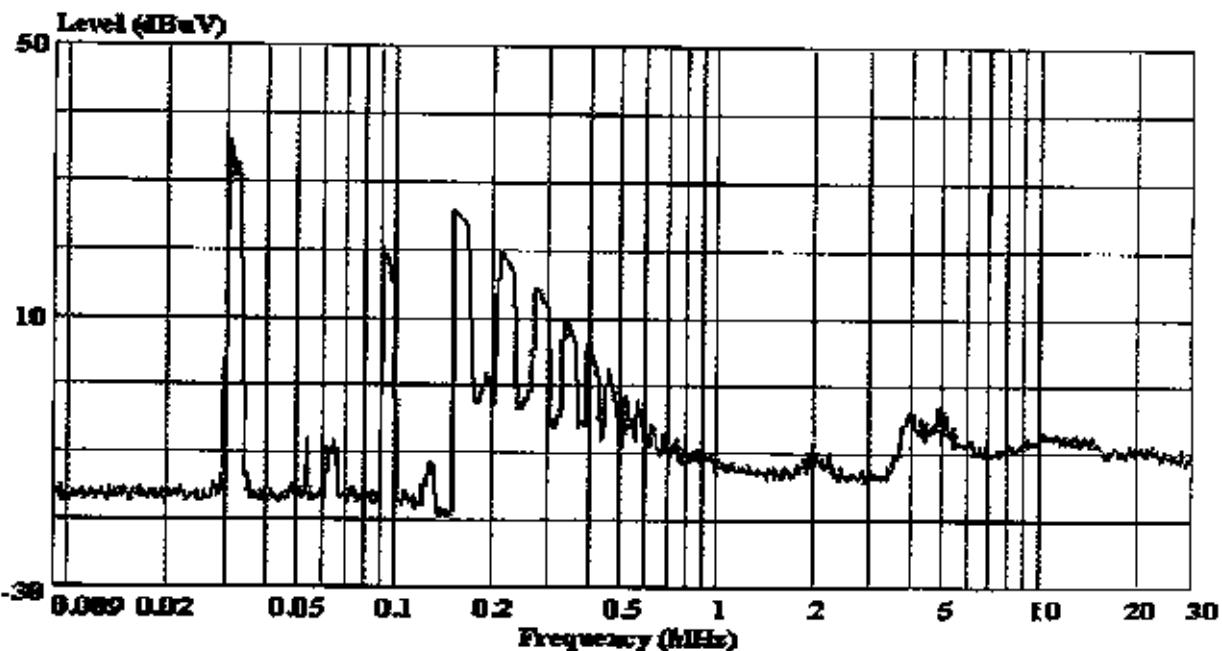


Site : audix-aci  
 Condition :  
 Project No. : AQE-000095  
 Applicant : NINGBO LEDESHI ELECTRICAL  
 : EQUIPMENT CO., LTD.  
 EUT : Electronic energy saving lamp  
 M/N : DEB 18-20W  
 S/N : ED81004(1)  
 Power Supply : 120V/60Hz  
 Ambient : 22°C 53%  
 Test Line : B  
 Test Mode : ON  
 Test Engineer: *[Signature]*



3F #348Bldg. No.680 GuiPing Rd.,  
CaoHeJing Hi-Tech Park,  
Shanghai, China  
Tel:+86-21-64955500  
Fax:+86-21-64955491  
audixaci@8848.net

Data# : 4 File#: D:\EMIVM\TEST\LV\樂德士.EMI

Date: 2001-08-21 Time: 16:41:00

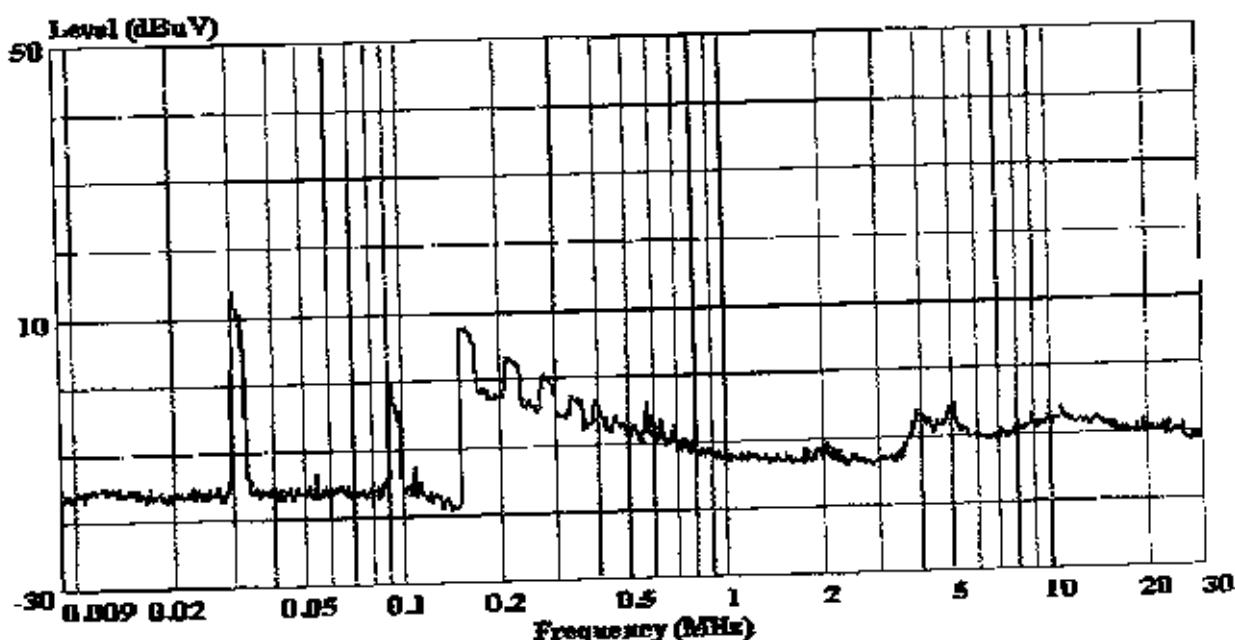

Site : audix-aci  
Condition :  
Project No: : AQE-000095  
Applicant : NINGBO LEDESHI ELECTRICAL  
EQUIPMENT CO., LTD  
EUT : Electronic energy saving lamp  
M/N : DEB 18-20W  
S/N : E081004(1)  
Power supply : 120V/60Hz  
Ambient : 22'C 53%  
Test Line : C  
Test Mode : ON  
Test Engineer: *Ren*




Audix Technology (Shanghai) Co., Ltd.  
奥喜电子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,  
CaoHeJing Hi-Tech Park,  
Shanghai, China  
Tel: +86-21-64955500  
Fax: +86-21-64955491  
audixaci@8848.net

Data#: 173 File#: D:\EMIVM\TEST\L\ledeshi.emi

Date: 2001-06-21 Time: 12:26:06

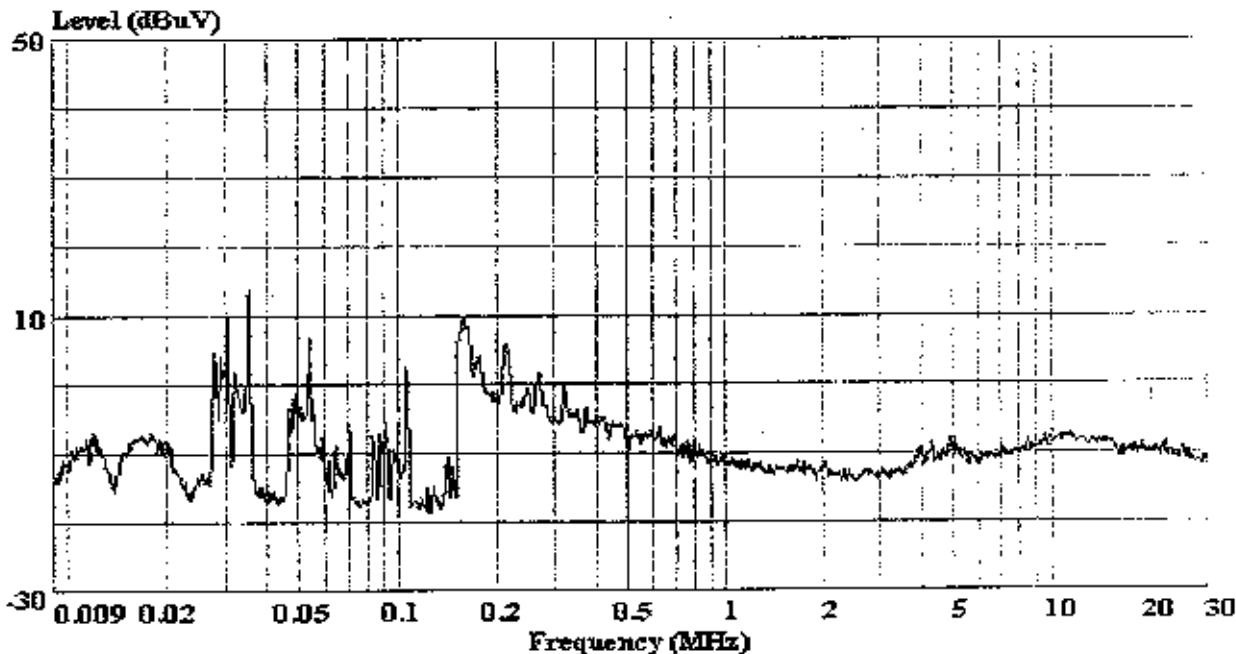


Site : audix-aci  
Condition :  
Project No. : AQE-000095  
Applicant : NINGBO LEDESHI ELECTRICAL  
: EQUIPMENT CO., LTD.  
EUT : Electronic energy saving lamp  
M/N : DEB 23-25W  
S/N : E081005(1)  
Power Supply : 120V/60Hz  
Ambient : 22°C 53%  
Test Line : A  
Test Mode : ON  
Test Engineer: L.W.



3F #34Bldg. No.680 GuiPing Rd.,  
CaoBeJing Hi-Tech Park,  
Shanghai, China  
Tel: +86-21-64955500  
Fax: +86-21-64955491  
audixaci@sohu.com

Data #: 170 File #: D:\EMIVM\TEST\L\ledeshi.emi

Date: 2001-08-21 Time: 12:23:07

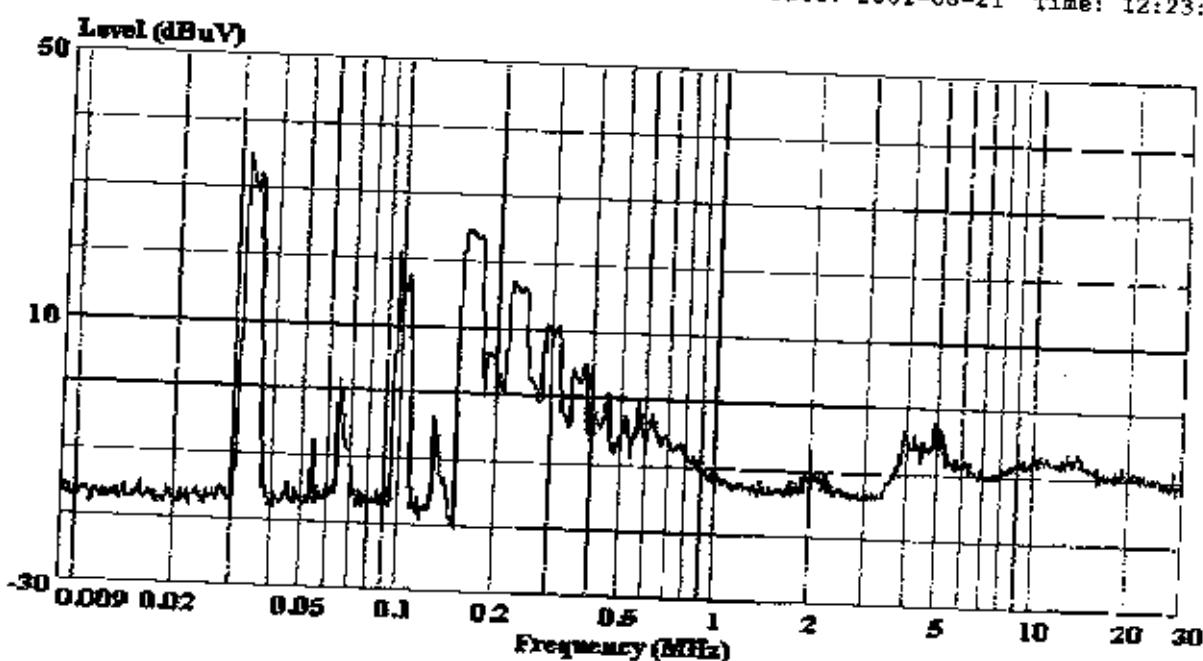


Site : audix-aci  
Condition :  
Project No. : AQE-000095  
Applicant : NINGBO LEDESHI ELECTRICAL  
: EQUIPMENT CO., LTD.  
EUT : Electronic energy saving lamp  
M/N : DEB 23-25W  
S/N : E081005(1)  
Power Supply : 120V/60Hz  
Ambient : 22°C 53%  
Test Line : B  
Test Mode : ON  
Test Engineer: *[Signature]*



3F #34Bldg. No.680 GuiPing Rd.,  
CaoBeJing Hi-Tech Park,  
Shanghai, China  
Tel:+86-21-64955500  
Fax:+86-21-64955491  
audixaci@88848.net

Data#: 167 File#: D:\EMIVM\TEST\L\ledeshi.emi Date: 2001-08-21 Time: 12:17:42

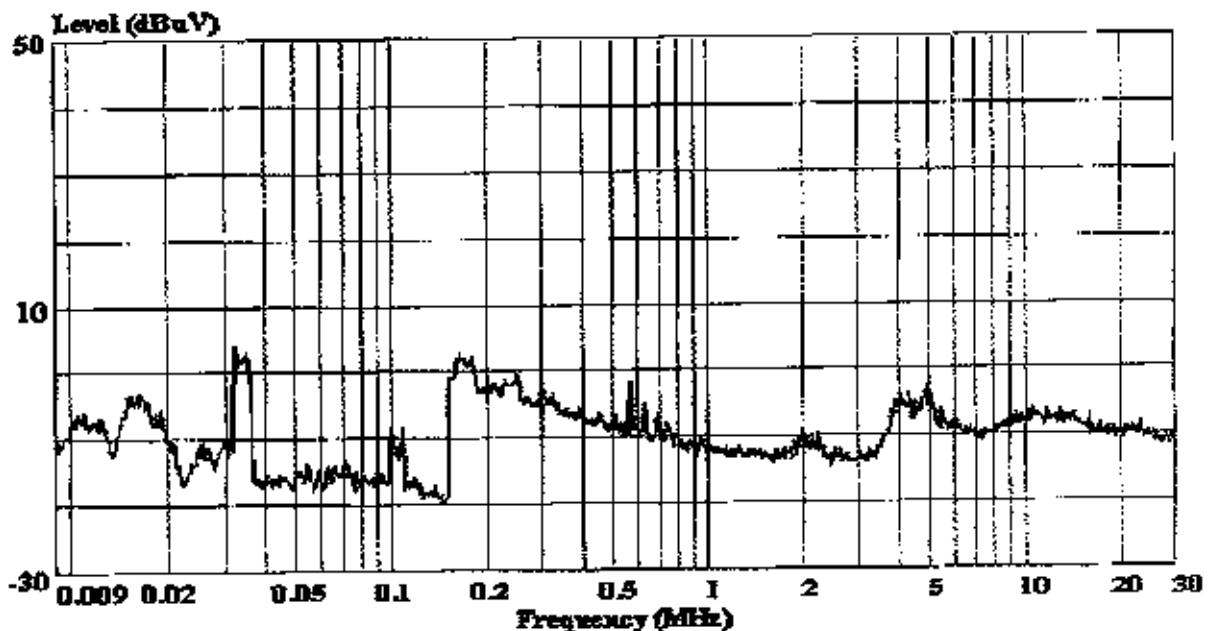

Site : audix-aci  
Condition :  
Project No. : AQE-000095  
Applicant : NINGBO LEDESHI ELECTRICAL  
: EQUIPMENT CO., LTD.  
EUT : Electronic energy saving lamp  
M/N : DEB 23-25W  
S/N : E081005(1)  
Power Supply : 120V/60Hz  
Ambient : 22°C 53%  
Test Line : C  
Test Mode : ON  
Test Engineer: *Larin*