



# Test Report Summary

## FCC CFR 47, Part 27

### Wireless Communications Service

**Manufacturer:** ADC Telecommunications

**Name of Equipment:** Spectrum AWS Path 1/AWS Path2 SRAU

**Model Number(s):** SPT-S1-2121-1MIMO

**Manufacturer's Address:** 1187 Park Place  
Shakopee, MN 55739

**Test Report Number:** MN110606\_AWSP1\_AWSP2\_MIMO\_SRAU

**Test Date(s):** 1 June, 2011 (Intertek)  
25 May, 2011 (ADC)

According to testing performed at Intertek, the above-mentioned unit is in accordance with the applicable electromagnetic compatibility (EMC) portions of the requirements defined in FCC Part 27.

It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. Any modifications necessary for compliance made during testing on the above mentioned date(s) must be implemented in all production units for compliance to be maintained.

All testing was done in accordance with the Federal Communications Commission's CFR 47 Part 27 and the EUT fulfills the requirements of the Federal Communications Commission's CFR 47 Part 27.

Date: 6 June, 2011

Location: Intertek Testing Services (INTERTEK)  
7250 Hudson Blvd., Suite 100  
Oakdale, MN 55128  
Phone: (651) 730-1188  
Fax: (651) 730-1282

ADC Telecommunications  
1187 Park Place  
Shakopee, MN 55379  
Phone: (952) 403-8340  
Fax: (952) 403-8858

Testing Conducted by (ADC):  
And Report Written by:



Joshua J. Wittman  
Compliance Engineer



## **EMC Emission – T E S T R E P O R T**

**Test Report File Number:** MN110606\_AWSP1\_AWSP2\_MIMO\_SRAU

**Date of Issue:** 6 June, 2011

**Model Number(s):** SPT-S1-2121-1MIMO

**Product Name:** Spectrum AWS Path1/AWS Path 2 MIMO SRAU

**Product Type:** Repeater

**Applicant:** ADC Telecommunications

**Manufacturer:** ADC Telecommunications

**License Holder:** ADC Telecommunications

**Address:** P.O. Box 1101  
Minneapolis, MN 55440-1101

**Test Result:**  **Positive**  **Negative**

**Test Project Number:** 100414419MIN-003  
**Reference(s)**

**Total pages including Appendices:** 46



## 1.0 TABLE OF CONTENTS

1.0	Table of Contents .....	3
2.0	Revision Description .....	4
3.0	Documentation .....	4
3.1	Test Regulations .....	4
3.2	Test Operation Mode .....	5
3.3	Configuration of the Device Under Test: .....	5
3.4	Product Options: .....	5
3.5	EUT Specifications and Requirements: .....	5
3.6	Cables: .....	5
3.7	Power Requirements: .....	5
3.8	Typical Installation and/or Operating Environment: .....	5
3.9	Other Special Requirements: .....	5
3.10	EUT Software: .....	5
3.11	EUT System Components .....	6
3.12	Support Equipment .....	6
3.13	Deviations from Standard: .....	6
3.14	General Remarks: .....	6
3.15	Summary: .....	6
4.0	Test Set-Up Drawings and Photos .....	7
4.1	Test Set-up Photo, Radiated Emissions .....	7
4.2	Test Set-up Photo, Radiated Emissions .....	9
4.3	Test Set-up Drawings .....	11
5.0	Test Results .....	13
5.1.1	27.50 RF Power Limits .....	13
5.1.2	27.54 Frequency Stability .....	14
5.1.3	27.53 Emission Limitations .....	15
6.0	Test Equipment .....	16
7.0	Appendix A .....	17
7.1	Conducted Emission Limits Test .....	18
7.2	Conducted Output Power Test .....	25
7.3	Frequency Stability Test .....	26
7.4	Intermodulation Test .....	27
7.5	Occupied Bandwidth Modulation Test .....	40
8.0	Appendix B .....	43
9.0	Appendix C .....	45



## 2.0 REVISION DESCRIPTION

Rev	Total Pages	Date	Description
A	46	6 June, 2011	Original Release
B	46	15 June, 2011	Added "Final RF Amp DC Voltage and Current"

## 3.0 DOCUMENTATION

### 3.1 Test Regulations

27.50 Power limits  
27.53 Emission limits  
27.54 Frequency stability

**The emissions tests were performed according to the following regulations:**

- FCC Part 22
- FCC Part 24
- FCC Part 27**
- FCC Part 90
- IC RSS-131 Issue 2

### Environmental Conditions in the lab:

#### ADC

Temperature: 24° C  
Relative Humidity: 21%  
Atmospheric Pressure: 98.8 kPa

#### Intertek

15-35° C  
30-60%  
86-106 kPa

### Power Supply Utilized:

Power Supply System : 1 phase, 60 Hz, 120 VAC

### **3.2 Test Operation Mode**

- Standby
- Test Program
- Practice Operation
- **Max composite in and out**

### **3.3 Configuration of the Device Under Test:**

Normal Operation – AWS – 2110 to 2155 MHz

### **3.4 Product Options:**

None

### **3.5 EUT Specifications and Requirements:**

Length: 11.50"

Width: 9.00"

Height: 3.50"

Weight: 7.49 pounds

### **3.6 Cables:**

Cable Type	Length	From	To
RF	> 3M	Ancillary Equip	EUT
RF	< 3M	EUT	50 Ohm Load
Power (2)	< 3M	Power	Input Power (Ancillary)
Coax (75 Ohm)	> 3M	Ancillary Equip	EUT

### **3.7 Power Requirements:**

Voltage: 54 VDC

### **3.8 Typical Installation and/or Operating Environment:**

Indoor. System is typically employed as an indoor repeater.

### **3.9 Other Special Requirements:**

None

### **3.10 EUT Software:**

Revision Level: Version V.6 or greater

Description: Internet Explorer

### 3.11 EUT System Components

Description	Model #	Serial #	FCC ID #
Prism Host Unit	FWP-0000HUII	None	
Spectrum DRU	SPT-0000DRUII	None	
Spectrum IFEU	742735-0	None	
Spectrum Power Supply	LTPCPR1U3C-Z-527		
Remote Access Unit	SPT-S1-2121-1MIMO	None	

### 3.12 Support Equipment

Description	Manufacturer	Model #	FCC ID #
Power Meter	HP	437B	
Signal Generator	Agilent	8648C	

### 3.13 Deviations from Standard:

Modifications required to pass:

- As indicated on the data sheet(s)
- None**

Test Specification Deviations; Additions to or Exclusions from:

- As indicated in the Test Plan
- None**

### 3.14 General Remarks:

None.

### 3.15 Summary:

The requirements according to the technical regulations are

- met**

- not Met

The equipment under test does


- fulfill the general approval requirements mentioned in Section 3.1.**


- not fulfill the general approval requirements mentioned in Section 3.1.

## 4.0 TEST SET-UP DRAWINGS AND PHOTOS


[Table of Contents; Section 1.0](#)

### 4.1 Test Set-up Photo, Radiated Emissions

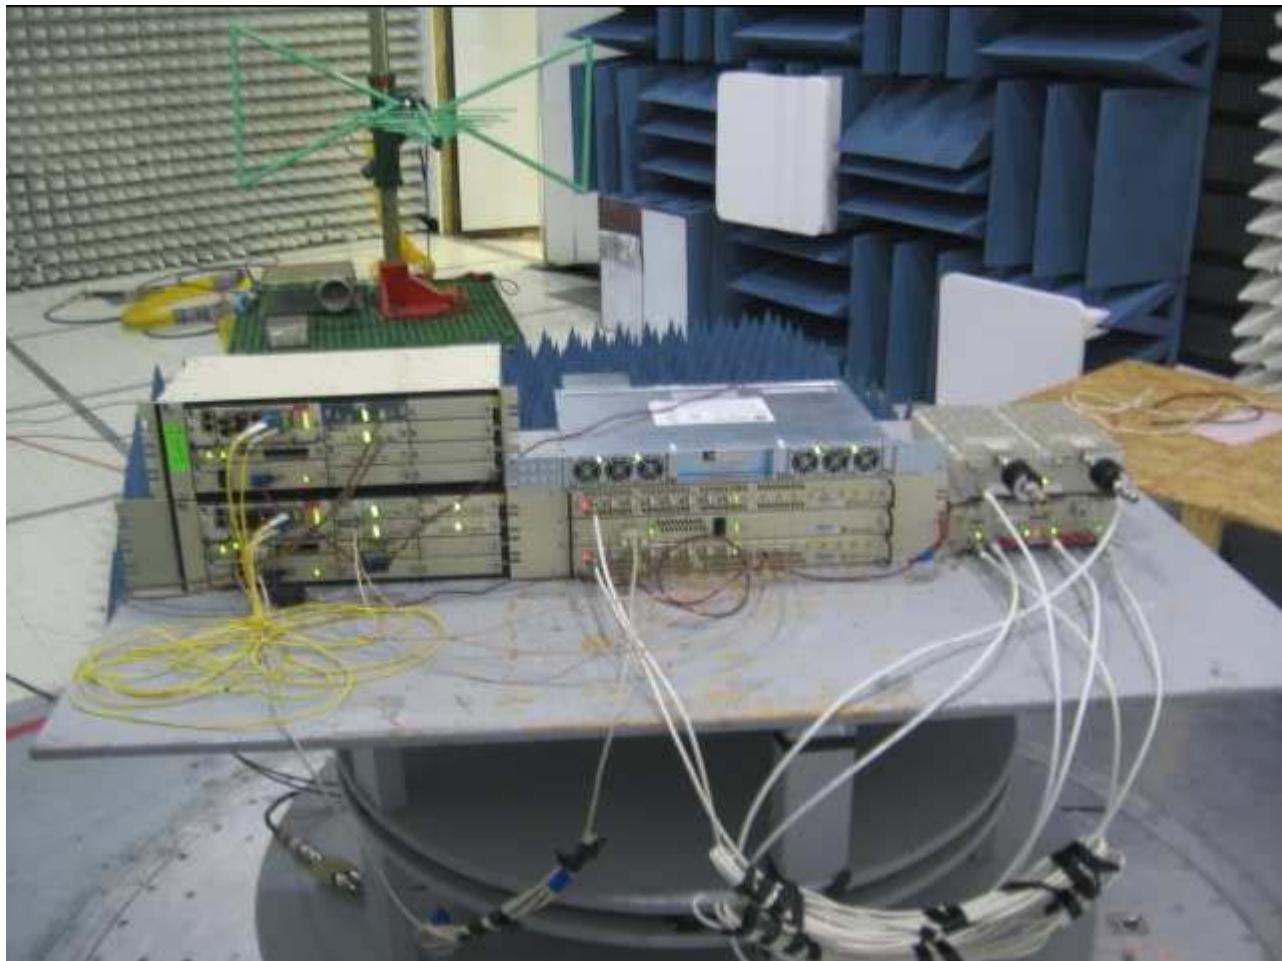

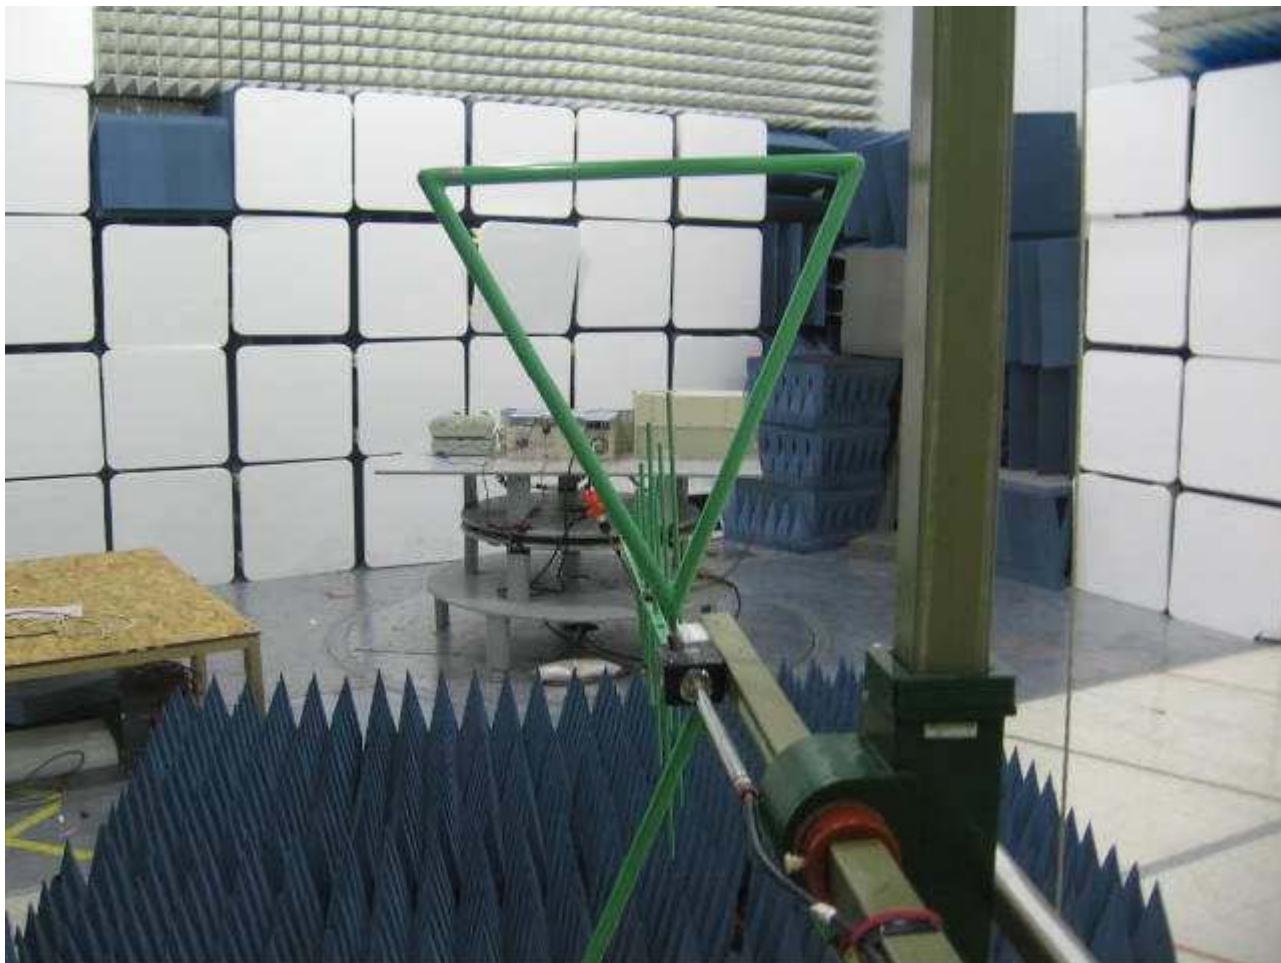

#### 4.2 Test Set-up Photo, Radiated Emissions

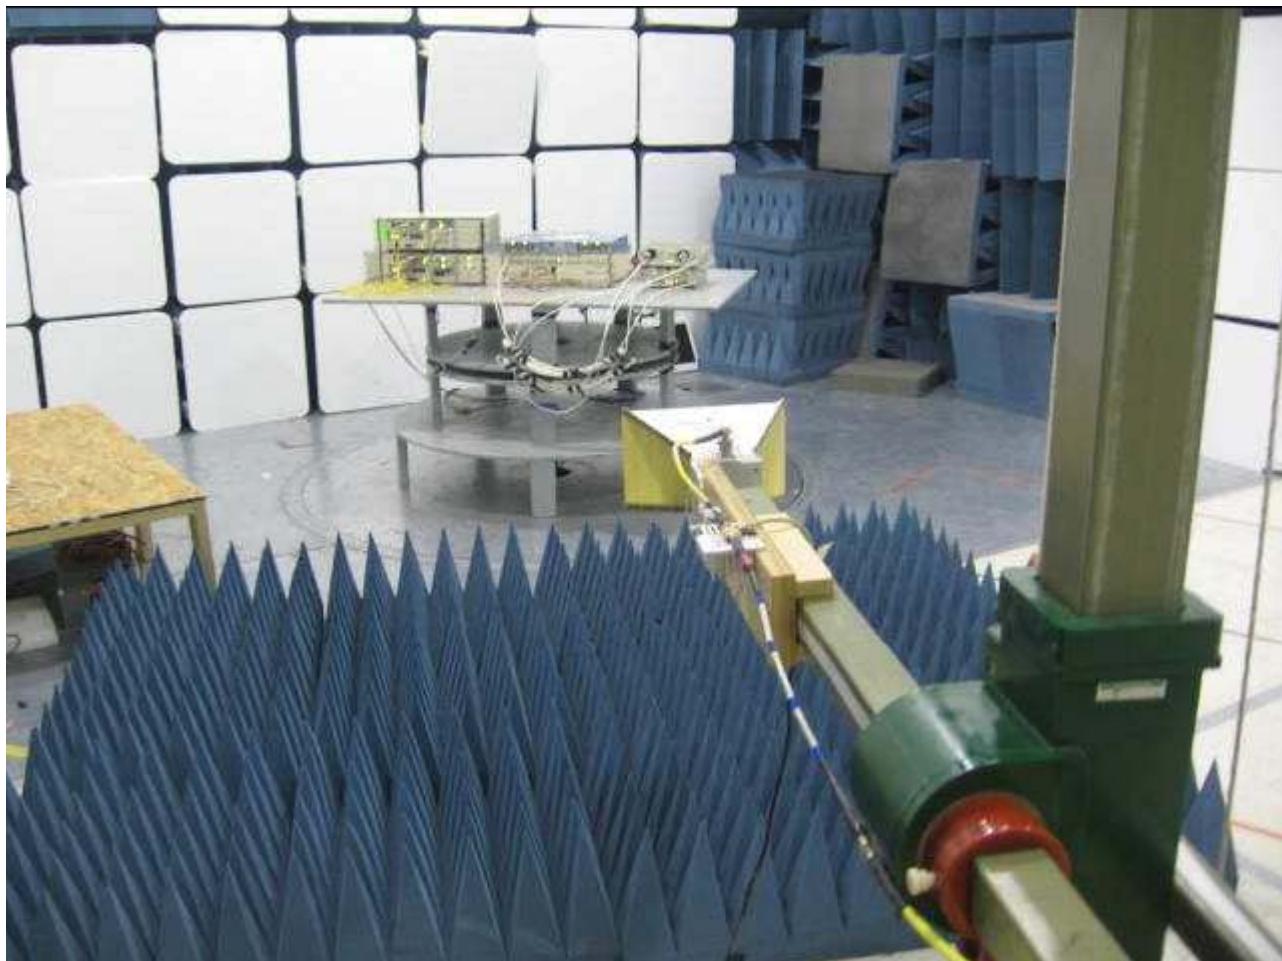




#### 4.3 Test Set-up Drawings

### Conducted and Radiated Emission Limits Test

#### Conducted Output Power Test

#### Inter-Modulation Test

#### Occupied Bandwidth Modulation Test

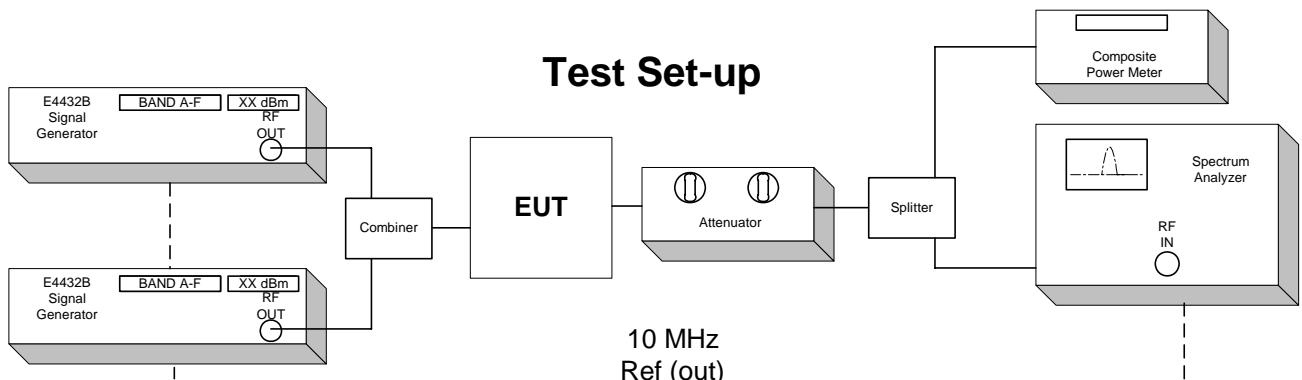


## Frequency Tolerance Test

The Host, DRU, and IFEU EUT are specified for indoor use with temperature range of 0° to +50° C, and were tested within their range.

The Remote Access Unit EUT is specified for indoor use with temperature range of -25° to +50° C, and was tested with its range.

### Test Set-up

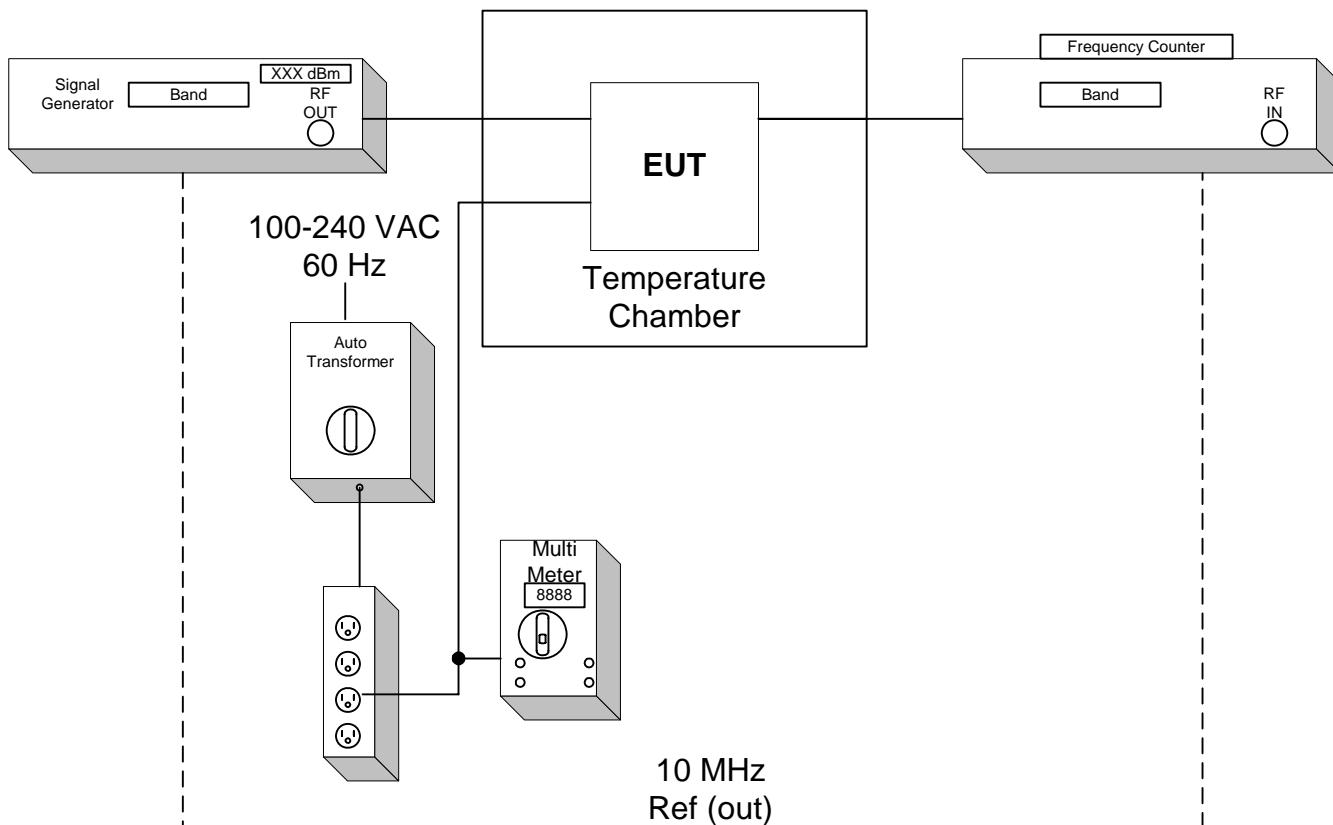

## 5.0 TEST RESULTS

### 5.1.1 27.50 RF Power Limits

#### **Test Summary:**

- The requirements are:  MET  NOT MET
- Minimum margin of compliance is 16.67 dB (Path 2) at 2132.5.0 MHz (W-CDMA)

#### **Test Location:**

- INTERTEK (Oakdale, MN)
- ADC facility (Shakopee, MN)**

#### **Test Distance:**

- 3 Meters
- 10 Meters

#### **Conducted measurement**

#### **Test Equipment (ADC):**

1, 2, 6, 7, 12

#### **Test Limit:**

100 Watts or 50 dBm Limit

#### **Test Data:**

[Conducted Output Power; Section 7.2](#)

**Test Engineer:** Joshua J. Wittman

**Date:** 25 May, 2011

[Table of Contents; Section 1.0](#)

## 5.1.2 27.54 Frequency Stability

### **Test Summary:**

- The requirements are:  MET  NOT MET
- The fundamental emission stays within the limit.
- Frequency measured over a temperature range of –25 to 50° C and an input voltage range of 100 to 240 VAC.

### **Test Location:**

- INTERTEK (Oakdale, MN)
- ADC facility (Shakopee, MN)**

### **Test Equipment (ADC):**

3, 4, 5, 6, 9, 11, 12

### **Test Limit:**

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### **Test Data:**

[Frequency Stability; Section 7.3](#)

**Test Engineer:** Joshua J. Wittman

**Date:** 25 May, 2011

[Table of Contents; Section 1.0](#)

### 5.1.3 27.53 Emission Limitations

#### **Test Summary:**

- The requirements are:  MET  NOT MET
- Out of band emissions were less than –13 dBm.
- Outside the emission bandwidth of the carrier, all emissions are attenuated at least 26 dB below the transmitter power.

#### **Test Location:**

- INTERTEK (Oakdale, MN)
- ADC facility (Shakopee, MN)**

#### **Test Equipment (ADC):**

1, 2, 6, 7, 12

#### **Test Limit:**

Out of band emissions:

Attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB, or –13 dBm.

Outside of the carrier emissions bandwidth:

26 dB below the transmitter power

#### **Test Data:**

- [Conducted Emissions; Section 7.1](#)
- [Intermodulation; Section 7.4](#)
- [Occupied Bandwidth; Section 7.5](#)
- Radiated Emissions; ([Appendix B](#))

**Test Engineer:** Joshua J. Wittman

**Date:** 25 May, 2011

**Date:** 25 May, 2011

**Date:** 25 May, 2011

[Table of Contents; Section 1.0](#)

## 6.0 TEST EQUIPMENT

[Table of Contents; Section 1.0](#)

Number	Description	Manufacturer	Model	ADC TELECOMMUNICAT IONS Serial Number	Cal Due	Used
1	Spectrum Analyzer	HP	8563E	MC27690	12-15-11	<input checked="" type="checkbox"/>
2	Power Meter	HP	437B	MC27839	6-30-11	<input checked="" type="checkbox"/>
3	Multimeter	Fluke	79	MC18758	6-15-11	<input checked="" type="checkbox"/>
4	Frequency Counter	HP	5347A	MC27569	8-12-11	<input checked="" type="checkbox"/>
5	Temperature Chamber	ESPEC	PSL-4G	MC10075	8-30-11	<input checked="" type="checkbox"/>
6	Signal Generator	Aeroflex	3414	Aeroflex SN 341001/259	9-20-11	<input checked="" type="checkbox"/>
7	Signal Generator	Aeroflex	3413	MC57947	6-30-11	<input checked="" type="checkbox"/>
8	Variable Auto Transformer	Staco	1520CT	MC44655	CNR	<input checked="" type="checkbox"/>
9	Digital Barometer	Fisher Scientific	02-403	MC50719	1-20-12	<input checked="" type="checkbox"/>
10	Attenuator	Aeroflex	49-30-33	N/A	CNR	<input checked="" type="checkbox"/>
11	Attenuator	Aeroflex	86-30-12	N/A	CNR	<input checked="" type="checkbox"/>
12	RF Power Sensor	Agilent	8482H	MC27519	8-12-11	<input checked="" type="checkbox"/>

Equipment with a Calibration Not Required (CNR) listing is verified and compensated for with NIST traceable calibrated equipment.

7.0

## APPENDIX A

Conducted Emissions Test Data

[Table of Contents; Section 1.0](#)

**Test Engineer:** Joshua J. Wittman

## 7.1 Conducted Emission Limits Test

[Table of Contents; Section 1.0](#)

[Back to Emission Limits; Section 5.1.3](#)

The out of band emissions were measured directly from the EUT antenna output in the TX path using a spectrum analyzer from 30 MHz to the 10<sup>th</sup> harmonic of the highest carrier frequency. Test signals used are WCDMA. The different signals were input one at a time to the EUT. In all cases, the out of band emissions were less than -13 dBm from the equation  
$$(19\text{dBm} - [43 + 10\log(0.08W)])$$

Band edge compliance is also demonstrated using a WCDMA signal at the upper and lower limits of the band.

The Prism Host, Spectrum DRU, and Spectrum IFEU are Part 15 devices and have been tested and are compliant as such.

Industry practice has generally set the input signal power level. Test signal used was  $\approx$  -11 dBm input to Prism Host in the TX Path.

Industry practice has generally set the output signal power level.

Prism Host:	Spectrum DRU:	Spectrum IFEU	Remote Access Unit(RAU):
Range: 21 - 60 VDC	Range: 21 - 60 VDC	Range: 54 VDC	Range: 54 VDC
Tested @: 54 VDC	Tested @: 54 VDC	Tested @: 54 VDC	Tested @: 54 VDC

Application details for 2.1033(c)(10), and 2.1033(c)(13):

Final RF Amplifier Input DC Voltage and Current: 7.3V at 400mA

PLL creates all the Local Oscillators that convert signal to IF and RF signals. When PLL is unlocked the band is shut down, this is to avoid transmission of any incorrect frequency.



Internal to the electronics, the use of SAW filters provides for higher Q roll-off at band edges.



This equipment does not modulate the RF, so there is no modulation limiter. This equipment does not change the modulation of the RF or the occupied bandwidth of any channel. It transports the signal, as is, over TV (IF) coax cable. The RF input is not changed in the RF output.

This is a constant gain device, so the setup controls the output. There is an overdrive and overpower limit control that prevents excess power.

Results:

Pass (See plots)

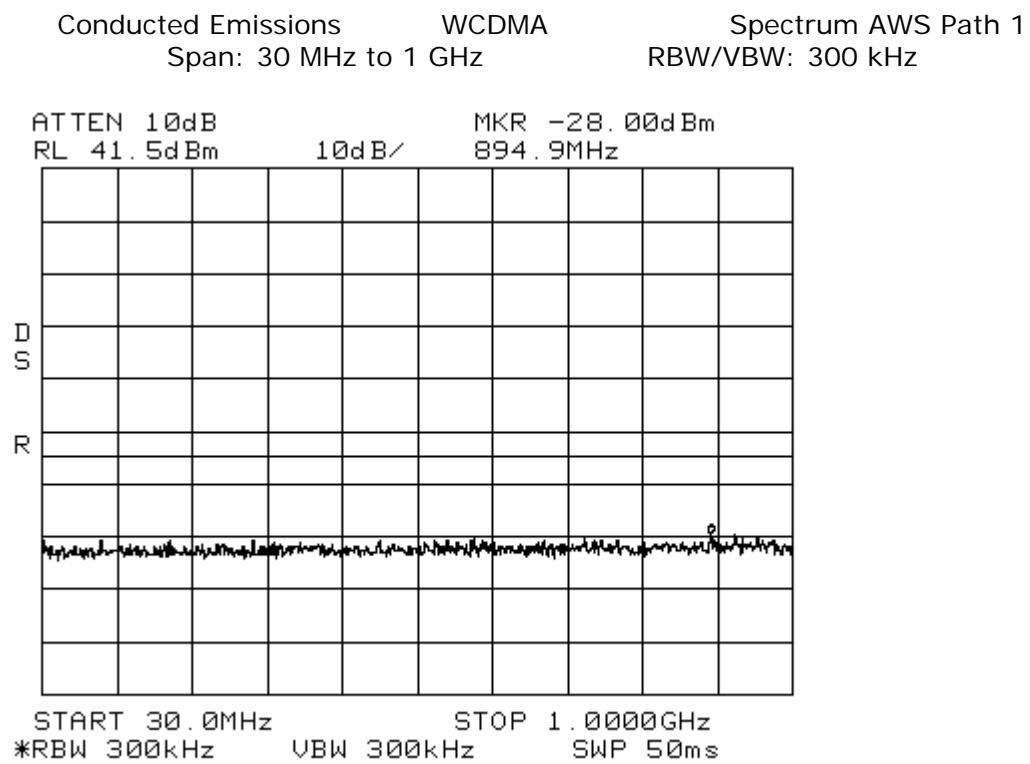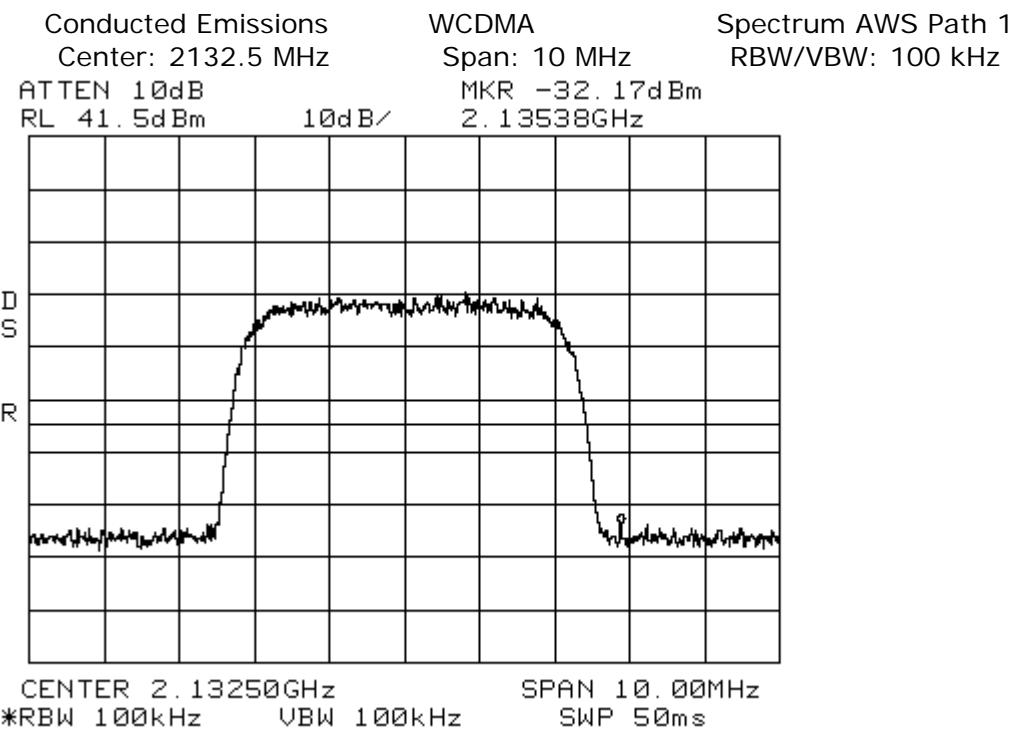


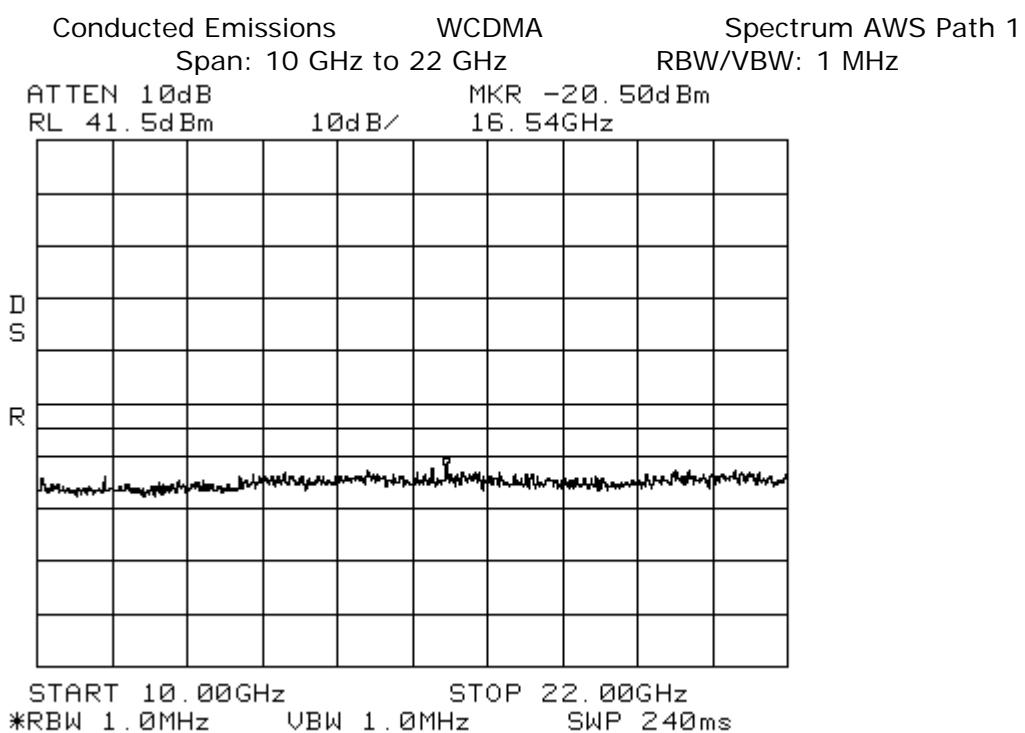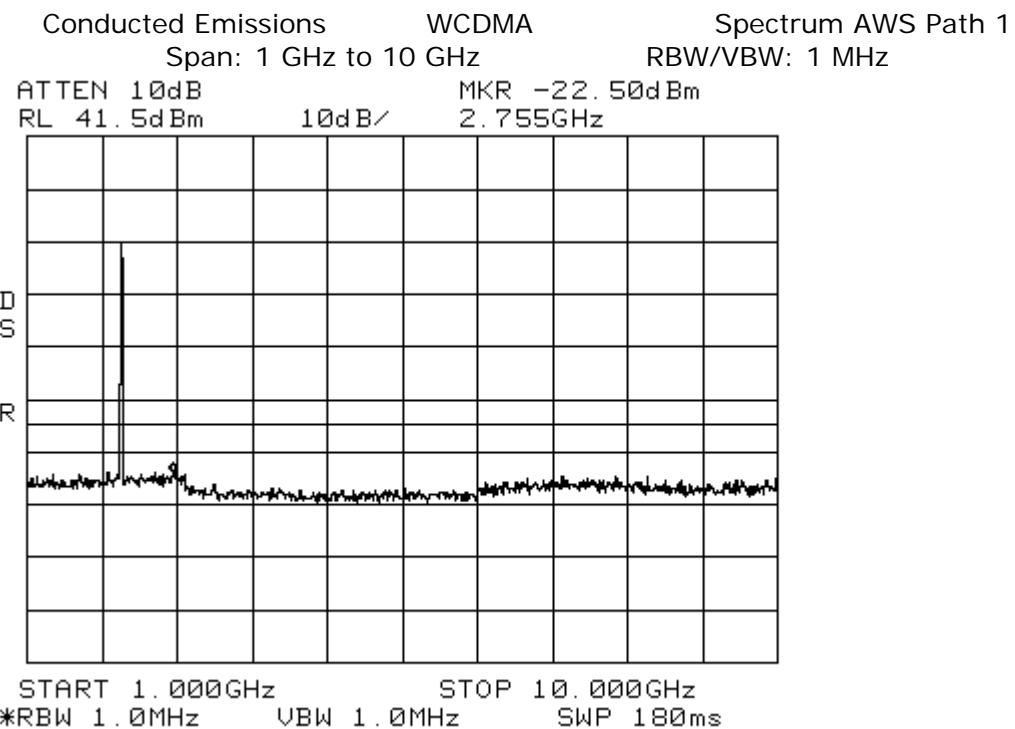

Conducted Emissions  
Center: 2132.5 MHz  
ATTEN 10dB  
RL 41.5dBm 10

WCDMA  
Span: 10 MHz  
MKR -29.00 dBm  
2.13522GHz




## Spectrum AWS Path 2


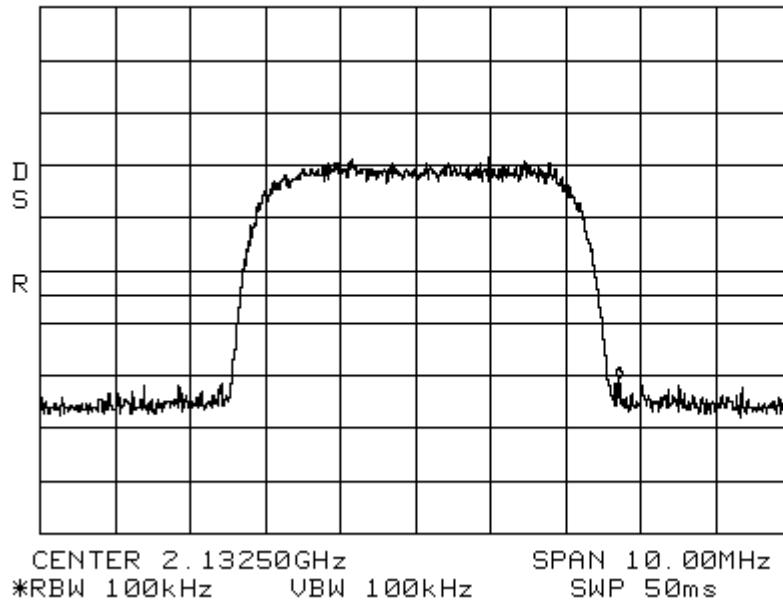


## Conducted Emissions



## WCDMA

## Spectrum AWS Path 2

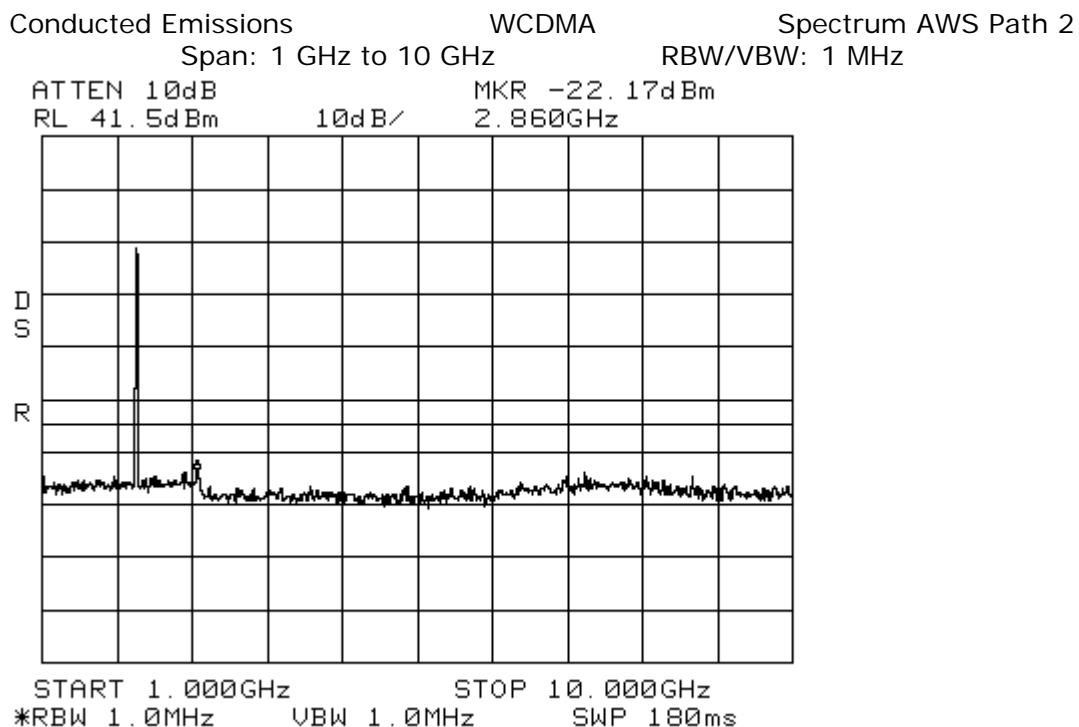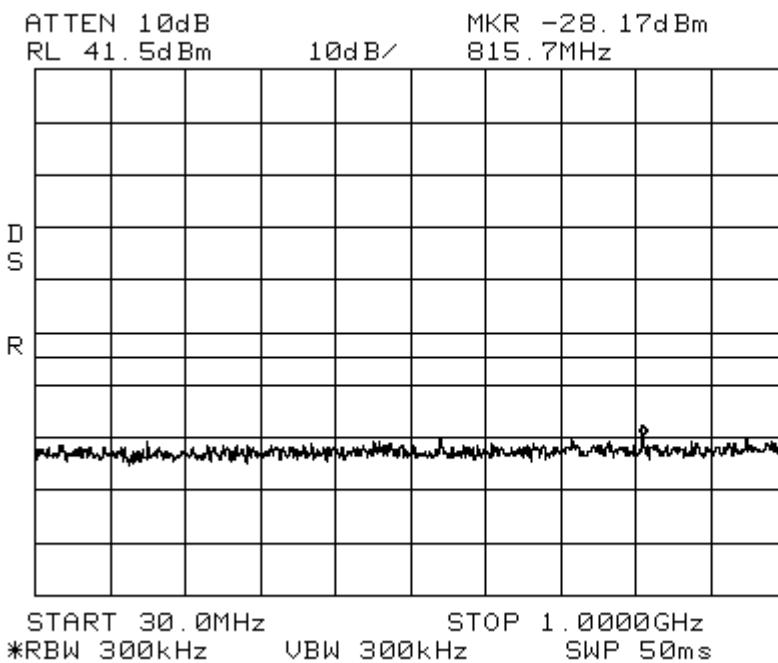


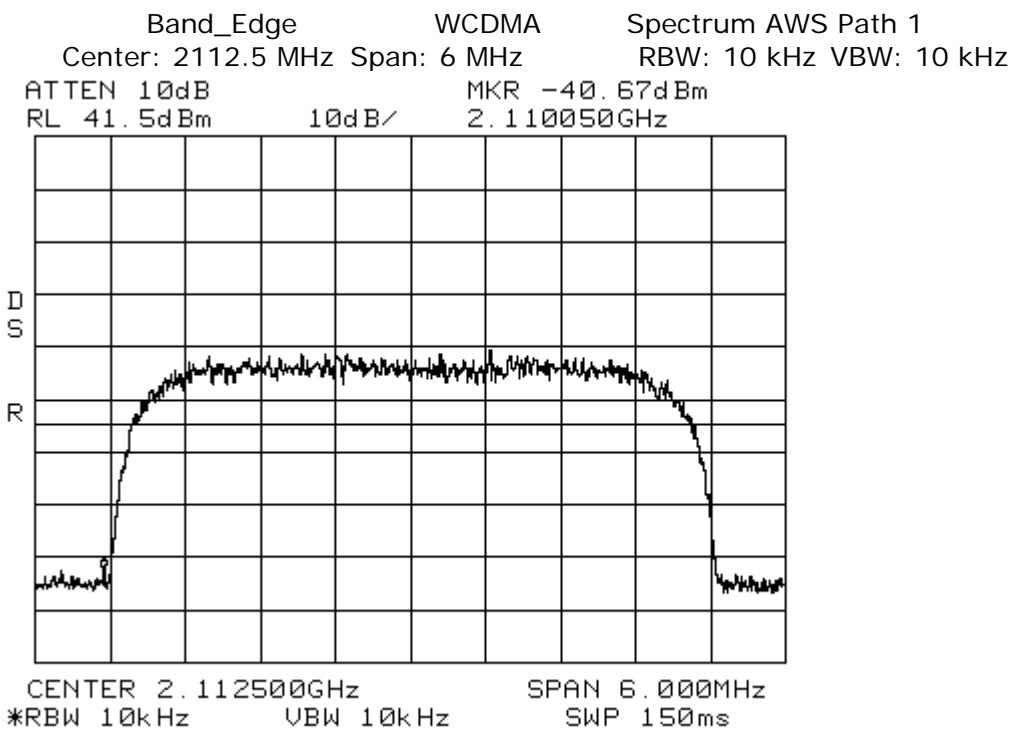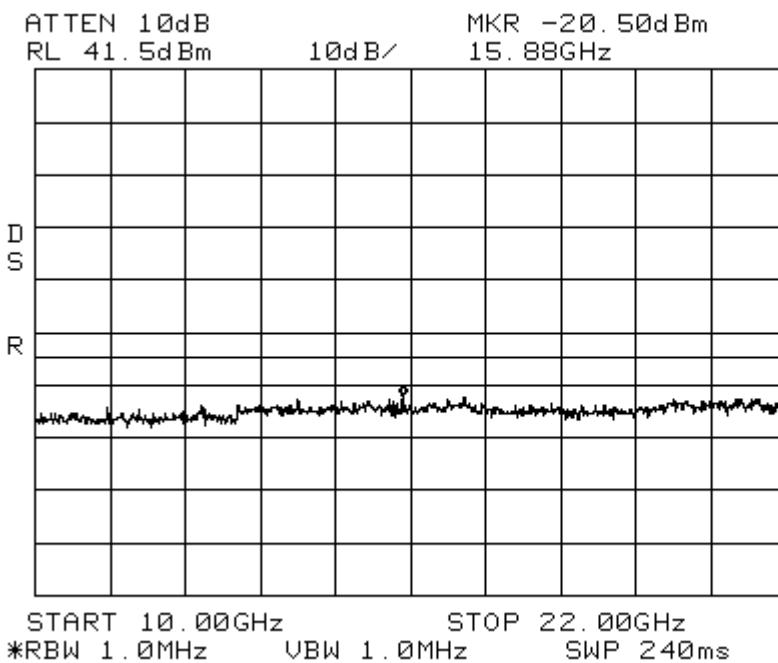

Band\_Edge WCDMA Spectrum AWS Path 1  
Center: 2152.5 MHz Span: 6 MHz RBW: 10 kHz VBW: 10 kHz

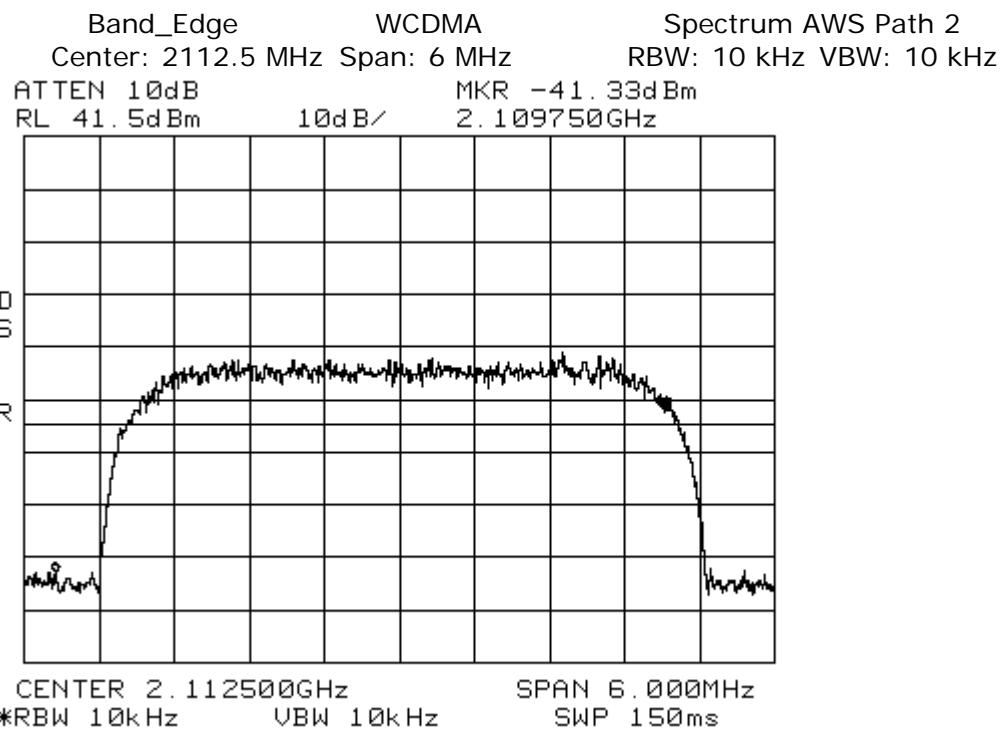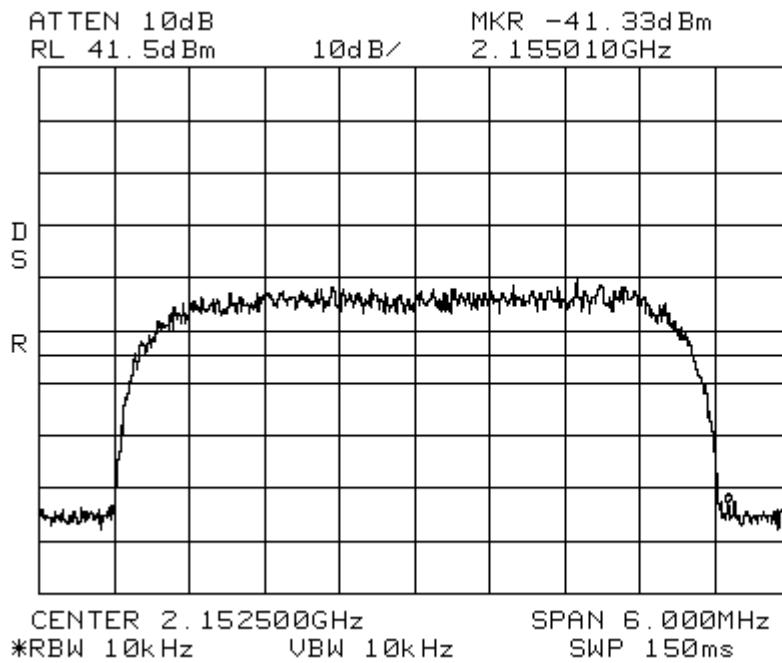

Band\_Edge WCDMA Spectrum AWS Path 2  
 Center: 2152.5 MHz Span: 6 MHz RBW: 10 kHz VBW: 10 kHz

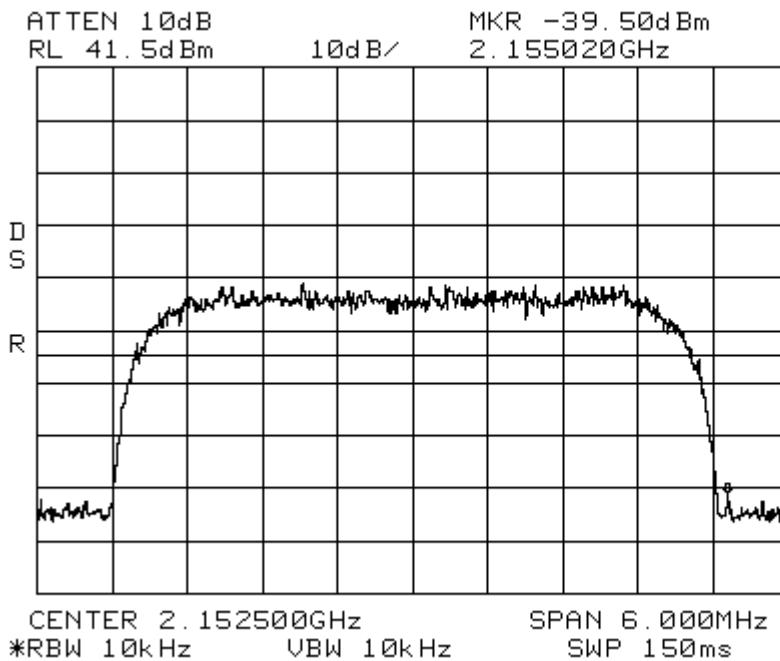

## 7.2 Conducted Output Power Test

[Table of Contents; Section 1.0](#)

[Back to Conducted Output Power; Section 5.1.1](#)

\*Note: The EUT is a fixed repeater and not a base station.

This measurement was made as a direct conducted emission measurement. The output from the EUT antenna connector was connected to the power meter. The carrier output, below, was conducted using a single WCDMA signal generator. The power meter level was offset to compensate for attenuators and cable loss between the EUT and the power meter.

A signal was used at the low, mid and high parts of the selected band.

### AWS Path 1

<b>WCDMA</b>	<b>0.04295 Watts</b>
Carrier Frequency	Carrier Output
2112.5 MHz	<u>16.33</u> dBm
2132.5 MHz	<u>15.80</u> dBm
2152.5 MHz	<u>15.77</u> dBm

### AWS Path 2

<b>WCDMA</b>	<b>0.04645 Watts</b>
Carrier Frequency	Carrier Output
2112.5 MHz	<u>15.42</u> dBm
2132.5 MHz	<u>16.67</u> dBm
2152.5 MHz	<u>15.60</u> dBm

### 7.3 Frequency Stability Test

[Table of Contents; Section 1.0](#)

[Back to Frequency Stability; Section 5.1.1](#)

Host/DRU	IFEU	RAU			
Input Voltage	Input Voltage	Input Voltage	Carrier Frequency	Measured Frequency	Meets Requirements?
100 VAC	54VDC	54 VDC	2110.200 MHz	2110.200 MHz	Yes
170 VAC	54VDC	54 VDC	2110.200 MHz	2110.200 MHz	Yes
240 VAC	54VDC	54 VDC	2110.200 MHz	2110.200 MHz	Yes
100 VAC	54VDC	54 VDC	2132.500 MHz	2132.500 MHz	Yes
170 VAC	54VDC	54 VDC	2132.500 MHz	2132.500 MHz	Yes
240 VAC	54VDC	54 VDC	2132.500 MHz	2132.500 MHz	Yes
100 VAC	54VDC	54 VDC	2154.800 MHz	2154.800 MHz	Yes
170 VAC	54VDC	54 VDC	2154.800 MHz	2154.800 MHz	Yes
240 VAC	54VDC	54 VDC	2154.800 MHz	2154.800 MHz	Yes
Temperature			Carrier Frequency	Measured Frequency	Meets Requirements?
-25 Deg. C			2110.200 MHz	2110.200 MHz	Yes
-20 Deg. C			2110.200 MHz	2110.200 MHz	Yes
-10 Deg. C			2110.200 MHz	2110.200 MHz	Yes
0 Deg. C			2110.200 MHz	2110.200 MHz	Yes
10 Deg. C			2110.200 MHz	2110.200 MHz	Yes

20 Deg. C		2110.200 MHz	2110.200 MHz	Yes
30 Deg. C		2110.200 MHz	2110.200 MHz	Yes
40 Deg. C		2110.200 MHz	2110.200 MHz	Yes
45 Deg. C		2110.200 MHz	2110.200 MHz	Yes
50 Deg. C		2110.200 MHz	2110.200 MHz	Yes
-25 Deg. C		2132.500 MHz	2132.500 MHz	Yes
-20 Deg. C		2132.500 MHz	2132.500 MHz	Yes
-10 Deg. C		2132.500 MHz	2132.500 MHz	Yes
0 Deg. C		2132.500 MHz	2132.500 MHz	Yes
10 Deg. C		2132.500 MHz	2132.500 MHz	Yes
20 Deg. C		2132.500 MHz	2132.500 MHz	Yes
30 Deg. C		2132.500 MHz	2132.500 MHz	Yes
40 Deg. C		2132.500 MHz	2132.500 MHz	Yes
45 Deg. C		2132.500 MHz	2132.500 MHz	Yes
50 Deg. C		2132.500 MHz	2132.500 MHz	Yes
-25 Deg. C		2154.800 MHz	2154.800 MHz	Yes
-20 Deg. C		2154.800 MHz	2154.800 MHz	Yes
-10 Deg. C		2154.800 MHz	2154.800 MHz	Yes
0 Deg. C		2154.800 MHz	2154.800 MHz	Yes
10 Deg. C		2154.800 MHz	2154.800 MHz	Yes
20 Deg. C		2154.800 MHz	2154.800 MHz	Yes
30 Deg. C		2154.800 MHz	2154.800 MHz	Yes
40 Deg. C		2154.800 MHz	2154.800 MHz	Yes
45 Deg. C		2154.800 MHz	2154.800 MHz	Yes
50 Deg. C		2154.800 MHz	2154.800 MHz	Yes

## 7.4 Intermodulation Test

[Table of Contents; Section 1.0](#)

[Back to Emission Limits; Section 5.1.3](#)

The inter-modulation products test was performed for the EUT. Three tests were preformed with the modulation type. Test 1 was with 2 signals input to the EUT at lower end channels. Test 2 was with 2 signals input to the EUT at upper end channels. Test 3 was with 2 signals input to the EUT at upper and lower end channels. The modulation types tested were WCDMA. An investigation was made from 30 MHz to the 10<sup>th</sup> Harmonic of the highest fundamental frequency (~20 GHz). The following plots show the results.

Results:  
(See Plots)


## Intermodulation Center: 2132.5 MHz

WCDMA\_Low  
Span: 70 MHz

## Spectrum AWS Path 1

ATTEN 10dB  
RL 41.5dBm 10dB/

MKR -31.83dBm  
2.10928GHz



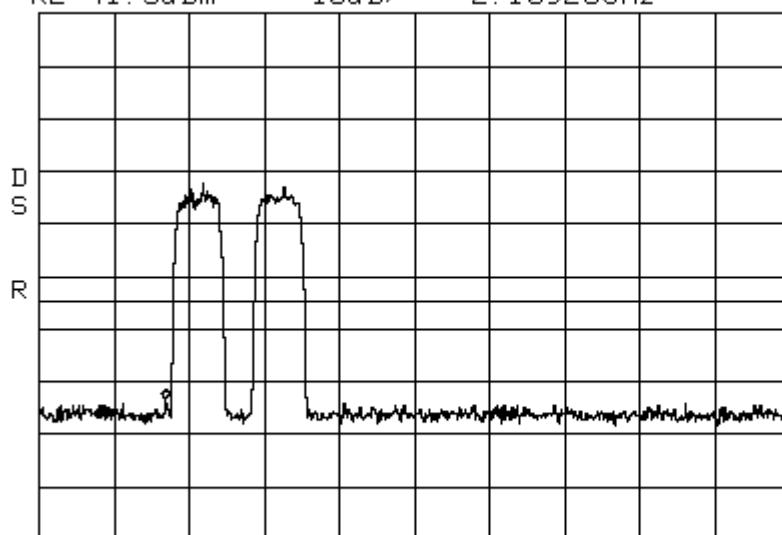




CENTER 2.13250GHz SPAN 70.00MHz  
\*RBW 100kHz VBW 100kHz SWP 50ms

## Intermodulation WC Span: 30 MHz to 1 GHz




## WCDMA\_Low



Spectrum AWS Path 1  
RBW/VBW: 300 kHz

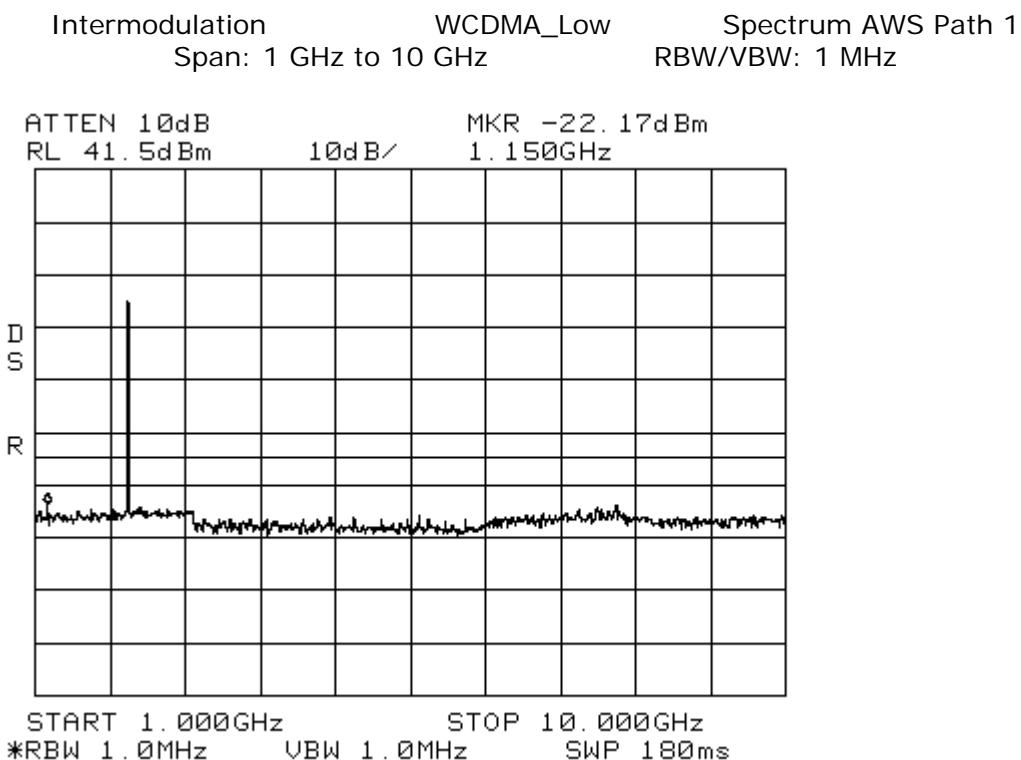
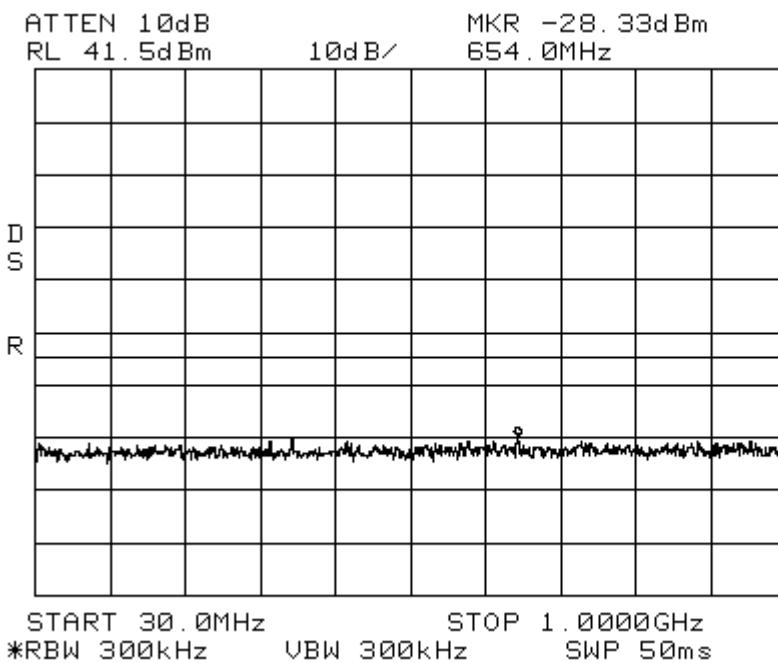


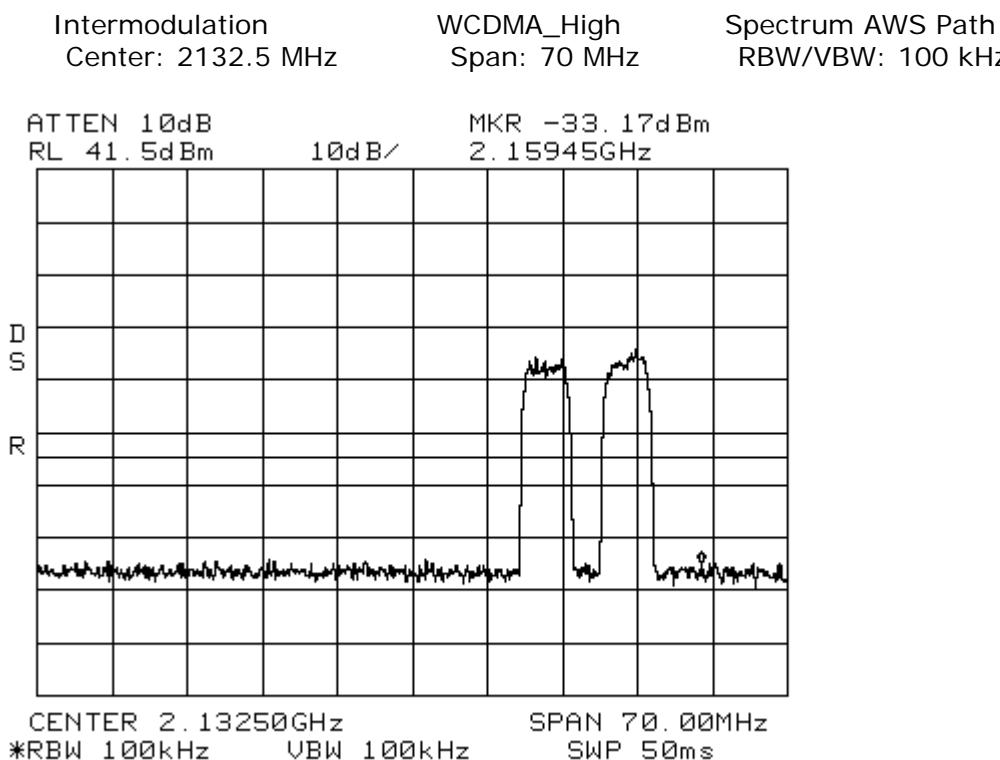
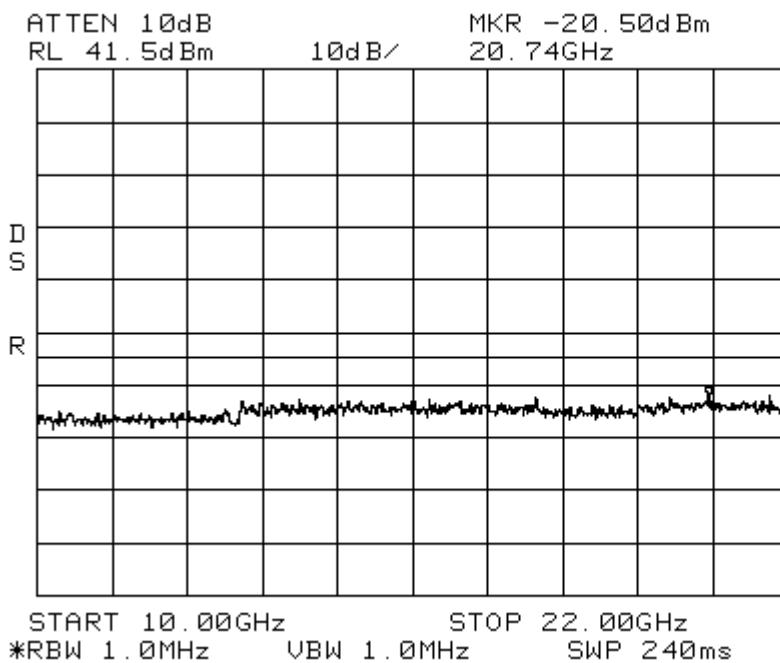


Intermodulation WCDMA\_High Spectrum AWS Path 1  
Span: 30 MHz to 1 GHz RBW/VBW: 300 kHz


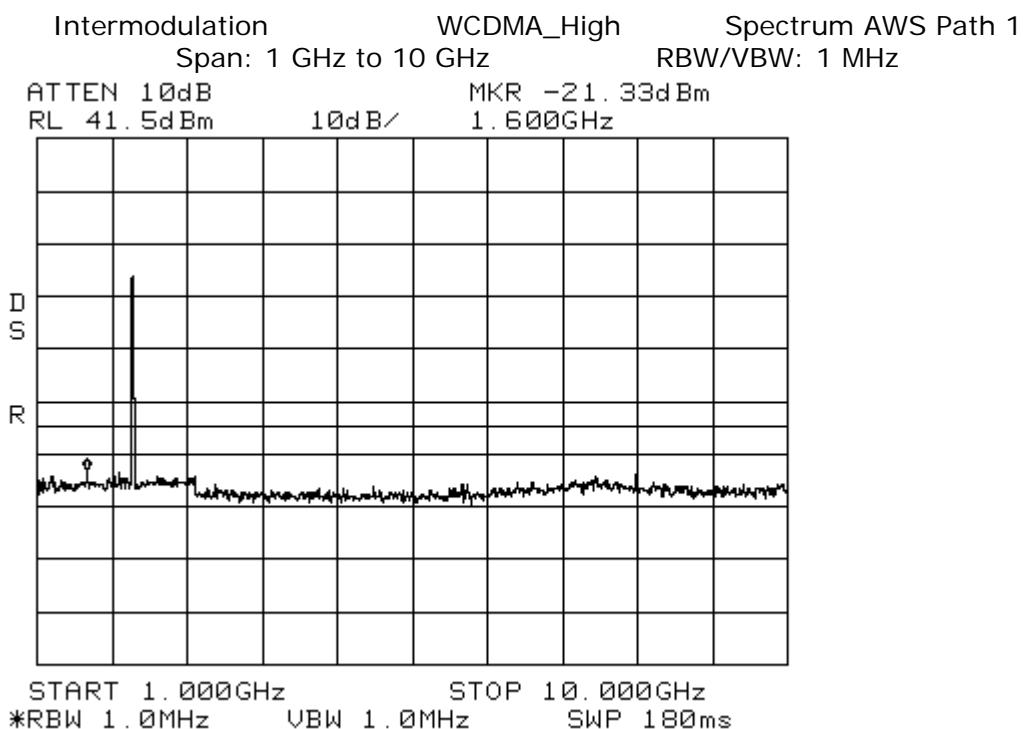
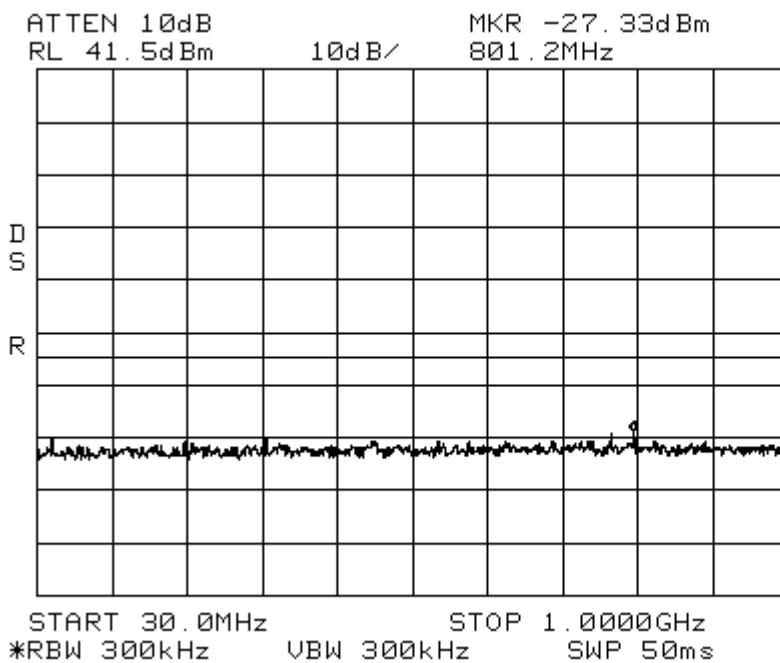



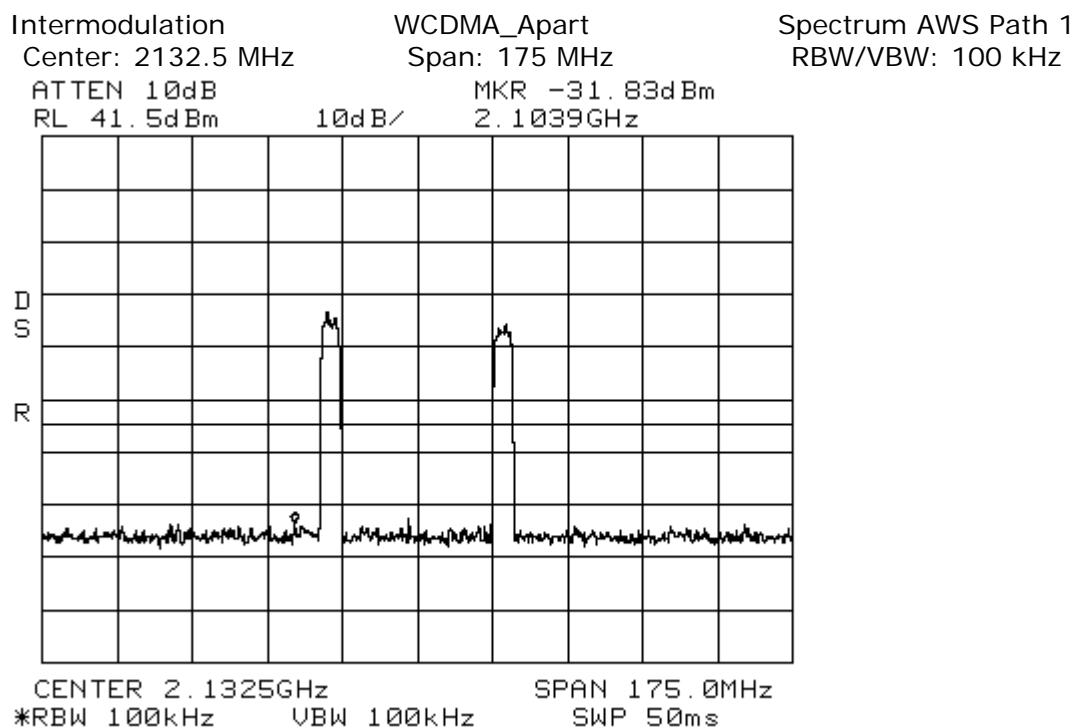
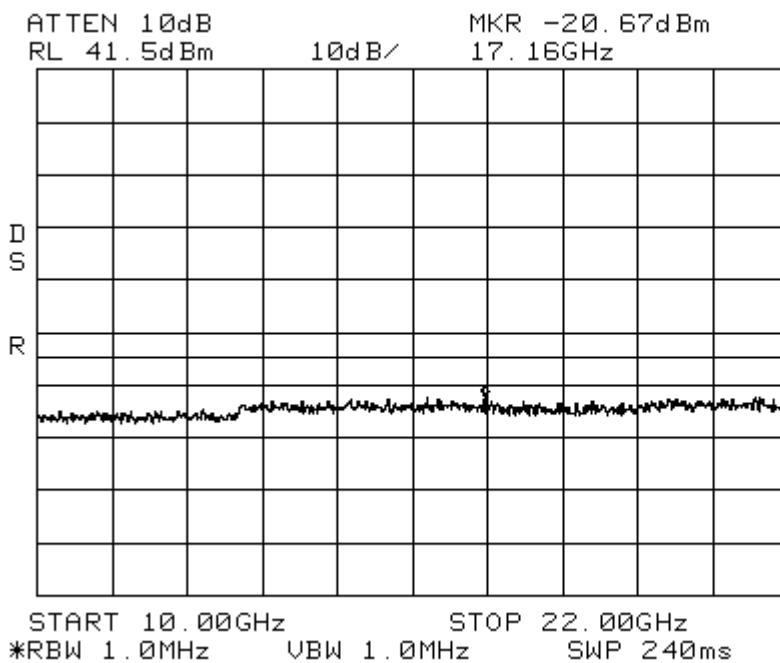



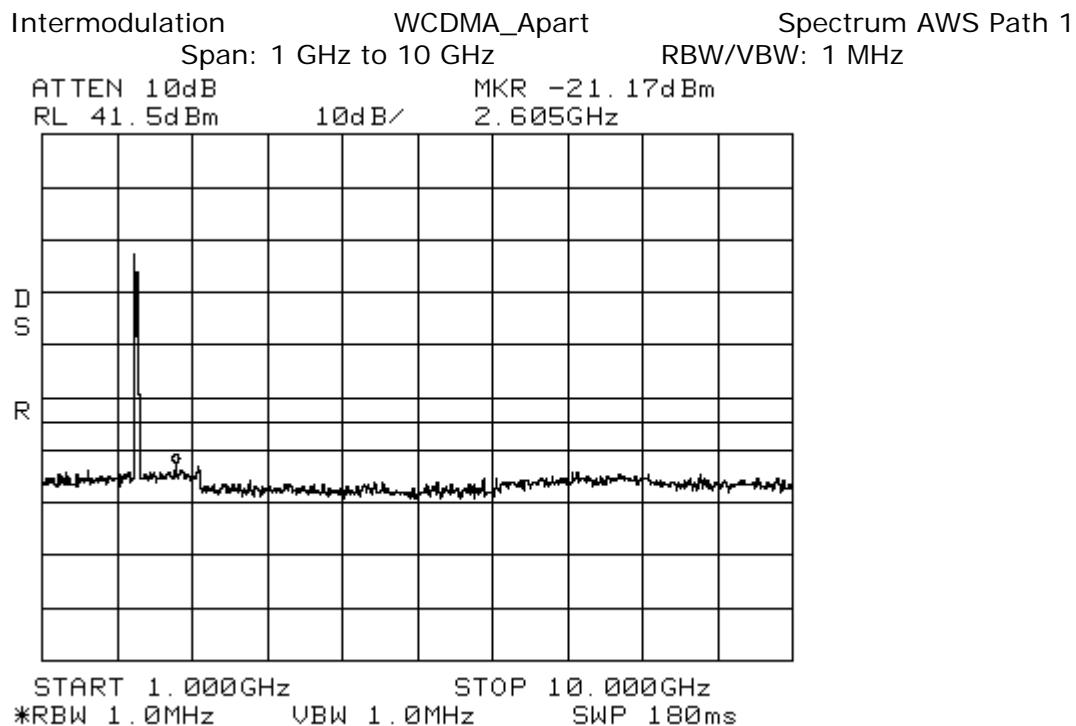
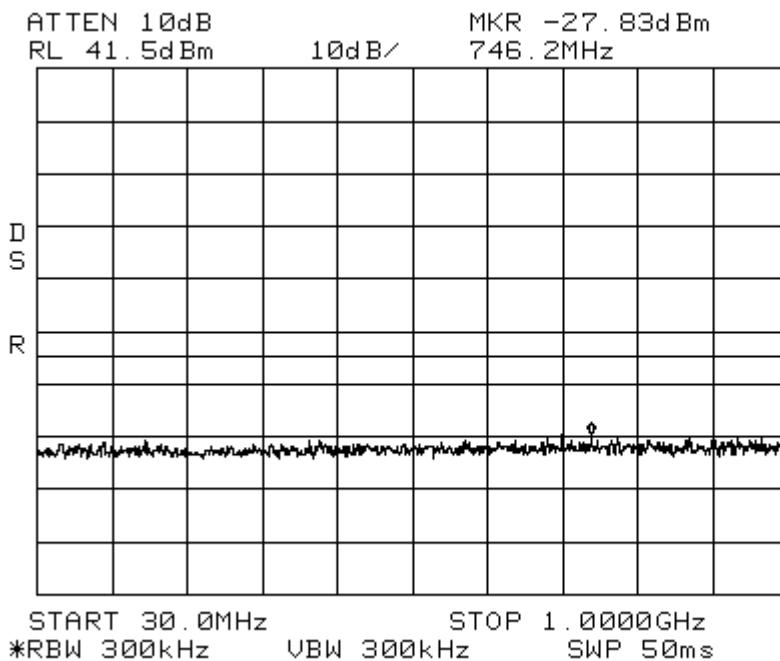


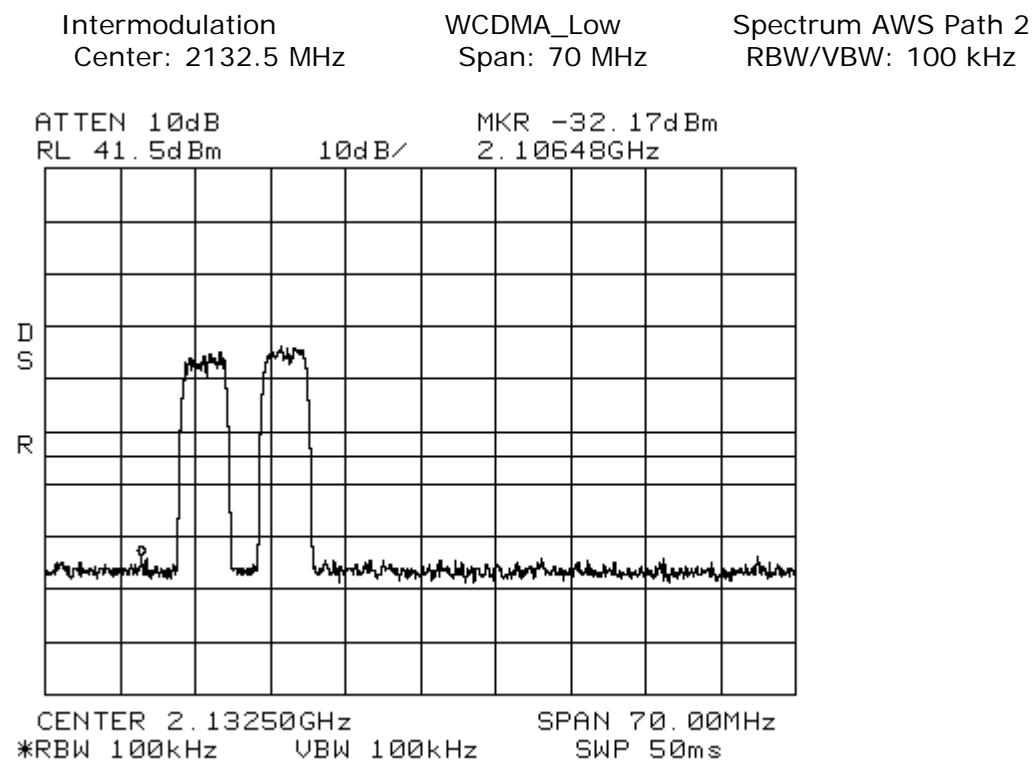
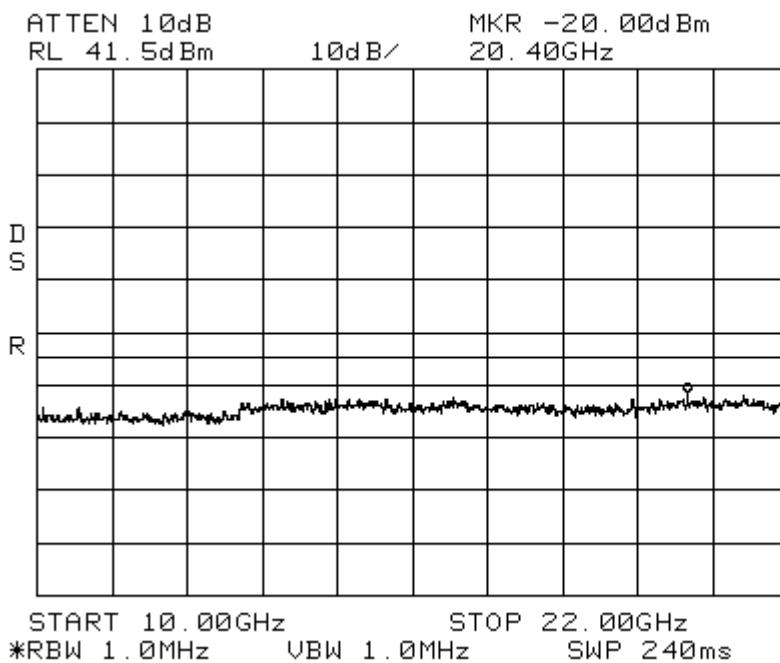


Intermodulation WCDMA\_Low Spectrum AWS Path 2  
Span: 30 MHz to 1 GHz RBW/VBW: 300 kHz

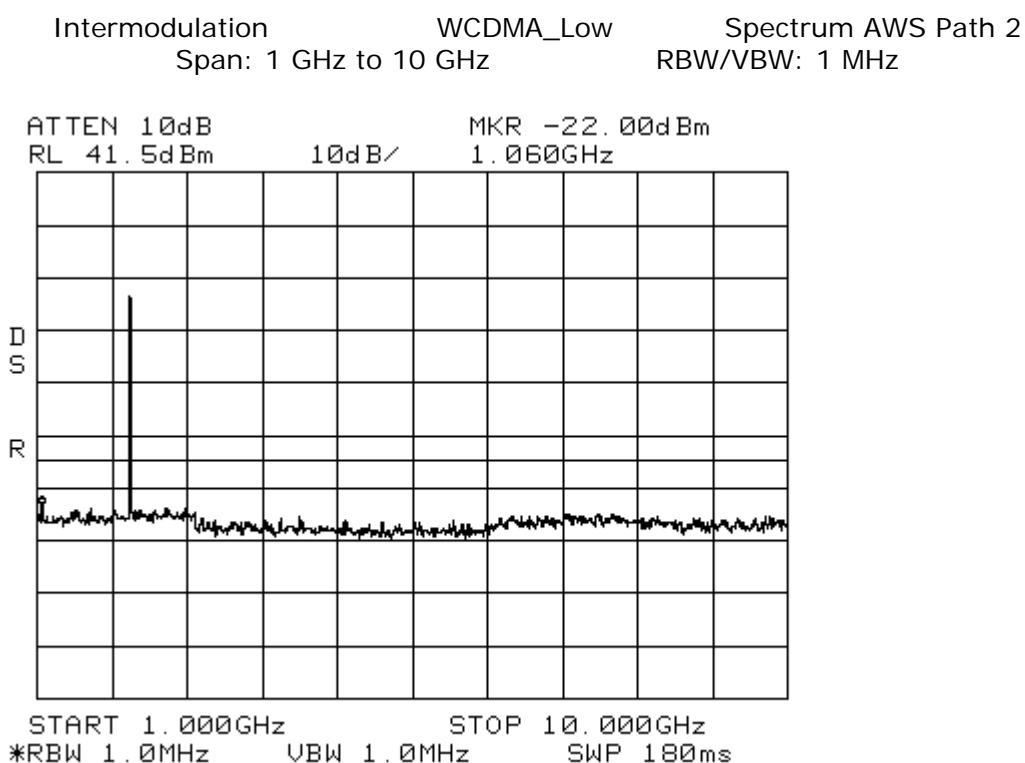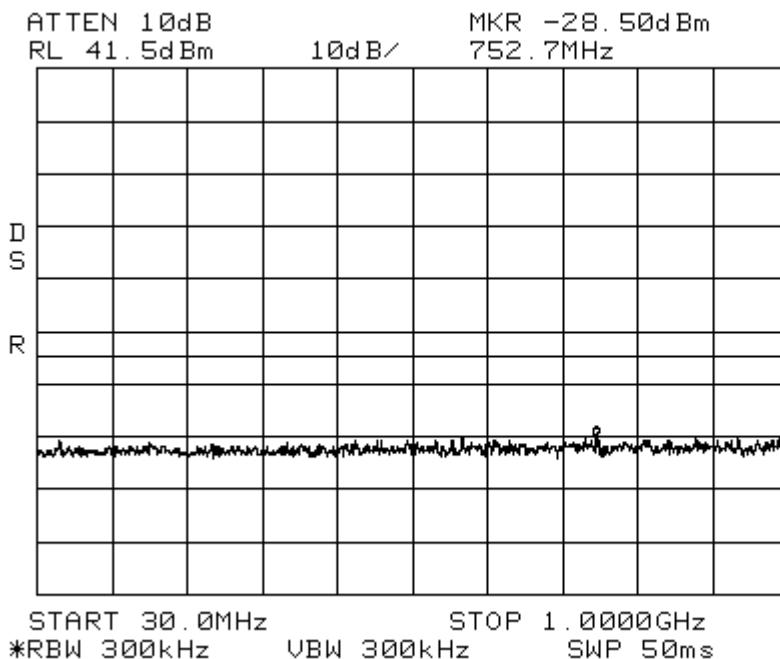

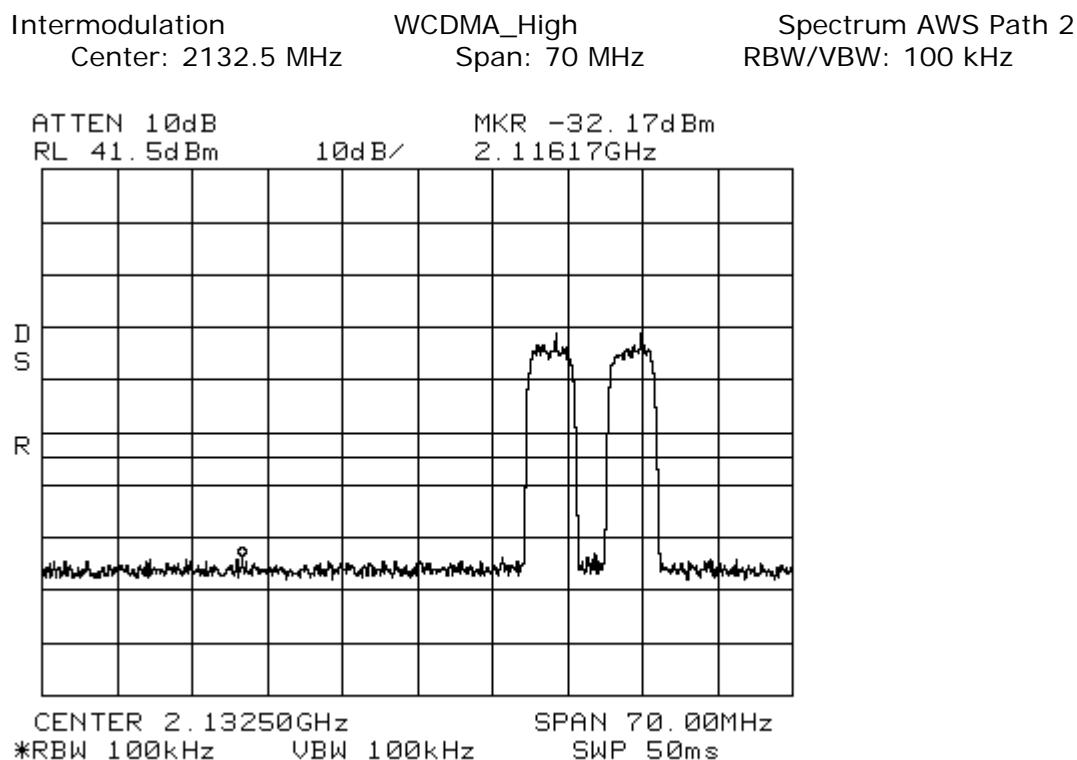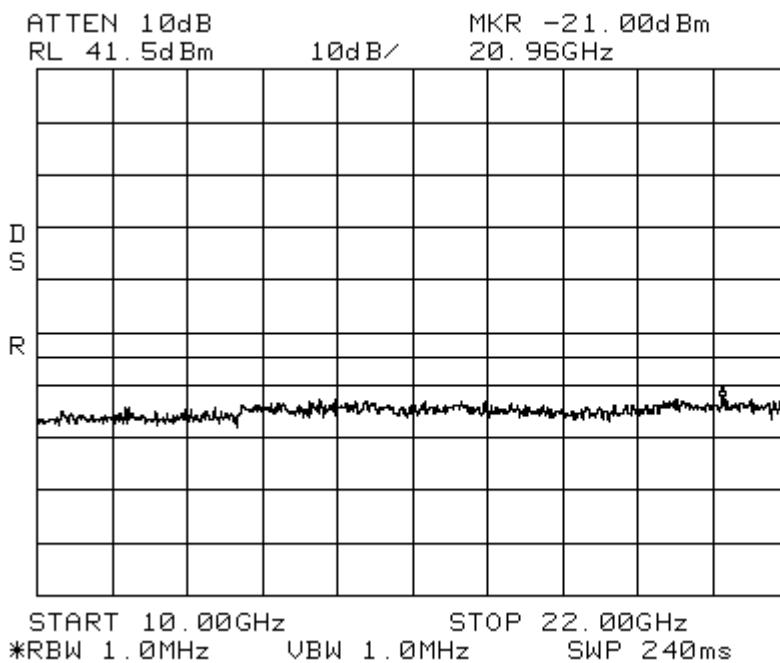

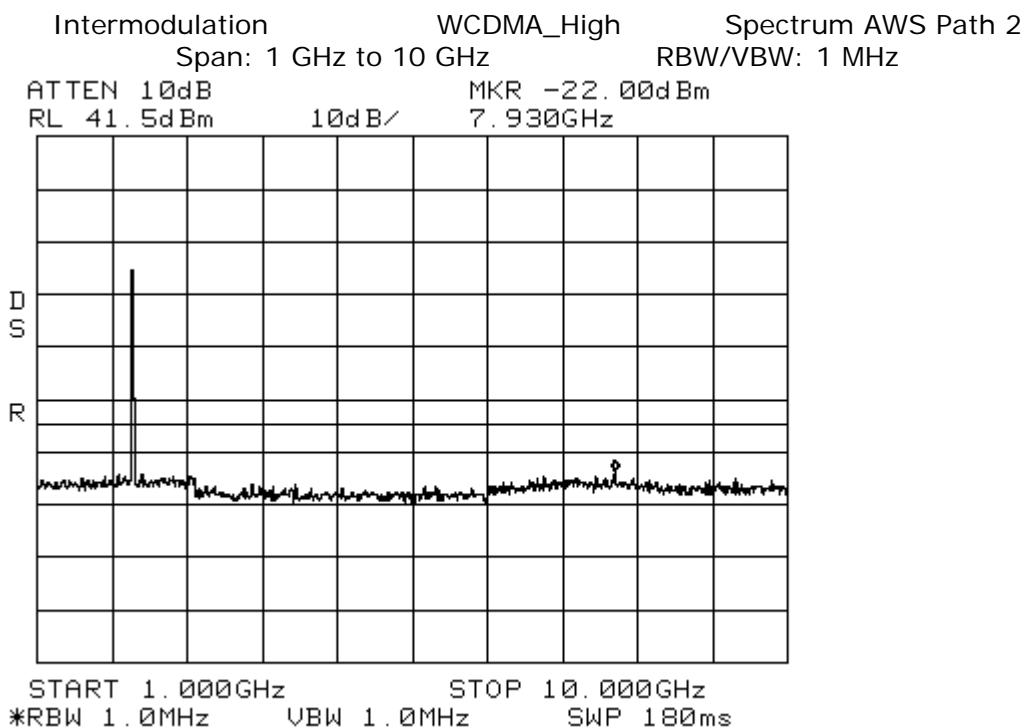
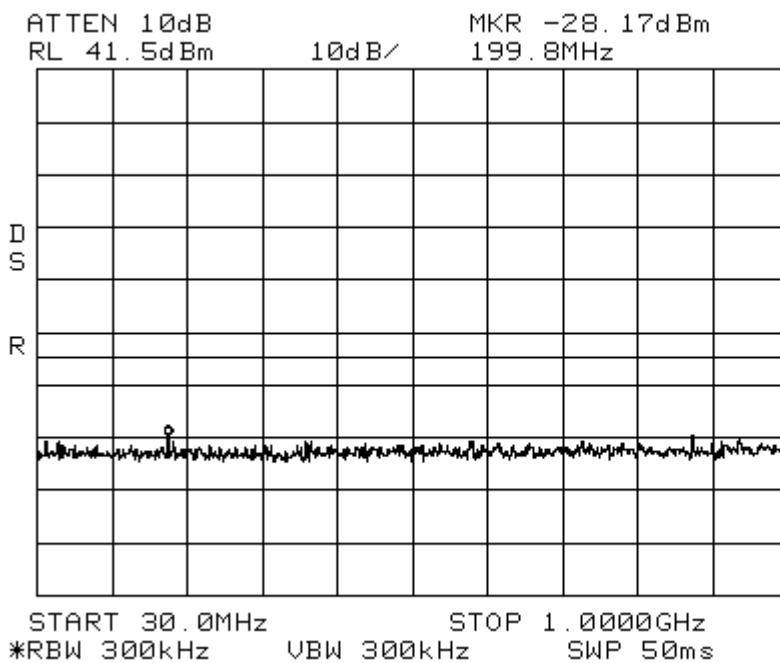


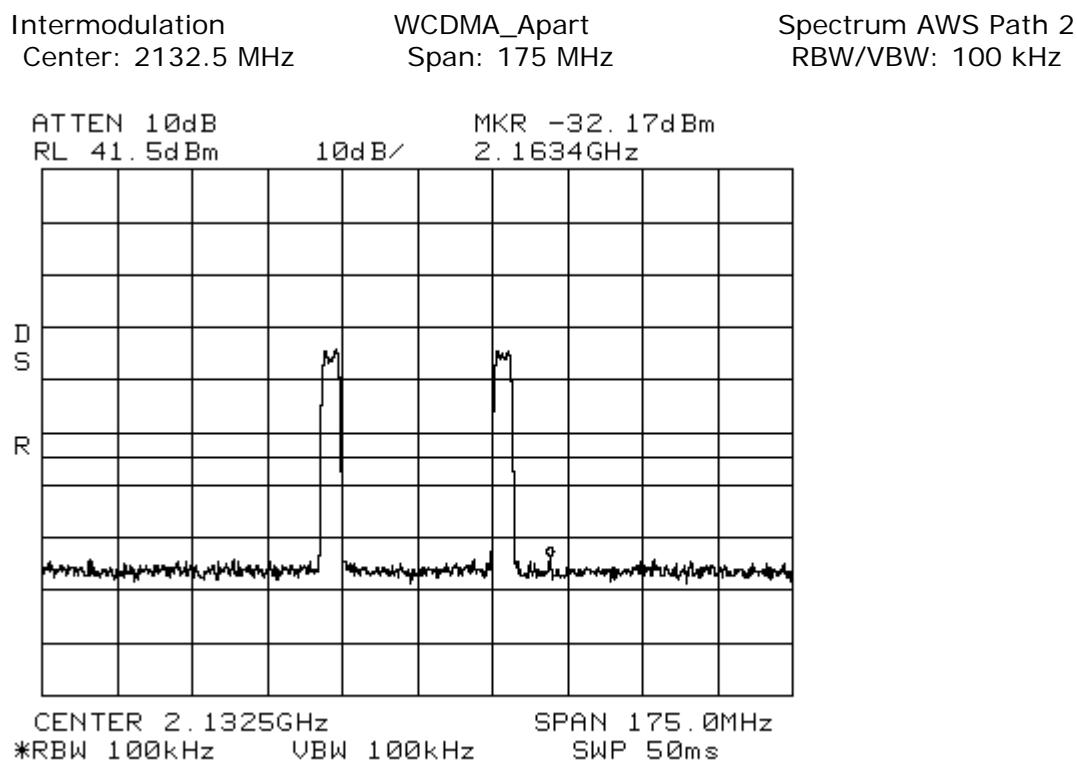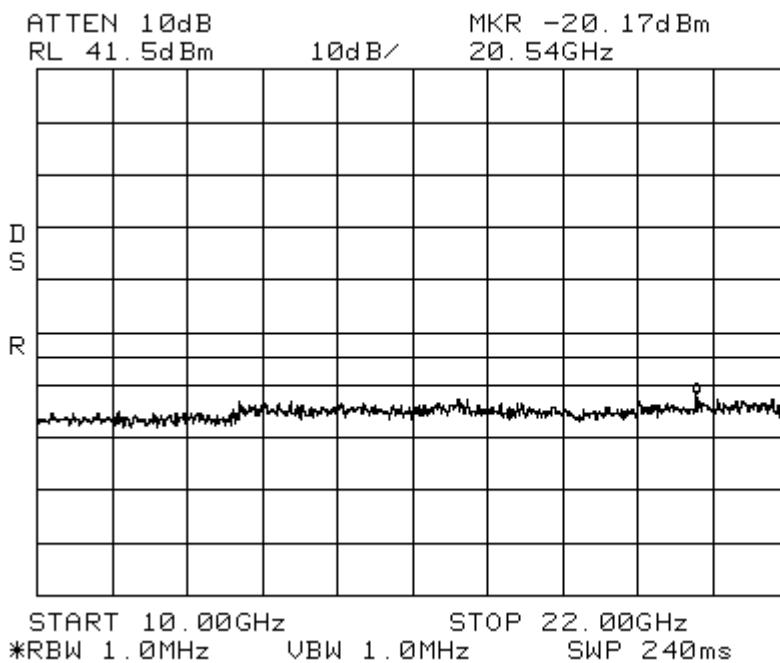


Intermodulation WCDMA\_Apart Spectrum AWS Path 2

Span: 30 MHz to 1 GHz

RBW/VBW: 300 kHz

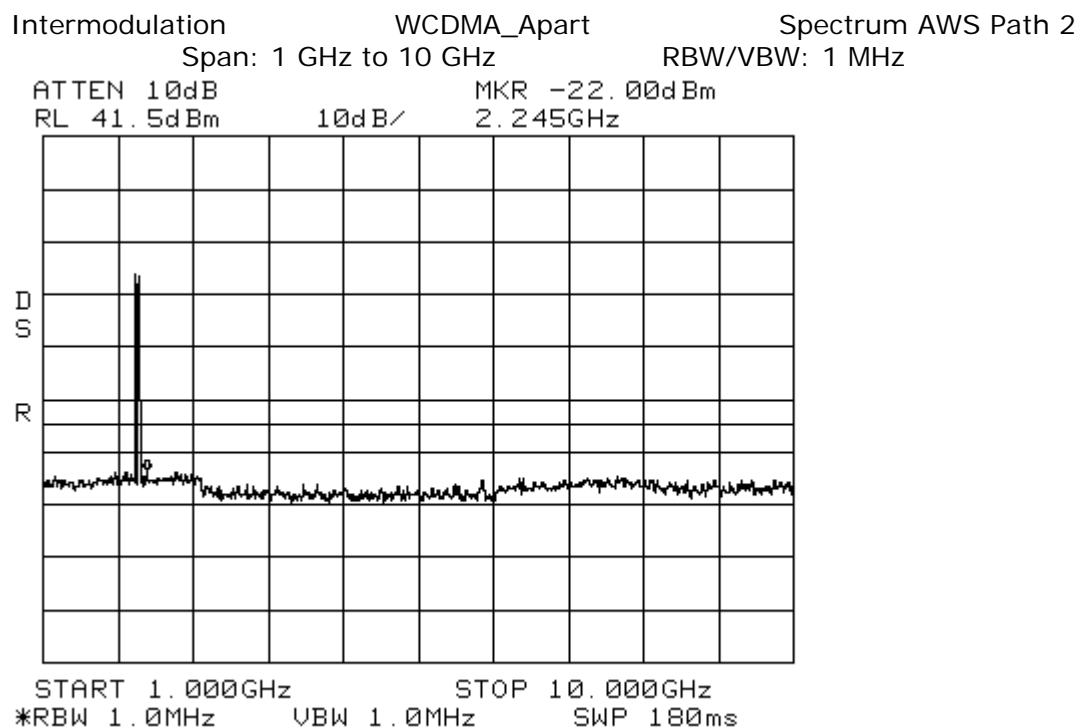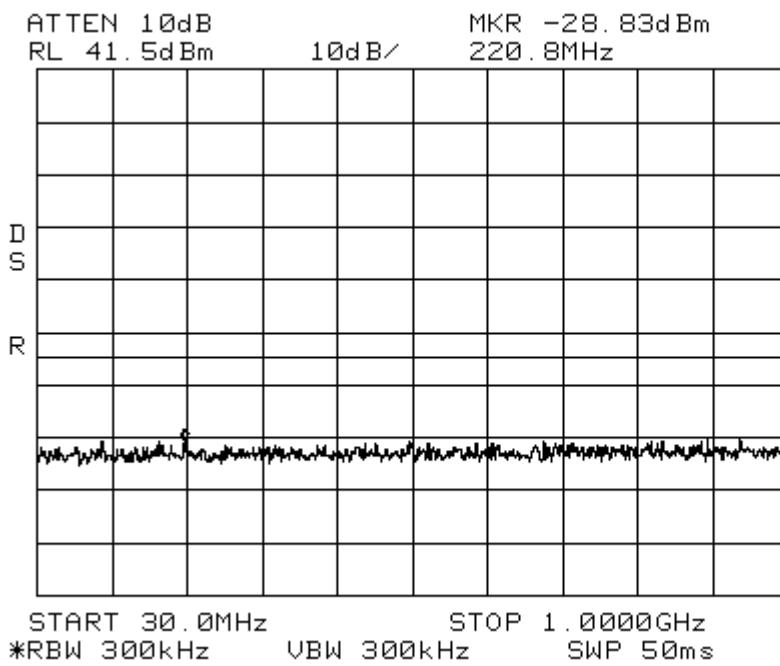

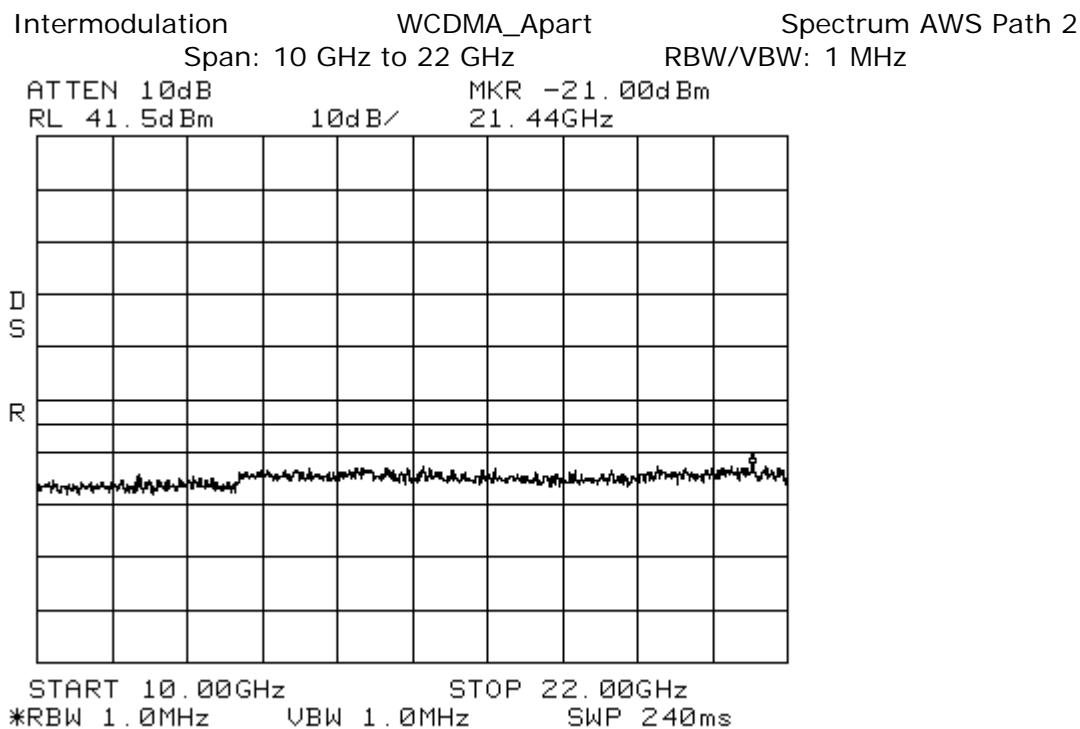

## 7.5 Occupied Bandwidth Modulation Test

## Table of Contents; Section 1.0

---


[Back to Emission Limits; Section 5.1.3](#)

An input/output Occupied Bandwidth test was done with modulation types: WCDMA. The purpose was to determine the amount of distortion added to different types of modulation schemes by the EUT. The following plots show input signals vs. output signals.



The resolution bandwidth is reduced to 1% of the estimated emission bandwidth and the video bandwidth is set to 3 times the resolution bandwidth. The markers are moved to the -20 dB points (from the previously established center frequency level) on either side of center frequency.


## Results:

## Results:

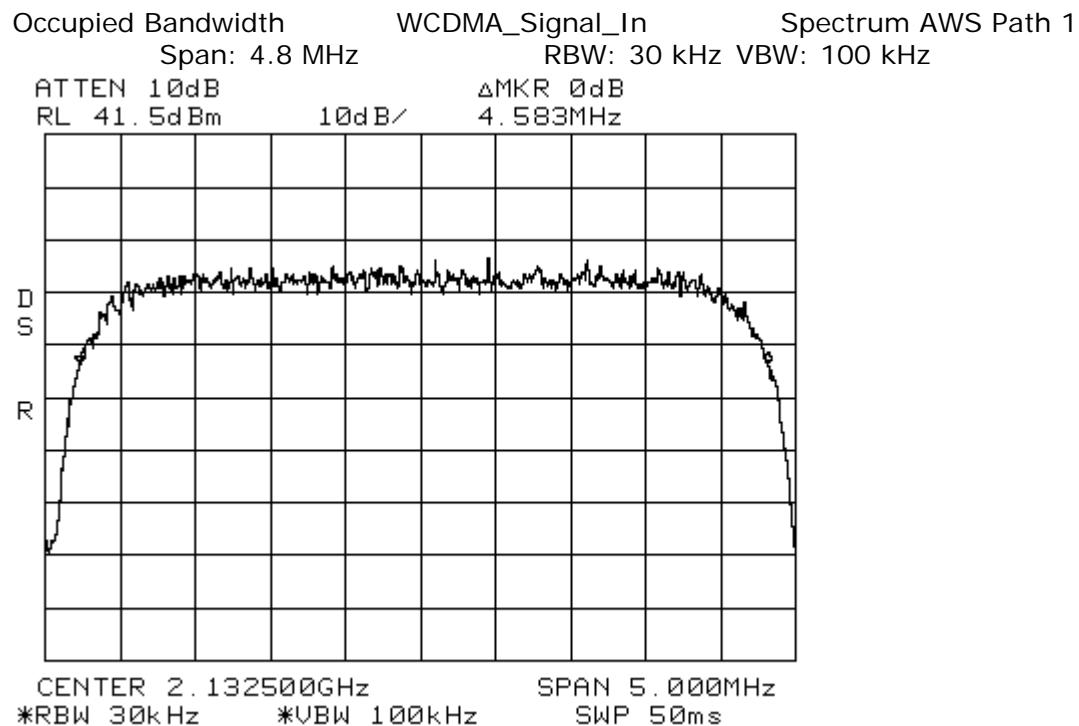

Occupied Bandwidth      WCDMA\_Signal\_Out      Spectrum AWS Path 1  
 Span: 4.8 MHz      RBW: 30 kHz VBW: 100 kHz

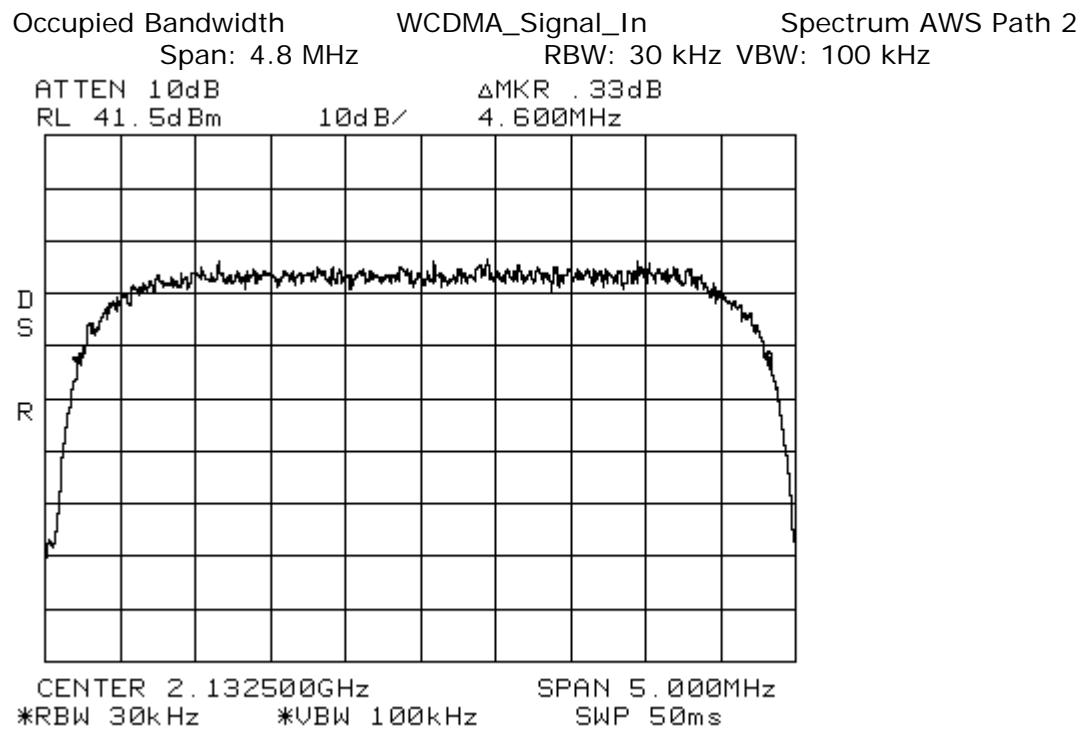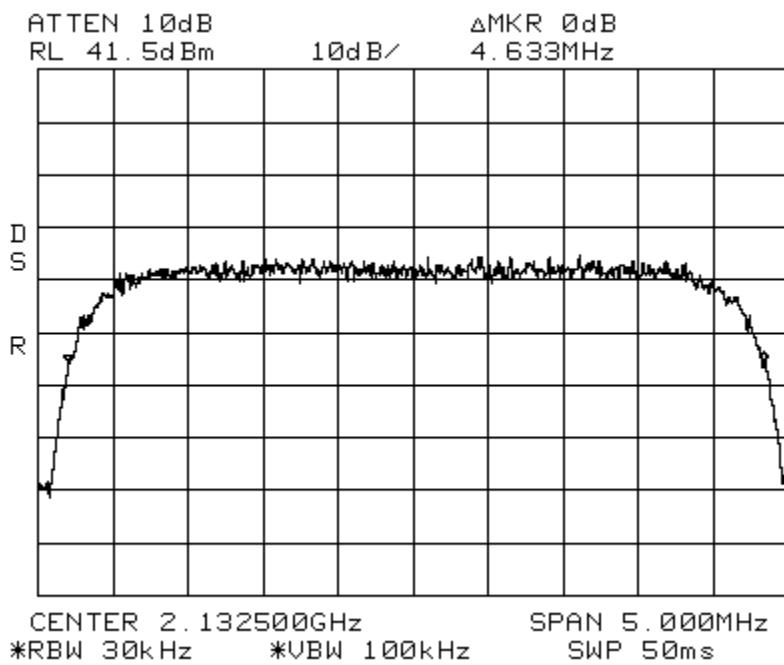

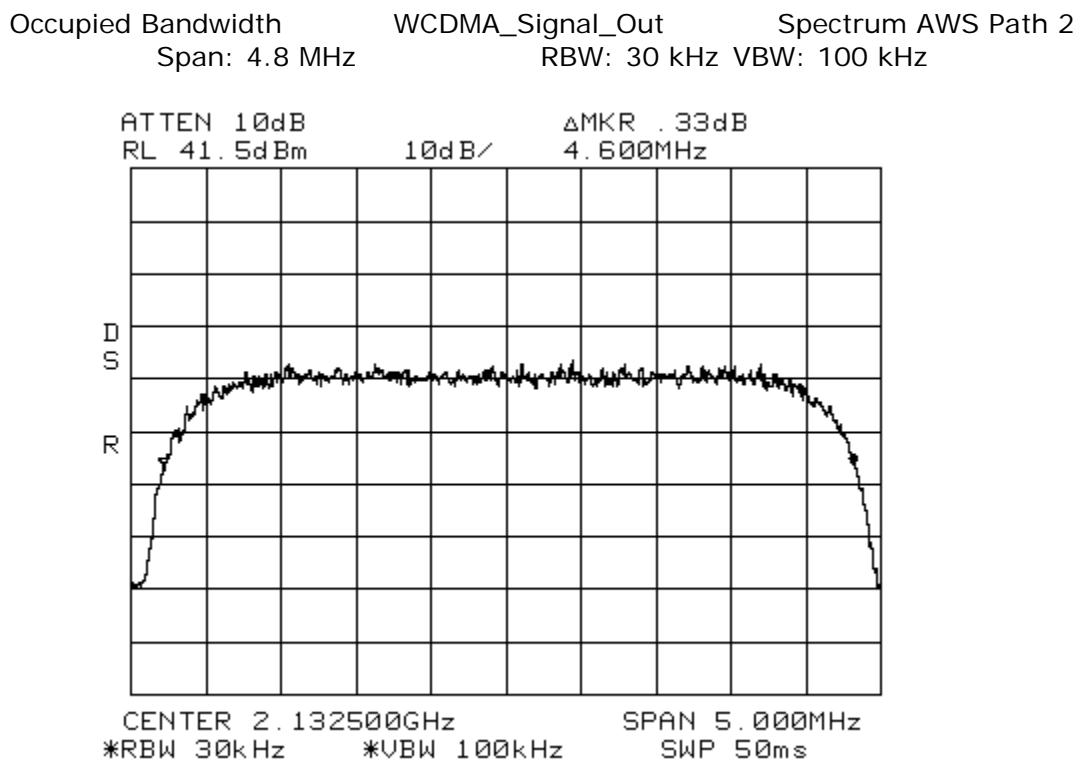

## 8.0

## APPENDIX B

### Measurement Protocol

[Table of Contents; Section 1.0](#)

[Back to Emission Limits; Section 5.1.3](#)

## Measurement Protocol

### Environmental conditions of the lab, (ADC)

Temperature: 24° C

Relative Humidity: 21 %

Atmospheric Pressure: 98.8 kPa

### **Test Methodology:**

Emission testing is performed according to the procedures in ANSI C63.4-2003.

### **Measurement Uncertainty**

The test system for conducted emissions is defined as the signal generator(s), the power meter, the spectrum analyzer and the coaxial cable. The equipment comprising the test systems is calibrated prior to testing the EUT.

### **Justification**

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left un-terminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

### **Radiated Emissions**

The final level, in dBuV/m, equals the reading from the spectrum analyzer (Level dBuV), adding the antenna correction factor and cable loss factor (Factor dB) to it, and subtracting the preamp gain (and duty cycle correction factor, if applicable). This result then has the limit subtracted from it to provide the Delta, which gives the tabular data as shown in the data sheets in Appendix B.

Example:

FREQ (MHz)	LEVEL (dBuV)	CABLE/ANT/PREAMP (dB)	FINAL (dB)	POL/HGT/AZ (m)	DELTA1 (deg)
---------------	-----------------	--------------------------	---------------	-------------------	-----------------

60.80

42.5Qp +

1.2 + 10.9 - 25.5 = 29.1

V 1.0 0.0

-10.9

### **Substitution Method**

A cabinet (or enclosure) radiated emission scan was also made, at Intertek, with the EUT's antenna replaced with a termination to demonstrate case radiation compliance to the -13 dBm requirement. Radiated emissions from the EUT are measured in the frequency range of 30 to 20,000 MHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is place directly on the turntable/ground plane. Interface cable that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees. The field strength levels were measured per ANSI C63.4. The EUT is then replaced with a tuned dipole antenna (below 1GHz) or horn antenna (above 1 GHz). The substitute antenna was placed in the same polarization as the test antenna. A signal generator was used to generate a signal level that matched the highest level measured from the EUT. The signal generator level minus the cable loss from the signal generator to the substitute antenna plus the substitute antenna gain equals the spurious power level.

### **Test Equipment**

All measurement instrumentation is traceable to the National Institute of Standards and Technology and is calibrated according to internal procedure.

## **9.0**

## **APPENDIX C**

### Radiated Emissions Test Data

#### [Table of Contents; Section 1.0](#)

Document Name: 100414419MIN-003

**Test Engineer:** Ivaylo Nadarliyski

**Date:** 1 June, 2011

#### **Test Procedure:**

Test measurements were made in accordance with ANSI C63.4-2003, Standard Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronics Equipment in the Range of 9 kHz to 40 GHz.

#### **Test Site Location:**

The test site is a 3 meter Semi-Anechoic Chamber, constructed by Panashield™ Inc. and located inside the building at 7250 Hudson Blvd. Suite 100, Oakdale, MN 55128.

#### **Test Site Description:**

The 3 meter Semi-Anechoic Chamber is constructed of Panabolt™ modular RF shielding and self-supported with structural steel designed for the local seismic zone rating. The chamber has the nominal size of 20' wide x 29' long x 18' high. All walls and ceiling of the chamber are treated with FFG-1000 Ferrite Grid absorber which was developed specifically to meet international requirements for EMC anechoic chambers for emissions and immunity

measurements. To meet high frequency testing white HY-35 hybrid absorber is mounted on the ferrites in specular regions of the chamber.

The chamber has a 2 meter diameter ANSI test volume area and meets the requirements of ANSI C63.4 (1992), EN55022, and FCC Part 15 standards for testing at a 3 meter path length.

FCC Registration Number: 0007355381

IC Registration Number: 4359A