

FCC PART 15
EMI TEST REPORT

of

E.U.T. : 2.4GHz Wireless AV Link
FCC ID. : NOQJM2282R
MODEL : 2282R

for

APPLICANT : JESMAY ELECTRONICS CO., LTD.
ADDRESS : 74, CHUNG-DER 20TH STREET TAINAN,
TAIWAN, R.O.C.

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN

NO. 34, LIN 5, DING FU TSUN, LINKOU HSIANG

TAIPEI HSIEN, TAIWAN, R.O.C.

Tel:(02)26023052 Fax:(02)26010910

<http://www/etc.org.tw> ; e-mail : etcemi@seed.net.tw

Report Number : ET92R-07-046-02

TEST REPORT CERTIFICATION

Applicant : JESMAY ELECTRONICS CO., LTD.
74, CHUNG-DER 20TH STREET TAINAN, TAIWAN, R.O.C.

Manufacturer : JESMAY ELECTRONICS CO., LTD.
74, CHUNG-DER 20TH STREET TAINAN, TAIWAN, R.O.C.

Description of EUT :
a) Type of EUT : 2.4GHz Wireless AV Link
b) Trade Name : JESMAY
c) Model No. : 2282R
d) FCC ID : NOQJM2282R
e) Power Supply : Adaptor; I/P: 120Vac, 60Hz;
O/P: 9Vdc, 300mA
f) Frequency Range : 433.92MHz

Regulation Applied : FCC Rules and Regulations Part 15 Subpart B & C (2002)

I HEREBY CERTIFY THAT, The data shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note : 1. The results of the testing report relate only to the items tested.
2. The testing report shall not be reproduced except in full, without the written approval of ETC.

Issued Date : Jul. 28, 2003

Test Engineer : Ion Lin
(Ion Lin)

Approve & Authorized Signer : Will Yau
Will Yau, Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN

Table of Contents	Page
1. GENERAL INFORMATION	1
1.1 PRODUCT DESCRIPTION.....	1
1.2 CHARACTERISTICS OF DEVICE:.....	1
1.3 TEST METHODOLOGY	1
1.4 TEST FACILITY.....	1
2. DEFINITION AND LIMITS.....	2
2.1 DEFINITION	2
2.2 RESTRICTED BANDS OF OPERATION	2
2.3 LIMITATION	3
2.4 LABELING REQUIREMENT	5
2.5 USER INFORMATION	5
3 SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION	6
3.2 DEVICES FOR TESTED SYSTEM	6
4. RADIATED EMISSION MEASUREMENT.....	7
4.1 APPLICABLE STANDARD.....	7
4.2 MEASUREMENT PROCEDURE	7
4.3 TEST DATA.....	9
4.3.1 <i>TX Portion</i>	9
4.3.2 <i>Rx Portion</i>	10
4.3.3 <i>Other Emissions</i>	13
4.4 FIELD STRENGTH CALCULATION.....	14
4.5 ACTIVATE TIME.....	14
4.6 CALCULATION OF DUTY FACTOR	14
4.7 RADIATED TEST EQUIPMENT	15
4.8 MEASURING INSTRUMENT SETUP	15
4.9 RADIATED MEASUREMENT PHOTOS.....	16
5. BANDWIDTH OF EMISSION	17
5.1 APPLICABLE STANDARD PLOT GRAPHIC OF BANDWIDTH.....	17
5.2 BANDWIDTH TEST EQUIPMENT	17
5.3 PLOT GRAPHIC OF BANDWIDTH.....	17
6. CONDUCTED EMISSION MEASUREMENT.....	18
6.1 DESCRIPTION	18
6.2 CONDUCTED EMISSION DATA.....	18
6.3 RESULT DATA CALCULATION	20
6.4 PHOTOS OF CONDUCTION MEASURING SETUP	21
6.5 CONDUCTED MEASURING SETUP DIAGRAM.....	22
6.6 CONDUCTED MEASUREMENT EQUIPMENT	22
7 ANTENNA REQUIREMENT	23
7.1 STANDARD APPLICABLE.....	23
7.2 ANTENNA CONSTRUCTION	23
APPENDIX 1 : PLOTTED DATA FOR BANDWIDTH.....	24
APPENDIX 2 : PLOTTED DATA OF POWER LINE CONDUCTED EMISSIONS.....	27
APPENDIX 3 : PLOTTED DATA FOR DUTY FACTOR	34

1. GENERAL INFORMATION

1.1 Product Description

a) Type of EUT	: 2.4GHz Wireless AV Link
b) Trade Name	: JESMAY
c) Model No.	: 2282R
d) FCC ID	: NOQJM2282R
e) Power Supply	: Adaptor; I/P: 120Vac, 60Hz; O/P: 9Vdc, 300mA

1.2 Characteristics of Device:

1. 2.4GHz wireless video and audio receiver employing frequencies 2407MHz, 2425MHz, 2442 MHz and 2458 MHz.
2. Infrared extender using 433.92 MHz for transmitting.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in chapter 13 of ANSI C63.4.

The Transmitter under test was operated continuously in its normal operating mode for the purpose of the measurements. In order to secure the continuous operation of the device under test, rewiring in the circuit was done by the manufacturer so as to affect its intended operation. The receiving antenna polarized horizontally was varied from 1 to 4 meters and the wooden turntable was rotated through 360 degrees to obtain the highest reading on the field strength meter or on the display of the spectrum analyzer. And also, each emission was to be maximized by changing the orientation of the Transmitter under test.

In order to determining the average value during one pulse train of the radiated power generated from the Transmitter under test, the encoded wave form in the time domain was used.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at No.34, Lin 5, Ding Fu Tsun, Linkou Hsiang, Taipei Hsien, Taiwan, R.O.C.

This site has been fully described in a report submitted to your office, and accepted in a letter dated Feb. 10, 2000.

2. DEFINITION AND LIMITS

2.1 Definition

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

2.2 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

Remark “**” : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.3 Limitation

(1) Conducted Emission Limits:

Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50Ω H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency MHz	Quasi Peak dB µV	Average dB µV
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreases with the logarithm of the frequency

(2) Radiated Emission Limits :

A.

According to 15.231, Periodic operation in the band 40.66-40.70 MHz and above 70 MHz, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Frequency Band (MHz)	Field strength of Fundamental (uV/m)	Field strength of Spurious (uV/m)
40.66-40.70	2250	225
70-130	1250	125
130-174	*1,250 to 3,750	*125 to 375
174-260	3750	375
260-470	*3,750 to 12,500	*375 to 1250
Above 470	12500	1250

* Linear interpolations.

According to 15.235, the field strength of emissions from intentional radiators operated under these frequency bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental µV/meter	dBµV/meter
49.82 - 49.90	10000	80

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209, as following table:

Other Frequencies (MHz)	Field Strength of Fundamental μV/meter dBμV/meter	
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

B.

According to 15.109, Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Class B Radiated Emission Limits :

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
above 960	3	54.0	500

(3) Limit of transmission time

- A manually operated Transmitter shall employ a switch that will automatically deactivate the Transmitter (Transmitter) within not more than 5 seconds of being released.
- A Transmitter activated automatically shall cease transmission within 5 seconds after activation.

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

3 SYSTEM TEST CONFIGURATION

3.1 Justification

All measurement were intentional to maximum the emissions from EUT by varying the connection cables, therefore, the test result is sure to meet the applicable requirement.

3.2 Devices for Tested System

Device	Manufacture	Model / FCC ID.	Description
2.4GHz Wireless AV Link	JESMAY ELECTRONICS CO., LTD.	2282R/NOQJM2282R	1.8m Unshielded AC Adaptor Poewr Cord 2.0m Unshielded AV Cable
Color TV/ Monitor	ACTION	ACN-9108	1.8m Unshielded AC Power Cord

Remark “*” means equipment under test.

4. RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For periodic operation intentional radiator, the radiated emission shall comply with § 15.231(b). According to § 15.33 (b), radiated emission frequency was measured from 30 MHz to 5GHz.

4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables (if any) associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


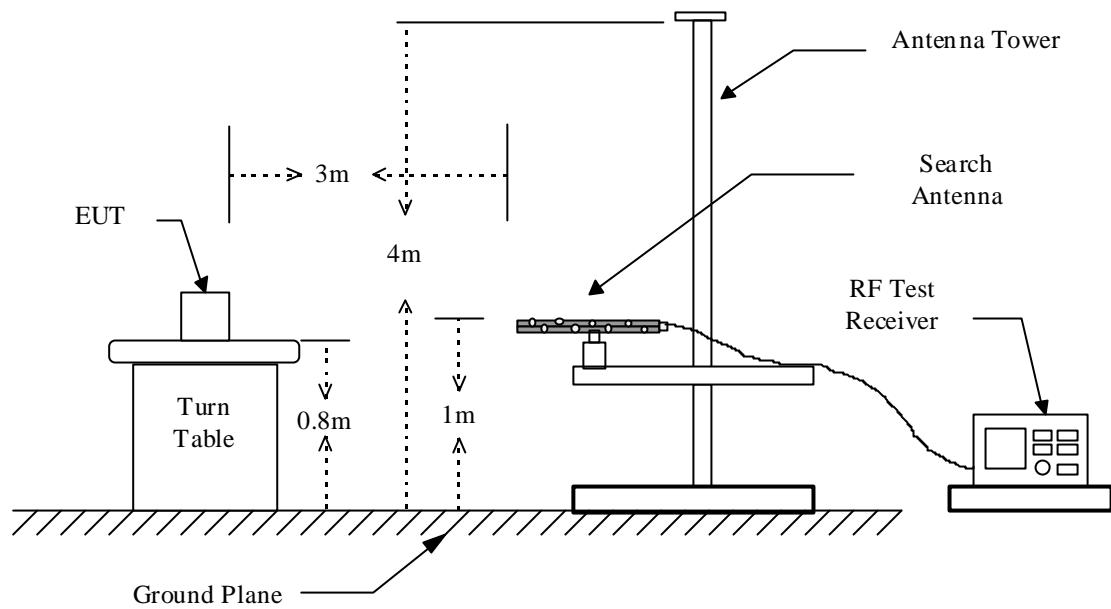


Figure 2 : Frequencies measured above 1 GHz configuration

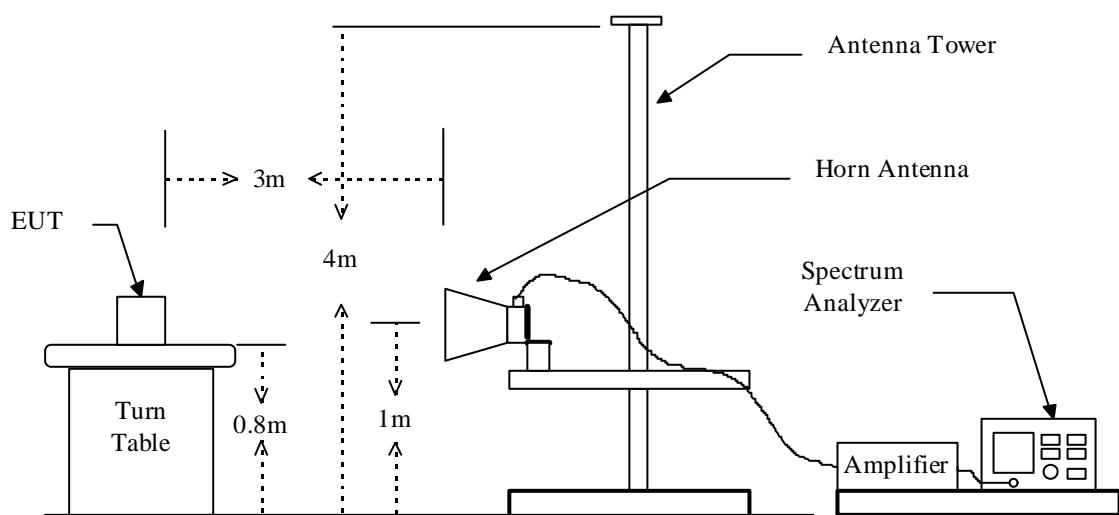

4.3 Test Data

4.3.1 TX Portion

Operation Mode : Transmitting

Test Date : Jul. 09, 2003

Temperature: 24

Humidity : 61%

Frequency (MHz)	Peak Reading (dBuV)		Factor (dB)		Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (m)
	C	D	Peak	Ave.	Peak	Ave.	Peak	Ave.			
433.922	101.7	99.0	-5.5	-20.1	96.2	76.1	100.3	80.3	-4.2	273	2.0
867.860	47.6	51.5	2.3	-20.1	53.8	33.7	80.3	60.3	-26.6	270	1.0
*1301.766	---	---	-8.4	-20.1	---	---	74.0	54.0	---	---	---
1735.688	---	---	-6.1	-20.1	---	---	80.3	60.3	---	---	---
2169.610	---	---	-4.0	-20.1	---	---	80.3	60.3	---	---	---
2603.532	---	---	-2.4	-20.1	---	---	80.3	60.3	---	---	---
3037.454	---	---	-1.1	-20.1	---	---	80.3	60.3	---	---	---
3471.376	---	---	-0.1	-20.1	---	---	80.3	60.3	---	---	---
*3905.298	---	---	1.6	-20.1	---	---	74.0	54.0	---	---	---
*4339.220	---	---	2.0	-20.1	---	---	74.0	54.0	---	---	---

Note :

1. Factor C means "corrected", and that includes antenna factor, cable loss, amplifier gain (if any). And Factor D means "Duty", that is for calculating the average value and derived from Appendix 3 in this test report.
2. Peak Result = Reading + C. Factor
Ave. Result = Peak Value + D Factor
3. "*" means the frequency fall in the restricted frequency band, and the limit of emission is referred to FCC class B
4. The limit for spurious emissions refers to FCC § 15.231.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

If the measured frequencies fall in the restricted frequency band, the limit employed is § 15.209 general requirement when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function, no duty factor applied.

4.3.2 Rx Portion**A. CH 1**

Operation Condition : Receiving (1934.513 MHz)

Test Date : Jul. 09, 2003 Temperature : 24 Humidity : 61%

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
1934.513	45.6	---	47.3	---	-5.0	42.3	---	74.0	54.0	-11.7	165	1.1
3869.026	---	---	---	---	1.5	---	---	74.0	54.0	---	---	---
5803.539	---	---	---	---	4.5	---	---	74.0	54.0	---	---	---
7738.052	---	---	---	---	6.3	---	---	74.0	54.0	---	---	---
9672.565	---	---	---	---	7.3	---	---	74.0	54.0	---	---	---
11607.078	---	---	---	---	9.1	---	---	74.0	54.0	---	---	---
13541.591	---	---	---	---	11.0	---	---	74.0	54.0	---	---	---
15476.104	---	---	---	---	9.1	---	---	74.0	54.0	---	---	---
17410.617	---	---	---	---	15.6	---	---	74.0	54.0	---	---	---
19345.130	---	---	---	---	8.7	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark “***” means that Peak result is meet average limit.
3. Remark “---” means that the emissions level is too low to be measured.
4. Item “Margin” referred to Average limit while there is only peak result.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

B. CH 2

Operation Condition : Receiving (1952.507 MHz)

Test Date : Jul. 09, 2003 Temperature : 24 Humidity : 61%

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
1952.507	45.9	---	47.7	---	-4.9	42.8	---	74.0	54.0	-11.2	185	1.1
3905.014	---	---	---	---	1.6	---	---	74.0	54.0	---	---	---
5857.521	---	---	---	---	4.5	---	---	74.0	54.0	---	---	---
7810.028	---	---	---	---	6.3	---	---	74.0	54.0	---	---	---
9762.535	---	---	---	---	7.3	---	---	74.0	54.0	---	---	---
11715.042	---	---	---	---	9.1	---	---	74.0	54.0	---	---	---
13667.549	---	---	---	---	11.1	---	---	74.0	54.0	---	---	---
15620.056	---	---	---	---	8.7	---	---	74.0	54.0	---	---	---
17572.563	---	---	---	---	16.4	---	---	74.0	54.0	---	---	---
19525.070	---	---	---	---	8.5	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark “***” means that Peak result is meet average limit.
3. Remark “---” means that the emissions level is too low to be measured.
4. Item “Margin” referred to Average limit while there is only peak result.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

C. CH 4

Operation Condition : Receiving (1988.500 MHz)

Test Date : Jul. 09, 2003 Temperature : 24 Humidity : 61%

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
1988.500	44.9	---	47.2	---	-4.7	42.5	---	74.0	54.0	-11.5	180	1.2
3977.000	---	---	---	---	1.9	---	---	74.0	54.0	---	---	---
5965.500	---	---	---	---	4.5	---	---	74.0	54.0	---	---	---
7954.000	---	---	---	---	6.4	---	---	74.0	54.0	---	---	---
9942.500	---	---	---	---	7.4	---	---	74.0	54.0	---	---	---
11931.000	---	---	---	---	9.2	---	---	74.0	54.0	---	---	---
13919.500	---	---	---	---	11.3	---	---	74.0	54.0	---	---	---
15908.000	---	---	---	---	8.0	---	---	74.0	54.0	---	---	---
17896.500	---	---	---	---	17.2	---	---	74.0	54.0	---	---	---
19885.000	---	---	---	---	8.6	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark “***” means that Peak result is meet average limit.
3. Remark “---” means that the emissions level is too low to be measured.
4. Item “Margin” referred to Average limit while there is only peak result.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

4.3.3 Other Emissions

Operation Condition : Working

Test Date : Jul. 09, 2003

Temperature : 24

Humidity: 61 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
439.571	V	25.6	-5.6	20.0	46.0	-26.0	182	1.1
472.623	V	24.4	-4.6	19.8	46.0	-26.2	96	1.0
508.294	V	24.2	-4.6	19.6	46.0	-26.4	173	1.1
693.114	V	24.4	-1.0	23.4	46.0	-22.6	196	1.1
803.538	V	24.4	0.8	25.2	46.0	-20.8	104	1.0
861.613	V	24.9	2.3	27.2	46.0	-18.8	58	1.0

Note :

1. Remark “---” means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

4.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

Corr. Factor = Antenna Factor + Cable Factor - Amplifier Gain (if any)

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor}$$

Note : If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.

4.5 Activate Time

This transmitter is operated by Manual, and Activate Time is less than 5 second after being released.

4.6 Calculation of Duty Factor

The duty factor is calculated with following formula :

$$20 \log \frac{\text{Total Duty}}{\text{Period of Pulse Train}} = -20.1 \text{dB}$$

$$20 \log \frac{(9.0 + 0.917) \text{ ms}}{100 \text{ ms}} = -20.1 \text{ dB}$$

Note : Please see Appendix 3

4.7 Radiated Test Equipment

Equipment	Manufacturer	Model No.	Next Cal. Date
Spectrum Analyzer	Hewlett-Packard	8568B	01/10/2004
Pre-selector	Hewlett-Packard	85685A	01/10/2004
Quasi Peak Detector	Hewlett-Packard	85650A	01/10/2004
Spectrum Analyzer	Hewlett-Packard	8564E	04/22/2004
RF Test Receiver	Rohde & Schwarz	ESVS 30	08/06/2003
Horn Antenna	EMCO	3115	05/10/2004
Log periodic Antenna	EMCO	3146	11/04/2003
Biconical Antenna	EMCO	3110B	11/04/2003
Preamplifier	Hewlett-Packard	8449B	05/10/2004
Preamplifier	Hewlett-Packard	8447D	04/03/2004

4.8 Measuring Instrument Setup

Explanation of measuring instrument setup in frequency band measured is as following :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	300 Hz

4.9 Radiated Measurement Photos

Please see Exhibit F-Test Setup Photos

5. BANDWIDTH OF EMISSION

5.1 Applicable Standard Plot Graphic of Bandwidth

Per FCC rule § 15.231(c), the permitted emission bandwidth is no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz.

5.2 Bandwidth Test Equipment

Equipment	Manufacturer	Model No.	Next Cal. Date
EMI Test Receiver	Rohde and Schwarz	ESBI	05/15/2004
Spectrum Analyzer	ADVANTEST	R3261A	11/01/2003
Plotter	Hewlett-Packard	7550A	N/A

5.3 Plot Graphic of Bandwidth

The emission bandwidth limit for this transmitter is

$$433.849 \text{ MHz} \times 0.25\% = 1084.6225 \text{ KHz}$$

$$20 \text{ dB bandwidth} = 105 \text{ KHz}$$

Test Result: 105 KHz < 1084.6225 KHz.

Note : Please see appendix 1 for Plotted Data

6. CONDUCTED EMISSION MEASUREMENT

6.1 Description

The initial setup in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on following data pages, and these signals are the quasi-peaked.

For this TV interface is a wireless receiver, applying a test signal recommended in ANSI C63.4 by directly conducting is not practical and available, therefore, a VITS test signal is applied via its respective transmitter.

6.2 Conducted Emission Data

A. CH 1

Operation Mode : Receiving (1934.500MHz)

Test Date : Jul. 10, 2003 Temperature : 24 Humidity: 55 %

Freq. (MHz)	Meter Reading (dB μ V)				Facto r (dB)	Limit (dB μ V)		Result (dB μ V)				
	Q.P Value		AVG. Value			Q.P Value	AVG. Value	Q.P Value		AVG. Value		
	N	L1	N	L1				N	L1	N	L1	
0.173	33.3	34.5	----	----	0.2	64.8	54.8	33.5	34.7	----	----	
0.519	25.6	23.2	----	----	0.3	56.0	46.0	25.9	23.5	----	----	
0.566	29.4	23.3	----	----	0.3	56.0	46.0	29.7	23.6	----	----	
0.590	30.2	25.4	----	----	0.3	56.0	46.0	30.5	25.7	----	----	
0.613	30.2	27.4	----	----	0.3	56.0	46.0	30.5	27.7	----	----	
0.684	28.9	30.4	----	----	0.3	56.0	46.0	29.2	30.7	----	----	

Note : 1. Please see appendix 2 for Plotted Data

2. The expanded uncertainty of the conducted emission tests is 2.45 dB.

B. CH 2

Operation Mode : Receiving (1952.500MHz)

Test Date : Jul. 10, 2003

Temperature : 24

Humidity: 55 %

Freq. (MHz)	Meter Reading (dB μ V)				Factor (dB)	Limit (dB μ V)		Result (dB μ V)				
	Q.P Value		AVG. Value			Q.P Value	AVG. Value	Q.P Value		AVG. Value		
	N	L1	N	L1				N	L1	N	L1	
0.286	32.2	34.0	----	----	0.2	60.6	50.6	32.4	34.2	----	----	
0.224	31.7	33.8	----	----	0.2	62.7	52.7	31.9	34.0	----	----	
0.490	22.3	25.7	----	----	0.3	56.2	46.2	22.6	26.0	----	----	
0.520	26.0	23.7	----	----	0.3	56.0	46.0	26.3	24.0	----	----	
0.613	30.0	27.4	----	----	0.3	56.0	46.0	30.3	27.7	----	----	
0.934	13.7	20.2	----	----	0.3	56.0	46.0	14.0	20.5	----	----	

C. CH 4

Operation Mode : Receiving (1988.500MHz)

Test Date : Jul. 10, 2003

Temperature : 24

Humidity: 55 %

Freq. (MHz)	Meter Reading (dB μ V)				Factor (dB)	Limit (dB μ V)		Result (dB μ V)				
	Q.P Value		AVG. Value			Q.P Value	AVG. Value	Q.P Value		AVG. Value		
	N	L1	N	L1				N	L1	N	L1	
0.259	29.8	33.4	----	----	0.2	61.5	51.5	30.0	33.6	----	----	
0.699	27.8	30.9	----	----	0.3	56.0	46.0	28.1	31.2	----	----	
0.723	26.7	31.3	----	----	0.3	56.0	46.0	27.0	31.6	----	----	
0.777	22.9	29.7	----	----	0.3	56.0	46.0	23.2	30.0	----	----	
0.801	20.6	28.4	----	----	0.3	56.0	46.0	20.9	28.7	----	----	
10.797	11.9	12.0	----	----	0.8	60.0	50.0	12.7	12.8	----	----	

Note : 1. Please see appendix 2 for Plotted Data

2. The expanded uncertainty of the conducted emission tests is 2.45 dB.

6.3 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{RESULT = READING + LISN\,FACTOR}$$

Assume a receiver reading of 22.5 dB μ V is obtained, and LISN Factor is 0.1 dB, then the total of field strength is 22.6 dB μ V.


$$\mathbf{RESULT = 22.5 + 0.1 = 22.6\,dB\,\mu\,V}$$

$$\begin{aligned}\mathbf{Level\,in\,\mu\,V} &= \text{Common Antilogarithm}[(22.6\,dB\,\mu\,V)/20] \\ &= 13.48\,\mu\,V\end{aligned}$$

6.4 Photos of Conduction Measuring Setup

Please see Exhibit F-Test Setup Photos

6.5 Conducted Measuring Setup Diagram

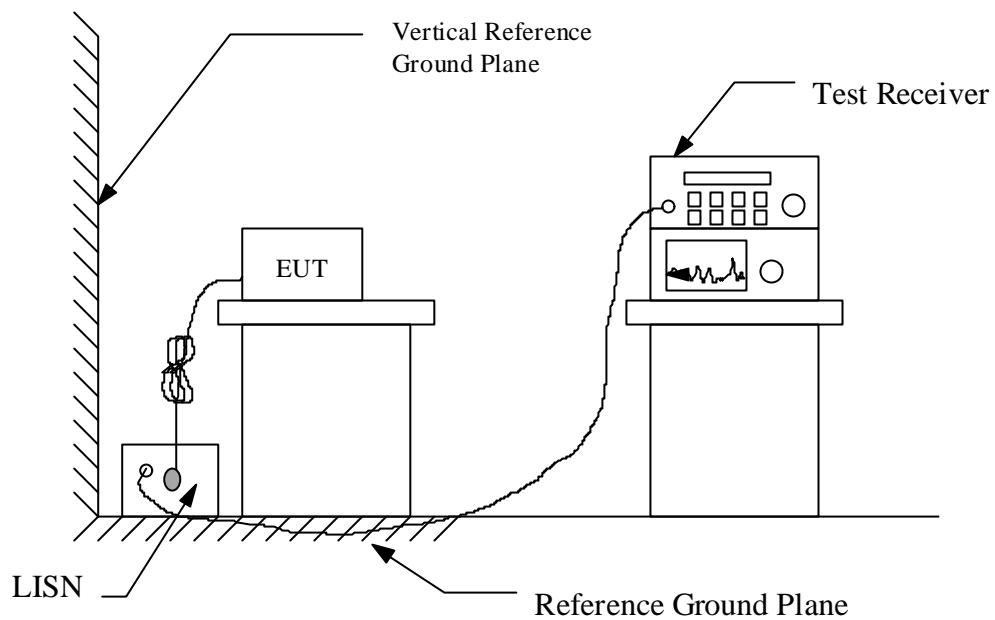

6.6 Conducted Measurement Equipment

The following test equipment are used during the conducted test .

Equipment	Manufacturer	Model No.	Next Cal. Due
EMI Test Receiver	Rohde and Schwarz	ESCS 30	11/27/2003
Line Impedance Stabilization network	Rohde and Schwarz	ESH2-Z5	09/03/2003
Monitor	IBM	E54	N.C.R.
Printer	HP	LaserJet 1000	N.C.R.
Shielded Room	Riken		N.C.R.
Computer	Acer	Veriton	N.C.R.
EMI Test Receiver	Rohde and Schwarz	ESCS 30	11/27/2003

7 ANTENNA REQUIREMENT

7.1 Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


7.2 Antenna Construction


1. The antenna for 2.4GHz receiving is permanently attached, no consideration of replacement.
2. The antenna for 433.92MHz transmitting is permanently attached, no consideration of replacement.

APPENDIX 1 : PLOTTED DATA FOR BANDWIDTH

Bandwidth Limit = 433.849 MHz × 0.25% = 1084.6225 KHz

FCC HQR.
REF 77.0 dB μ V
10dB/
ETC EMI LAB
A_view B_biank

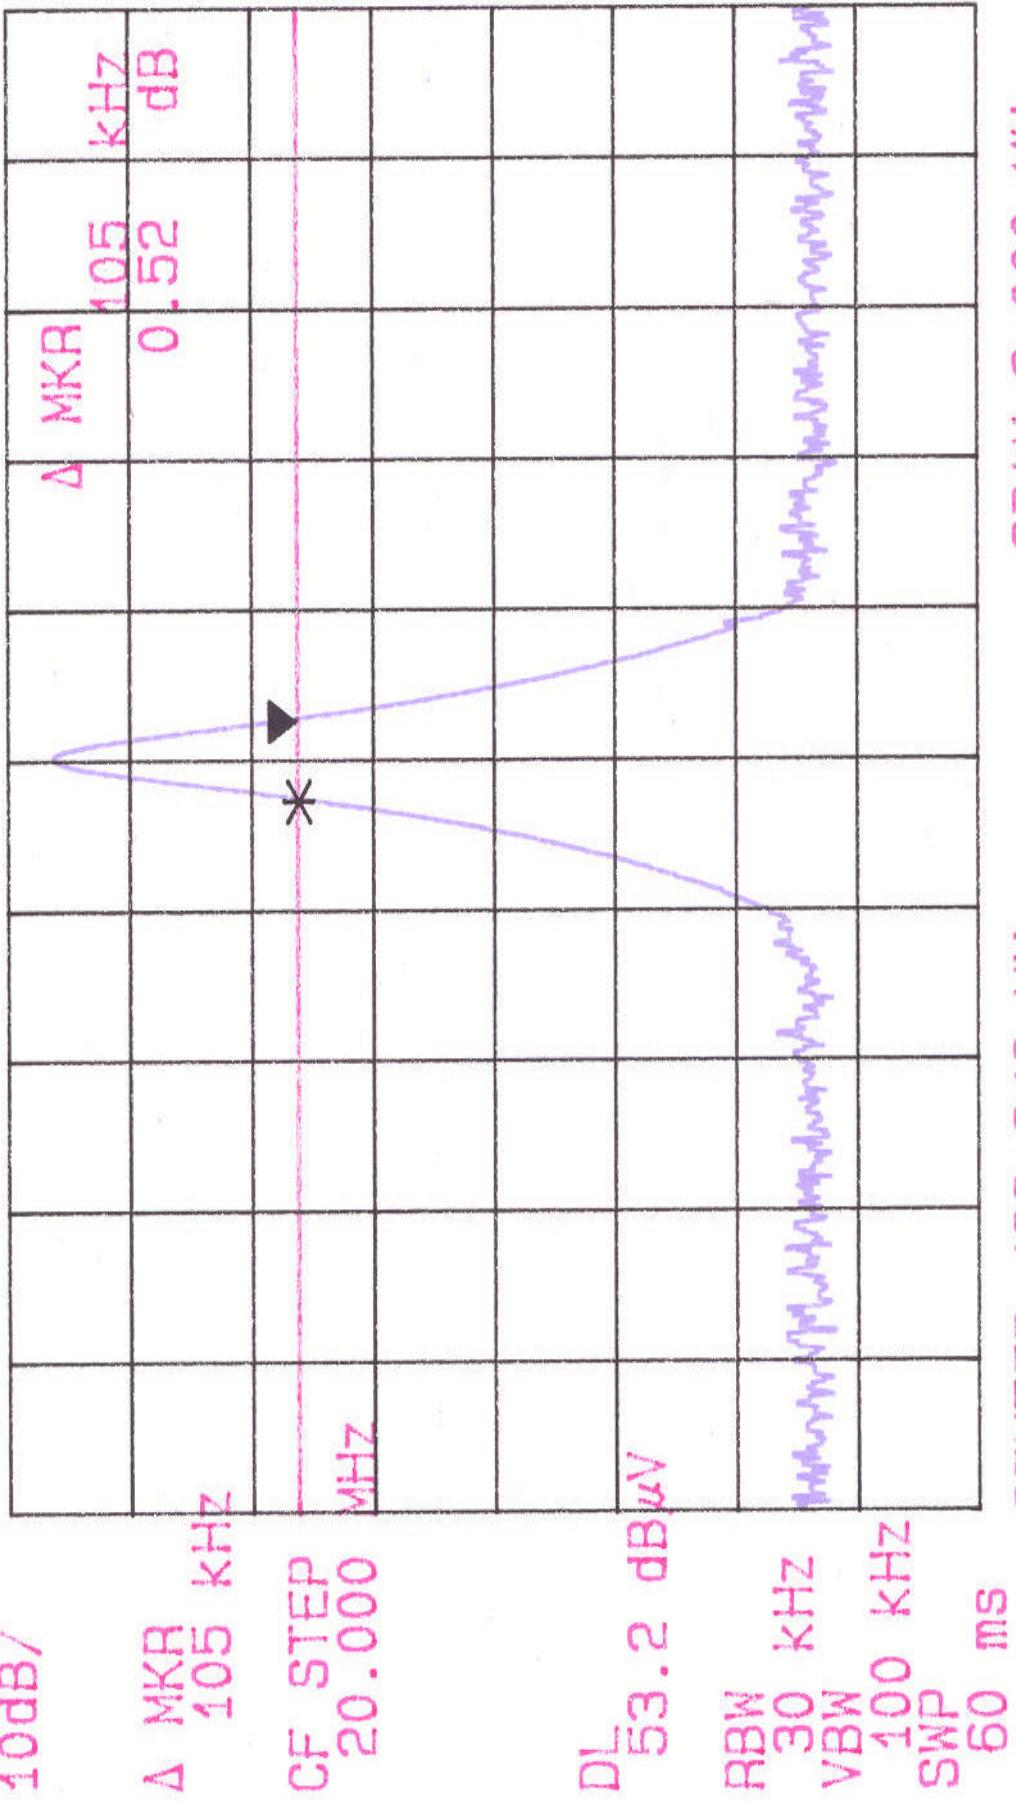

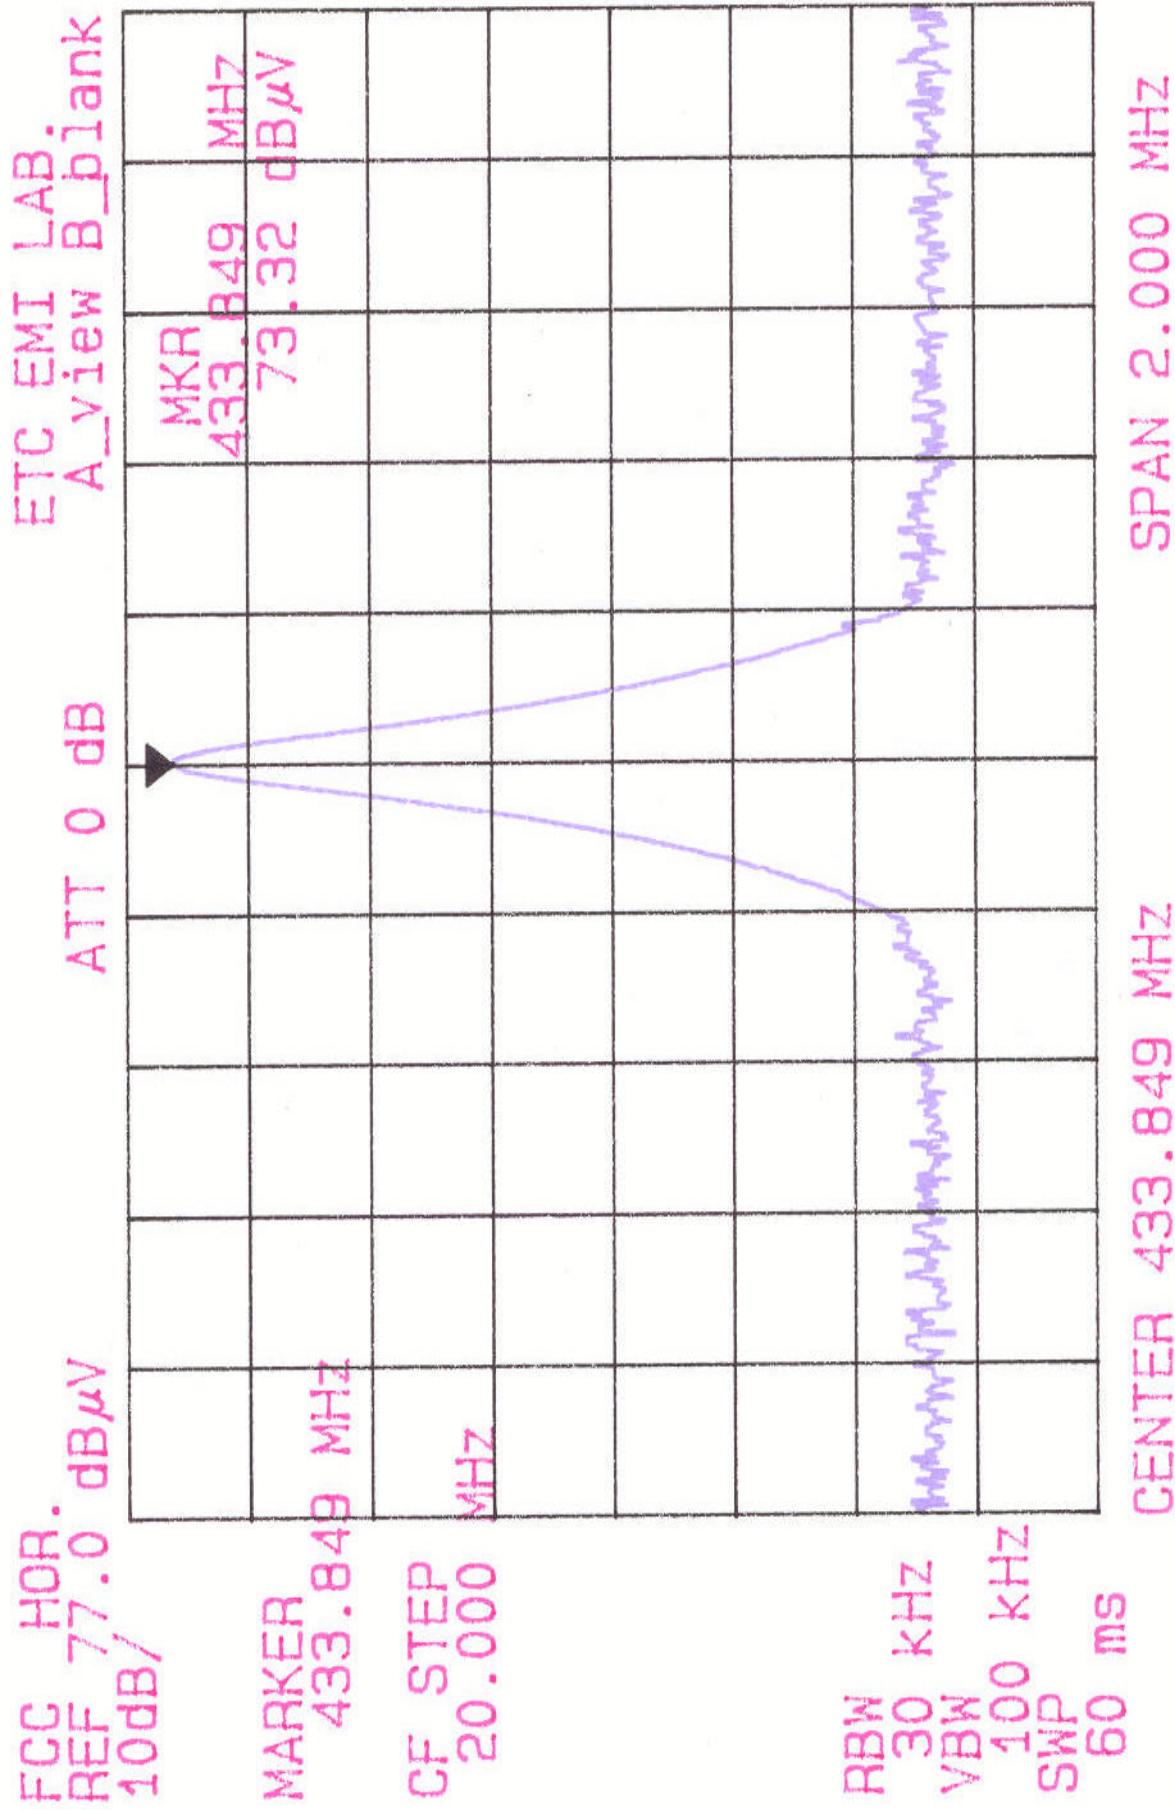

APPENDIX 2 : PLOTTED DATA OF POWER LINE CONDUCTED EMISSIONS

CONDUCTION EMISSION TEST

Peak Value

EUT: 2282R

Manuf:

Op Cond: CH1


Operator:

Test Spec:

Comment:

N

Final Measurement: Detector: X QP
Meas Time: 1sec
Peaks: 8
Acc Margin: 25 dB

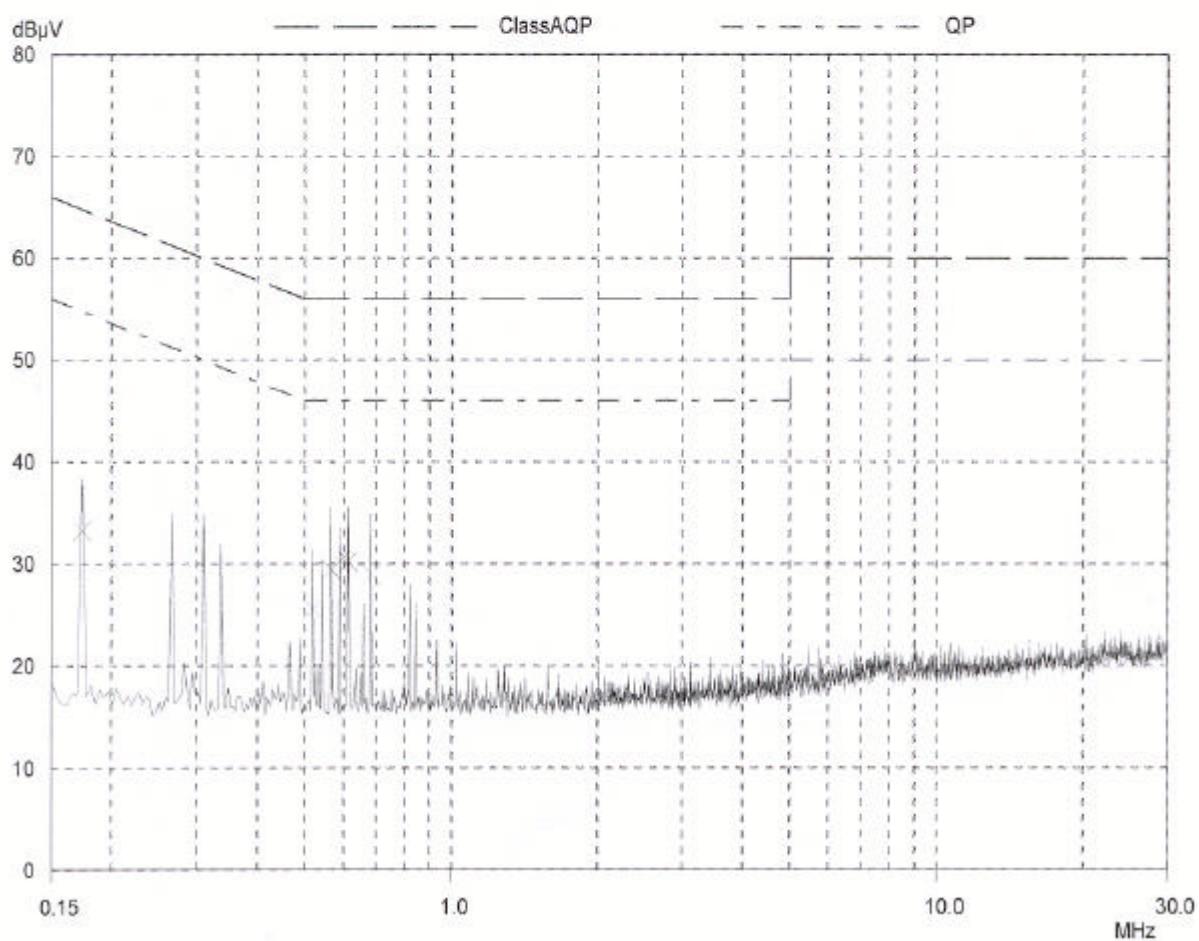

CONDUCTION EMISSION TEST

Peak Value

EUT: 2282R

Manuf:

Op Cond: CH1

Operator:

Test Spec:


Comment:

L1

Final Measurement: Detector: X QP
 Meas Time: 1sec
 Peaks: 8
 Acc Margin: 25 dB

Test Measurements (dBuV)

Frequency	Class AQP	QP
25.000	25.00	25.00
25.025	25.02	25.02
25.050	25.05	25.05
25.075	25.07	25.07
25.100	25.10	25.10
25.125	25.12	25.12
25.150	25.15	25.15
25.175	25.17	25.17
25.200	25.20	25.20
25.225	25.22	25.22
25.250	25.25	25.25
25.275	25.27	25.27
25.300	25.30	25.30
25.325	25.32	25.32
25.350	25.35	25.35
25.375	25.37	25.37
25.400	25.40	25.40
25.425	25.42	25.42
25.450	25.45	25.45
25.475	25.47	25.47
25.500	25.50	25.50
25.525	25.52	25.52
25.550	25.55	25.55
25.575	25.57	25.57
25.600	25.60	25.60
25.625	25.62	25.62
25.650	25.65	25.65
25.675	25.67	25.67
25.700	25.70	25.70
25.725	25.72	25.72
25.750	25.75	25.75
25.775	25.77	25.77
25.800	25.80	25.80
25.825	25.82	25.82
25.850	25.85	25.85
25.875	25.87	25.87
25.900	25.90	25.90
25.925	25.92	25.92
25.950	25.95	25.95
25.975	25.97	25.97
26.000	26.00	26.00
26.025	26.02	26.02
26.050	26.05	26.05
26.075	26.07	26.07
26.100	26.10	26.10
26.125	26.12	26.12
26.150	26.15	26.15
26.175	26.17	26.17
26.200	26.20	26.20
26.225	26.22	26.22
26.250	26.25	26.25
26.275	26.27	26.27
26.300	26.30	26.30
26.325	26.32	26.32
26.350	26.35	26.35
26.375	26.37	26.37
26.400	26.40	26.40
26.425	26.42	26.42
26.450	26.45	26.45
26.475	26.47	26.47
26.500	26.50	26.50
26.525	26.52	26.52
26.550	26.55	26.55
26.575	26.57	26.57
26.600	26.60	26.60
26.625	26.62	26.62
26.650	26.65	26.65
26.675	26.67	26.67
26.700	26.70	26.70
26.725	26.72	26.72
26.750	26.75	26.75
26.775	26.77	26.77
26.800	26.80	26.80
26.825	26.82	26.82
26.850	26.85	26.85
26.875	26.87	26.87
26.900	26.90	26.90
26.925	26.92	26.92
26.950	26.95	26.95
26.975	26.97	26.97
27.000	27.00	27.00
27.025	27.02	27.02
27.050	27.05	27.05
27.075	27.07	27.07
27.100	27.10	27.10
27.125	27.12	27.12
27.150	27.15	27.15
27.175	27.17	27.17
27.200	27.20	27.20
27.225	27.22	27.22
27.250	27.25	27.25
27.275	27.27	27.27
27.300	27.30	27.30
27.325	27.32	27.32
27.350	27.35	27.35
27.375	27.37	27.37
27.400	27.40	27.40
27.425	27.42	27.42
27.450	27.45	27.45
27.475	27.47	27.47
27.500	27.50	27.50
27.525	27.52	27.52
27.550	27.55	27.55
27.575	27.57	27.57
27.600	27.60	27.60
27.625	27.62	27.62
27.650	27.65	27.65
27.675	27.67	27.67
27.700	27.70	27.70
27.725	27.72	27.72
27.750	27.75	27.75
27.775	27.77	27.77
27.800	27.80	27.80
27.825	27.82	27.82
27.850	27.85	27.85
27.875	27.87	27.87
27.900	27.90	27.90
27.925	27.92	27.92
27.950	27.95	27.95
27.975	27.97	27.97
28.000	28.00	28.00
28.025	28.02	28.02
28.050	28.05	28.05
28.075	28.07	28.07
28.100	28.10	28.10
28.125	28.12	28.12
28.150	28.15	28.15
28.175	28.17	28.17
28.200	28.20	28.20
28.225	28.22	28.22
28.250	28.25	28.25
28.275	28.27	28.27
28.300	28.30	28.30
28.325	28.32	28.32
28.350	28.35	28.35
28.375	28.37	28.37
28.400	28.40	28.40
28.425	28.42	28.42
28.450	28.45	28.45
28.475	28.47	28.47
28.500	28.50	28.50
28.525	28.52	28.52
28.550	28.55	28.55
28.575	28.57	28.57
28.600	28.60	28.60
28.625	28.62	28.62
28.650	28.65	28.65
28.675	28.67	28.67
28.700	28.70	28.70
28.725	28.72	28.72
28.750	28.75	28.75
28.775	28.77	28.77
28.800	28.80	28.80
28.825	28.82	28.82
28.850	28.85	28.85
28.875	28.87	28.87
28.900	28.90	28.90
28.925	28.92	28.92
28.950	28.95	28.95
28.975	28.97	28.97
29.000	29.00	29.00
29.025	29.02	29.02
29.050	29.05	29.05
29.075	29.07	29.07
29.100	29.10	29.10
29.125	29.12	29.12
29.150	29.15	29.15
29.175	29.17	29.17
29.200	29.20	29.20
29.225	29.22	29.22
29.250	29.25	29.25
29.275	29.27	29.27
29.300	29.30	29.30
29.325	29.32	29.32
29.350	29.35	29.35
29.375	29.37	29.37
29.400	29.40	29.40
29.425	29.42	29.42
29.450	29.45	29.45
29.475	29.47	29.47
29.500	29.50	29.50
29.525	29.52	29.52
29.550	29.55	29.55
29.575	29.57	29.57
29.600	29.60	29.60
29.625	29.62	29.62
29.650	29.65	29.65
29.675	29.67	29.67
29.700	29.70	29.70
29.725	29.72	29.72
29.750	29.75	29.75
29.775	29.77	29.77
29.800	29.80	29.80
29.825	29.82	29.82
29.850	29.85	29.85
29.875	29.87	29.87
29.900	29.90	29.90
29.925	29.92	29.92
29.950	29.95	29.95
29.975	29.97	29.97
30.000	30.00	30.00

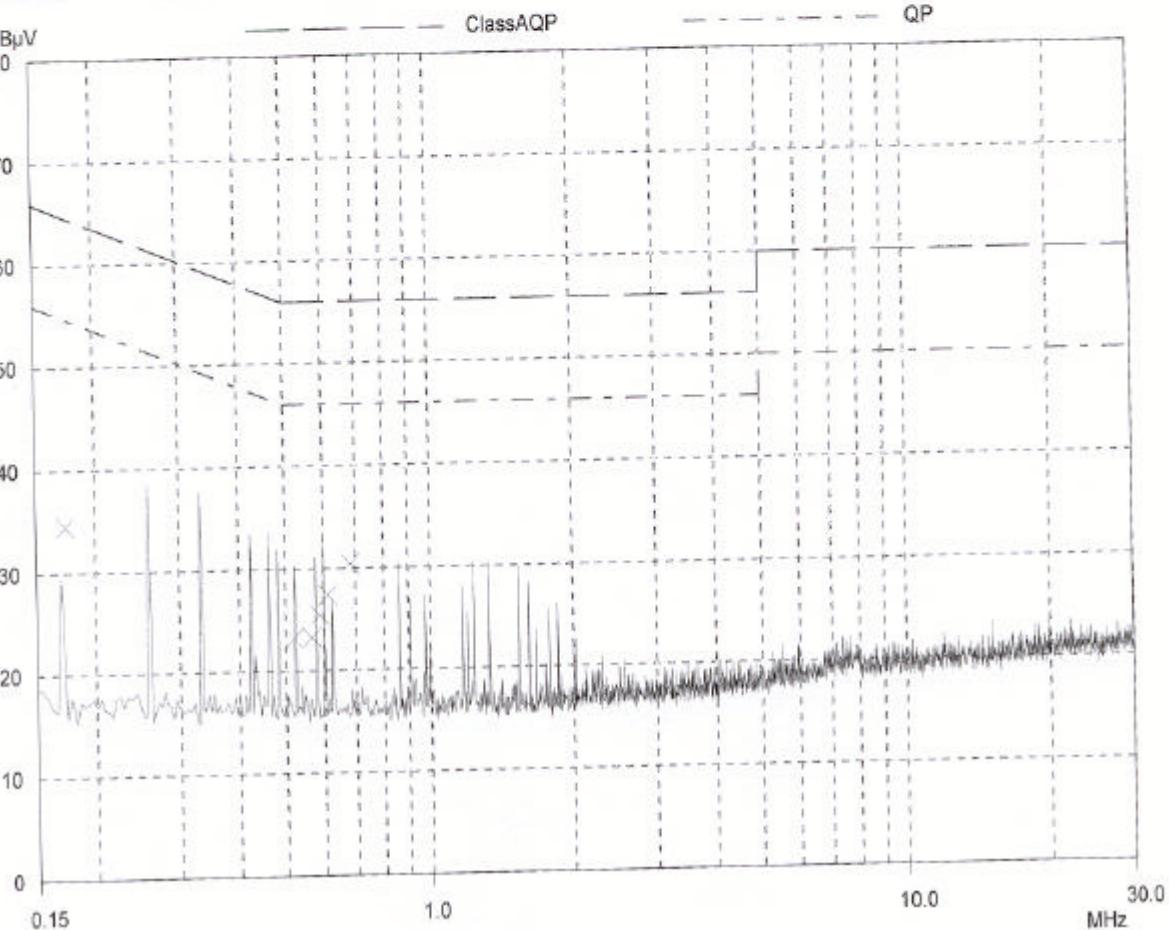

CONDUCTION EMISSION TEST

Peak Value

EUT: 2282R

Manuf:

Op Cond: CH2


Operator:

Test Spec:

Comment:

N

Final Measurement: Detector: X QP
Meas Time: 1sec
Peaks: 8
Acc Margin: 26 dB

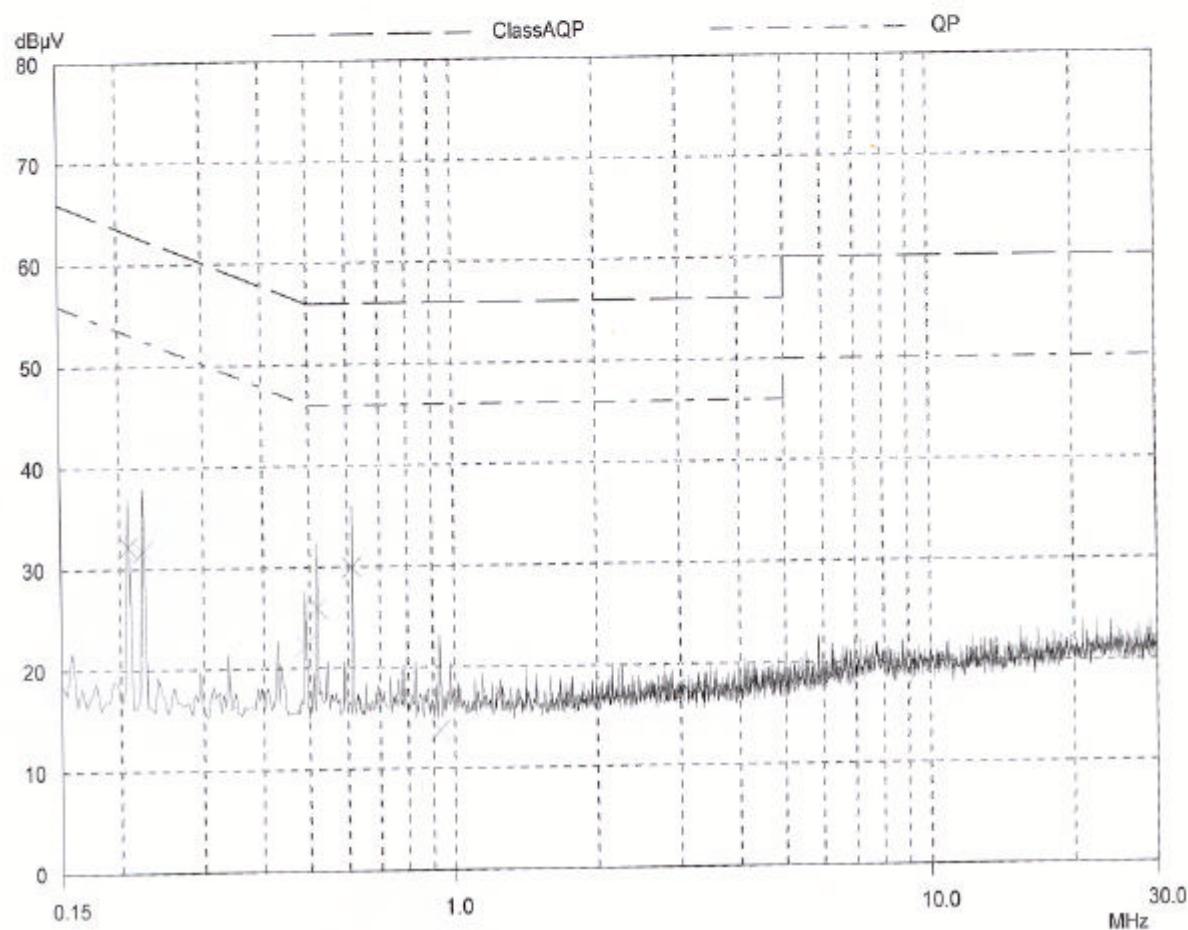

CONDUCTION EMISSION TEST

Peak Value

EUT: 2282R

Manuf:

Op Cond: CH2

Operator:

Test Spec:


Comment:

L1

Final Measurement: Detector: X QP
Meas Time: 1sec
Peaks: 8
Acc Margin: 25 dB

Peak Measurement Results

Frequency	CF L1	CF 1sec	CF QP
0.02000	22.50	22.50	22.50
0.02100	22.50	22.50	22.50
0.02200	22.50	22.50	22.50
0.02300	22.50	22.50	22.50
0.02400	22.50	22.50	22.50
0.02500	22.50	22.50	22.50
0.02600	22.50	22.50	22.50
0.02700	22.50	22.50	22.50
0.02800	22.50	22.50	22.50
0.02900	22.50	22.50	22.50
0.03000	22.50	22.50	22.50

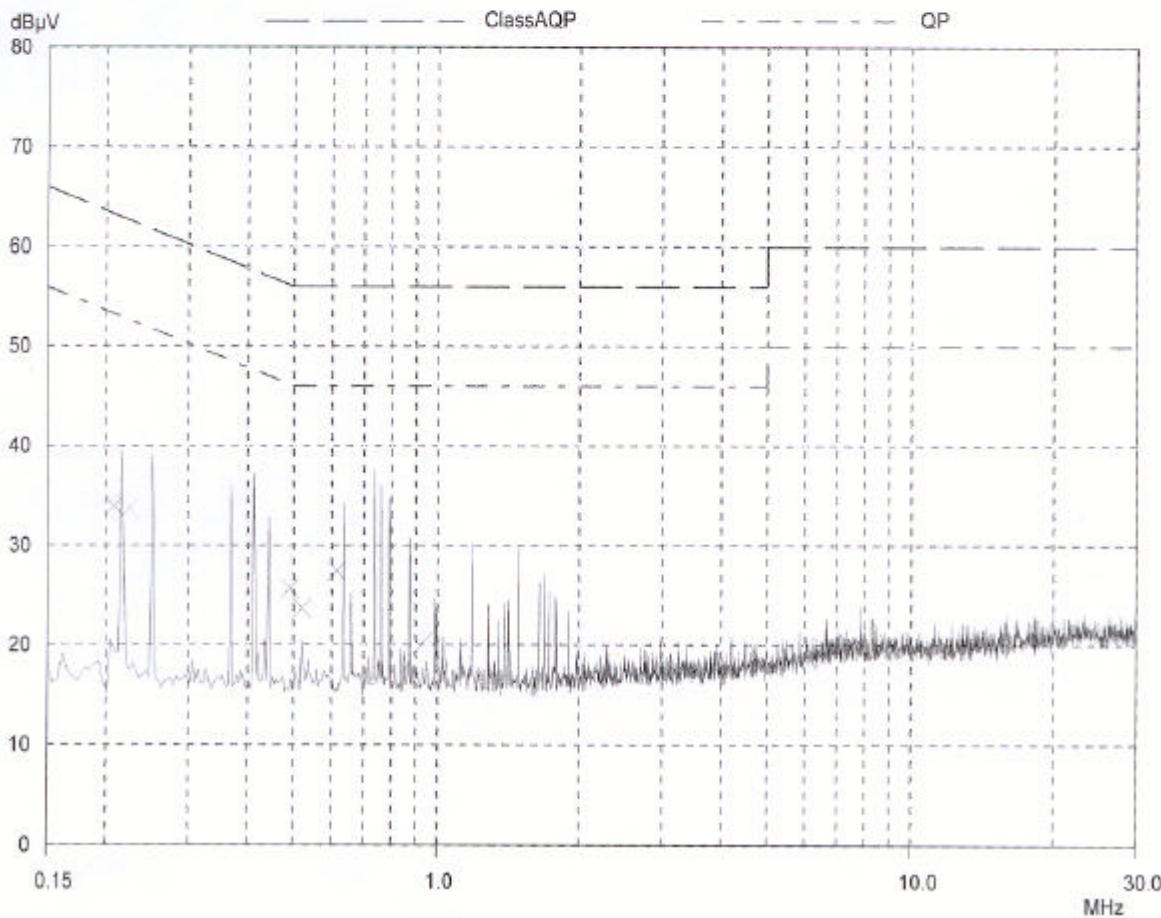

CONDUCTION EMISSION TEST

Peak Value

EUT: 2282R

Manuf:

Op Cond: CH4


Operator:

Test Spec:

Comment:

N

Final Measurement: Detector: X QP
 Meas Time: 1sec
 Peaks: 8
 Acc Margin: 25 dB

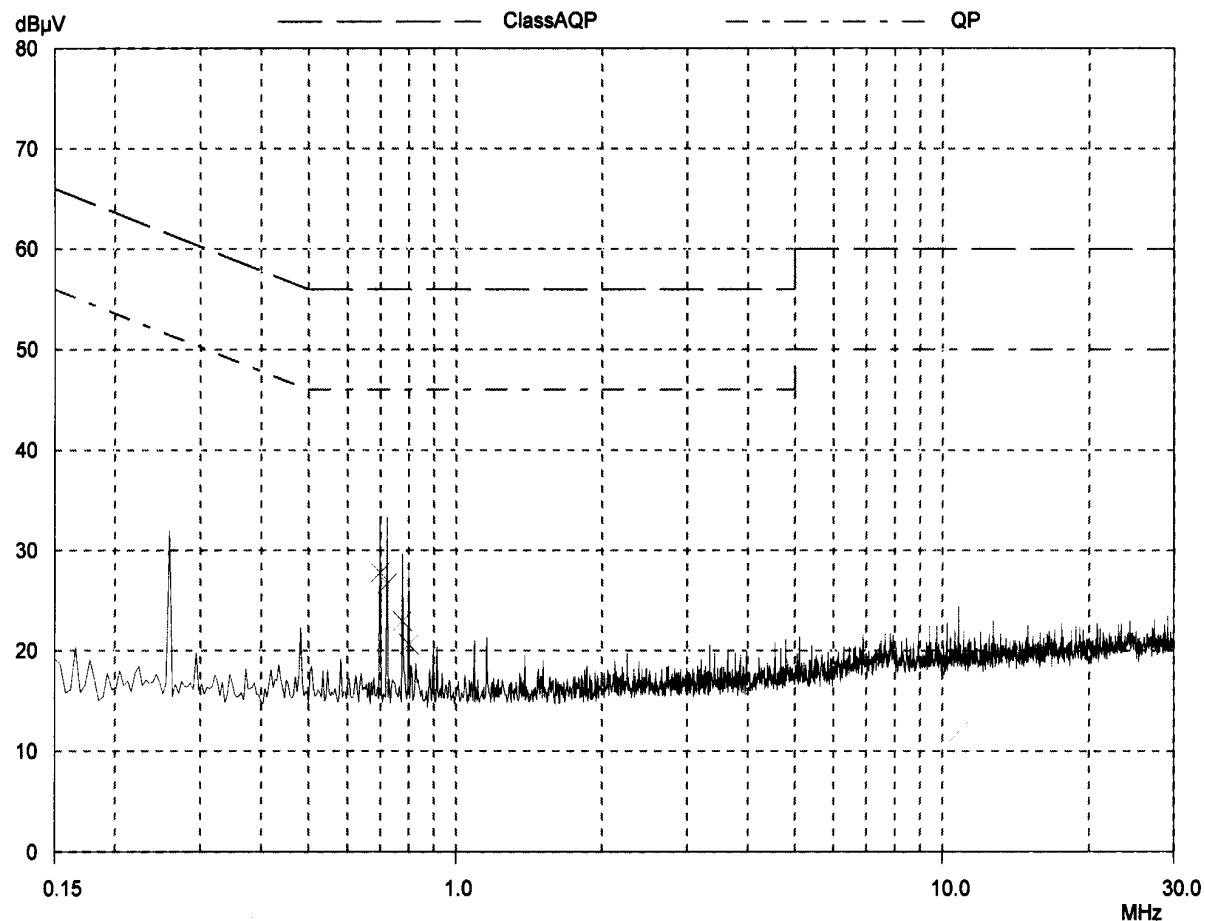

CONDUCTION EMISSION TEST

Peak Value

EUT: 2282R

Manuf:

Op Cond: CH4

Operator:

Test Spec:


Comment:

L1

Final Measurement:	Detector:	X QP
	Meas Time:	1sec
	Peaks:	8
	Acc Margin:	25 dB

Final Measurement Results

Frequency MHz	QP Level dB μ V	QP Time dB μ V	QP Data
0.25037	55.42	54.45	25.03
0.38621	51.93	54.93	25.03
0.75595	51.25	56.76	24.76
0.97734	59.45	59.06	25.41
1.82071	59.39	58.70	25.42
10.77267	59.02	56.07	25.02

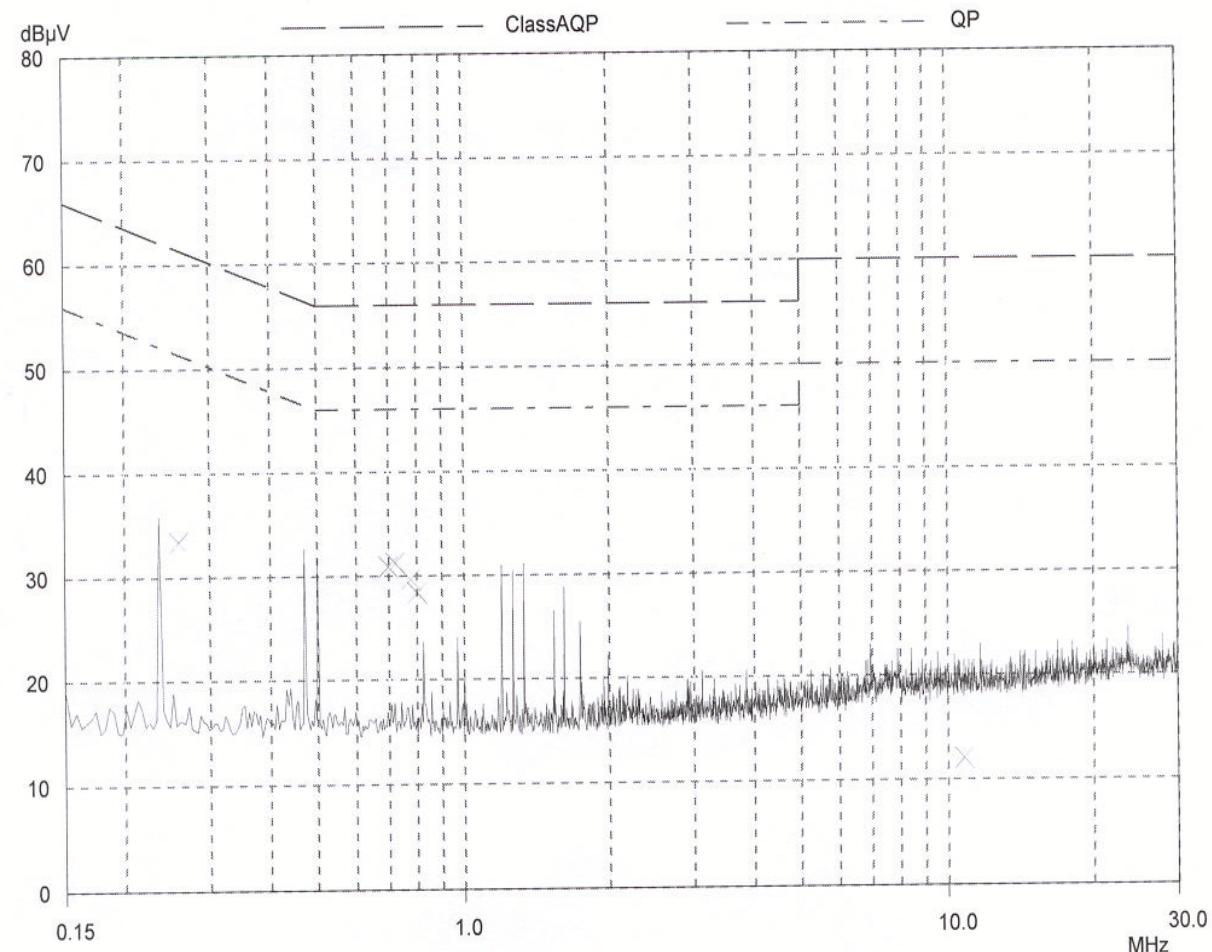


APPENDIX 3 : PLOTTED DATA FOR DUTY FACTOR**Calculation of Duty Factor****The duty factor is calculated with following formula:**


$$20\log \frac{\text{Total Duty}}{\text{Period of Pulse Train}}$$

$$20\log \frac{9\text{ms}+0.917\text{ms}}{100\text{ms}}$$

=-20.1 dB

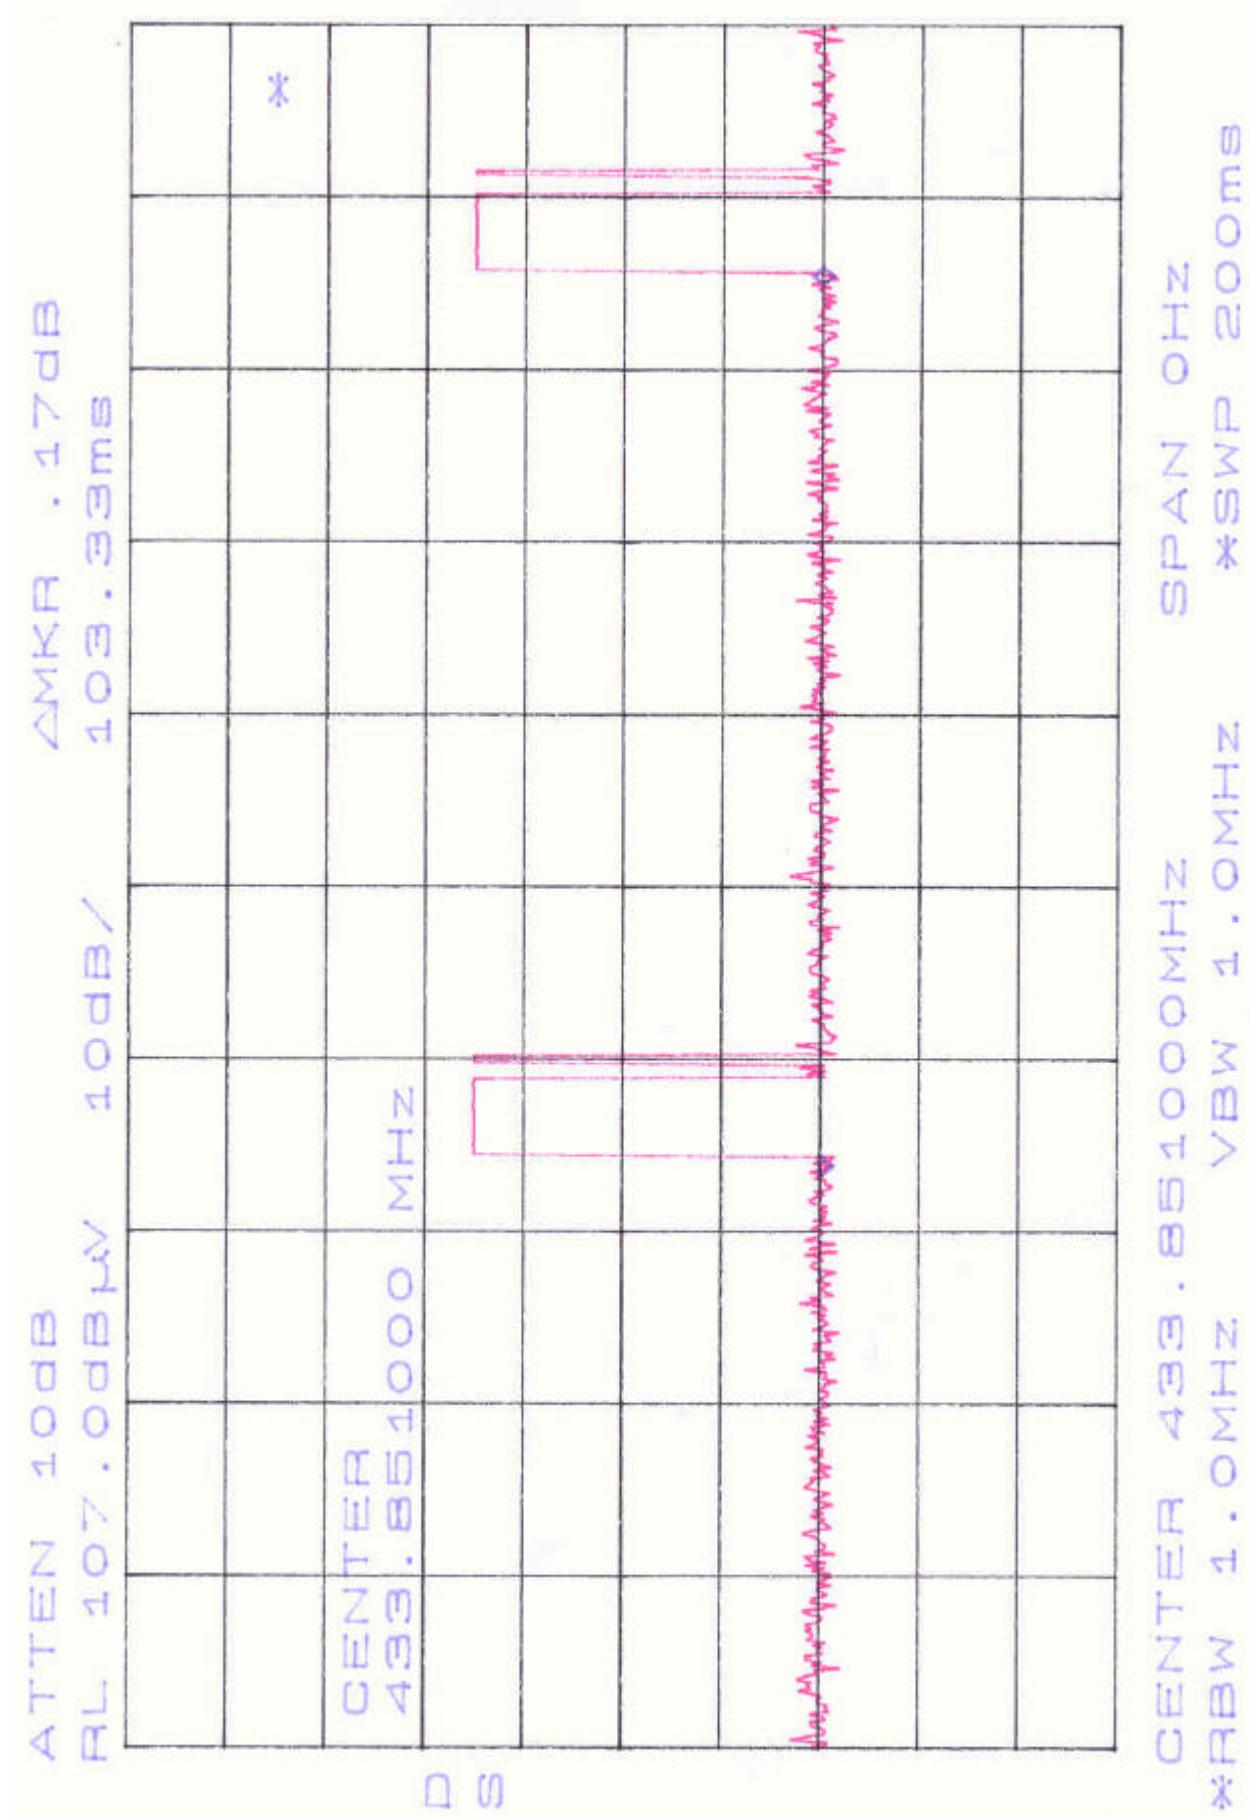

ATTEN 40dB/
RL 407.0dBm 40dB/
2MKR -2.00000MS

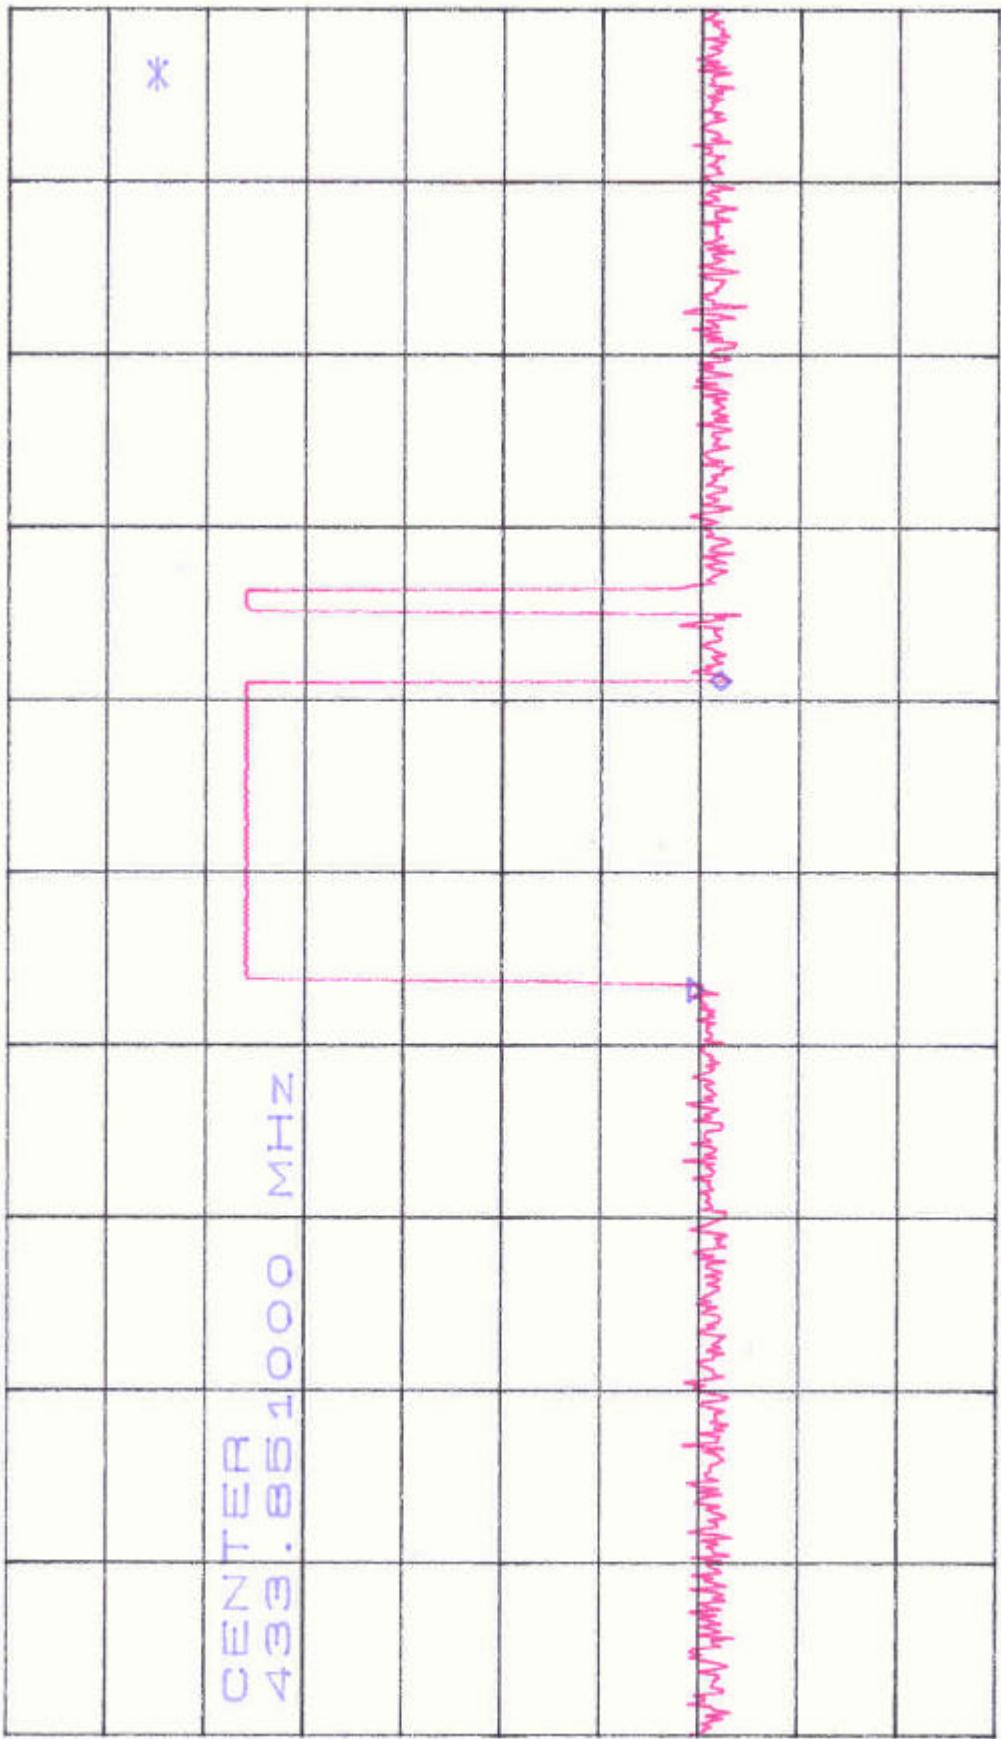

CENTER 433.854000MHz
*RBW 1.0MHz VBW 4.0MHz
SPAN 0Hz *SWP 50.0ms

