



Report No.: 4788635857

Issued Date: 2018-08-27

## TEST REPORT

### **Test Report No. : 4788635857**

**Applicant:** PC Partner Limited

**Product Description:** LED Label

**Model Number:** H138

**Tanapa#:** -

**Test Standard:** FCC CFR Title 47 Part 15 Subpart C Section 15.247

**Date of Test:** Aug.16, 2018 – Aug.27, 2018

**Test Result:** Complied

**Issued by:** UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Address:** Room 101, Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

**Prepared by:**

---

Gary Zhang / Project Engineer

**Approved by:**

---

Stephen Guo / Laboratory Manager

This test report consists of 28 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou Co., Ltd, Song Shan Lake Branch. The test results in the report only apply to the tested sample.

The issuance of this report in no way implies Listing, Classification or Recognition by UL and does not authorize the use of UL Listing, Classification or Recognition Marks or any other reference to UL on the product or system. UL LLC authorizes the above named company to reproduce this Report provided it is reproduced in its entirety. UL's name or marks cannot be used in any packaging, advertising, promotion or marketing relating to the data in this Report, without UL's prior written permission. UL LLC, its employees, and its agents shall not be responsible to anyone for the use or nonuse of the information contained in this Report, and shall not incur any obligation or liability for damages, including consequential damages, arising out of or in connection with the use of, or inability to use, the information contained in this Report.



## Contents

|  |           |
|--|-----------|
| <b><u>1. TEST STANDARDS AND REPORT VERSION</u></b>       | <b>3</b>  |
| 1.1. <b>Test Standards</b>                               | <b>3</b>  |
| 1.2. <b>Report version</b>                               | <b>3</b>  |
| <b><u>2. TEST DESCRIPTION</u></b>                        | <b>4</b>  |
| <b><u>3. SUMMARY</u></b>                                 | <b>5</b>  |
| 3.1. <b>Client Information</b>                           | <b>5</b>  |
| 3.2. <b>Product Description</b>                          | <b>5</b>  |
| 3.3. <b>Operation state</b>                              | <b>6</b>  |
| 3.4. <b>EUT configuration</b>                            | <b>6</b>  |
| 3.5. <b>Modifications</b>                                | <b>6</b>  |
| <b><u>4. TEST ENVIRONMENT</u></b>                        | <b>7</b>  |
| 4.1. <b>Address of the test laboratory</b>               | <b>7</b>  |
| 4.2. <b>Test Facility</b>                                | <b>7</b>  |
| 4.3. <b>Environmental conditions</b>                     | <b>8</b>  |
| 4.4. <b>Statement of the measurement uncertainty</b>     | <b>8</b>  |
| 4.5. <b>Equipments Used during the Test</b>              | <b>9</b>  |
| <b><u>5. TEST CONDITIONS AND RESULTS</u></b>             | <b>11</b> |
| 5.1. <b>Antenna Requirement</b>                          | <b>11</b> |
| 5.2. <b>Conducted Peak Output Power</b>                  | <b>12</b> |
| 5.3. <b>Power Spectral Density</b>                       | <b>13</b> |
| 5.4. <b>6dB bandwidth</b>                                | <b>15</b> |
| 5.5. <b>Restricted band</b>                              | <b>17</b> |
| 5.6. <b>Band edge and Spurious Emissions (conducted)</b> | <b>19</b> |
| 5.7. <b>Spurious Emissions (radiated)</b>                | <b>23</b> |
| <b><u>6. TEST SETUP PHOTOS</u></b>                       | <b>29</b> |
| <b><u>7. EXTERANAL AND INTERNAL PHOTOS</u></b>           | <b>30</b> |



Report No.: 4788635857

Issued Date: 2018-08-27

## **1. TEST STANDARDS AND REPORT VERSION**

### **1.1. Test Standards**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 DTS Meas Guidance v05](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating under §15.247

### **1.2. Report version**

| Version No. | Date of issue | Description |
|-------------|---------------|-------------|
| N/A         | 2018-08-27    | Original    |
|             |               |             |
|             |               |             |
|             |               |             |
|             |               |             |



## 2. TEST DESCRIPTION

| Test Item                   | FCC Rule         | Result | Test Engineer |
|-----------------------------|------------------|--------|---------------|
| Antenna requirement         | 15.203/15.247(c) | PASS   | Xiaokang Tan  |
| Conducted Peak Output Power | 15.247(b)(3)     | PASS   | Xiaokang Tan  |
| Power Spectral Density      | 15.247(e)        | PASS   | Xiaokang Tan  |
| 6dB Bandwidth               | 15.247(a)(2)     | PASS   | Xiaokang Tan  |
| Restricted band             | 15.247(d)/15.205 | PASS   | Xiaokang Tan  |
| Spurious Emissions          | 15.247(d)/15.209 | PASS   | Xiaokang Tan  |

Note: The measurement uncertainty is not included in the test result.



### 3. **SUMMARY**

#### 3.1. Client Information

|               |  |
|---------------|--|
| Applicant:    | PC Partner Limited   |
| Address:      | Unit 1901-1908, 19/F., Shatin Galleria, 18-24 Shan Mei Street, Fo Tan, Shatin, N.T., Hong Kong |
| Manufacturer: | PC Partner Limited   |
| Address:      | Unit 1901-1908, 19/F., Shatin Galleria, 18-24 Shan Mei Street, Fo Tan, Shatin, N.T., Hong Kong |

#### 3.2. Product Description

|                      |                       |
|----------------------|-----------------------|
| Name of EUT:         | LED Label             |
| Trade Mark:          | -                     |
| Model No.:           | H138                  |
| Listed Model(s):     | -                     |
| Power supply:        | 3V*2 Button batteries |
| Adapter information: | -                     |
| Hardware version:    | V 1.0                 |
| Software version:    | Medea_2_0_9_AB.HEX    |
| <b>Bluetooth</b>     |                       |
| Version:             | Supported BT4.0+BLE   |
| Modulation:          | GFSK                  |
| Operation frequency: | 2402MHz~2480MHz       |
| Channel number:      | 40                    |
| Channel separation:  | 2MHz                  |
| Antenna type:        | PCB                   |
| Antenna gain:        | 0dBi                  |



### 3.3. Operation state

#### ➤ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

| Channel | Frequency (MHz) |
|---------|-----------------|
| 00      | 2402            |
| 01      | 2404            |
| :       | :               |
| 19      | 2440            |
| :       | :               |
| 38      | 2478            |
| 39      | 2480            |

#### ➤ Test mode

|  |
|--|
| For RF test items  |
| The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).  |
| For AC power line conducted emissions:   |
| The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.   |
| For Radiated suprious emissions test item:   |
| The engineering test program was provided and enabled to make EUT continuous transmit(duty cycle>98%). The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report. |

### 3.4. EUT configuration

**The following peripheral devices and interface cables were connected during the measurement:**

- - supplied by the manufacturer
- - supplied by the lab

|  |   |               |   |
|--|---|---------------|---|
|  | / | Manufacturer: | / |
|  | / | Model No.:    | / |
|  | / | Manufacturer: | / |
|  | / | Model No.:    | / |

### 3.5. Modifications

No modifications were implemented to meet testing criteria.



## **4. TEST ENVIRONMENT**

### **4.1. Address of the test laboratory**

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

### **4.2. Test Facility**

#### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### **A2LA-Lab Cert. No.: 3902.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### **FCC-Registration No.: 762235**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

#### **IC-Registration No.:5377B-1**

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

#### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.



#### 4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                    |             |
|--------------------|-------------|
| Temperature:       | 15~35°C     |
| Relative Humidity: | 30~60 %     |
| Air Pressure:      | 950~1050mba |

#### 4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

| Test Items                              | Measurement Uncertainty | Notes |
|---|-------------------------|-------|
| Transmitter power conducted             | 0.57 dB                 | (1)   |
| Transmitter power Radiated              | 2.20 dB                 | (1)   |
| Conducted spurious emissions 9kHz~40GHz | 1.60 dB                 | (1)   |
| Radiated spurious emissions 9kHz~40GHz  | 2.20 dB                 | (1)   |
| Conducted Emissions 9kHz~30MHz          | 3.39 dB                 | (1)   |
| Radiated Emissions 30~1000MHz           | 4.24 dB                 | (1)   |
| Radiated Emissions 1~18GHz              | 5.16 dB                 | (1)   |
| Radiated Emissions 18~40GHz             | 5.54 dB                 | (1)   |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.



#### 4.5. Equipments Used during the Test

| Conducted Emissions |                     |              |           |            |                      |                      |
|---------------------|---------------------|--------------|-----------|------------|----------------------|----------------------|
| Item                | Test Equipment      | Manufacturer | Model No. | Serial No. | Last Cal. (mm-dd-yy) | Next Cal. (mm-dd-yy) |
| 1                   | EMI Test Receiver   | R&S          | ESCI      | 101247     | 11/11/2017           | 11/10/2018           |
| 2                   | Artificial Mains    | SCHWARZBECK  | NNLK 8121 | 573        | 11/11/2017           | 11/10/2018           |
| 3                   | 2-Line V-Network    | R&S          | ESH3-Z5   | 100049     | 11/11/2017           | 11/10/2018           |
| 4                   | Pulse Limiter       | R&S          | ESH3-Z2   | 101488     | 11/11/2017           | 11/10/2018           |
| 5                   | RF Connection Cable | HUBER+SUHNER | EF400     | N/A        | 11/21/2017           | 11/20/2018           |
| 6                   | Test Software       | R&S          | ES-K1     | N/A        | N/A                  | N/A                  |

| Radiated Emissions |                         |                    |              |              |                      |                      |
|--------------------|-------------------------|--------------------|--------------|--------------|----------------------|----------------------|
| Item               | Test Equipment          | Manufacturer       | Model No.    | Serial No.   | Last Cal. (mm-dd-yy) | Next Cal. (mm-dd-yy) |
| 1                  | Semi-Anechoic Chamber   | Albatross projects | SAC-3m-01    | C11121       | 10/16/2016           | 10/15/2019           |
| 2                  | EMI Test Receiver       | R&S                | ESCI         | 100900       | 11/11/2017           | 11/10/2018           |
| 3                  | Loop Antenna            | R&S                | HFH2-Z2      | 100020       | 11/20/2017           | 11/19/2020           |
| 4                  | Ultra-Broadband Antenna | SCHWARZBECK        | VULB9163     | 538          | 4/5/2017             | 4/4/2020             |
| 5                  | Horn Antenna            | SCHWARZBECK        | 9120D        | 1011         | 3/27/2017            | 3/26/2020            |
| 6                  | Broadband Horn Antenna  | SCHWARZBECK        | BBHA9170     | BBHA9170 472 | 3/27/2017            | 3/26/2020            |
| 7                  | Pre-amplifier           | SCHWARZBECK        | BBV 9743     | 9743-0022    | 10/18/2017           | 10/17/2018           |
| 8                  | Broadband Pre-amplifier | SCHWARZBECK        | BBV 9718     | 9718-248     | 10/18/2017           | 10/17/2018           |
| 9                  | Spectrum Analyzer       | R&S                | FSP40        | 100597       | 11/11/2017           | 11/10/2018           |
| 10                 | RF Connection Cable     | HUBER+SUHNER       | RE-7-FL      | N/A          | 11/21/2017           | 11/20/2018           |
| 11                 | RF Connection Cable     | HUBER+SUHNER       | RE-7-FH      | N/A          | 11/21/2017           | 11/20/2018           |
| 12                 | Test Software           | Audix              | E3           | N/A          | N/A                  | N/A                  |
| 13                 | Test Software           | R&S                | ES-K1        | N/A          | N/A                  | N/A                  |
| 14                 | Turntable               | Maturo Germany     | TT2.0-1T     | N/A          | N/A                  | N/A                  |
| 15                 | Antenna Mast            | Maturo Germany     | CAM-4.0-P-12 | N/A          | N/A                  | N/A                  |



Report No.: 4788635857

Issued Date: 2018-08-27

**RF Conducted Test**

| Item | Test Equipment      | Manufacturer | Model No. | Serial No. | Last Cal. (mm-dd-yy) | Next Cal. (mm-dd-yy) |
|------|---------------------|--------------|-----------|------------|----------------------|----------------------|
| 1    | Spectrum Analyzer   | R&S          | FSV40     | 100048     | 11/11/2017           | 11/10/2018           |
| 2    | EXA Signal Analyzer | Agilent      | N9020A    | 184247     | 9/22/2017            | 9/21/2018            |
| 3    | Power Meter         | Anritsu      | ML249A    | N/A        | 9/22/2017            | 9/21/2018            |
| 4    | OSP                 | R&S          | OSP120    | 101317     | N/A                  | N/A                  |

## 5. TEST CONDITIONS AND RESULTS

### 5.1. Antenna Requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST RESULTS

Passed       Not Applicable

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.

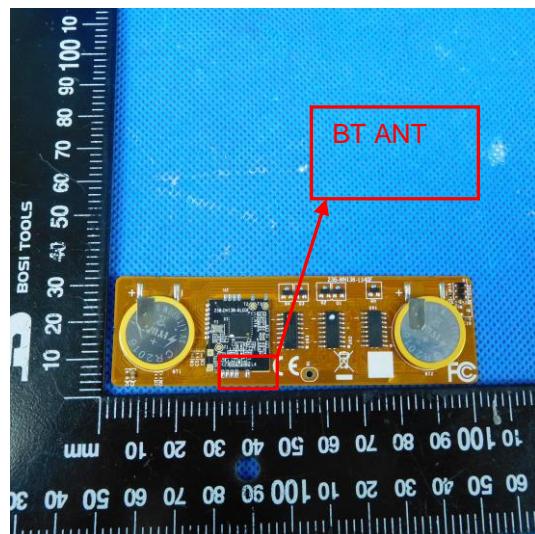




## 5.2. Conducted Peak Output Power

### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30 dBm

### TEST CONFIGURATION

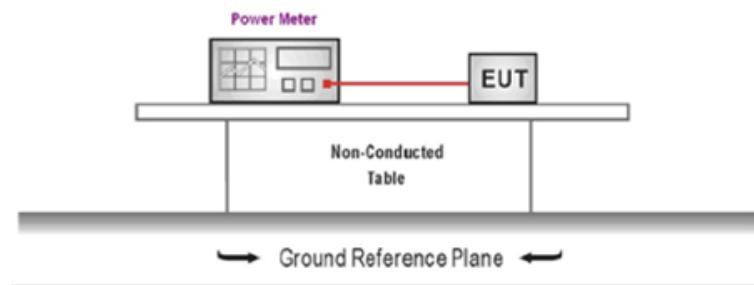

### TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10: 2013 and KDB 558074 D01 for compliance to FCC 47 CFR 15.247 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
4. Record the measurement data.

### TEST MODE:

Please refer to the clause 3.3

### TEST RESULTS

Passed       Not Applicable

| Type   | Channel | Output power (dBm) | Limit (dBm)  | Result |
|--------|---------|--------------------|--------------|--------|
| BT-BLE | 00      | -6.93              | $\leq 30.00$ | Pass   |
|        | 19      | -8.03              |              |        |
|        | 39      | -8.20              |              |        |


### 5.3. Power Spectral Density

#### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### TEST CONFIGURATION

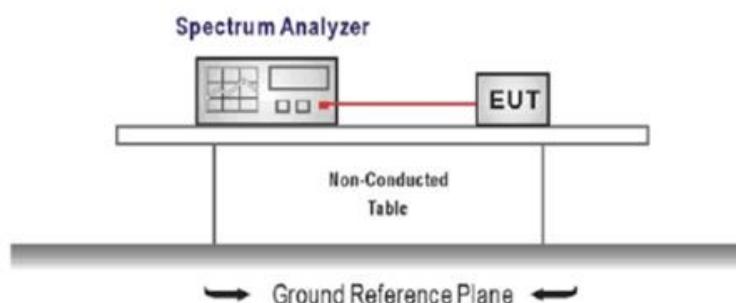

#### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:  
Center frequency=DTS channel center frequency  
Span =1.5 times the DTS bandwidth  
RBW = 3 kHz  $\leq$  RBW  $\leq$  100 kHz, VBW  $\geq$  3  $\times$  RBW  
Sweep time = auto couple  
Detector = peak  
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### TEST MODE:


Please refer to the clause 3.3

#### TEST RESULTS

Passed       Not Applicable

| Type   | Channel | Power Spectral Density(dBm/3KHz) | Limit (dBm/3KHz) | Result |
|--------|---------|----------------------------------|------------------|--------|
| BT-BLE | 00      | -18.53                           | $\leq$ 8.00      | Pass   |
|        | 19      | -19.63                           |                  |        |
|        | 39      | -20.92                           |                  |        |

Test plot as follows:

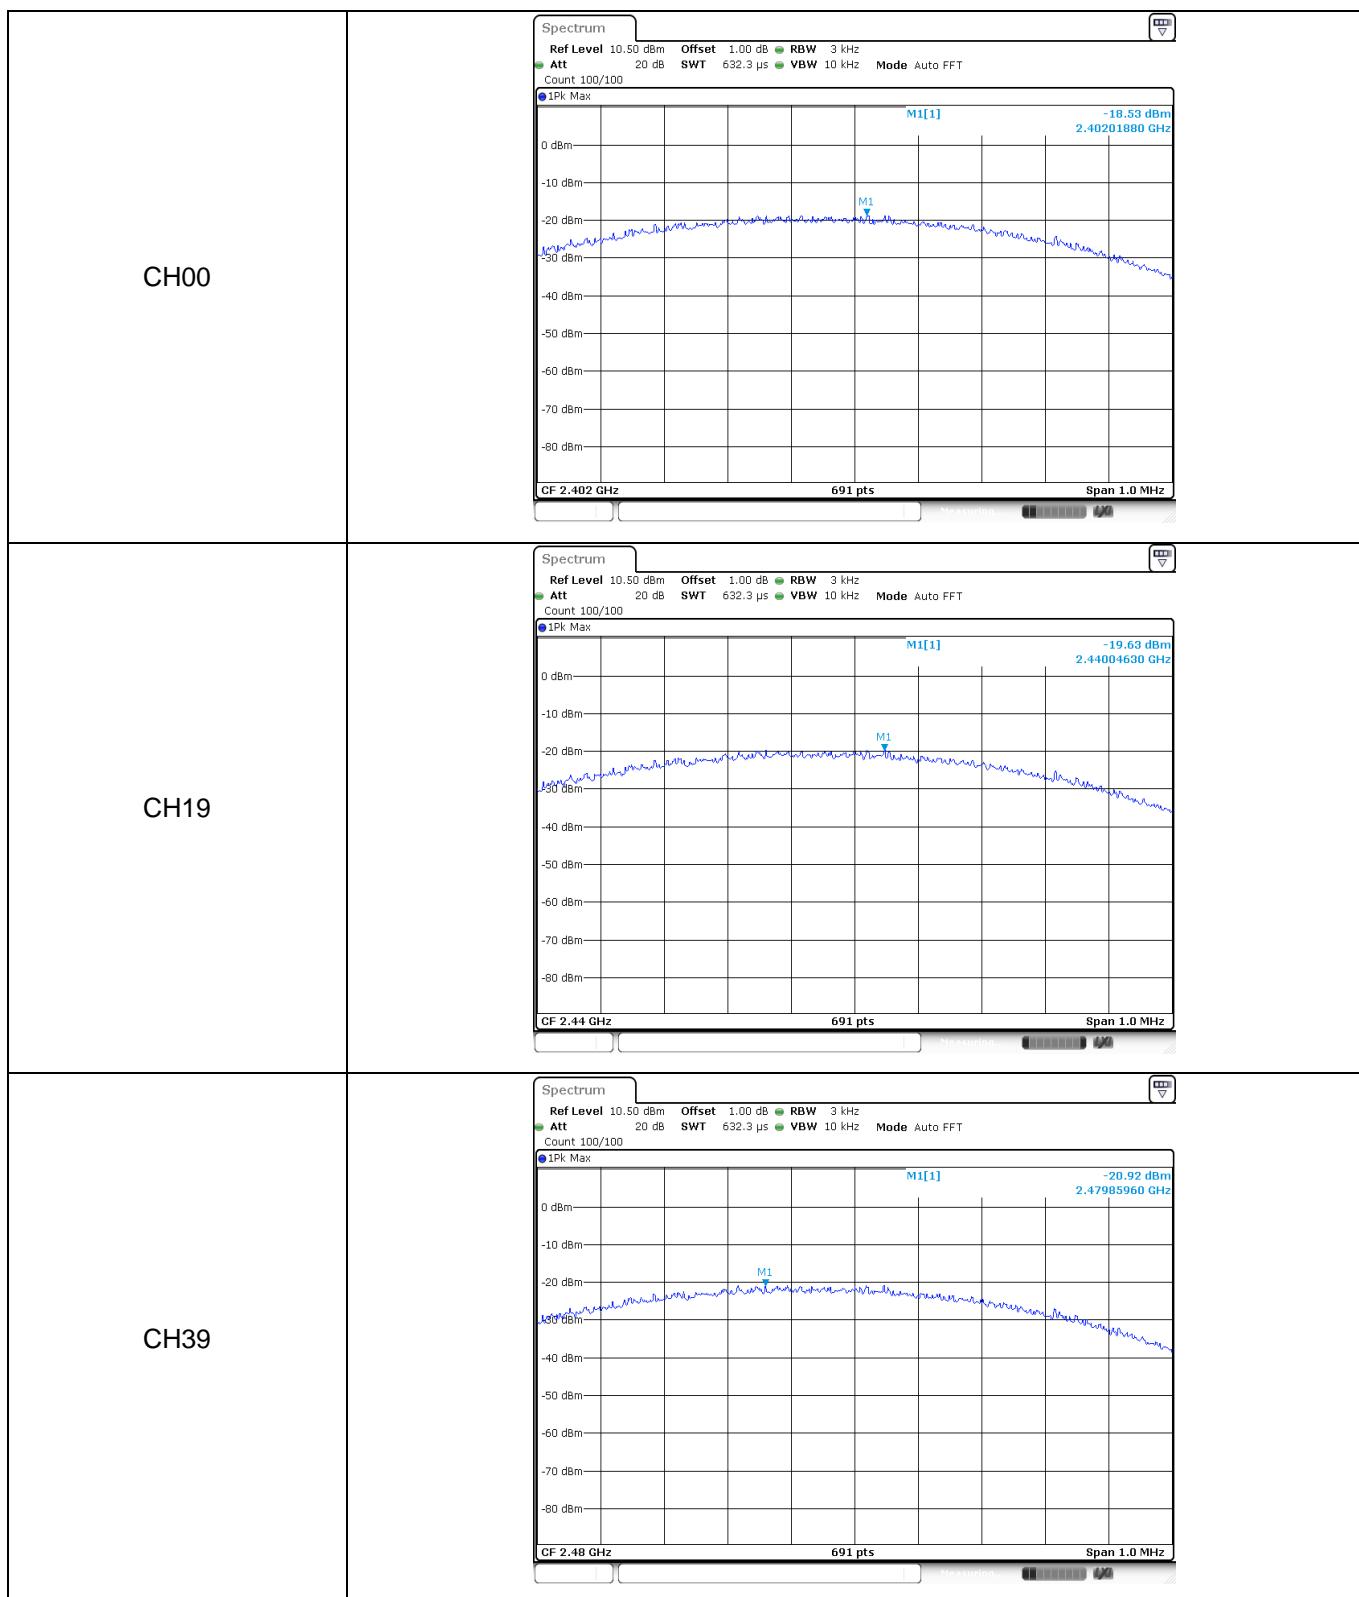


## 5.4. 6dB bandwidth

### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### TEST CONFIGURATION

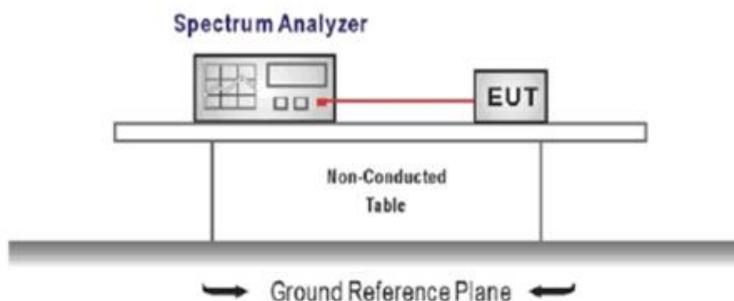

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).  
Center Frequency =DTS channel center frequency  
Span=2 x DTS bandwidth  
 $RBW = 100 \text{ kHz}$ ,  $VBW \geq 3 \times RBW$   
Sweep time= auto couple  
Detector = Peak  
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

### TEST MODE:


Please refer to the clause 3.3

### TEST RESULTS

Passed       Not Applicable

| Type   | Channel | 6dB Bandwidth(MHz) | Limit (kHz) | Result |
|--------|---------|--------------------|-------------|--------|
| BT-BLE | 00      | 0.68               | $\geq 500$  | Pass   |
|        | 19      | 0.68               |             |        |
|        | 39      | 0.68               |             |        |

Test plot as follows:

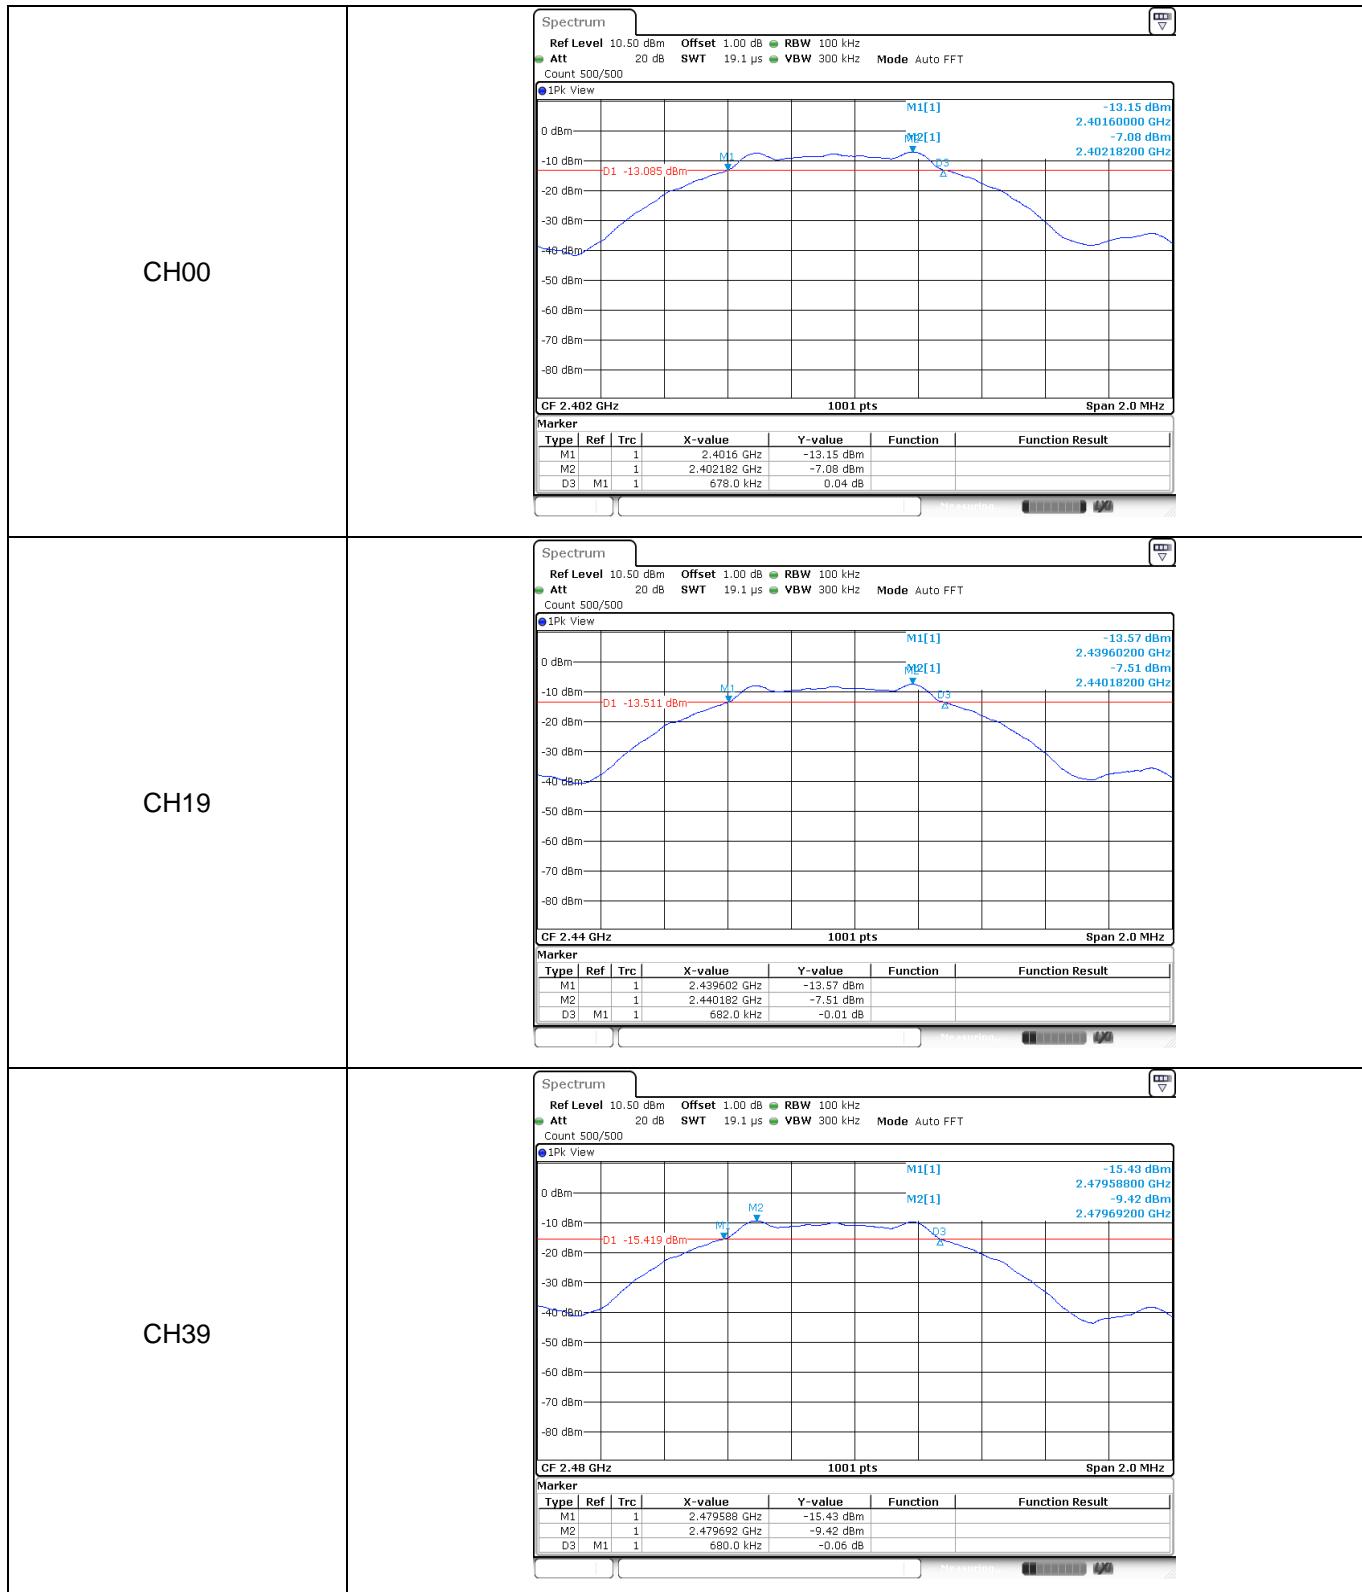


## 5.5. Restricted band

### LIMIT

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

### TEST CONFIGURATION

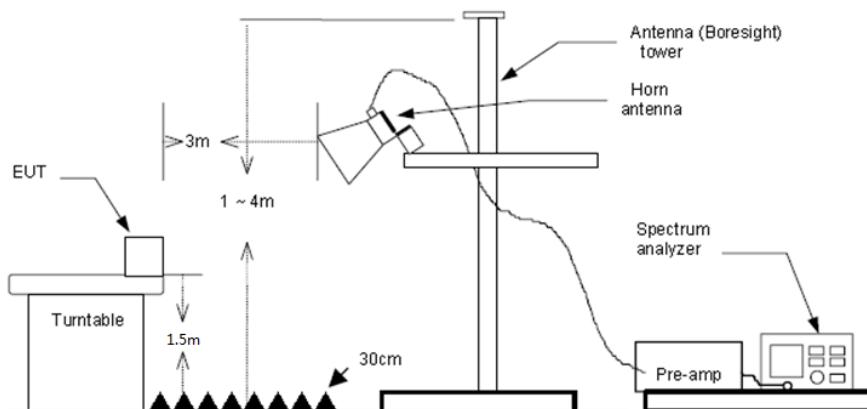

### TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT waspositioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find themaximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW=3MHz RMS detector for Average value.

### TEST MODE:

Please refer to the clause 3.3

### TEST RESULTS

Passed       Not Applicable

Note:

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
- 2) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.



| Test channel    |                   |                       |                 |                    | CH00           |                     |                 |              |            |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|------------|
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization | Test value |
| 2310.00         | 36.75             | 28.05                 | 6.62            | 37.59              | 33.83          | 74.00               | -40.17          | Vertical     | Peak       |
| 2389.93         | 49.29             | 27.65                 | 6.75            | 37.59              | 46.10          | 74.00               | -27.90          | Vertical     | Peak       |
| 2310.10         | 35.07             | 28.05                 | 6.62            | 37.59              | 32.15          | 74.00               | -41.85          | Horizontal   | Peak       |
| 2390.03         | 42.59             | 27.65                 | 6.75            | 37.59              | 39.40          | 74.00               | -34.60          | Horizontal   | Peak       |
| 2310.00         | 31.18             | 28.05                 | 6.62            | 37.59              | 28.26          | 54.00               | -25.74          | Vertical     | Average    |
| 2389.83         | 45.51             | 27.65                 | 6.75            | 37.59              | 42.32          | 54.00               | -11.68          | Vertical     | Average    |
| 2310.10         | 26.78             | 28.05                 | 6.62            | 37.59              | 23.86          | 54.00               | -30.14          | Horizontal   | Average    |
| 2389.74         | 36.39             | 27.65                 | 6.75            | 37.59              | 33.20          | 54.00               | -20.80          | Horizontal   | Average    |


| Test channel    |                   |                       |                 |                    | CH39           |                     |                 |              |            |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|------------|
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization | Test value |
| 2483.50         | 38.88             | 27.26                 | 6.83            | 37.59              | 35.38          | 74.00               | -38.62          | Vertical     | Peak       |
| 2500.00         | 34.77             | 27.20                 | 6.84            | 37.59              | 31.22          | 74.00               | -42.78          | Vertical     | Peak       |
| 2483.50         | 42.91             | 27.26                 | 6.83            | 37.59              | 39.41          | 74.00               | -34.59          | Horizontal   | Peak       |
| 2499.98         | 31.61             | 27.20                 | 6.84            | 37.59              | 28.06          | 74.00               | -45.94          | Horizontal   | Peak       |
| 2483.50         | 33.05             | 27.26                 | 6.83            | 37.59              | 29.55          | 54.00               | -24.45          | Vertical     | Average    |
| 2500.00         | 25.87             | 27.20                 | 6.84            | 37.59              | 22.32          | 54.00               | -31.68          | Vertical     | Average    |
| 2483.50         | 37.56             | 27.26                 | 6.83            | 37.59              | 34.06          | 54.00               | -19.94          | Horizontal   | Average    |
| 2500.00         | 25.58             | 27.20                 | 6.84            | 37.59              | 22.03          | 54.00               | -31.97          | Horizontal   | Average    |

## 5.6. Band edge and Spurious Emissions (conducted)

### LIMIT

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### TEST CONFIGURATION

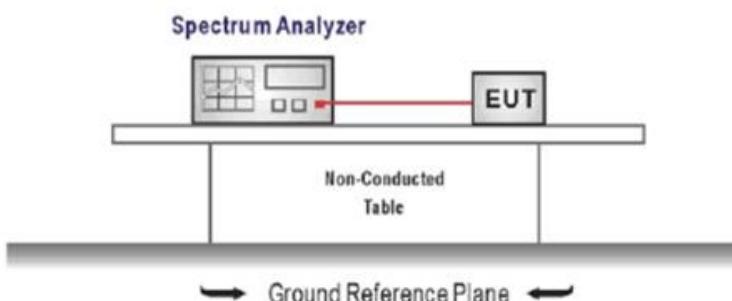

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure  
Center frequency=DTS channel center frequency  
The span = 1.5 times the DTS bandwidth.  
RBW = 100 kHz, VBW  $\geq$  3 x RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum PSD level  
  
Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
3. Emission level measurement  
Set the center frequency and span to encompass frequency range to be measured  
RBW = 100 kHz, VBW  $\geq$  3 x RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.



### TEST MODE:

Please refer to the clause 3.3

### TEST RESULTS

Passed       Not Applicable

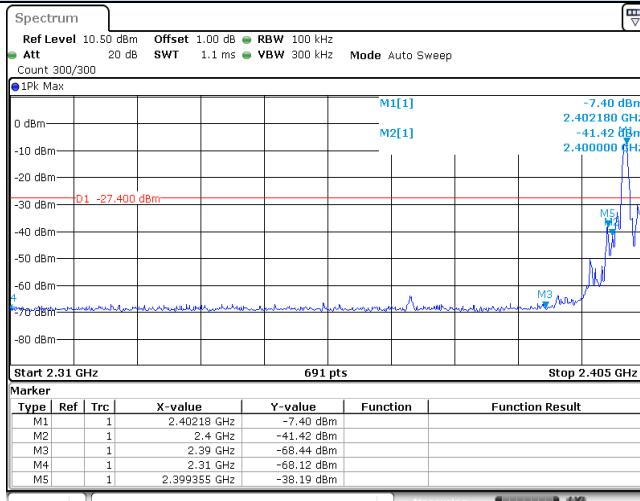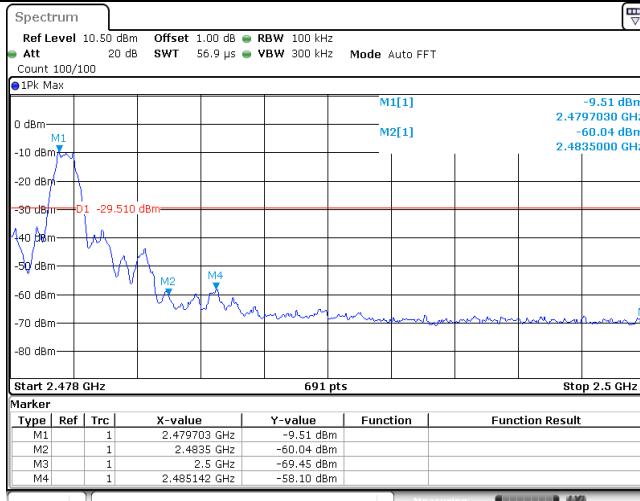


| Test Item: | Band edge  |      |              |            |          |                 |          |                 |    |   |  |              |           |  |  |    |   |  |            |            |  |  |    |   |  |          |            |  |  |    |   |  |              |            |  |  |    |   |  |              |            |  |  |
|------------|--|------|--------------|------------|----------|-----------------|----------|-----------------|----|---|--|--------------|-----------|--|--|----|---|--|------------|------------|--|--|----|---|--|----------|------------|--|--|----|---|--|--------------|------------|--|--|----|---|--|--------------|------------|--|--|
| CH00       |  <table border="1"><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.40218 GHz</td><td>-7.40 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-41.42 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-69.44 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-68.12 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.399355 GHz</td><td>-38.19 dBm</td><td></td><td></td></tr></tbody></table> | Type | Ref          | Trc        | X-value  | Y-value         | Function | Function Result | M1 | 1 |  | 2.40218 GHz  | -7.40 dBm |  |  | M2 | 1 |  | 2.4 GHz    | -41.42 dBm |  |  | M3 | 1 |  | 2.39 GHz | -69.44 dBm |  |  | M4 | 1 |  | 2.31 GHz     | -68.12 dBm |  |  | M5 | 1 |  | 2.399355 GHz | -38.19 dBm |  |  |
| Type       | Ref  | Trc  | X-value      | Y-value    | Function | Function Result |          |                 |    |   |  |              |           |  |  |    |   |  |            |            |  |  |    |   |  |          |            |  |  |    |   |  |              |            |  |  |    |   |  |              |            |  |  |
| M1         | 1  |      | 2.40218 GHz  | -7.40 dBm  |          |                 |          |                 |    |   |  |              |           |  |  |    |   |  |            |            |  |  |    |   |  |          |            |  |  |    |   |  |              |            |  |  |    |   |  |              |            |  |  |
| M2         | 1  |      | 2.4 GHz      | -41.42 dBm |          |                 |          |                 |    |   |  |              |           |  |  |    |   |  |            |            |  |  |    |   |  |          |            |  |  |    |   |  |              |            |  |  |    |   |  |              |            |  |  |
| M3         | 1  |      | 2.39 GHz     | -69.44 dBm |          |                 |          |                 |    |   |  |              |           |  |  |    |   |  |            |            |  |  |    |   |  |          |            |  |  |    |   |  |              |            |  |  |    |   |  |              |            |  |  |
| M4         | 1  |      | 2.31 GHz     | -68.12 dBm |          |                 |          |                 |    |   |  |              |           |  |  |    |   |  |            |            |  |  |    |   |  |          |            |  |  |    |   |  |              |            |  |  |    |   |  |              |            |  |  |
| M5         | 1  |      | 2.399355 GHz | -38.19 dBm |          |                 |          |                 |    |   |  |              |           |  |  |    |   |  |            |            |  |  |    |   |  |          |            |  |  |    |   |  |              |            |  |  |    |   |  |              |            |  |  |
| CH39       |  <table border="1"><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.479703 GHz</td><td>-9.51 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4835 GHz</td><td>-60.04 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.5 GHz</td><td>-69.45 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.485142 GHz</td><td>-58.10 dBm</td><td></td><td></td></tr></tbody></table>  | Type | Ref          | Trc        | X-value  | Y-value         | Function | Function Result | M1 | 1 |  | 2.479703 GHz | -9.51 dBm |  |  | M2 | 1 |  | 2.4835 GHz | -60.04 dBm |  |  | M3 | 1 |  | 2.5 GHz  | -69.45 dBm |  |  | M4 | 1 |  | 2.485142 GHz | -58.10 dBm |  |  |    |   |  |              |            |  |  |
| Type       | Ref  | Trc  | X-value      | Y-value    | Function | Function Result |          |                 |    |   |  |              |           |  |  |    |   |  |            |            |  |  |    |   |  |          |            |  |  |    |   |  |              |            |  |  |    |   |  |              |            |  |  |
| M1         | 1  |      | 2.479703 GHz | -9.51 dBm  |          |                 |          |                 |    |   |  |              |           |  |  |    |   |  |            |            |  |  |    |   |  |          |            |  |  |    |   |  |              |            |  |  |    |   |  |              |            |  |  |
| M2         | 1  |      | 2.4835 GHz   | -60.04 dBm |          |                 |          |                 |    |   |  |              |           |  |  |    |   |  |            |            |  |  |    |   |  |          |            |  |  |    |   |  |              |            |  |  |    |   |  |              |            |  |  |
| M3         | 1  |      | 2.5 GHz      | -69.45 dBm |          |                 |          |                 |    |   |  |              |           |  |  |    |   |  |            |            |  |  |    |   |  |          |            |  |  |    |   |  |              |            |  |  |    |   |  |              |            |  |  |
| M4         | 1  |      | 2.485142 GHz | -58.10 dBm |          |                 |          |                 |    |   |  |              |           |  |  |    |   |  |            |            |  |  |    |   |  |          |            |  |  |    |   |  |              |            |  |  |    |   |  |              |            |  |  |




| Test Item:              | SE |
|-------------------------|----|
| CH00<br>Reference level |    |
| CH00<br>30MHz~1000MHz   |    |
| CH00<br>1GHz~26GHz      |    |




CH19  
Reference level

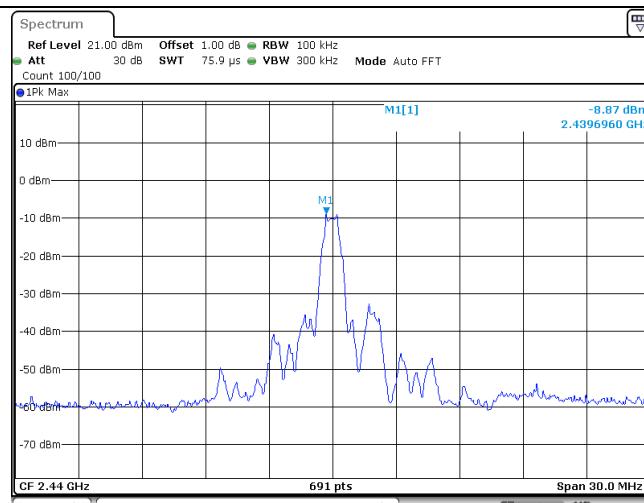


CH19  
30MHz~1000MHz

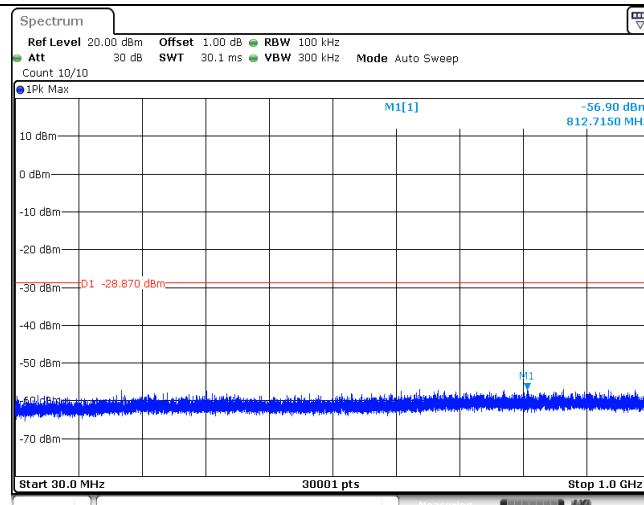

CH19  
1GHz~26GHz

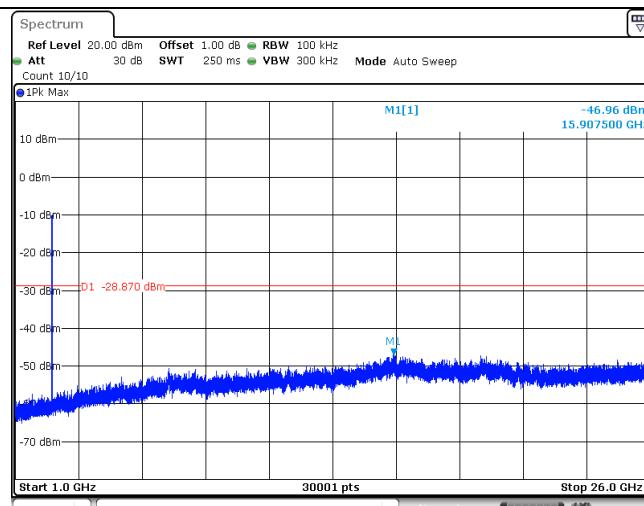

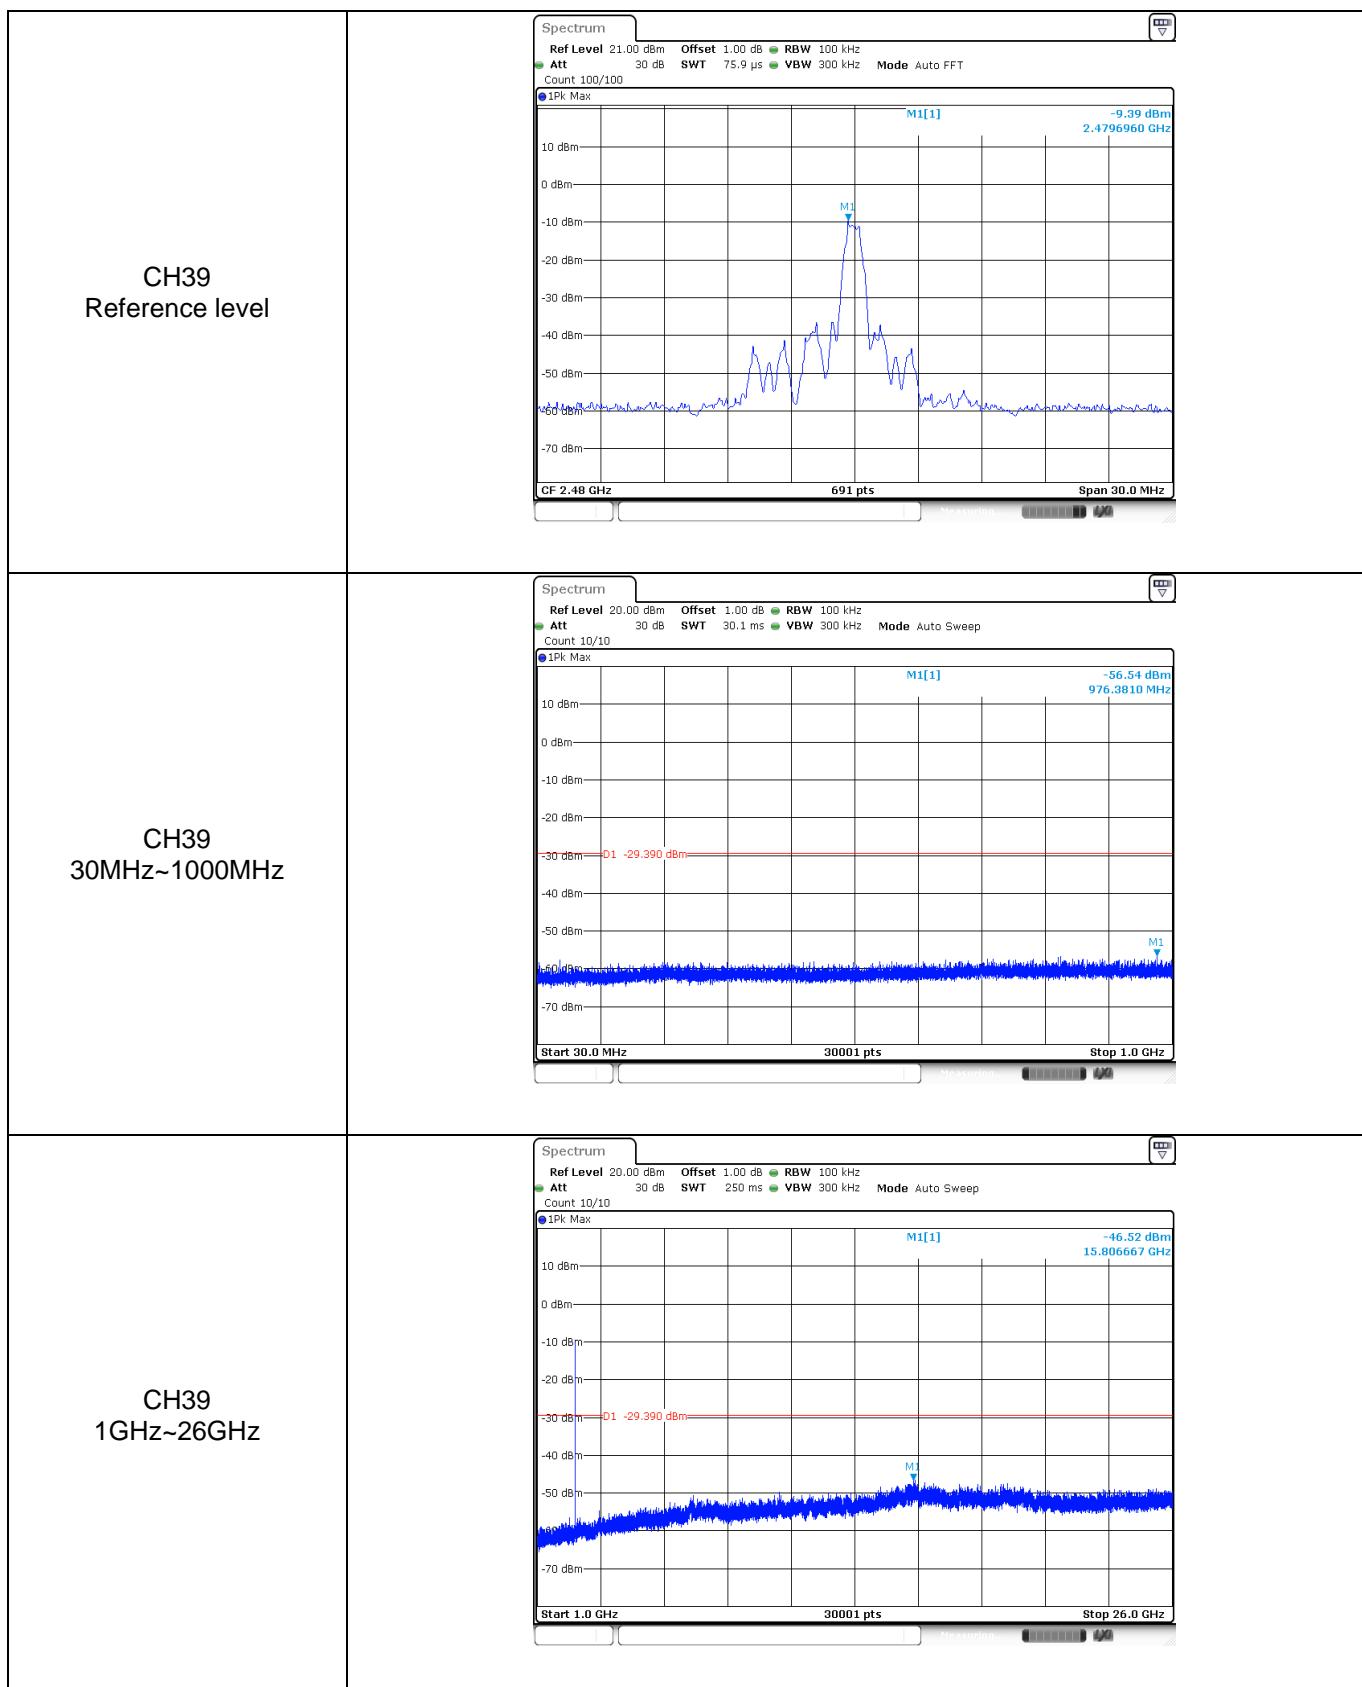

## 5.7. Spurious Emissions (radiated)


### LIMIT

**FCC CFR Title 47 Part 15 Subpart C Section 15.209**


| Frequency     | Limit (dBuV/m @3m) | Value      |
|---------------|--------------------|------------|
| 30MHz~88MHz   | 40.00              | Quasi-peak |
| 88MHz~216MHz  | 43.50              | Quasi-peak |
| 216MHz~960MHz | 46.00              | Quasi-peak |
| 960MHz~1GHz   | 54.00              | Quasi-peak |
| Above 1GHz    | 54.00              | Average    |
|               | 74.00              | Peak       |

**TEST CONFIGURATION**


- 9 kHz ~ 30 MHz

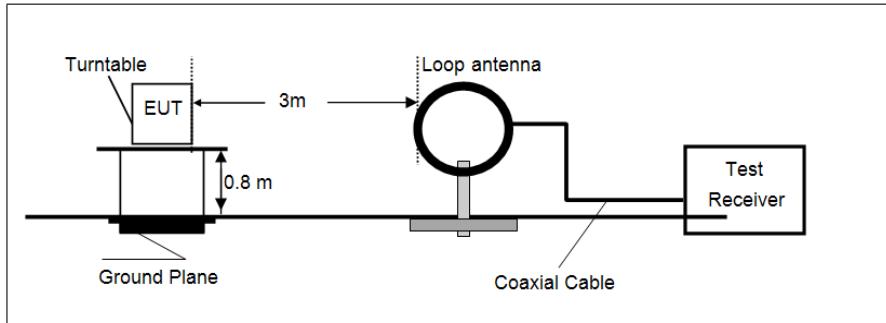

- 30 MHz ~ 1 GHz

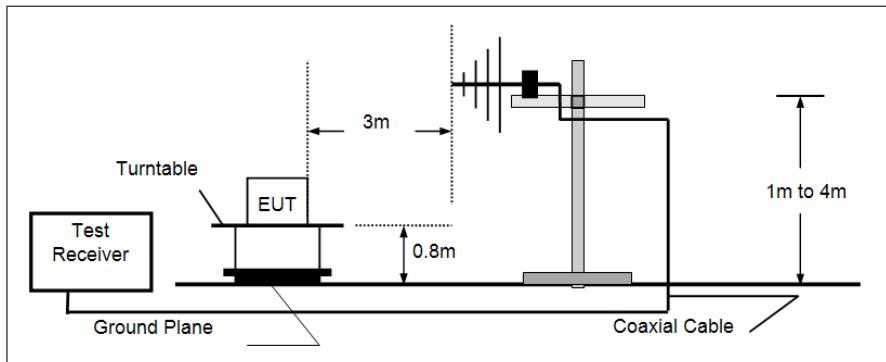

- Above 1 GHz

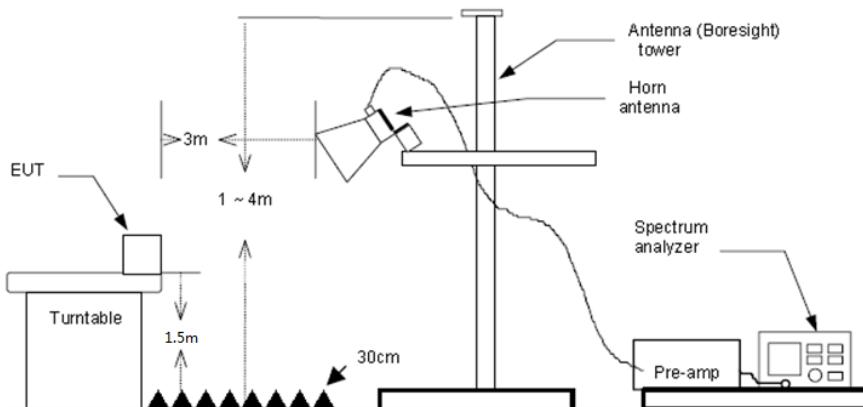
**TEST PROCEDURE**

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.



2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Below 1 GHz:  
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;  
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - (3) From 1 GHz to 10<sup>th</sup> harmonic:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW=3MHz RMS detector for Average value.

#### TEST MODE:

Please refer to the clause 3.3

#### TEST RESULTS

Passed       Not Applicable

Note:

- 1) Above 1GHz Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.


➤ **9 kHz ~ 30 MHz**

The EUT was pre-scanned the frequency band (9 kHz ~ 30 MHz), found the radiated level lower than the limit, so don't show on the report.

➤ **30 MHz ~ 1000 MHz**

Have pre-scan all modulation mode, found the BT-BLE mode CH39 which it was worst case, so only the worst case's data on the test report.

➤ **30 MHz ~ 1 GHz**

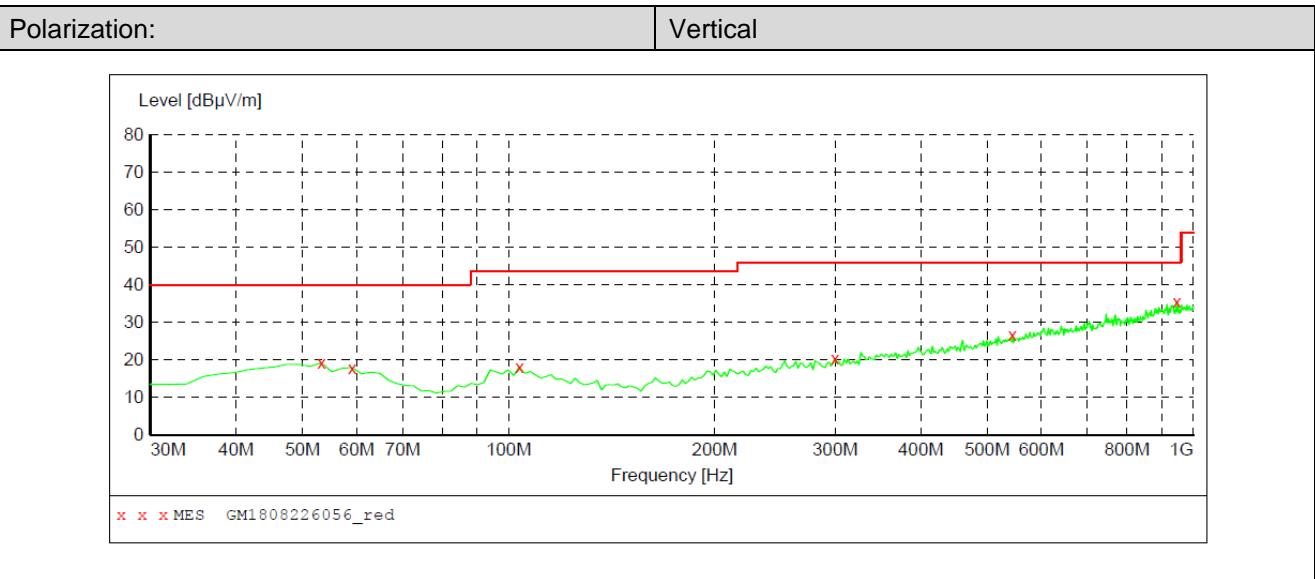


**MEASUREMENT RESULT: "GM1808226056\_red"**

8/22/2018 2:41PM

| Frequency<br>MHz | Level<br>dB $\mu$ V/m | Transd<br>dB | Limit<br>dB $\mu$ V/m | Margin<br>dB | Det. | Height<br>cm | Azimuth<br>deg | Polarization |
|------------------|-----------------------|--------------|-----------------------|--------------|------|--------------|----------------|--------------|
| 53.280000        | 19.20                 | -9.0         | 40.0                  | 20.8         | QP   | 100.0        | 165.00         | VERTICAL     |
| 59.100000        | 17.90                 | -9.8         | 40.0                  | 22.1         | QP   | 100.0        | 325.00         | VERTICAL     |
| 103.720000       | 18.10                 | -10.5        | 43.5                  | 25.4         | QP   | 100.0        | 257.00         | VERTICAL     |
| 299.660000       | 20.30                 | -7.3         | 46.0                  | 25.7         | QP   | 100.0        | 337.00         | VERTICAL     |
| 544.100000       | 26.60                 | -0.9         | 46.0                  | 19.4         | QP   | 100.0        | 127.00         | VERTICAL     |
| 945.680000       | 35.50                 | 7.2          | 46.0                  | 10.5         | QP   | 100.0        | 313.00         | VERTICAL     |

Polarization:

Horizontal

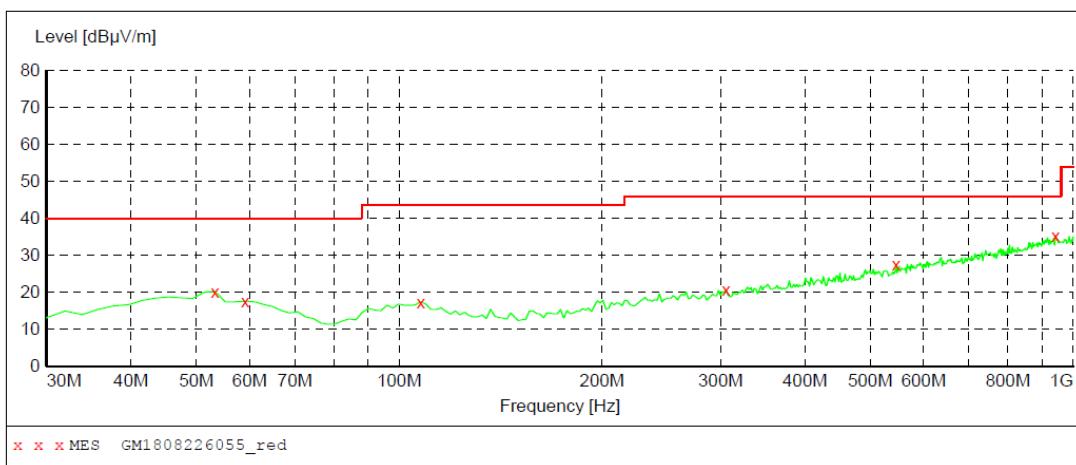**MEASUREMENT RESULT: "GM1808226055\_red"**

8/22/2018 2:38PM

| Frequency<br>MHz | Level<br>dB $\mu$ V/m | Transd<br>dB | Limit<br>dB $\mu$ V/m | Margin<br>dB | Det. | Height<br>cm | Azimuth<br>deg | Polarization |
|------------------|-----------------------|--------------|-----------------------|--------------|------|--------------|----------------|--------------|
| 53.280000        | 20.20                 | -9.0         | 40.0                  | 19.8         | QP   | 100.0        | 92.00          | HORIZONTAL   |
| 59.100000        | 17.50                 | -9.8         | 40.0                  | 22.5         | QP   | 300.0        | 126.00         | HORIZONTAL   |
| 107.600000       | 17.40                 | -10.6        | 43.5                  | 26.1         | QP   | 300.0        | 116.00         | HORIZONTAL   |
| 305.480000       | 20.70                 | -7.2         | 46.0                  | 25.3         | QP   | 300.0        | 116.00         | HORIZONTAL   |
| 546.040000       | 27.40                 | -0.8         | 46.0                  | 18.6         | QP   | 100.0        | 28.00          | HORIZONTAL   |
| 941.800000       | 35.30                 | 7.2          | 46.0                  | 10.7         | QP   | 100.0        | 132.00         | HORIZONTAL   |

**➤ 1 GHz ~ 25 GHz**

| Test channel       |                               |                             |                       |                          | CH00                    |                              |                       |              |               |
|--------------------|-------------------------------|-----------------------------|-----------------------|--------------------------|-------------------------|------------------------------|-----------------------|--------------|---------------|
| Frequency<br>(MHz) | Read<br>Level<br>(dB $\mu$ V) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>Factor<br>(dB) | Level<br>(dB $\mu$ V/m) | Limit Line<br>(dB $\mu$ V/m) | Over<br>Limit<br>(dB) | Polarization | Test<br>value |
| 1195.05            | 41.23                         | 26.26                       | 4.65                  | 37.23                    | 34.91                   | 74.00                        | -39.09                | Vertical     | Peak          |
| 1943.29            | 42.32                         | 25.74                       | 6.18                  | 37.55                    | 36.69                   | 74.00                        | -37.31                | Vertical     | Peak          |
| 4809.50            | 41.10                         | 31.58                       | 9.55                  | 35.72                    | 46.51                   | 74.00                        | -27.49                | Vertical     | Peak          |
| 7527.83            | 32.13                         | 36.13                       | 12.49                 | 33.02                    | 47.73                   | 74.00                        | -26.27                | Vertical     | Peak          |
| 1195.05            | 42.70                         | 26.26                       | 4.65                  | 37.23                    | 36.38                   | 74.00                        | -37.62                | Horizontal   | Peak          |
| 1395.80            | 43.70                         | 25.91                       | 4.99                  | 37.12                    | 37.48                   | 74.00                        | -36.52                | Horizontal   | Peak          |
| 4809.50            | 39.87                         | 31.58                       | 9.55                  | 35.72                    | 45.28                   | 74.00                        | -28.72                | Horizontal   | Peak          |



Report No.: 4788635857

Issued Date: 2018-08-27

|         |       |       |       |       |       |       |        |            |      |
|---------|-------|-------|-------|-------|-------|-------|--------|------------|------|
| 7961.43 | 32.04 | 36.95 | 12.49 | 33.07 | 48.41 | 74.00 | -25.59 | Horizontal | Peak |
|---------|-------|-------|-------|-------|-------|-------|--------|------------|------|

| Test channel    |                   |                       |                 |                    | CH19           |                     |                 |              |            |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|------------|
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization | Test value |
| 1795.84         | 43.13             | 25.39                 | 5.95            | 37.40              | 37.07          | 74.00               | -36.93          | Vertical     | Peak       |
| 1988.33         | 41.27             | 26.19                 | 6.25            | 37.59              | 36.12          | 74.00               | -37.88          | Vertical     | Peak       |
| 3192.37         | 39.12             | 28.80                 | 7.71            | 37.40              | 38.23          | 74.00               | -35.77          | Vertical     | Peak       |
| 4883.52         | 39.90             | 31.43                 | 9.59            | 35.58              | 45.34          | 74.00               | -28.66          | Vertical     | Peak       |
| 1207.28         | 40.71             | 26.29                 | 4.67            | 37.22              | 34.45          | 74.00               | -39.55          | Horizontal   | Peak       |
| 4883.52         | 37.71             | 31.43                 | 9.59            | 35.58              | 43.15          | 74.00               | -30.85          | Horizontal   | Peak       |
| 6478.05         | 33.08             | 33.85                 | 11.13           | 33.64              | 44.42          | 74.00               | -29.58          | Horizontal   | Peak       |
| 7470.56         | 31.93             | 36.16                 | 12.30           | 33.07              | 47.32          | 74.00               | -26.68          | Horizontal   | Peak       |




| Test channel    |                   |                       |                 |                    | CH39           |                     |                 |              |            |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|------------|
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization | Test value |
| 1998.48         | 46.50             | 26.29                 | 6.27            | 37.60              | 41.46          | 74.00               | -32.54          | Vertical     | Peak       |
| 2394.36         | 46.94             | 27.63                 | 6.76            | 37.59              | 43.74          | 74.00               | -30.26          | Vertical     | Peak       |
| 4958.68         | 38.37             | 31.46                 | 9.64            | 35.45              | 44.02          | 74.00               | -29.98          | Vertical     | Peak       |
| 6511.12         | 32.90             | 34.02                 | 11.20           | 33.63              | 44.49          | 74.00               | -29.51          | Vertical     | Peak       |
| 1198.10         | 49.76             | 26.29                 | 4.66            | 37.23              | 43.48          | 74.00               | -30.52          | Horizontal   | Peak       |
| 1993.40         | 41.36             | 26.24                 | 6.26            | 37.59              | 36.27          | 74.00               | -37.73          | Horizontal   | Peak       |
| 4958.68         | 37.04             | 31.46                 | 9.64            | 35.45              | 42.69          | 74.00               | -31.31          | Horizontal   | Peak       |
| 8022.46         | 32.79             | 37.08                 | 12.35           | 33.06              | 49.16          | 74.00               | -24.84          | Horizontal   | Peak       |

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



## 6. TEST SETUP PHOTOS

Radiated Emissions

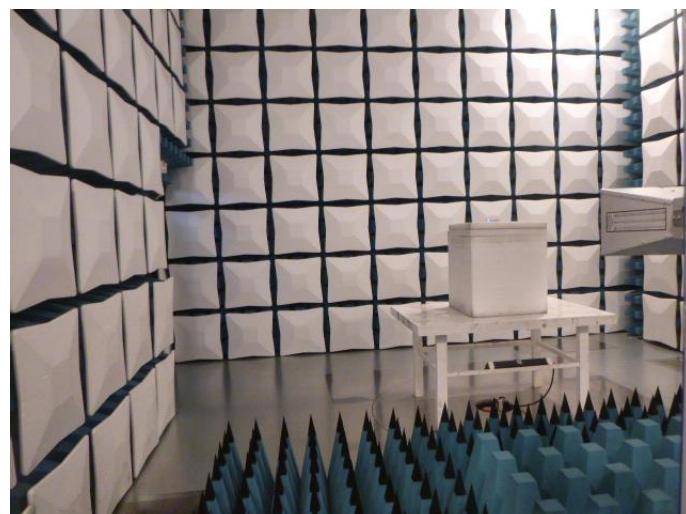

## 7. EXTERANAL AND INTERNAL PHOTOS



### EXTERANAL AND INTERNAL PHOTOS

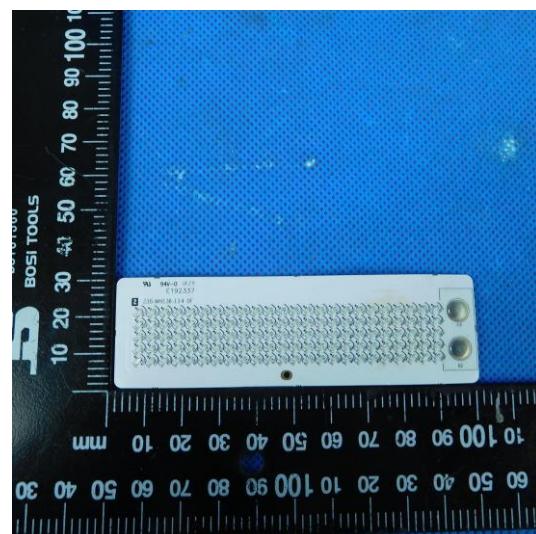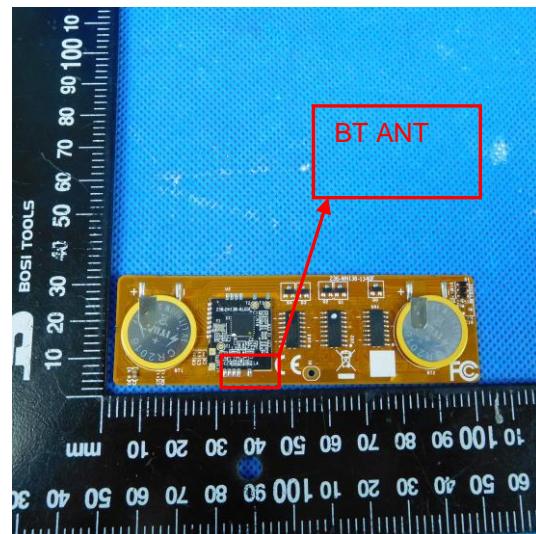



Report No.: 4788635857

Issued Date: 2018-08-27

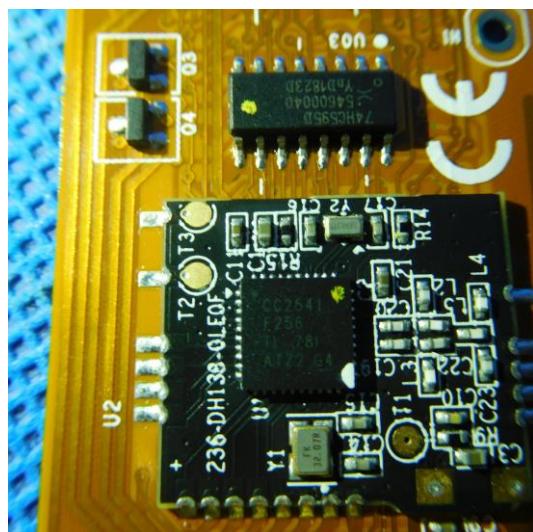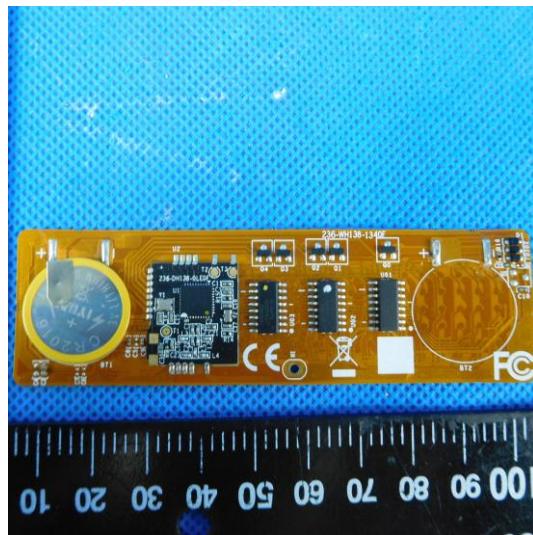

-----End of Report-----