
SAR TEST PLOTS

DIGITAL EMC CO., LTD

DUT: CRX-1000; Type: WLL

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.979 \text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1703; ConvF(6.39, 6.39, 6.39); Calibrated: 2005-03-24; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Test Date: 2005-10-11; Ambient Temp: 23.0; Tissue Temp: 22.0

2.5cm from Body, GSM Ch.128, Ant Fixed, Charger mode


Area Scan (51x151x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.155 dB

Peak SAR (extrapolated) = 0.539 W/kg

SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.291 mW/g

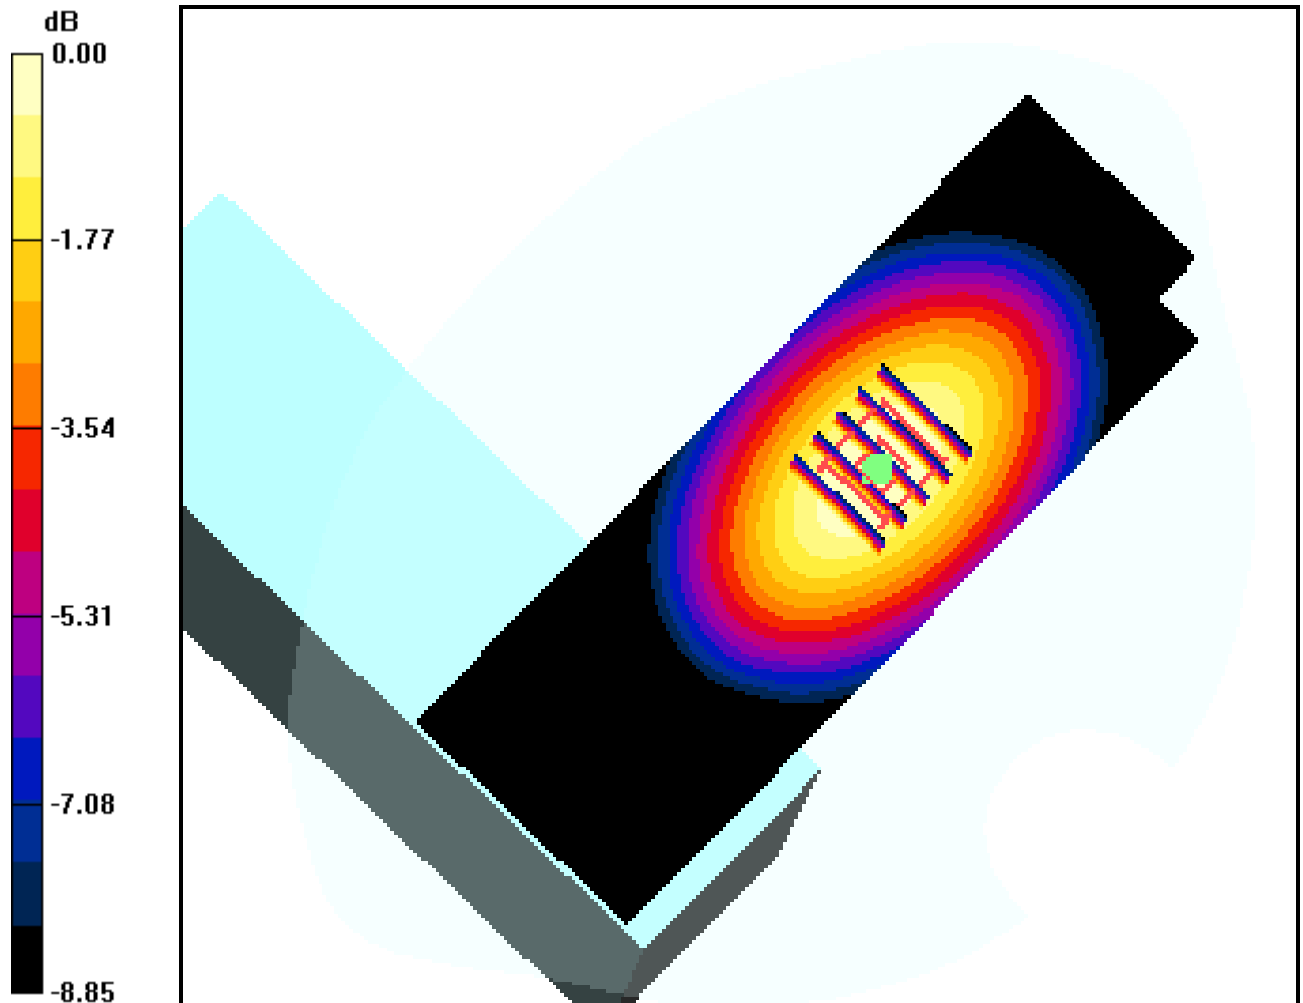

0 dB = 0.435mW/g

DIGITAL EMC CO., LTD

DUT: CRX-1000; Type: WLL

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.992 \text{ mho/m}$; $\epsilon_r = 53.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1703; ConvF(6.39, 6.39, 6.39); Calibrated: 2005-03-24; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Test Date: 2005-10-11; Ambient Temp: 23.0; Tissue Temp: 22.0

2.5cm from Body, GSM Ch.190, Ant Fixed, Charger mode


Area Scan (51x151x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.440 mW/g; SAR(10 g) = 0.313 mW/g

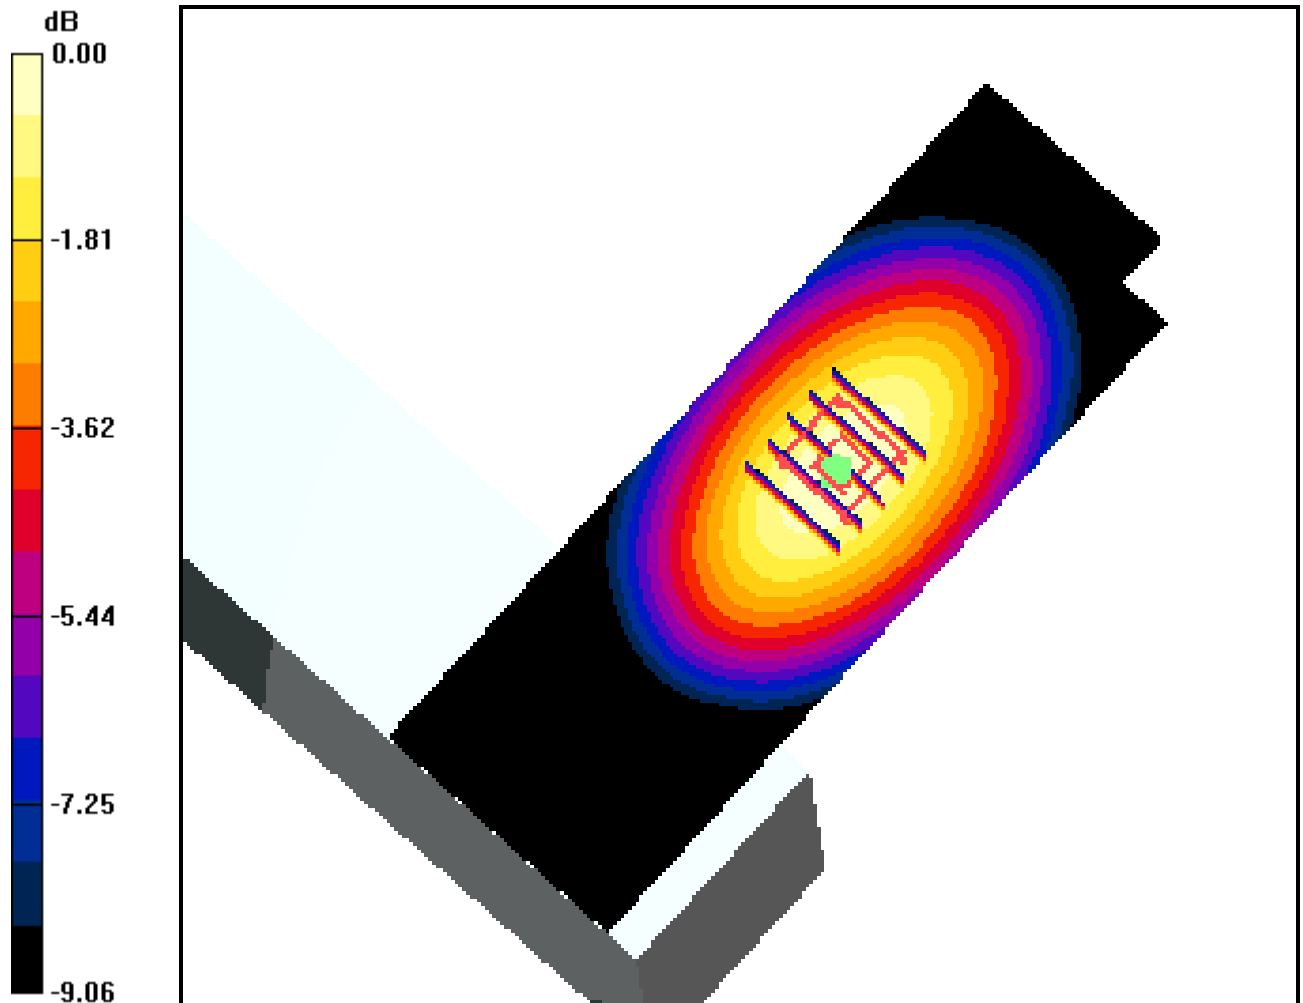

0 dB = 0.469mW/g

DIGITAL EMC CO., LTD

DUT: CRX-1000; Type: WLL

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1703; ConvF(6.39, 6.39, 6.39); Calibrated: 2005-03-24; Electronics: DAE3 Sn520
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Test Date: 2005-10-11; Ambient Temp: 23.0; Tissue Temp: 22.0

2.5cm from Body, GSM Ch.251, Ant Fixed, Charger mode


Area Scan (51x151x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.124 dB

Peak SAR (extrapolated) = 0.424 W/kg

SAR(1 g) = 0.319 mW/g; SAR(10 g) = 0.228 mW/g

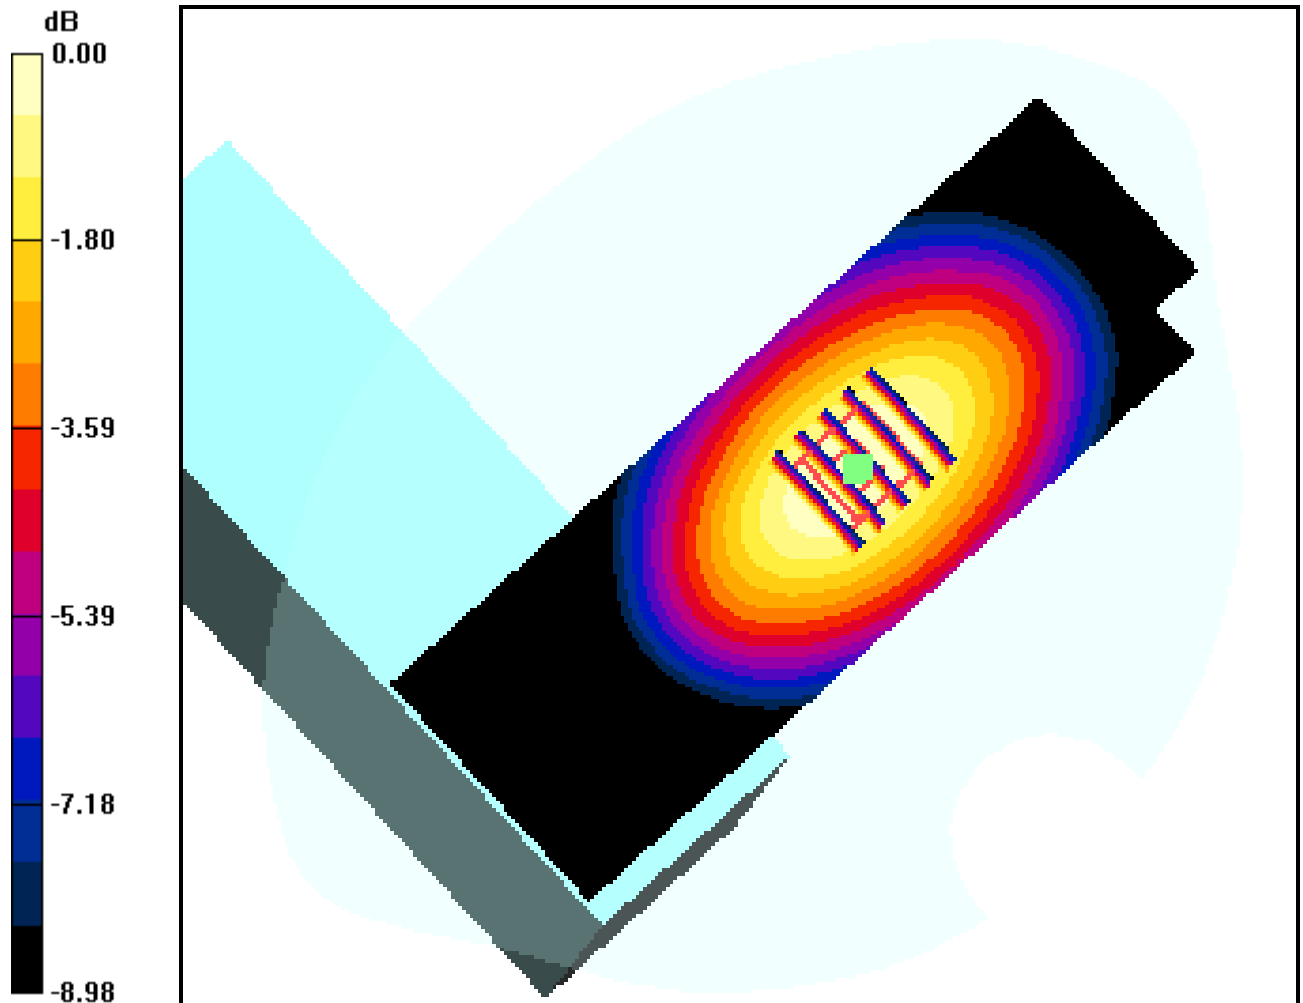

0 dB = 0.340mW/g

DIGITAL EMC CO., LTD

DUT: CRX-1000; Type: WLL

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1703; ConvF(4.81, 4.81, 4.81); Calibrated: 2005-03-24; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Test Date: 2005-10-12; Ambient Temp: 23.0; Tissue Temp: 21.3

2.5cm from Body, PCS Ch.512, Ant Fixed, Charger mode


Area Scan (51x151x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.118 dB

Peak SAR (extrapolated) = 0.237 W/kg

SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.099 mW/g

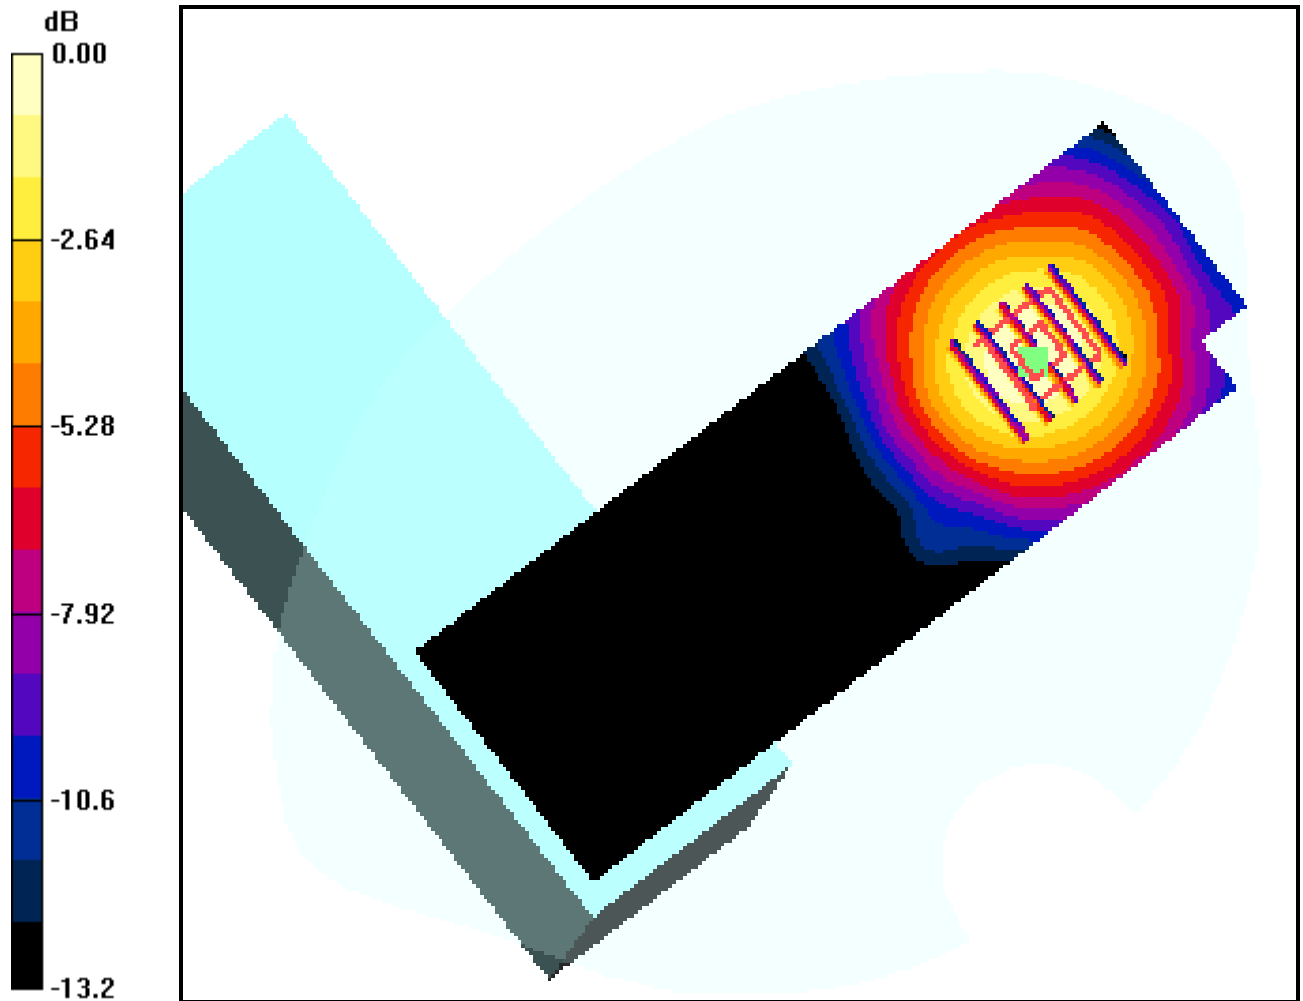

0 dB = 0.165mW/g

DIGITAL EMC CO., LTD

DUT: CRX-1000; Type: WLL

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1703; ConvF(4.81, 4.81, 4.81); Calibrated: 2005-03-24; Electronics: DAE3 Sn520

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Test Date: 2005-10-12; Ambient Temp: 23.0; Tissue Temp: 21.3

2.5cm from Body, PCS Ch.661, Ant Fixed, Charger mode


Area Scan (51x151x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.302 dB

Peak SAR (extrapolated) = 0.237 W/kg

SAR(1 g) = 0.174 mW/g; SAR(10 g) = 0.112 mW/g

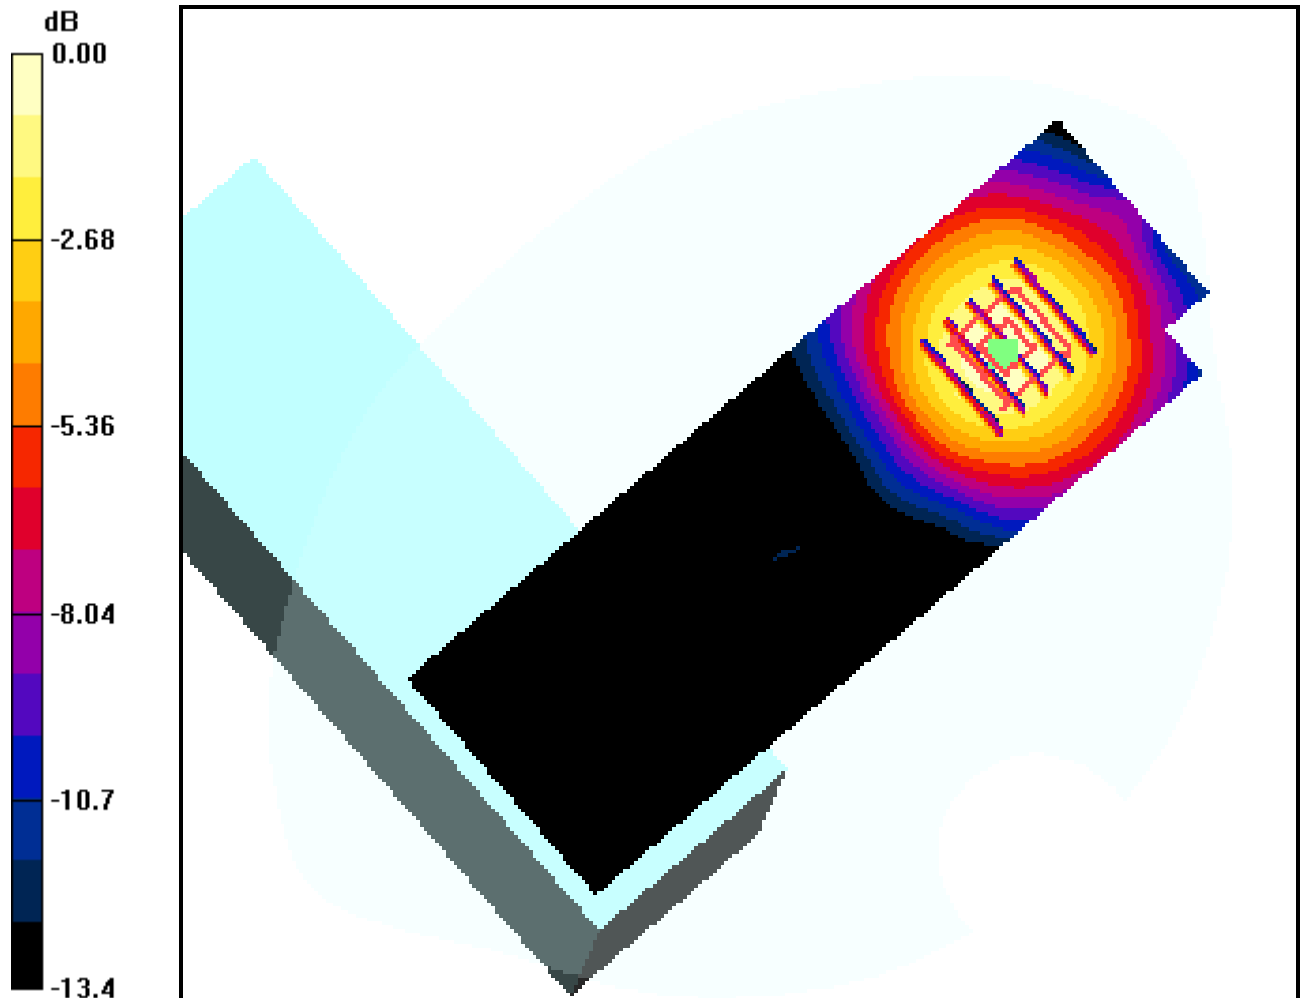

0 dB = 0.189mW/g

DIGITAL EMC CO., LTD

DUT: CRX-1000; Type: WLL

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.59 \text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1703; ConvF(4.81, 4.81, 4.81); Calibrated: 2005-03-24; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Test Date: 2005-10-12; Ambient Temp: 23.0; Tissue Temp: 21.3

2.5cm from Body, PCS Ch.810, Ant Fixed, Charger mode


Area Scan (51x151x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.148 mW/g; SAR(10 g) = 0.096 mW/g

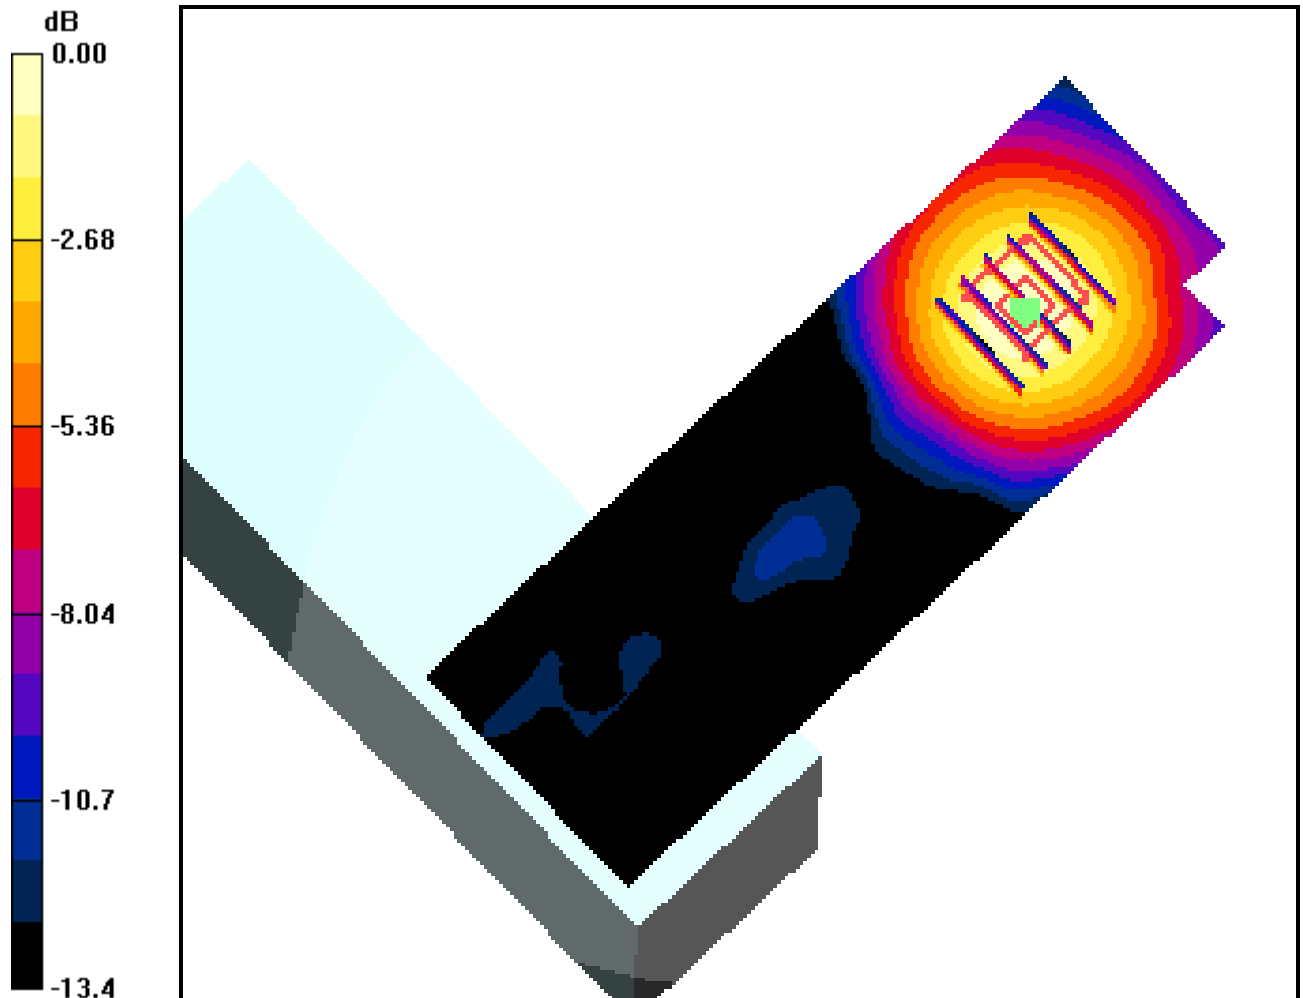

0 dB = 0.167mW/g