
SAR TEST PLOTS

DIGITAL EMC CO., LTD

DUT: 1950g; Type: WLL

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.979 \text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1703; ConvF(6.39, 6.39, 6.39); Calibrated: 2005-03-24; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Test Date: 2005-10-11; Ambient Temp: 23.0; Tissue Temp: 22.0

2.5cm from Body, GSM Ch.128, Ant Fixed, Charger mode


Area Scan (41x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.076 dB

Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.383 mW/g; SAR(10 g) = 0.247 mW/g

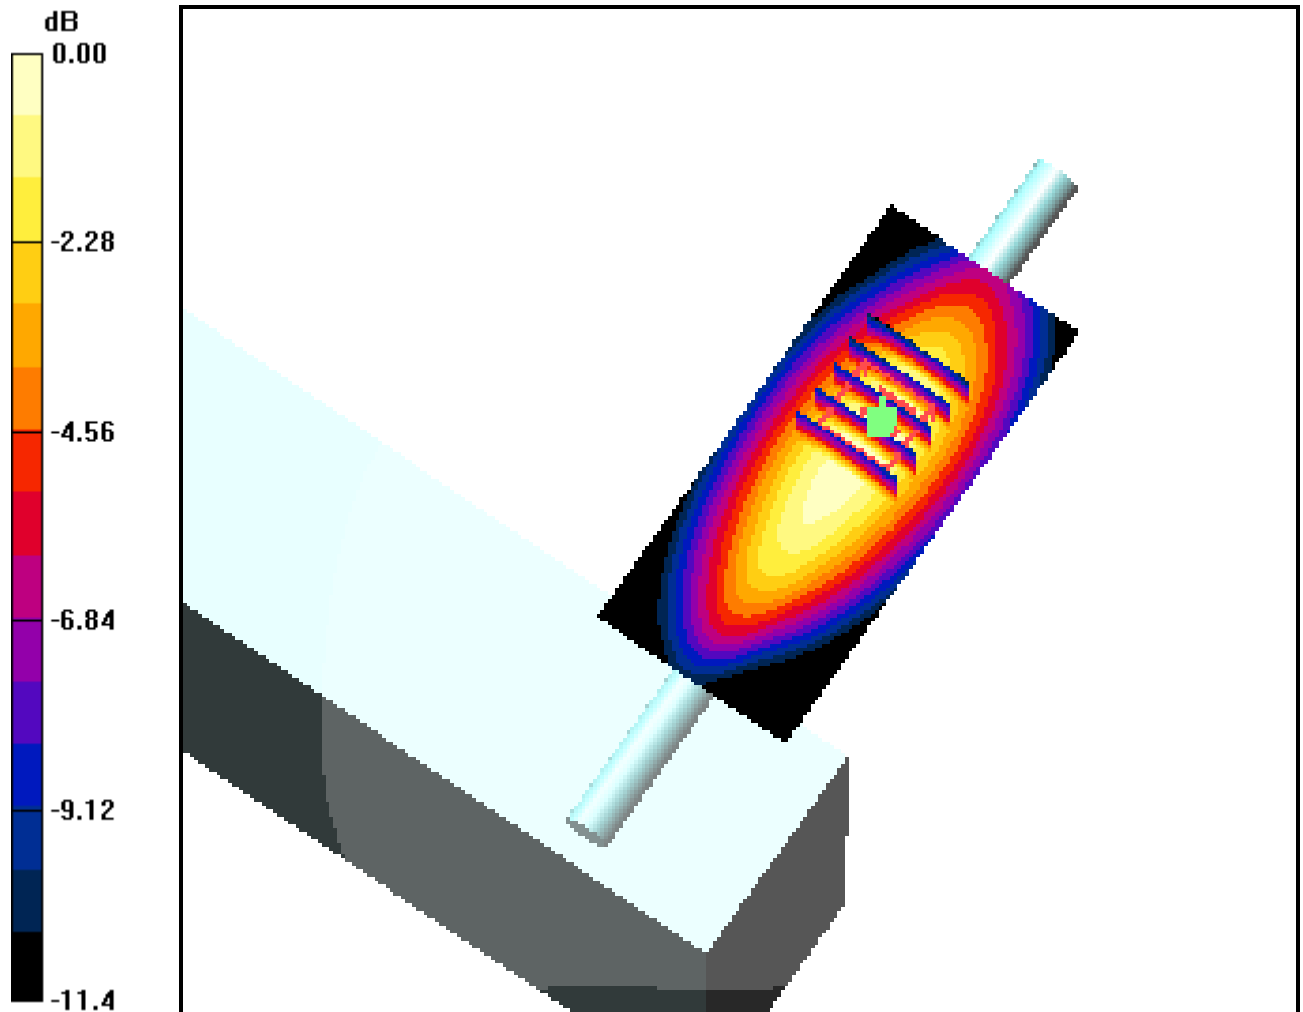

DIGITAL EMC CO., LTD

DUT: 1950g; Type: WLL

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.992 \text{ mho/m}$; $\epsilon_r = 53.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1703; ConvF(6.39, 6.39, 6.39); Calibrated: 2005-03-24; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Test Date: 2005-10-11; Ambient Temp: 23.0; Tissue Temp: 22.0

2.5cm from Body, GSM Ch.190, Ant Fixed, Charger mode


Area Scan (41x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.575 W/kg

SAR(1 g) = 0.405 mW/g; SAR(10 g) = 0.263 mW/g

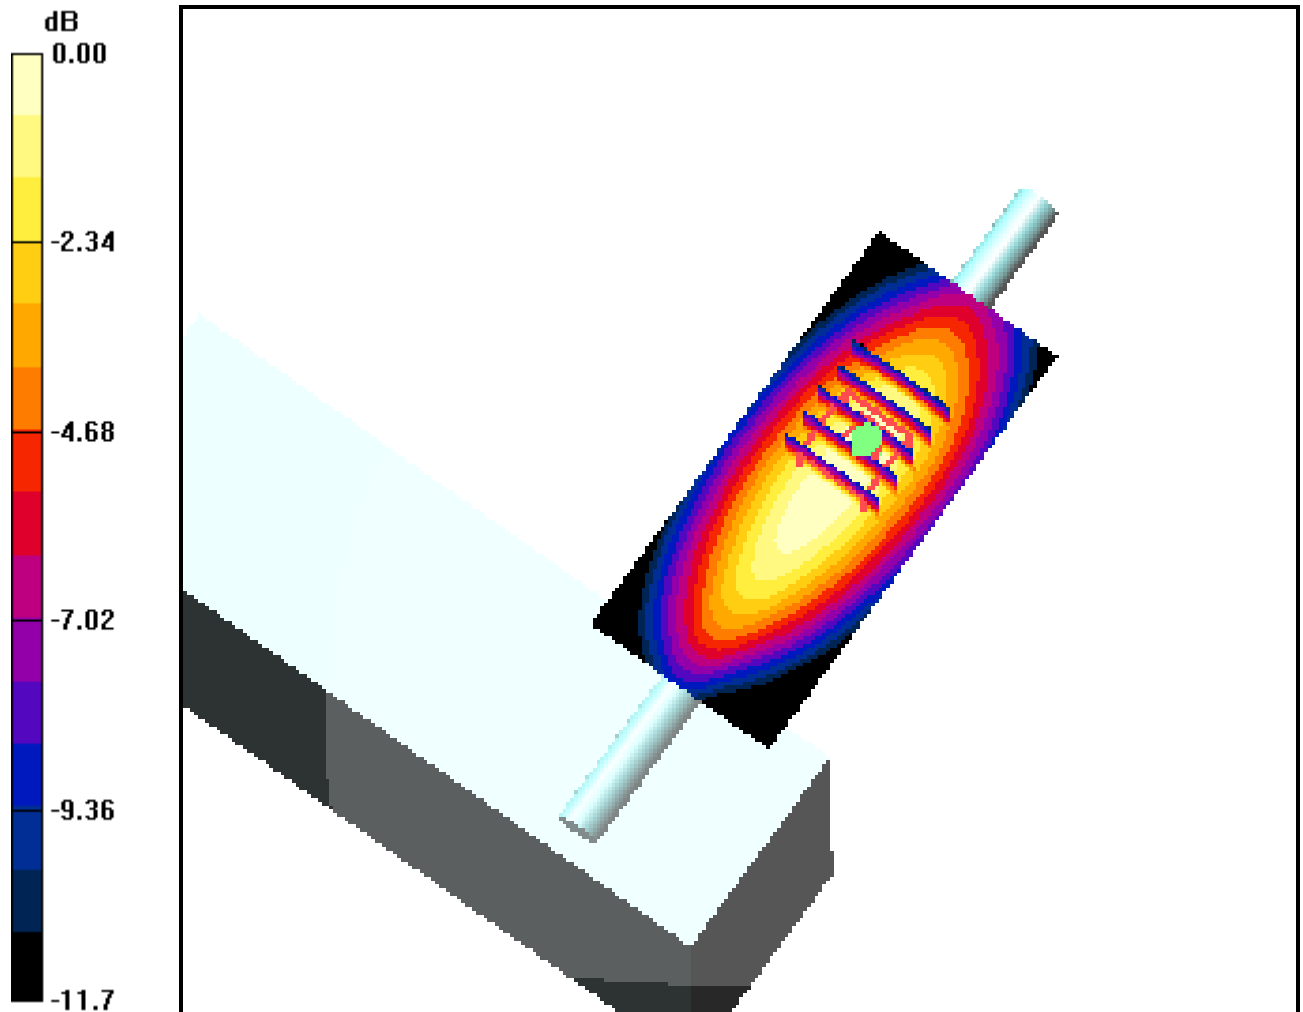

0 dB = 0.444mW/g

DIGITAL EMC CO., LTD

DUT: 1950g; Type: WLL

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1703; ConvF(6.39, 6.39, 6.39); Calibrated: 2005-03-24; Electronics: DAE3 Sn520
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Test Date: 2005-10-11; Ambient Temp: 23.0; Tissue Temp: 22.0

2.5cm from Body, GSM Ch.251, Ant Fixed, Charger mode


Area Scan (41x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.441 mW/g; SAR(10 g) = 0.291 mW/g

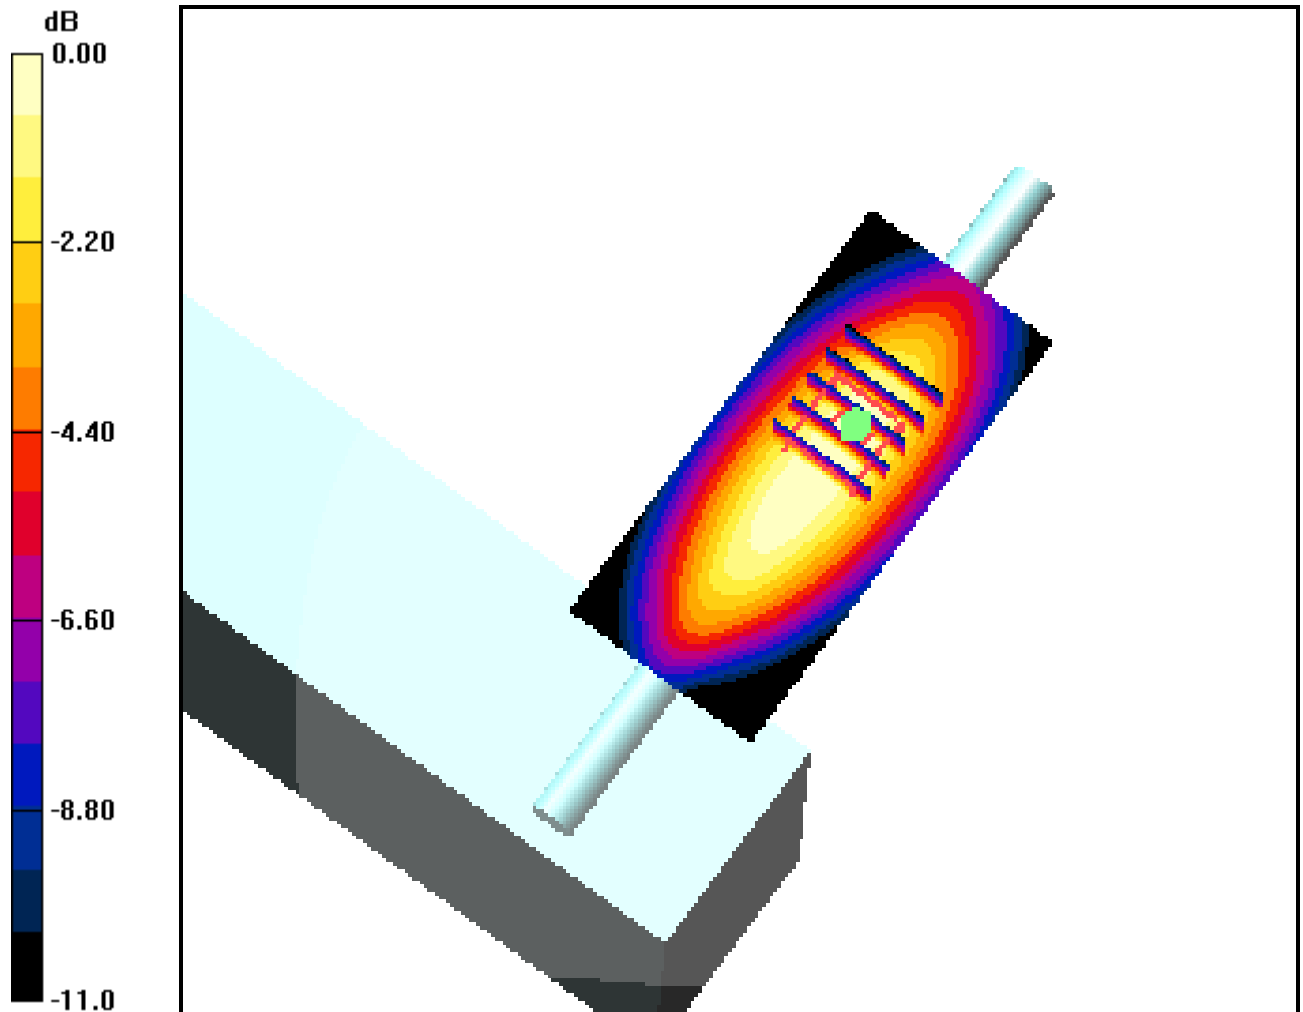

0 dB = 0.482mW/g

DIGITAL EMC CO., LTD

DUT: 1950g; Type: WLL

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1703; ConvF(4.81, 4.81, 4.81); Calibrated: 2005-03-24; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Test Date: 2005-10-12; Ambient Temp: 23.0; Tissue Temp: 21.3

2.5cm from Body, PCS Ch.512, Ant Fixed, Charger mode


Area Scan (51x151x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.250 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.119 mW/g

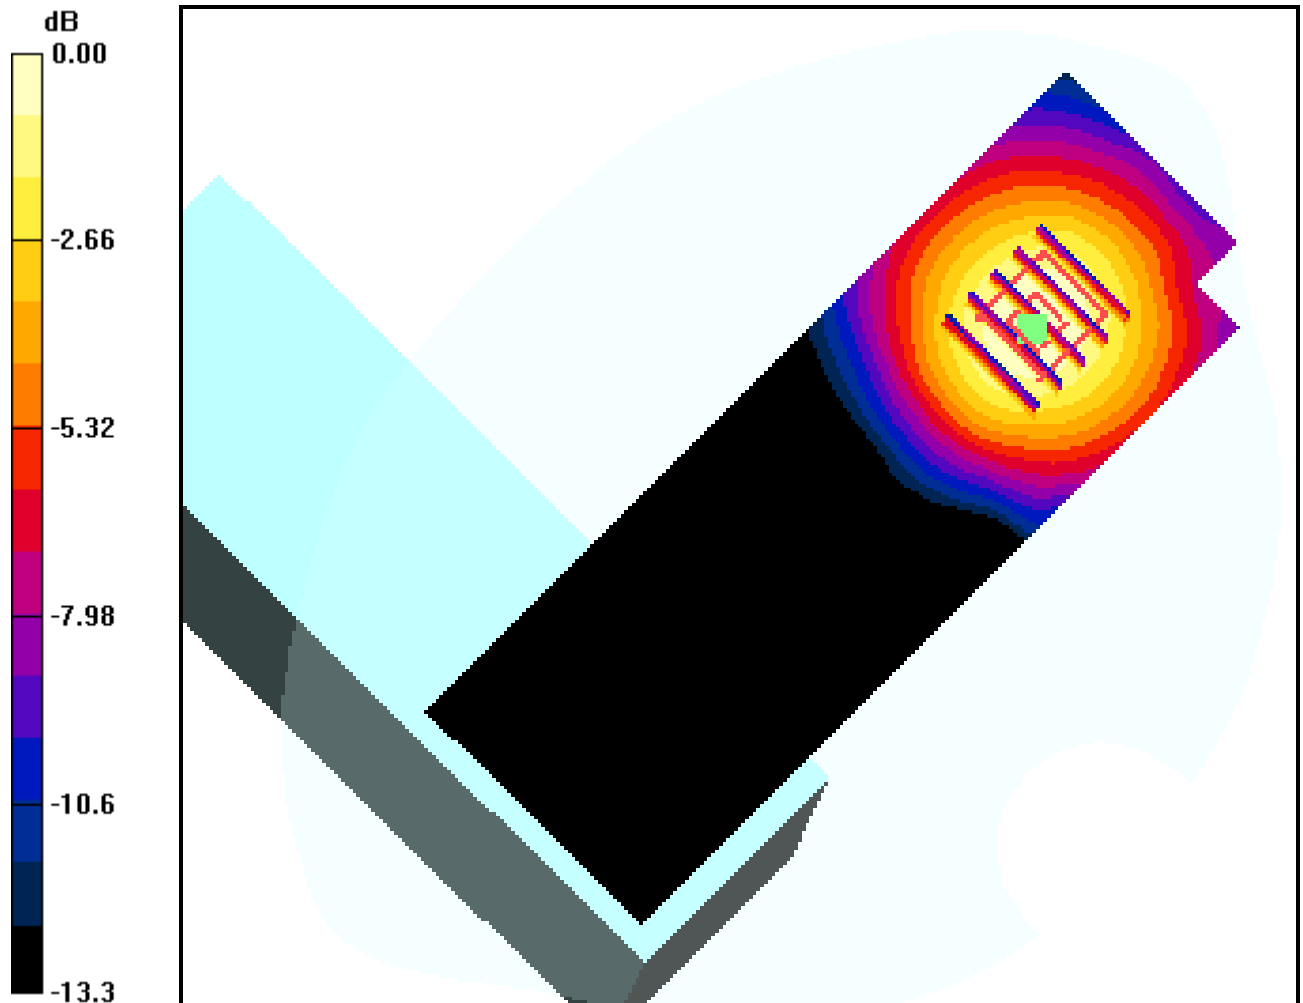

0 dB = 0.198mW/g

DIGITAL EMC CO., LTD

DUT: 1950g; Type: WLL

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1703; ConvF(4.81, 4.81, 4.81); Calibrated: 2005-03-24; Electronics: DAE3 Sn520

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Test Date: 2005-10-12; Ambient Temp: 23.0; Tissue Temp: 21.3

2.5cm from Body, PCS Ch.661, Ant Fixed, Charger mode


Area Scan (51x151x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.172 dB

Peak SAR (extrapolated) = 0.263 W/kg

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.117 mW/g

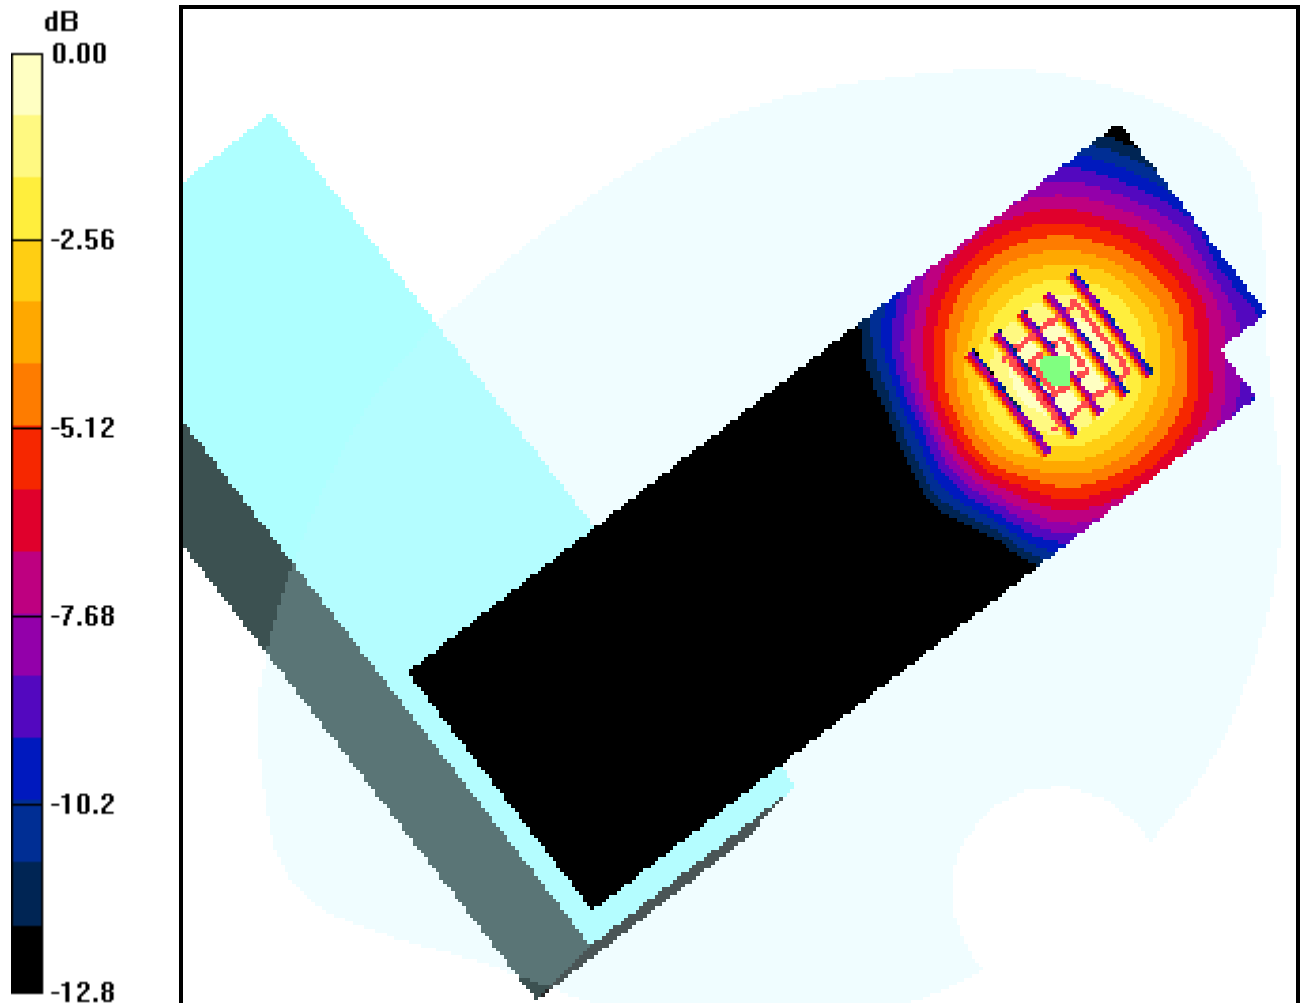

0 dB = 0.194mW/g

DIGITAL EMC CO., LTD

DUT: 1950g; Type: WLL

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.59 \text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1703; ConvF(4.81, 4.81, 4.81); Calibrated: 2005-03-24; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Test Date: 2005-10-12; Ambient Temp: 23.0; Tissue Temp: 21.3

2.5cm from Body, PCS Ch.810, Ant Fixed, Charger mode


Area Scan (51x151x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.214 dB

Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.108 mW/g

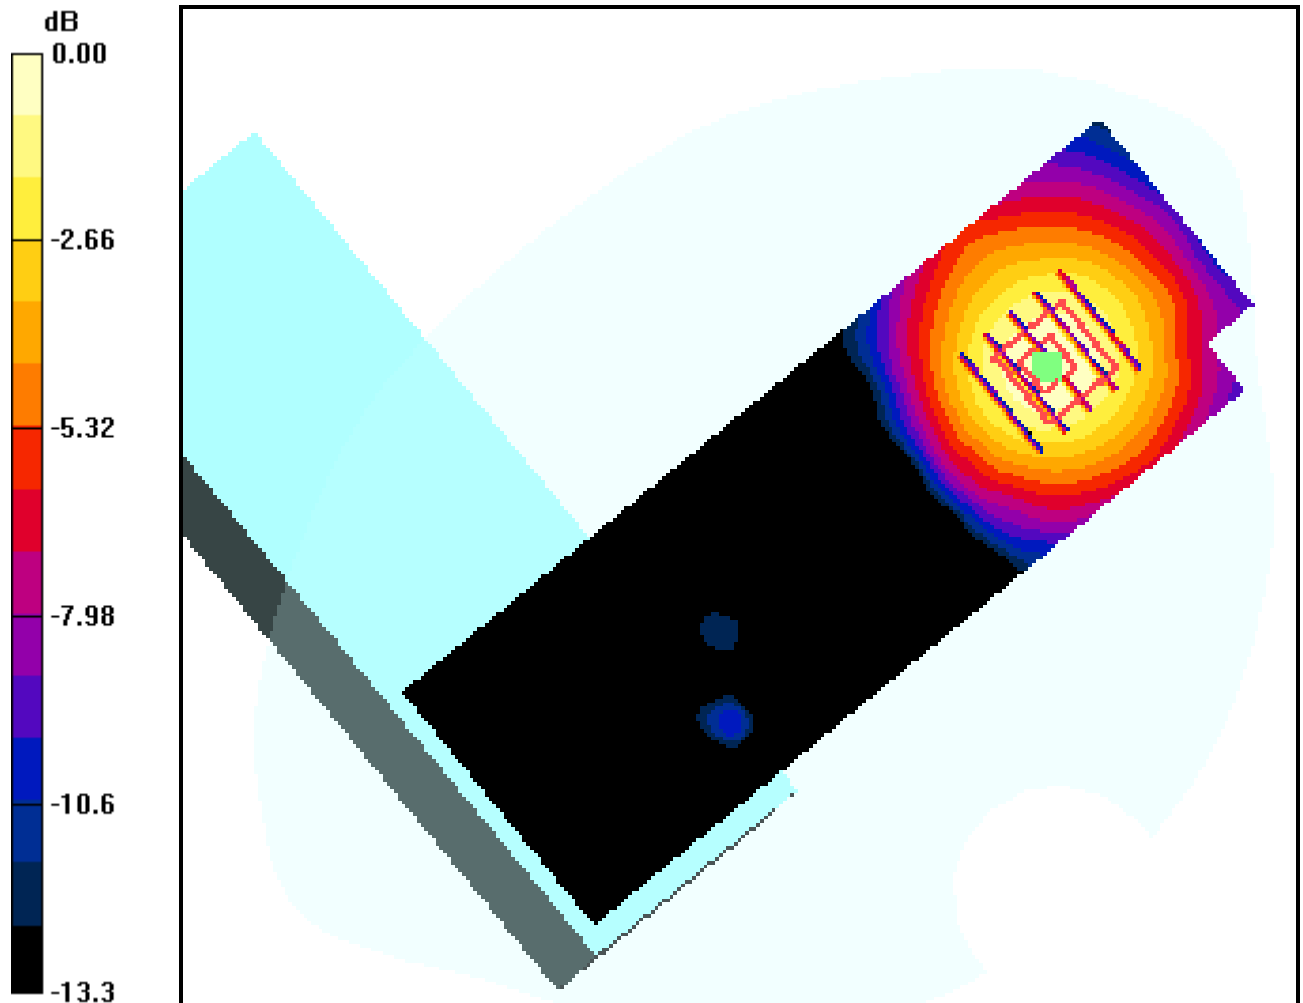

0 dB = 0.179mW/g