

DIGITAL EMC CO., LTD

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 40.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Test Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

Dipole Validation


Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.001 dB

Peak SAR (extrapolated) = 3.79 W/kg

SAR(1 g) = 2.51 mW/g; SAR(10 g) = 1.64 mW/g

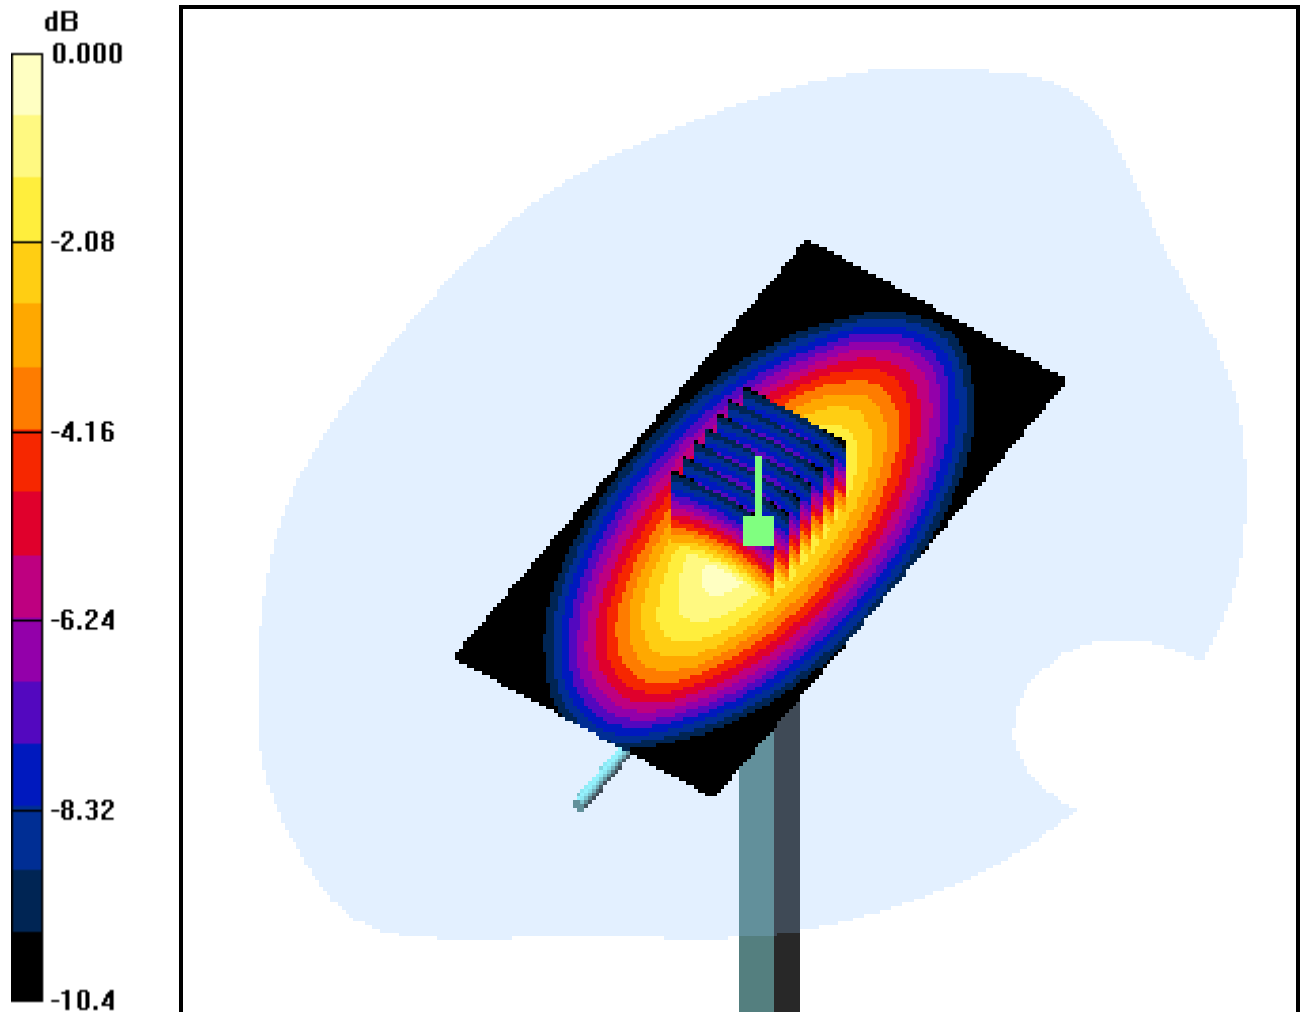

0 dB = 2.71mW/g

DIGITAL EMC CO., LTD

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d029

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Test Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Dipole Validation


Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.125 dB

Peak SAR (extrapolated) = 18.0 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.37 mW/g

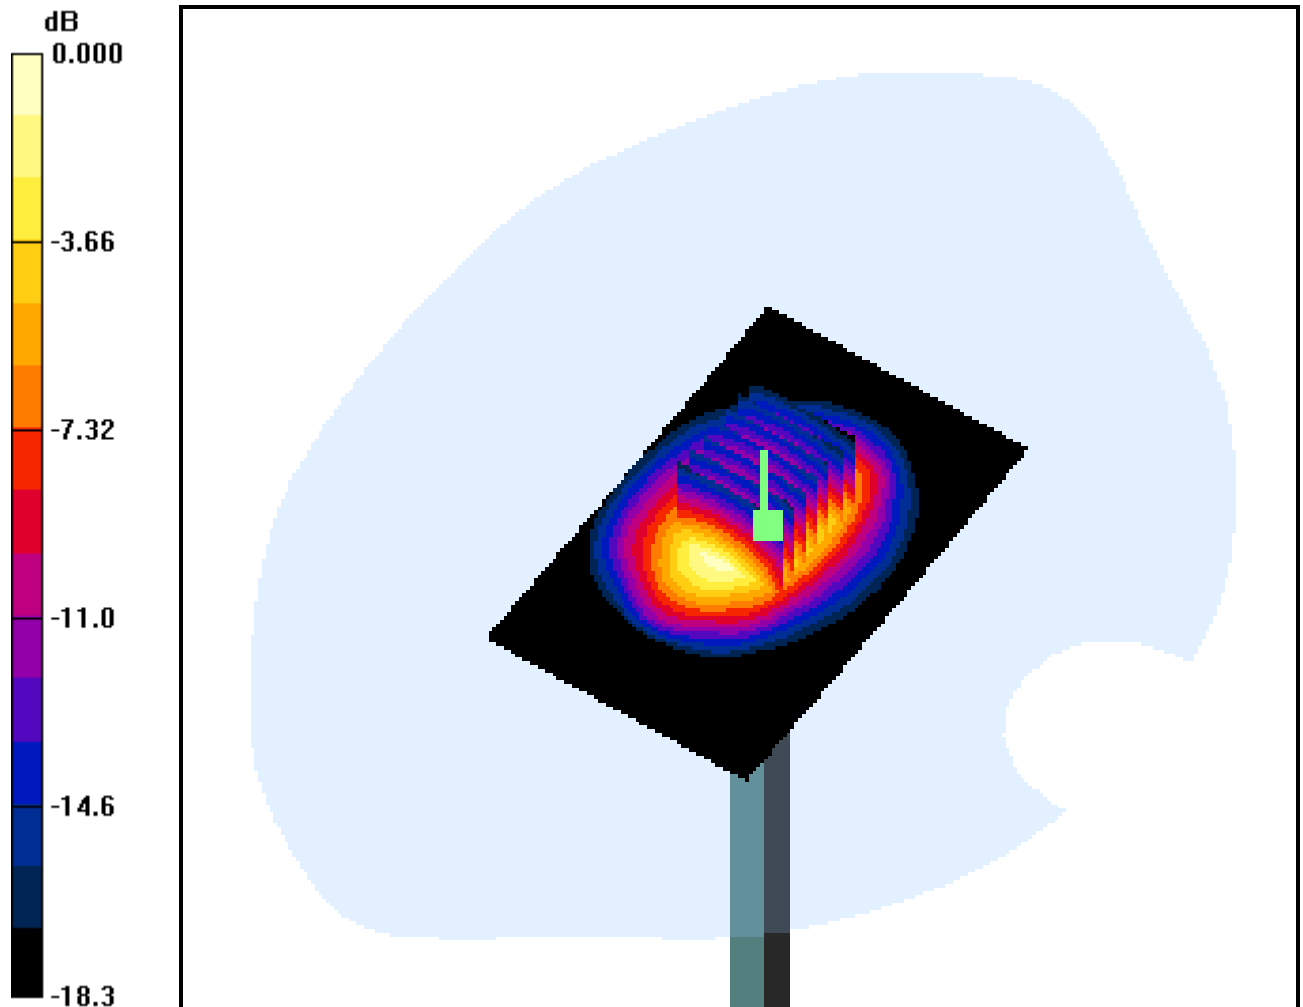

0 dB = 11.5mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.871 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

Right Touch GSM Ch.128, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.136 dB

Peak SAR (extrapolated) = 0.678 W/kg

SAR(1 g) = 0.482 mW/g; SAR(10 g) = 0.319 mW/g

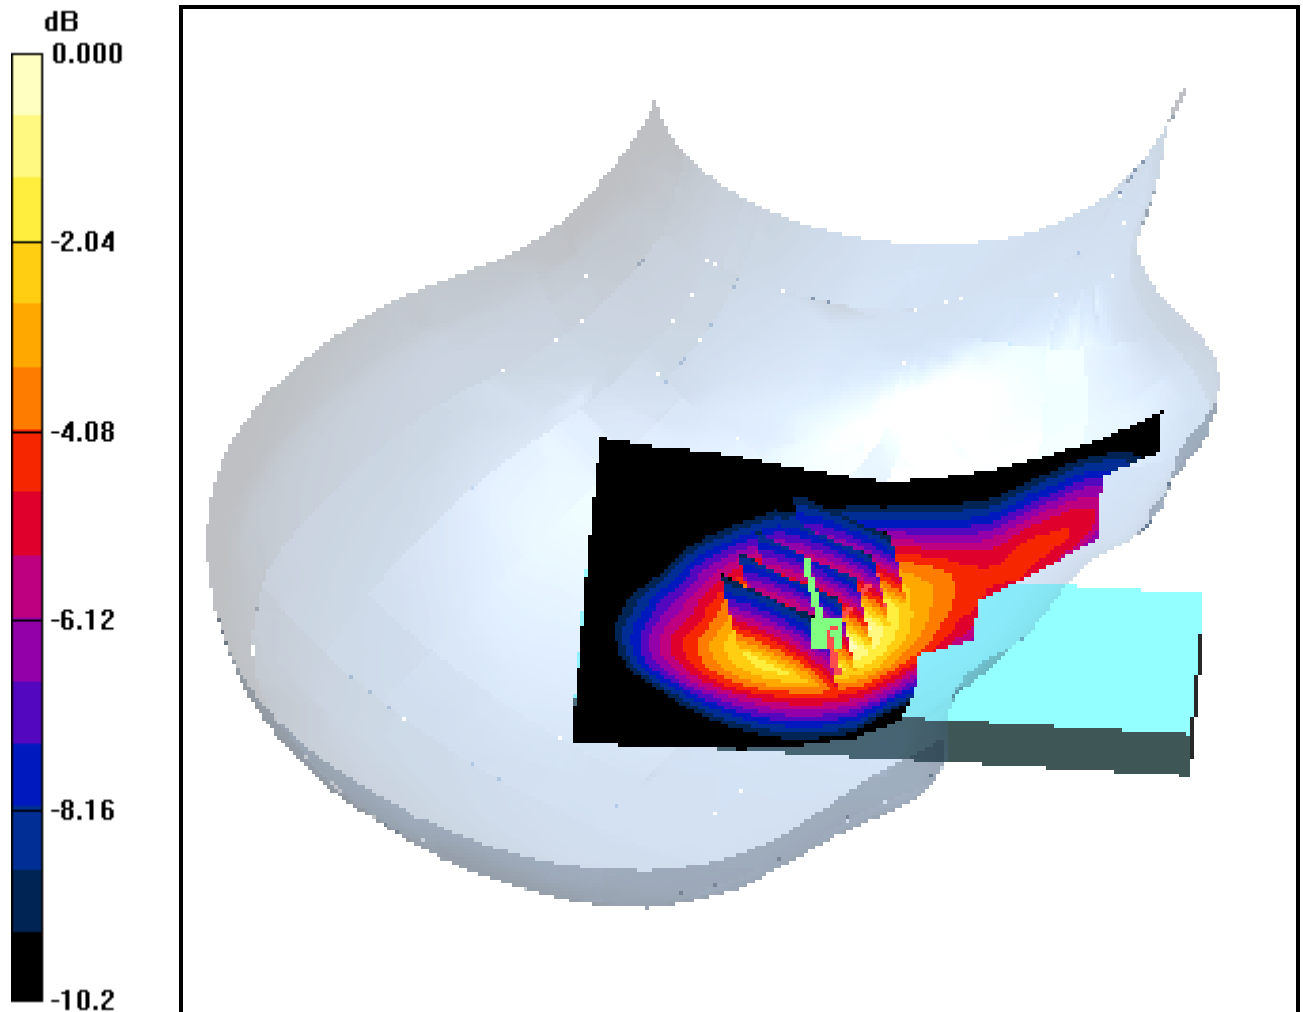

0 dB = 0.522mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.883 \text{ mho/m}$; $\epsilon_r = 40.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

Right Touch GSM Ch.190, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.117 dB

Peak SAR (extrapolated) = 0.899 W/kg

SAR(1 g) = 0.619 mW/g; SAR(10 g) = 0.404 mW/g

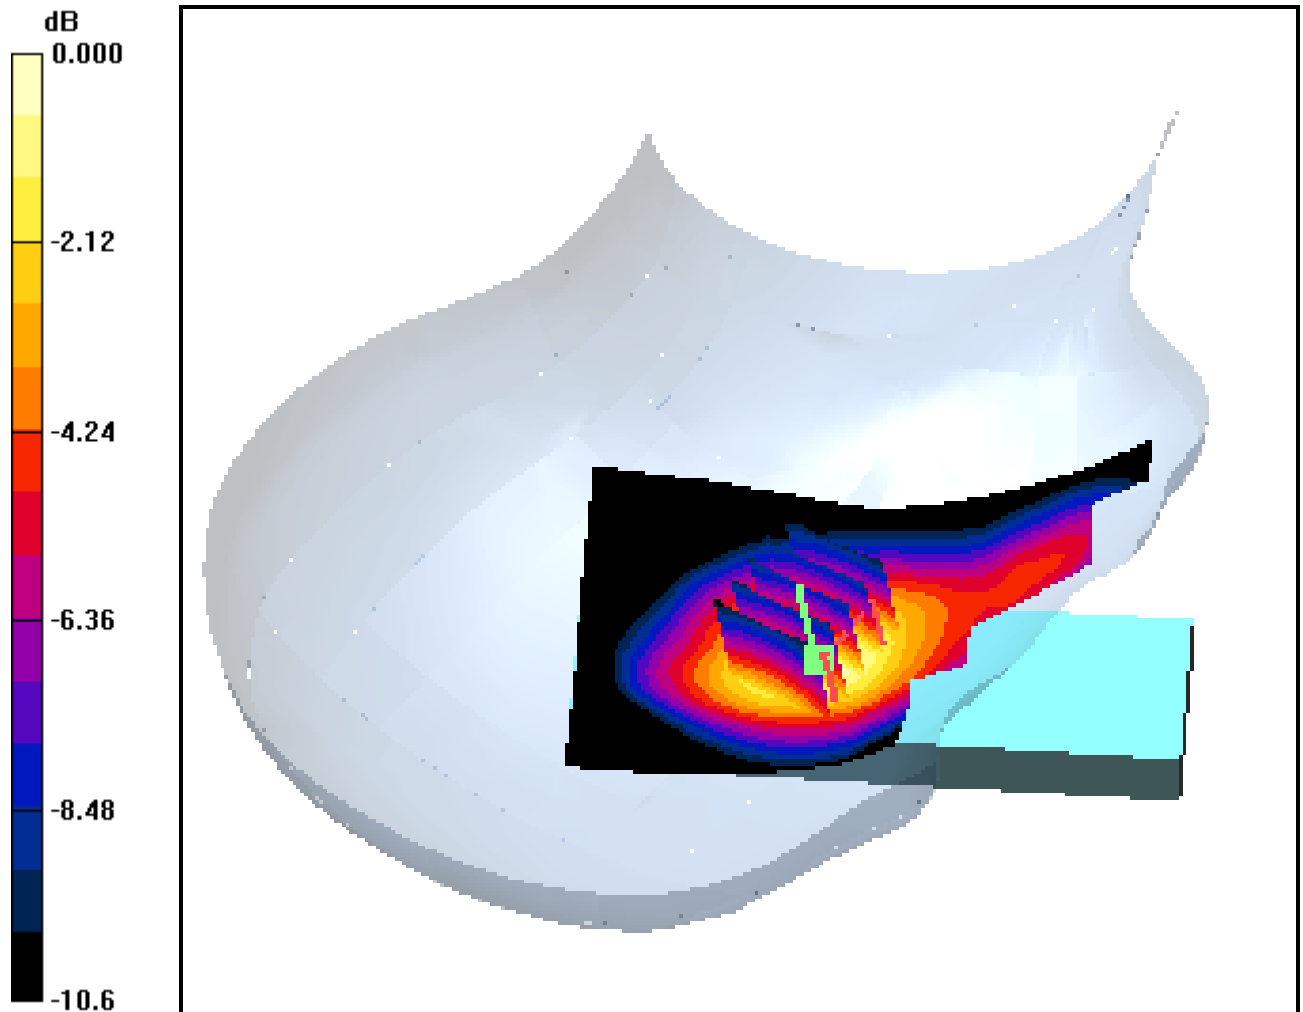

0 dB = 0.669mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.892 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

Right Touch GSM Ch.251, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.098 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.723 mW/g; SAR(10 g) = 0.472 mW/g

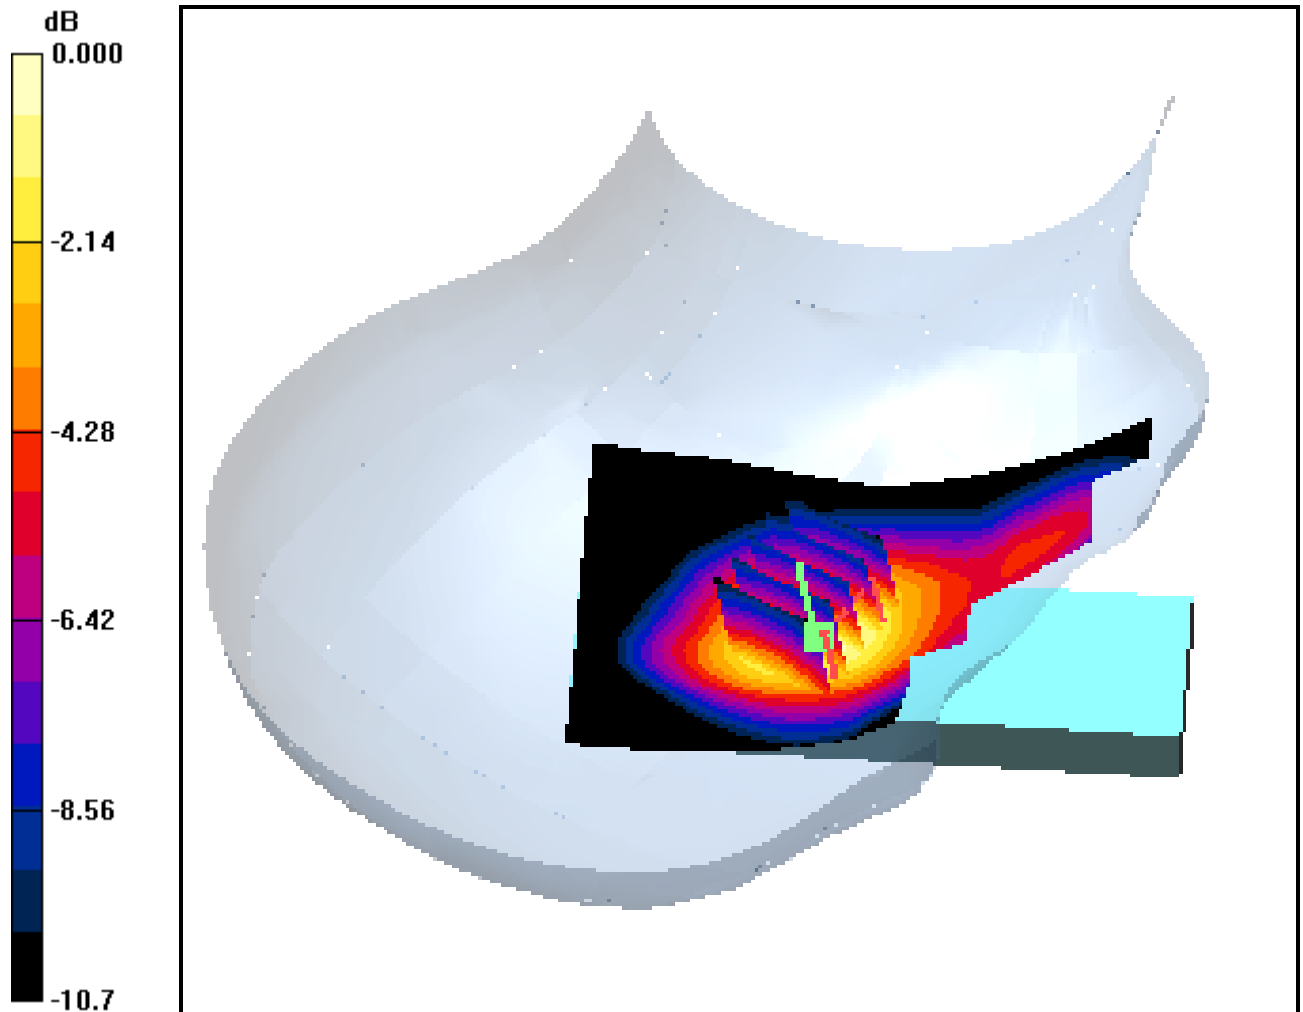

0 dB = 0.781mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.883 \text{ mho/m}$; $\epsilon_r = 40.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

Right Tilt GSM Ch.190, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.190 dB

Peak SAR (extrapolated) = 0.303 W/kg

SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.170 mW/g

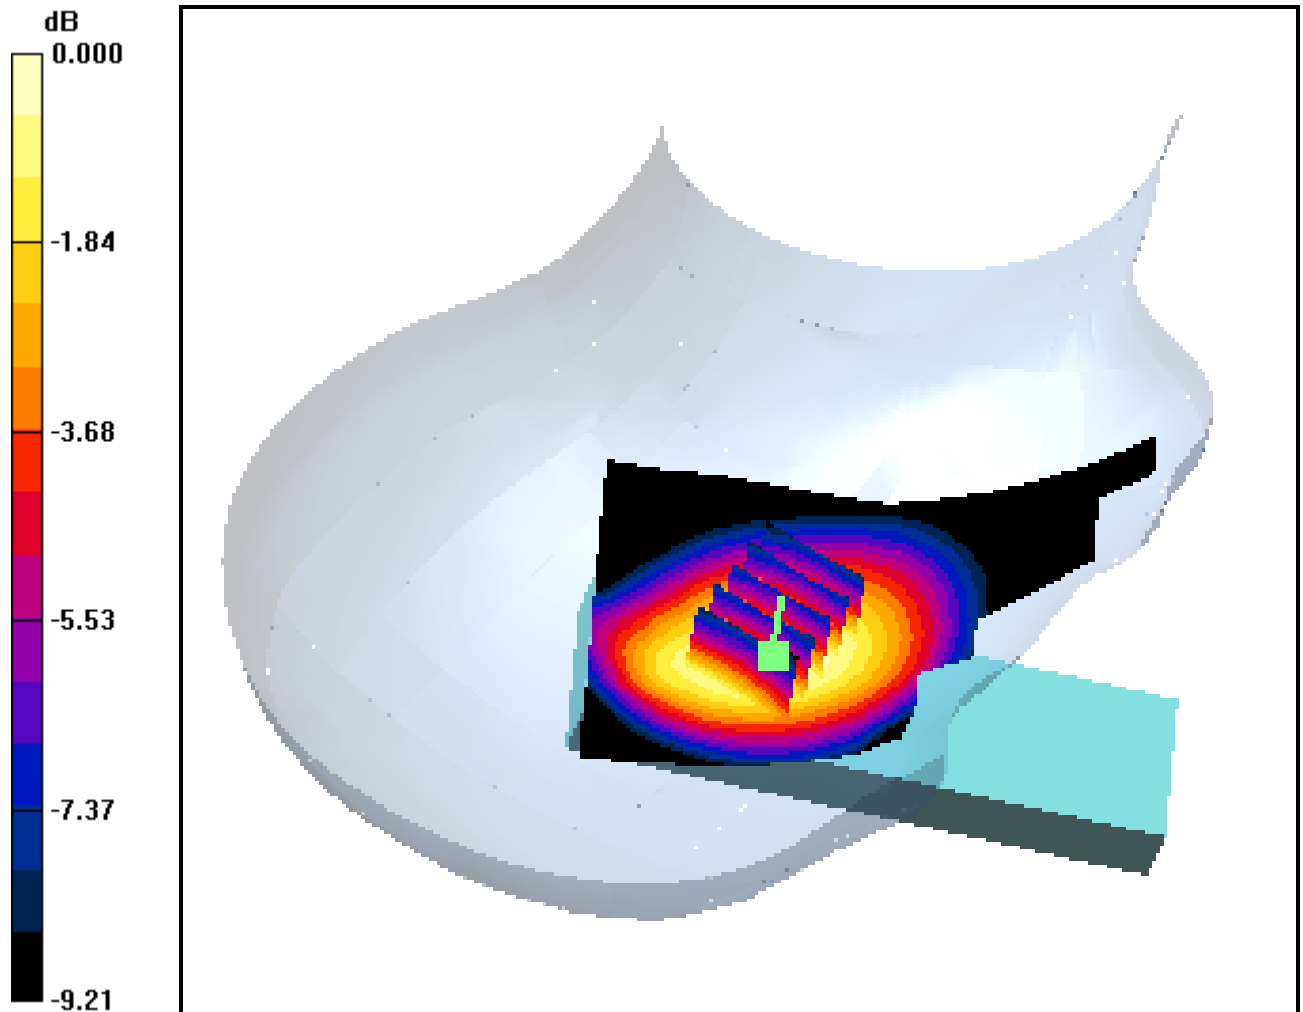

0 dB = 0.251mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.871 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

Left Touch GSM Ch.128, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.263 dB

Peak SAR (extrapolated) = 0.816 W/kg

SAR(1 g) = 0.585 mW/g; SAR(10 g) = 0.389 mW/g

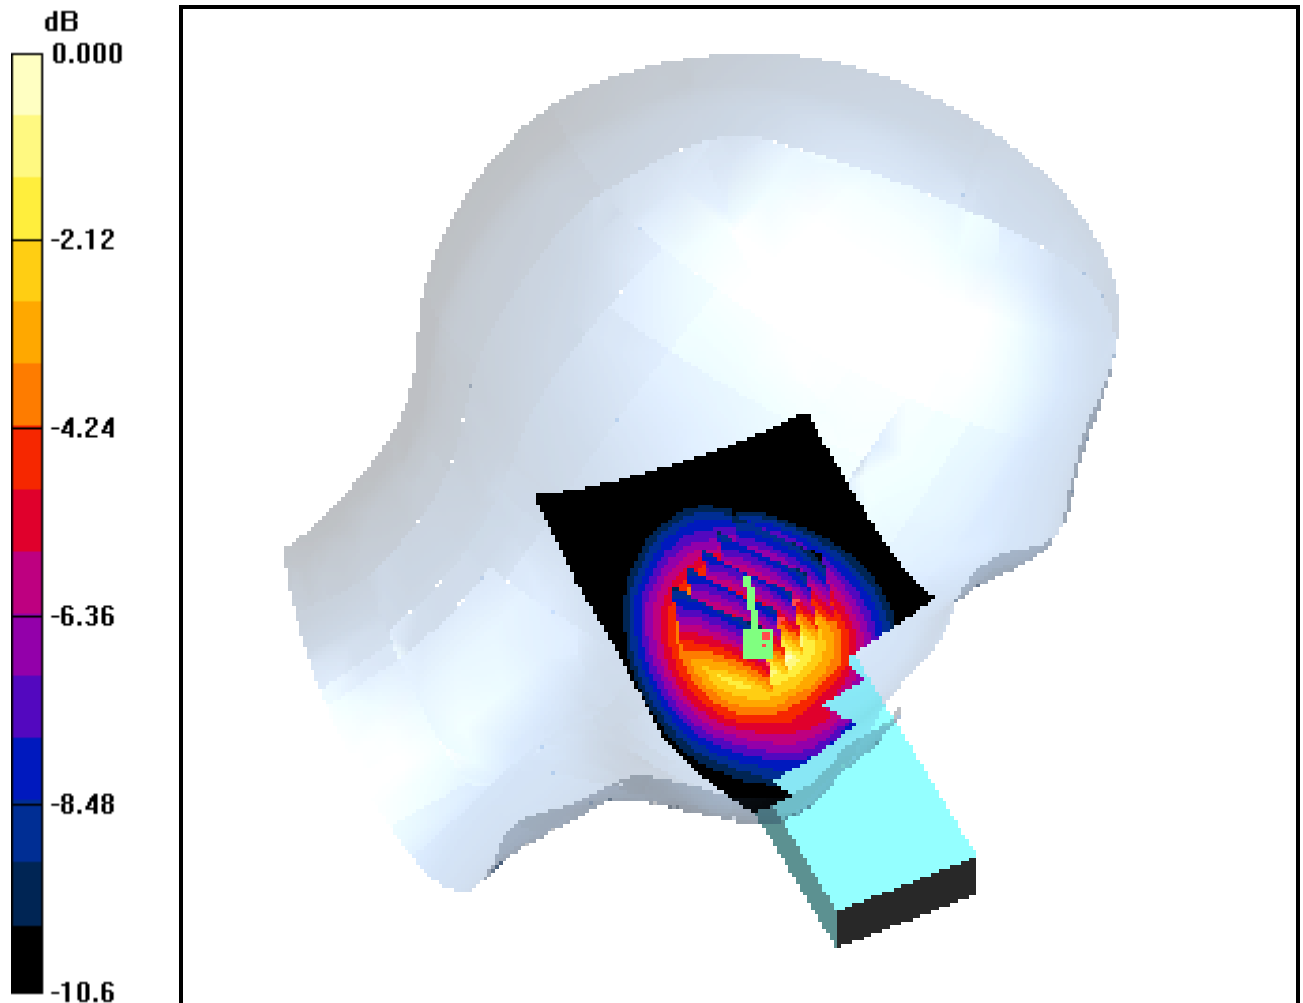

0 dB = 0.632mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.883 \text{ mho/m}$; $\epsilon_r = 40.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

Left Touch GSM Ch.190, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.193 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.697 mW/g; SAR(10 g) = 0.456 mW/g

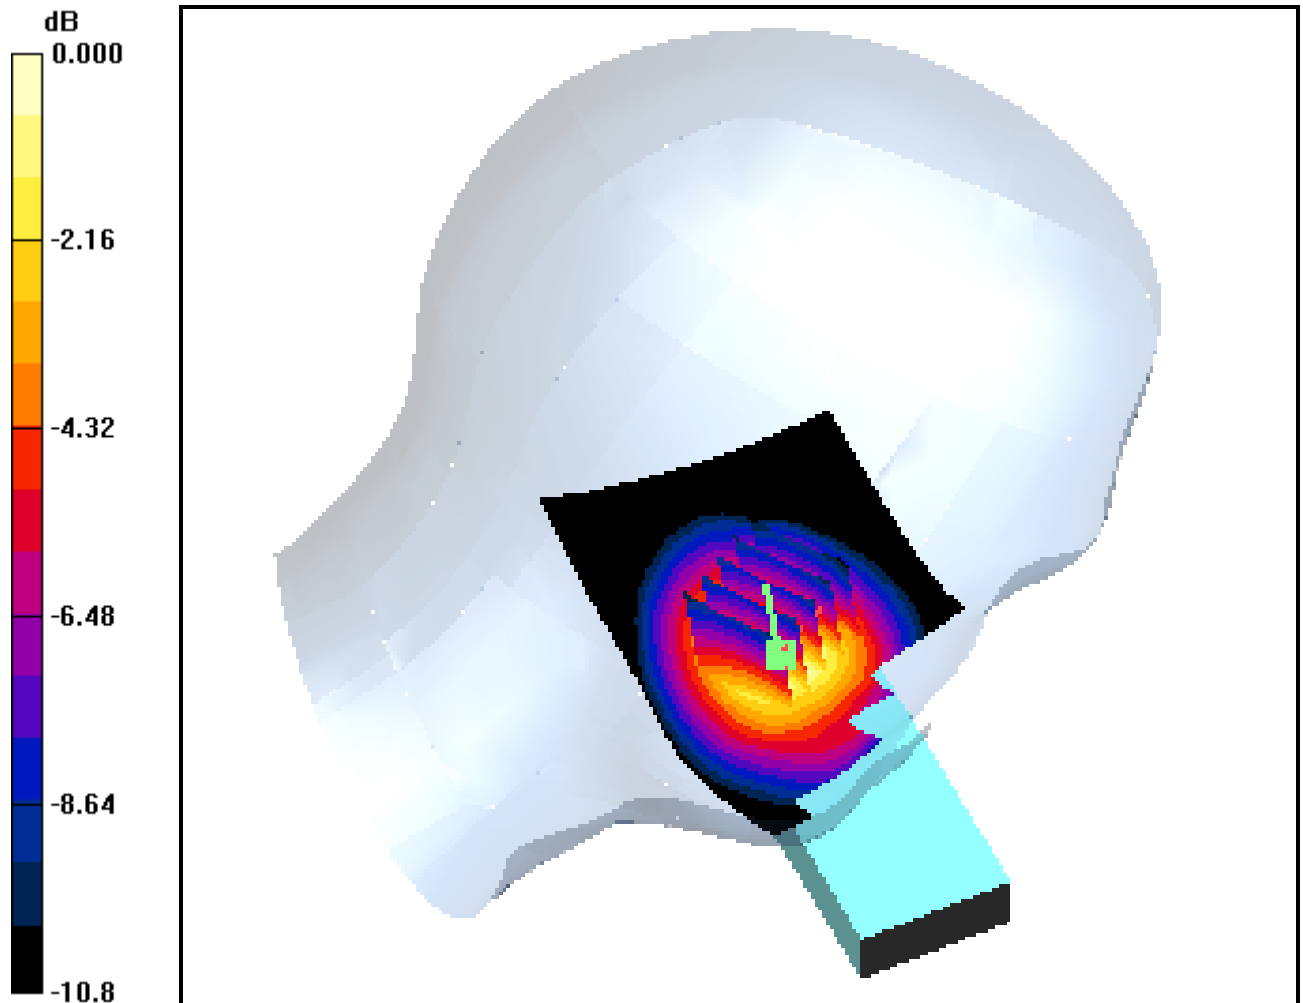

0 dB = 0.757mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.892 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

Left Touch GSM Ch.251, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.182 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.824 mW/g; SAR(10 g) = 0.538 mW/g

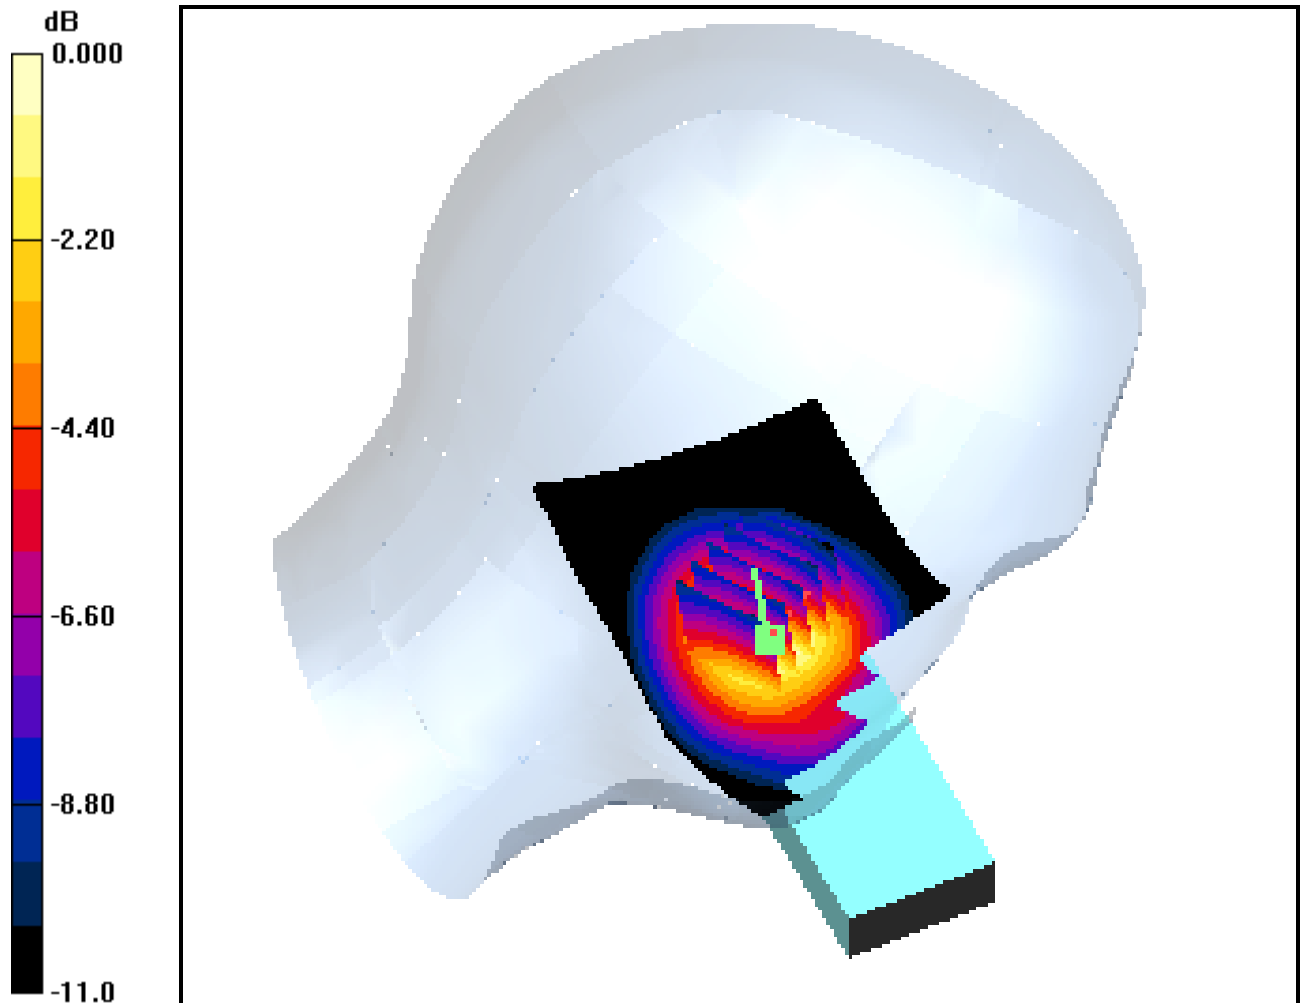

0 dB = 0.889mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.883 \text{ mho/m}$; $\epsilon_r = 40.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

Left Tilt GSM Ch.190, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.277 W/kg

SAR(1 g) = 0.215 mW/g; SAR(10 g) = 0.156 mW/g

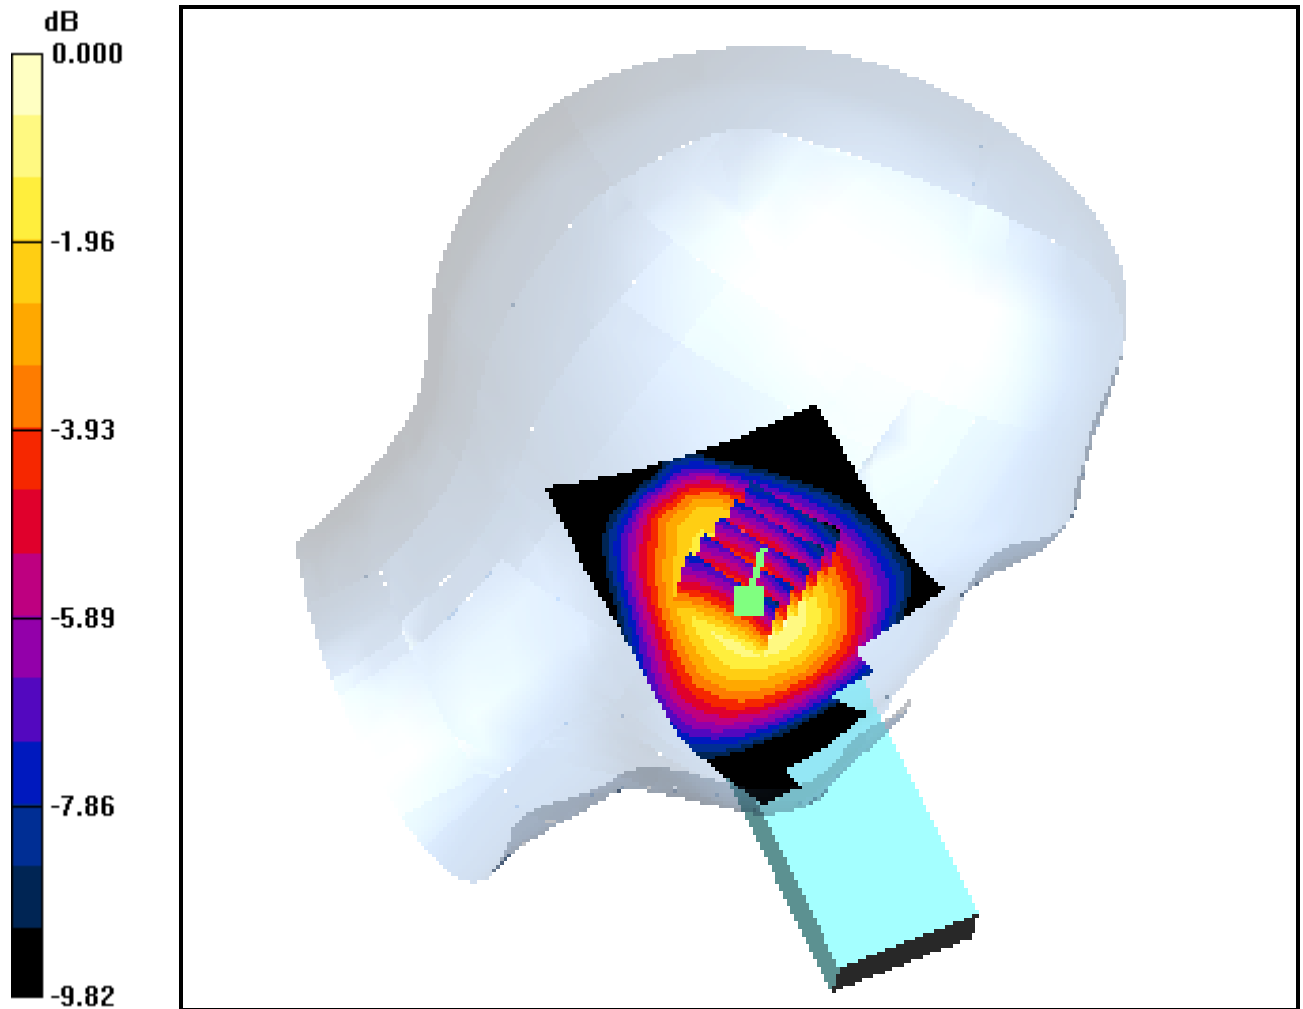

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.892 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

Left Touch GSM Ch.251, Ant Intenna, Standard Battery With BT ON


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.166 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.867 mW/g; SAR(10 g) = 0.565 mW/g

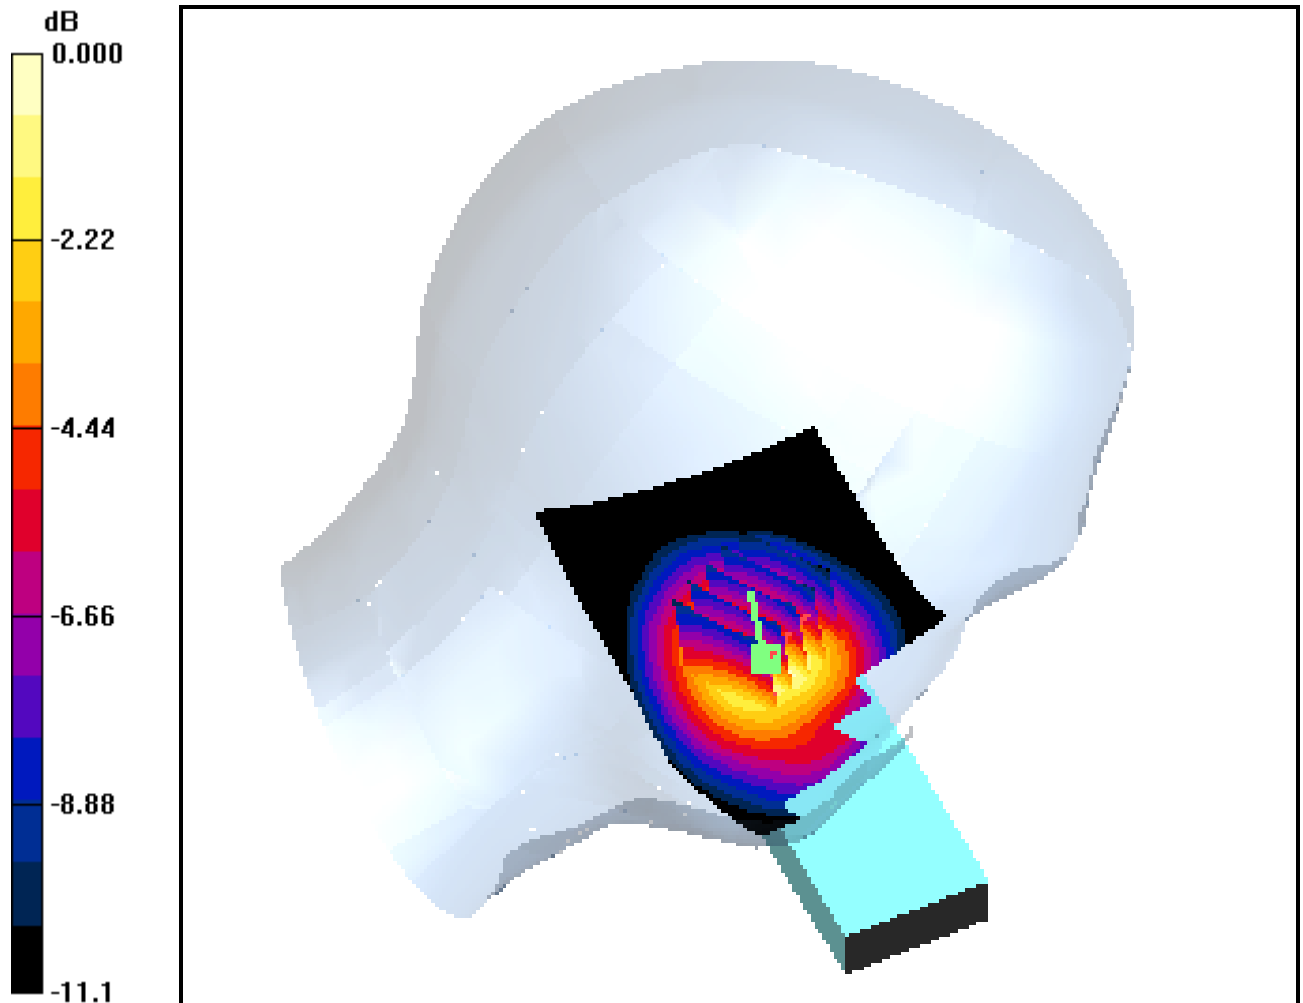

0 dB = 0.928mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.22, 6.22, 6.22); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Test Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

1.5cm from Body, GSM Ch.128, Ant Intenna, Standard Battery GPRS Mode


Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.251 dB

Peak SAR (extrapolated) = 0.739 W/kg

SAR(1 g) = 0.555 mW/g; SAR(10 g) = 0.384 mW/g

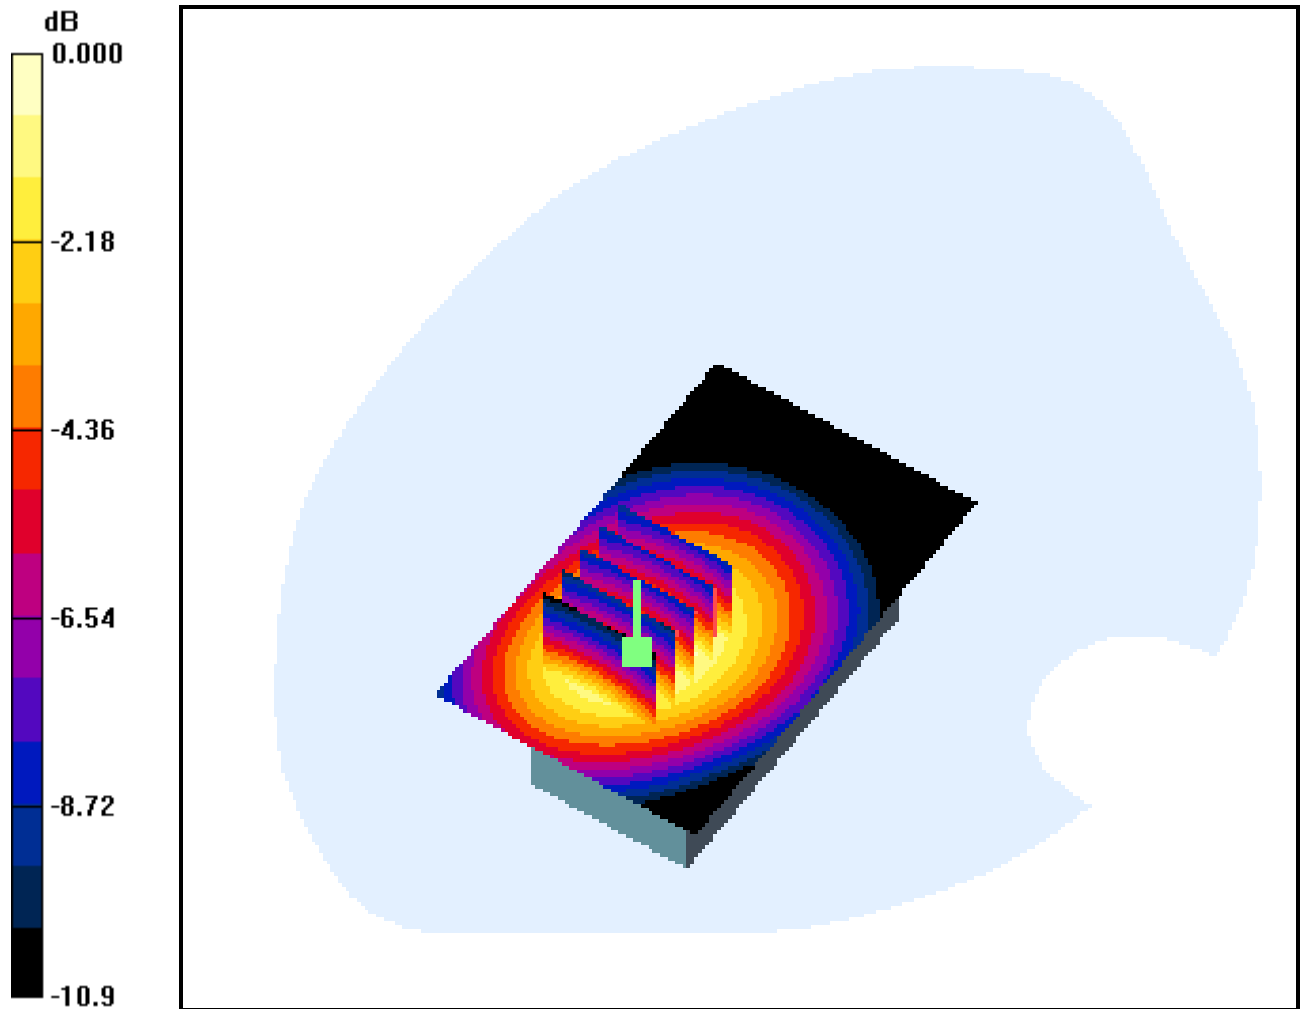

0 dB = 0.596mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.979 \text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.22, 6.22, 6.22); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Test Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

1.5cm from Body, GSM Ch.190, Ant Intenna, Standard Battery GPRS Mode


Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.312 dB

Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.428 mW/g

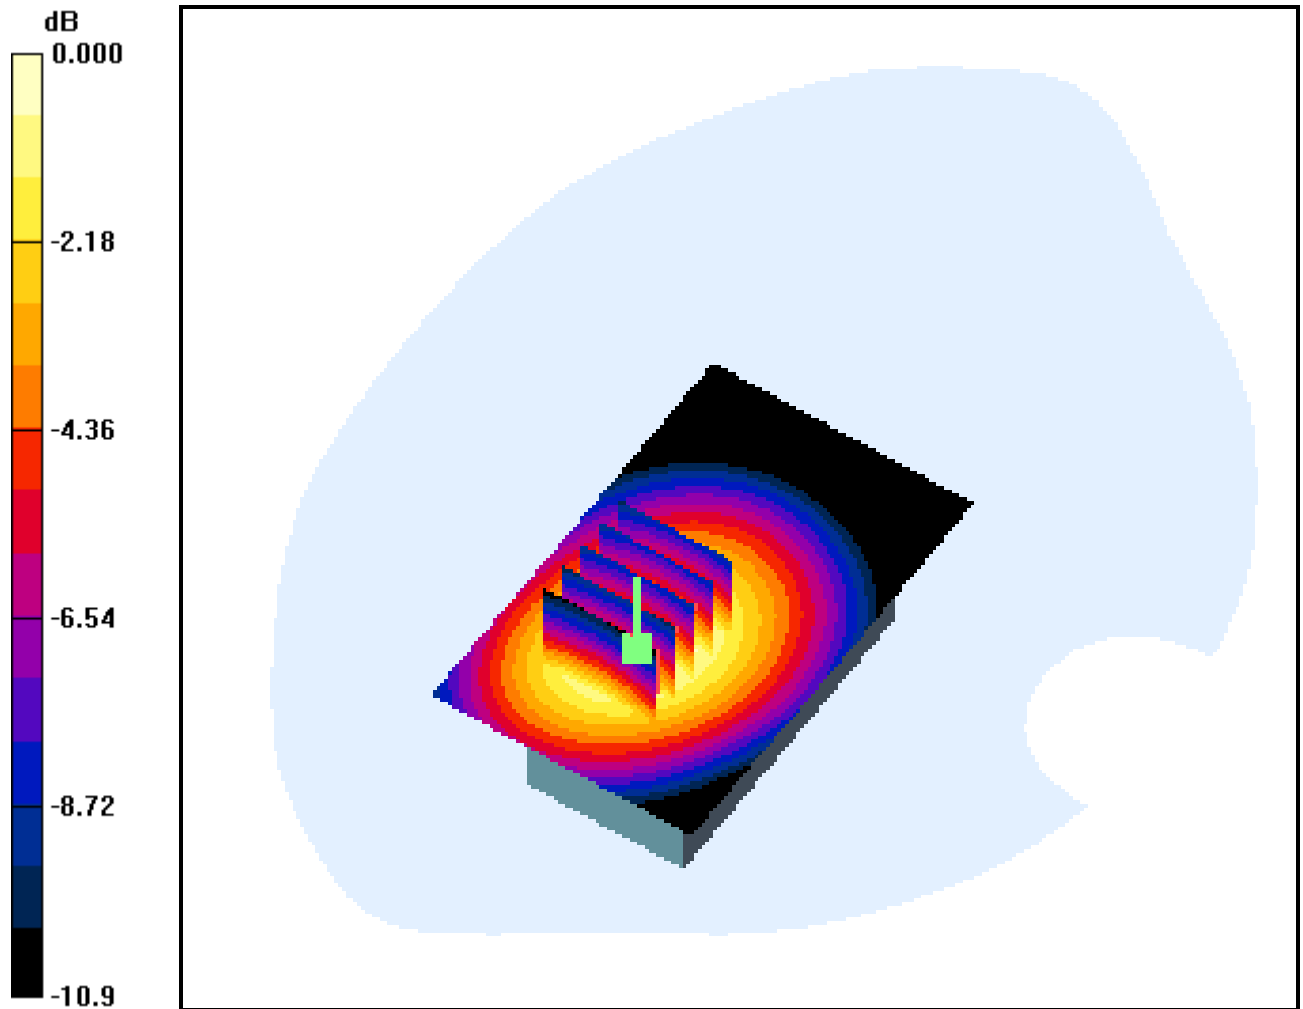

0 dB = 0.670mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.991 \text{ mho/m}$; $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.22, 6.22, 6.22); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Test Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

1.5cm from Body, GSM Ch.251, Ant Intenna, Standard Battery GPRS Mode


Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.286 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.789 mW/g; SAR(10 g) = 0.540 mW/g

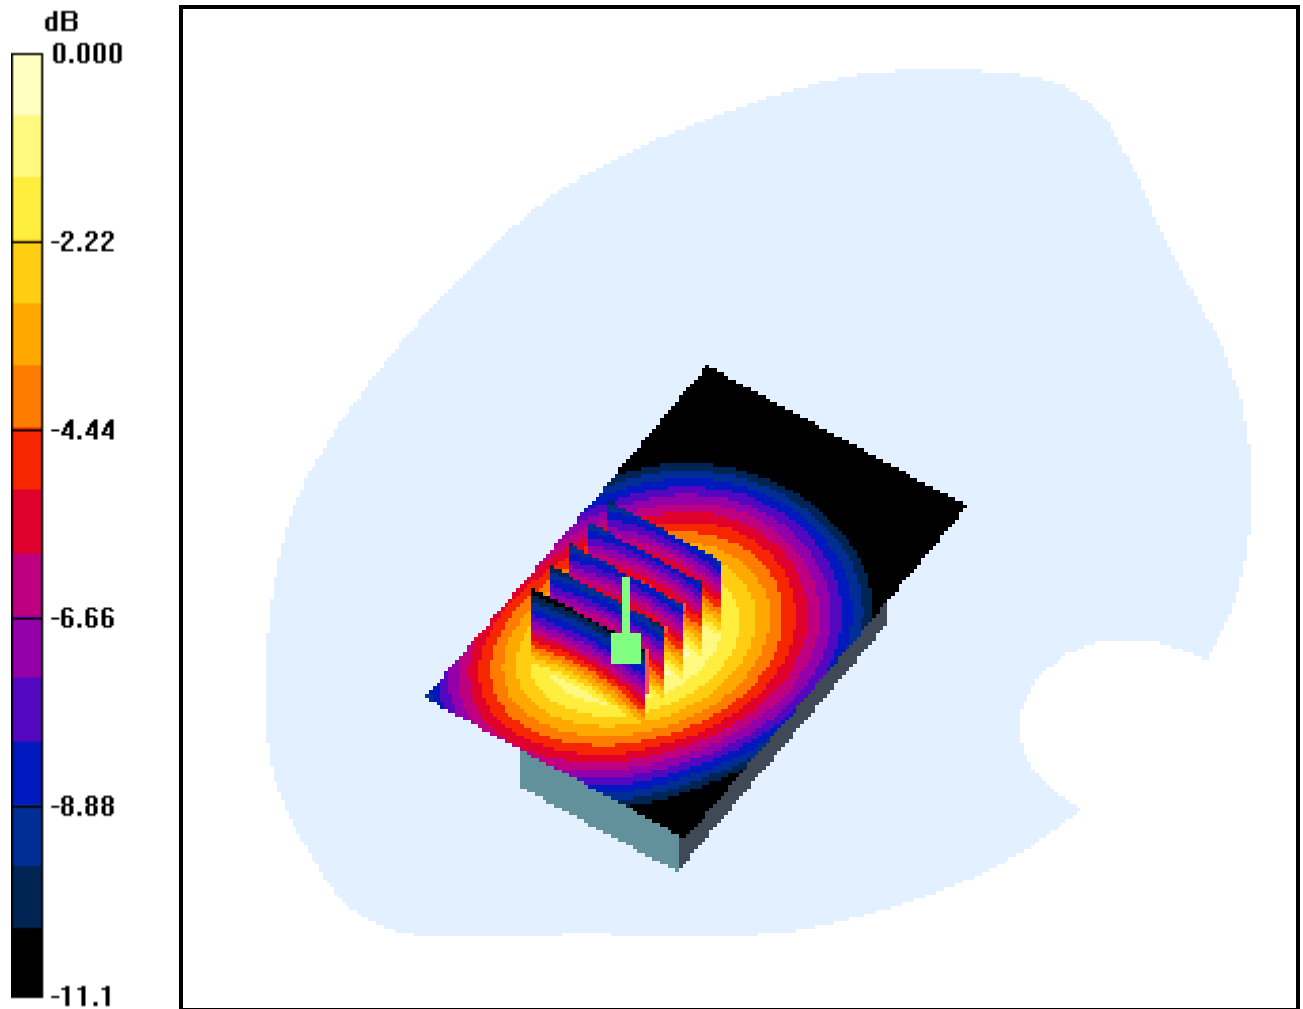

0 dB = 0.847mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.991 \text{ mho/m}$; $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.22, 6.22, 6.22); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Test Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

1.5cm from Body, GSM Ch.251, Ant Intenna, Standard Battery GPRS Mode With BT ON


Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.116 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.746 mW/g; SAR(10 g) = 0.511 mW/g

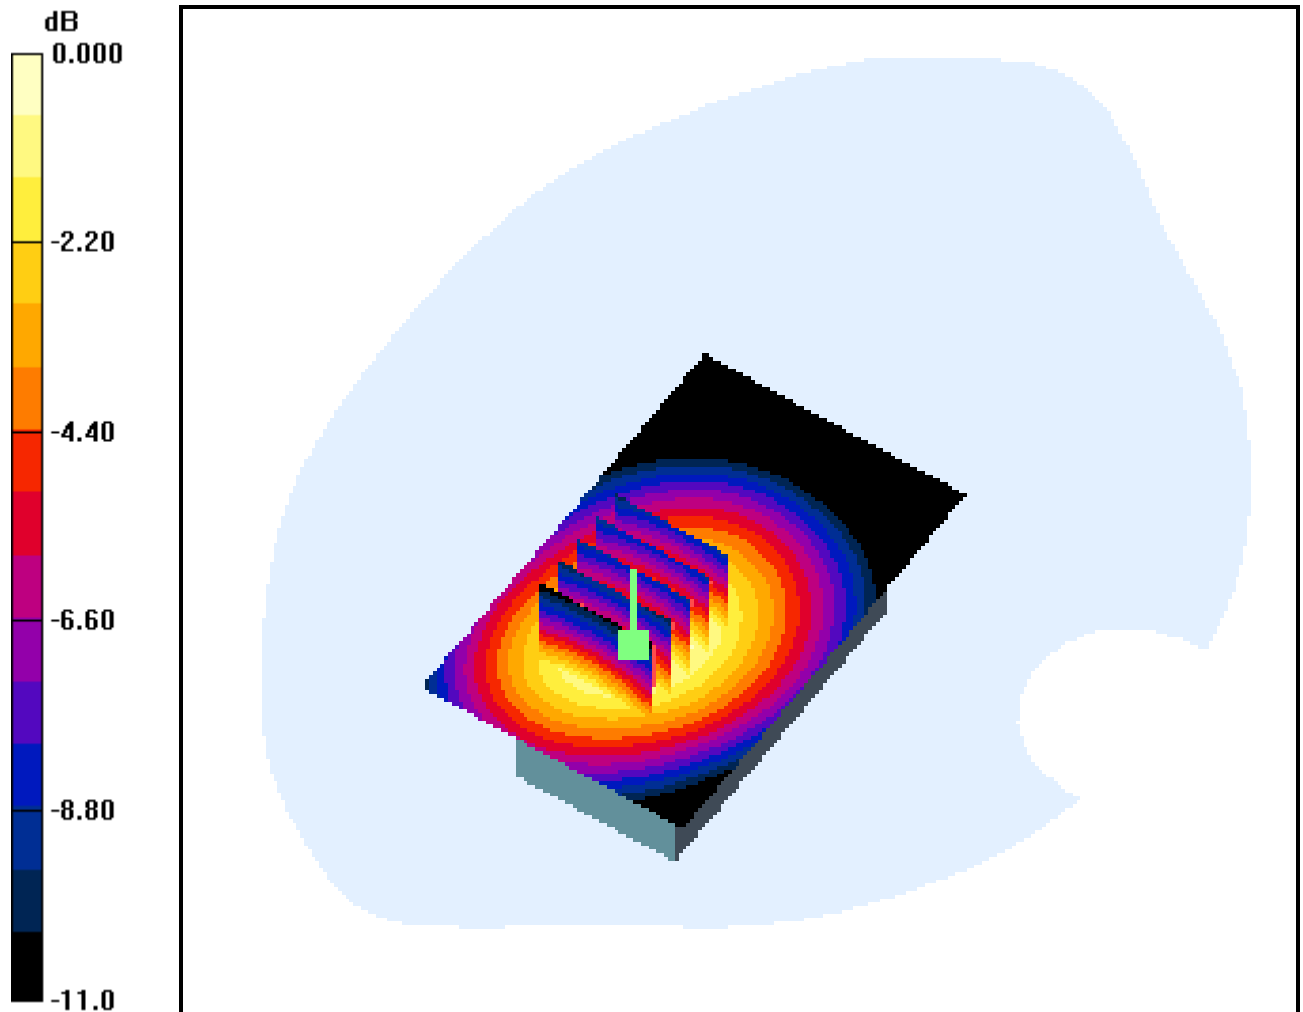

0 dB = 0.800mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Right Touch PCS Ch.512, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.810 W/kg

SAR(1 g) = 0.587 mW/g; SAR(10 g) = 0.369 mW/g

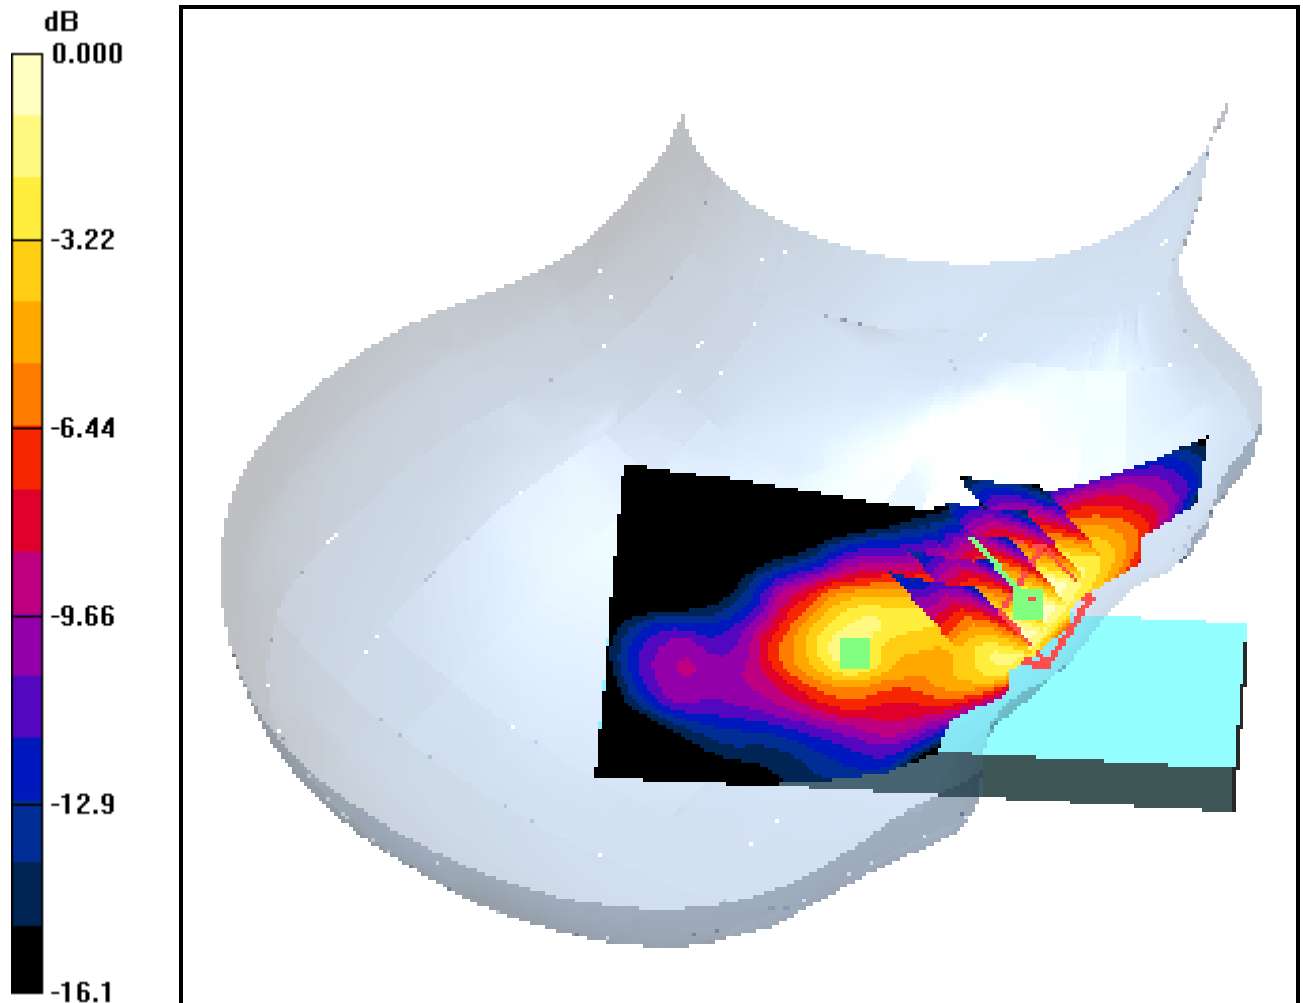

0 dB = 0.636mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Right Touch PCS Ch.512, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.617 W/kg

SAR(1 g) = 0.417 mW/g; SAR(10 g) = 0.232 mW/g

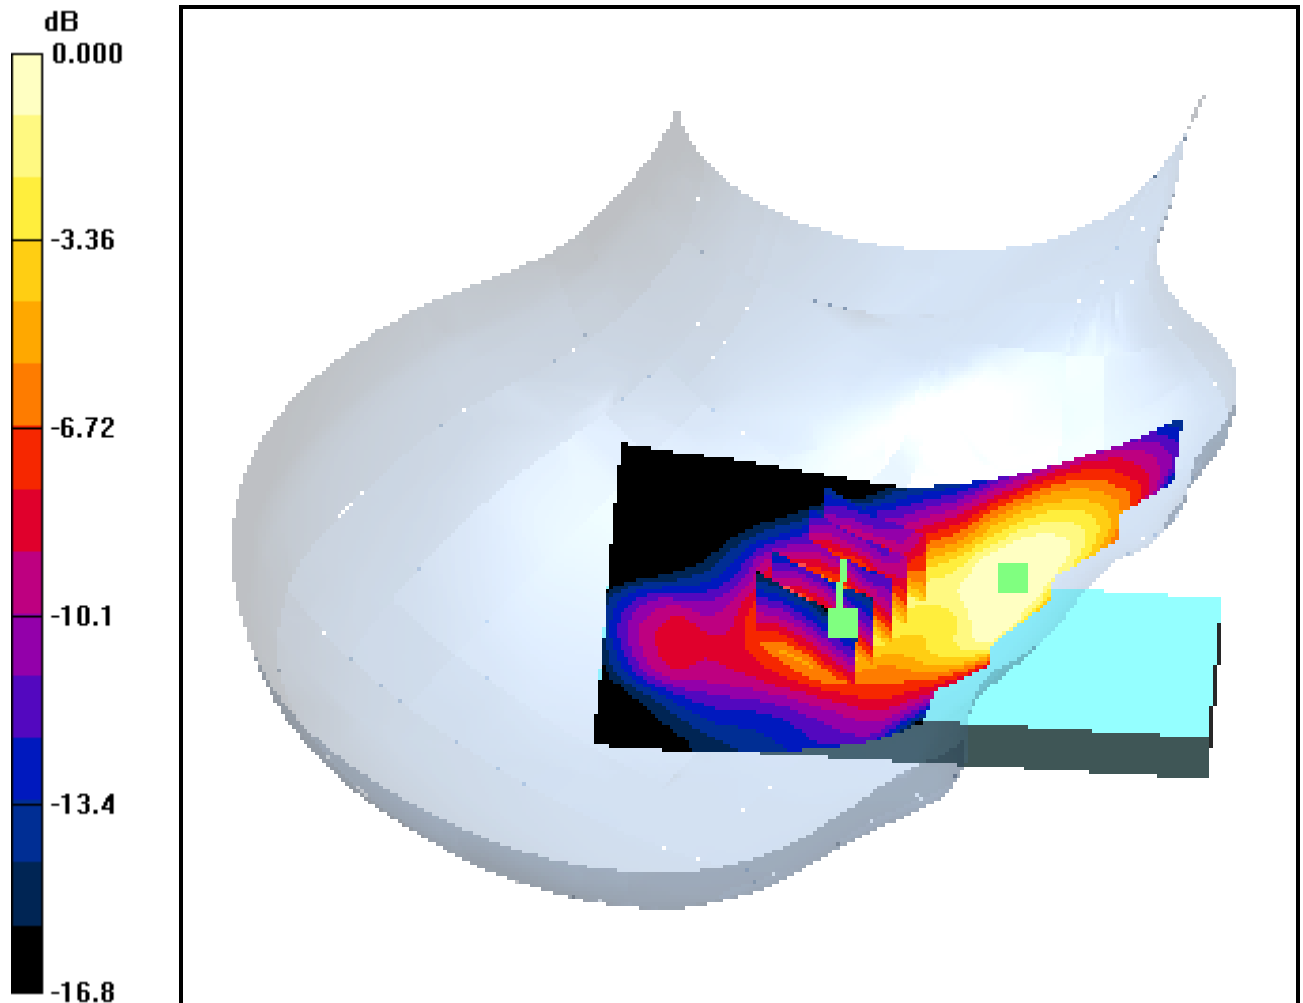

0 dB = 0.467mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Right Touch PCS Ch.661, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.041 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.759 mW/g; SAR(10 g) = 0.472 mW/g

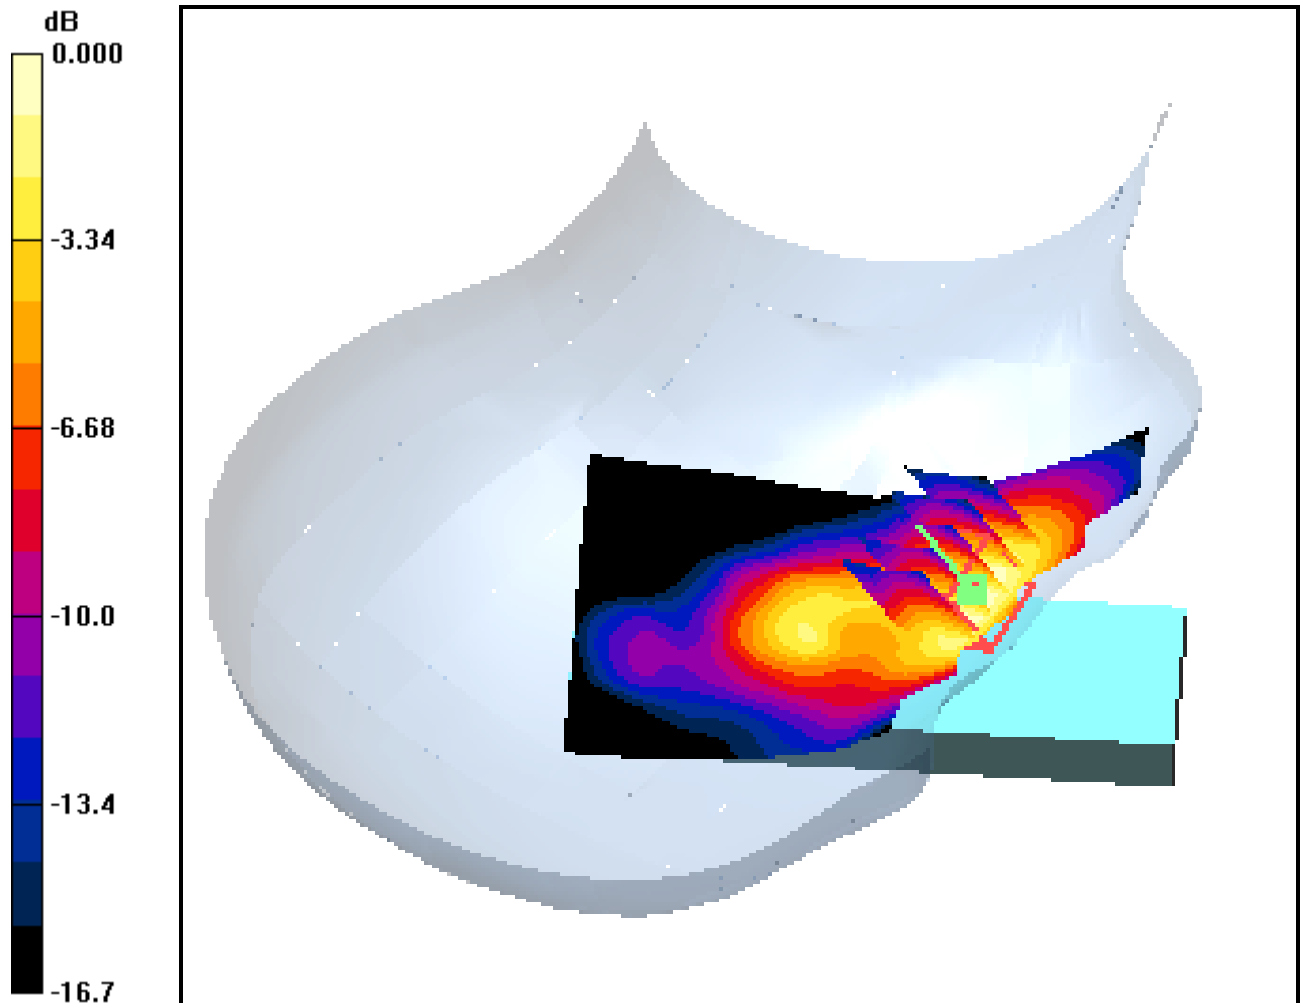

0 dB = 0.824mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Right Touch PCS Ch.810, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.880 W/kg

SAR(1 g) = 0.623 mW/g; SAR(10 g) = 0.387 mW/g

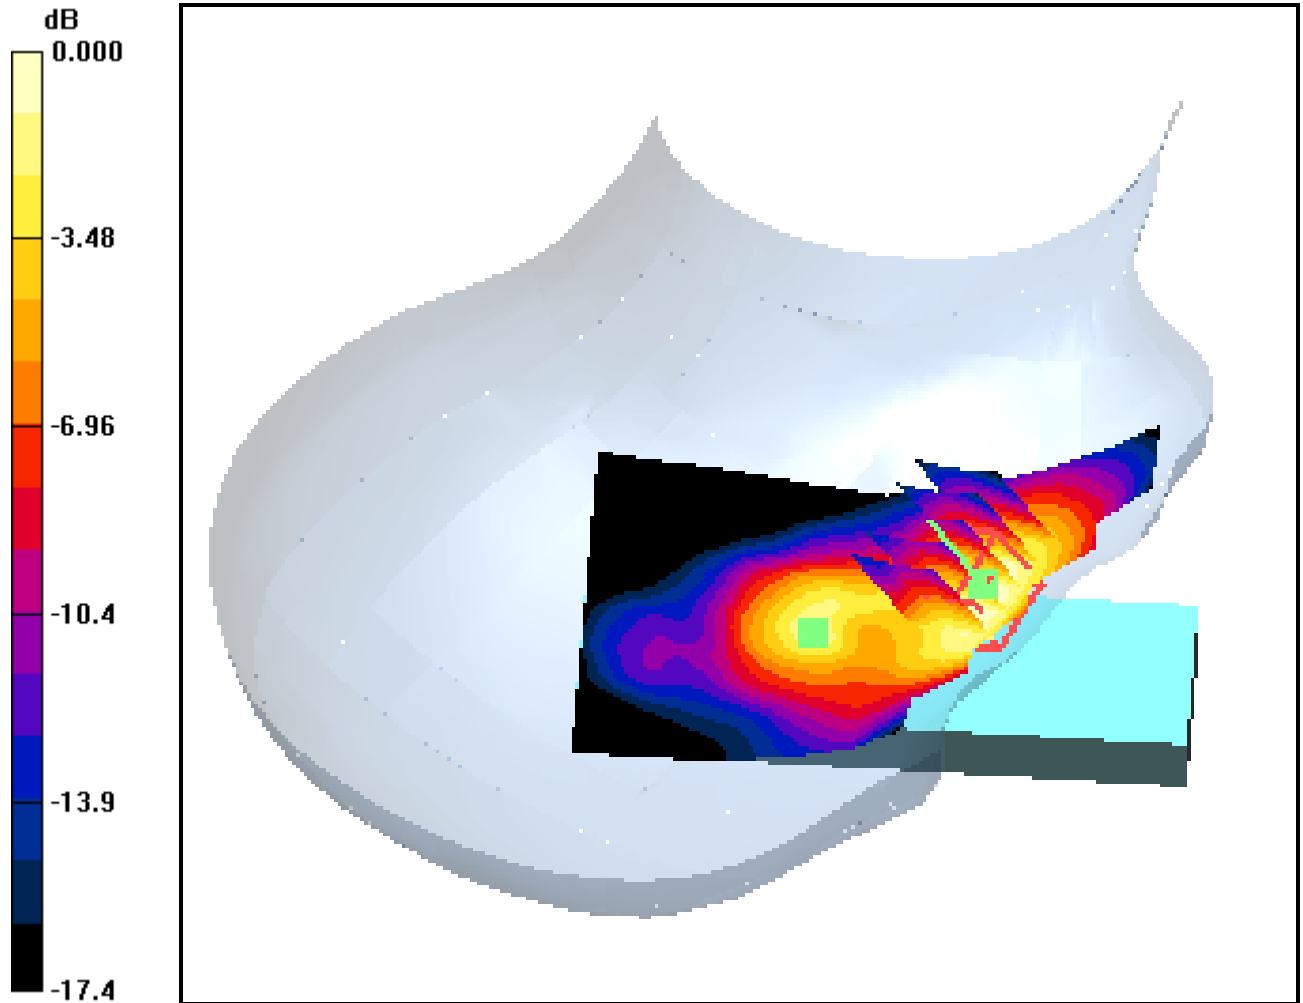

0 dB = 0.664mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Right Touch PCS Ch.810, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.652 W/kg

SAR(1 g) = 0.434 mW/g; SAR(10 g) = 0.243 mW/g

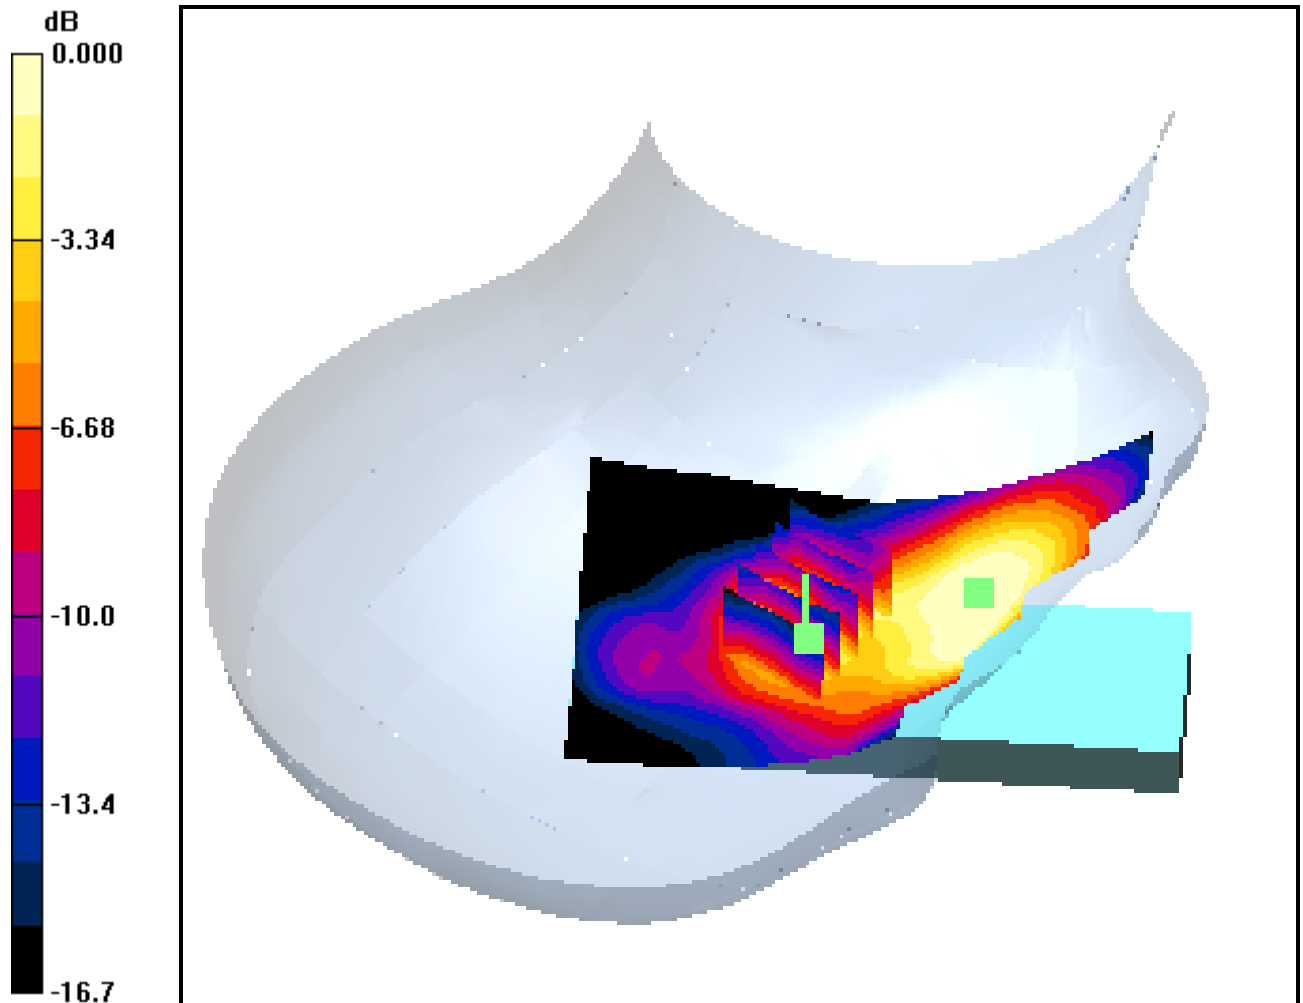

0 dB = 0.474mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Right Tilt PCS Ch.661, Ant Intenna, Standard Battery


Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.038 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.118 mW/g; SAR(10 g) = 0.063 mW/g

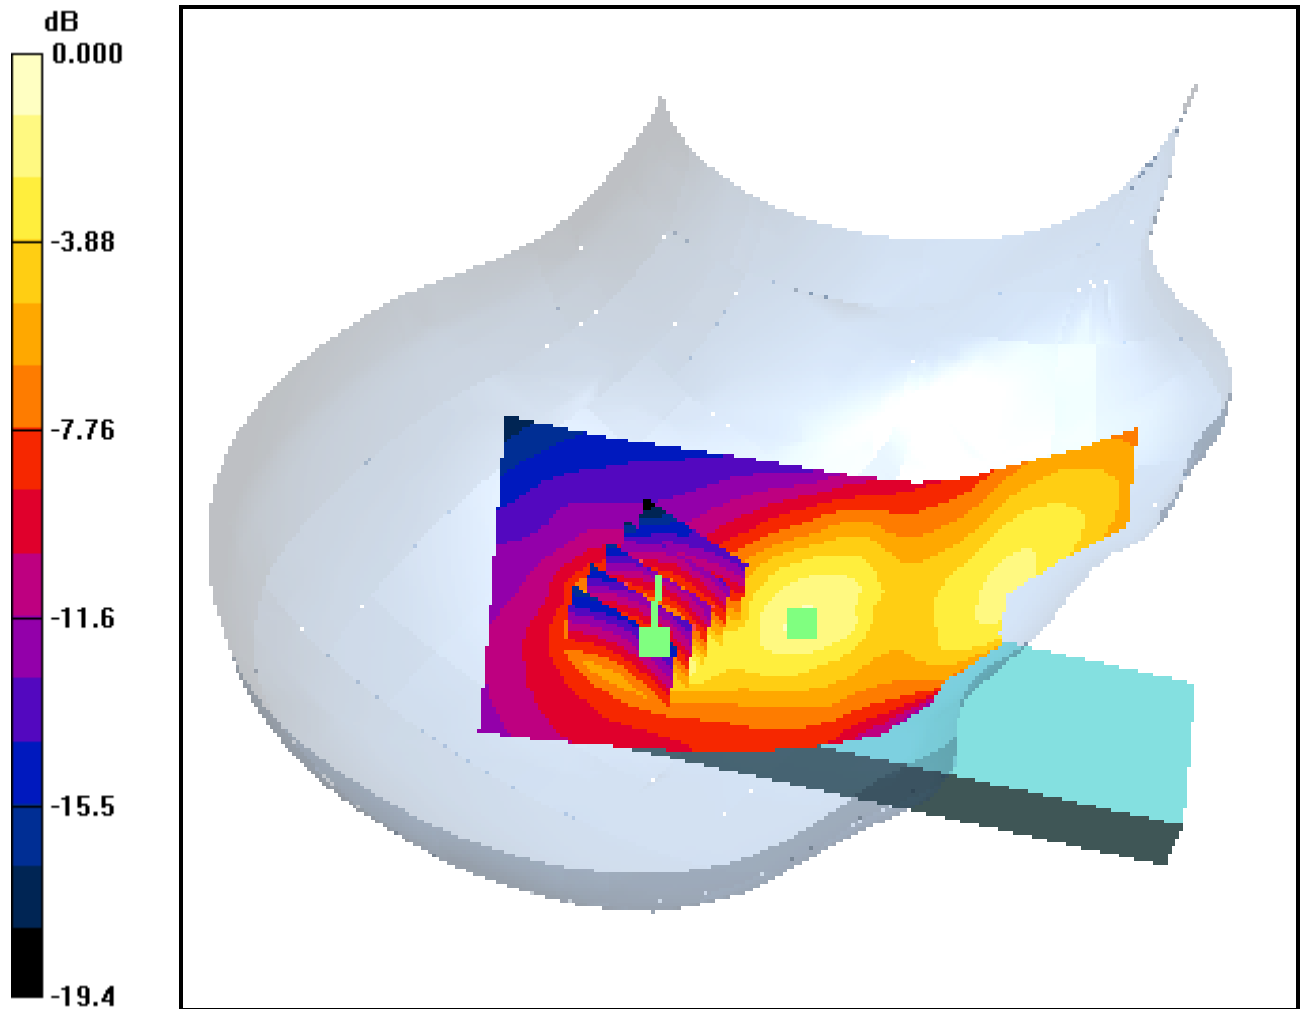

0 dB = 0.133mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Right Tilt PCS Ch.661, Ant Intenna, Standard Battery


Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.038 dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.059 mW/g

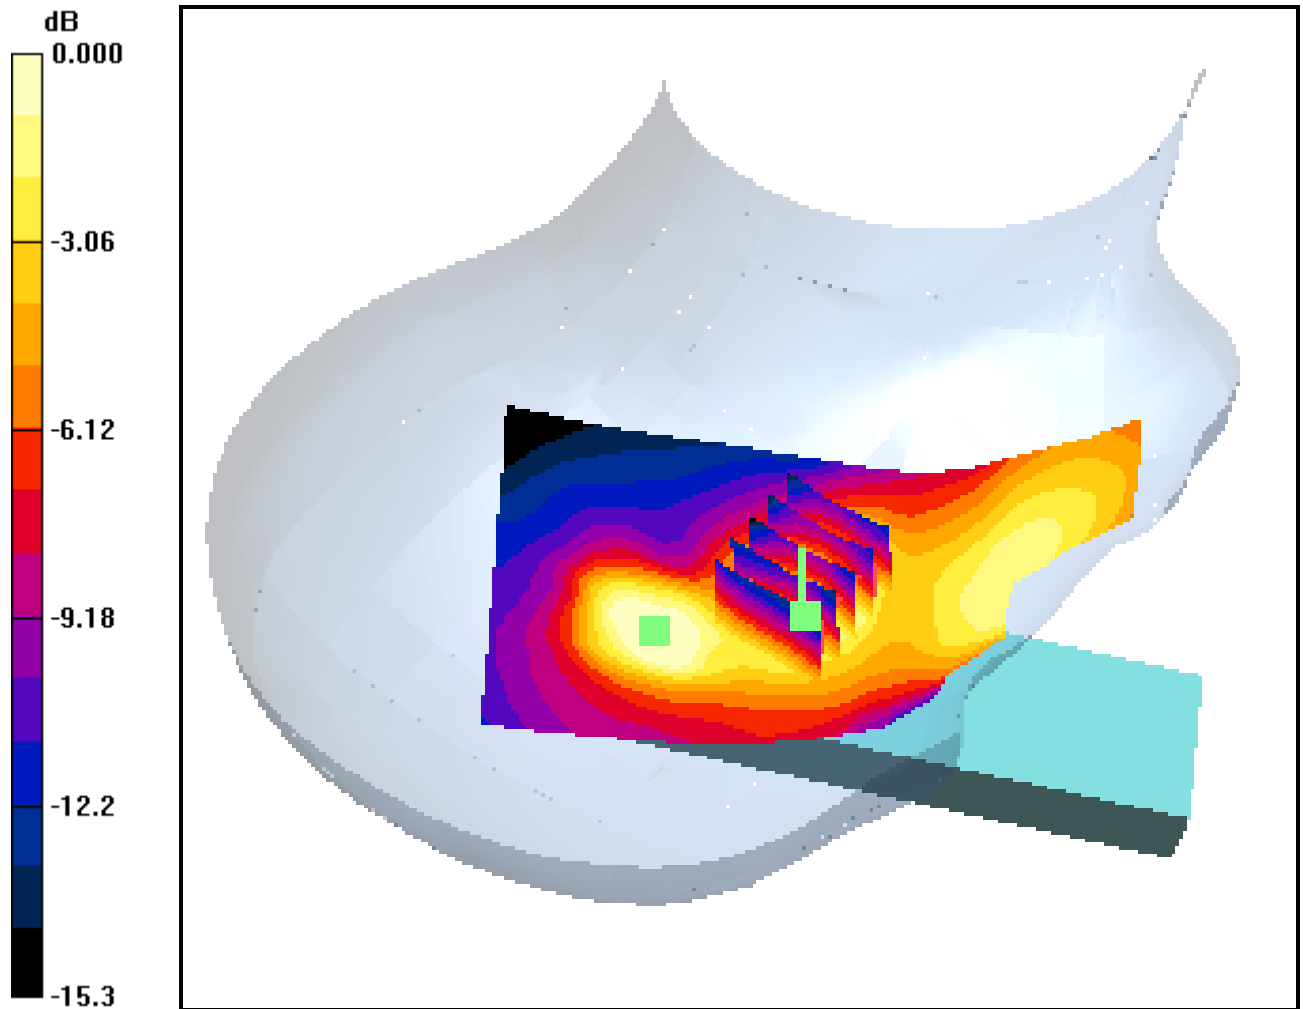

0 dB = 0.104mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Left Touch PCS Ch.512, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.080 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.573 mW/g; SAR(10 g) = 0.363 mW/g

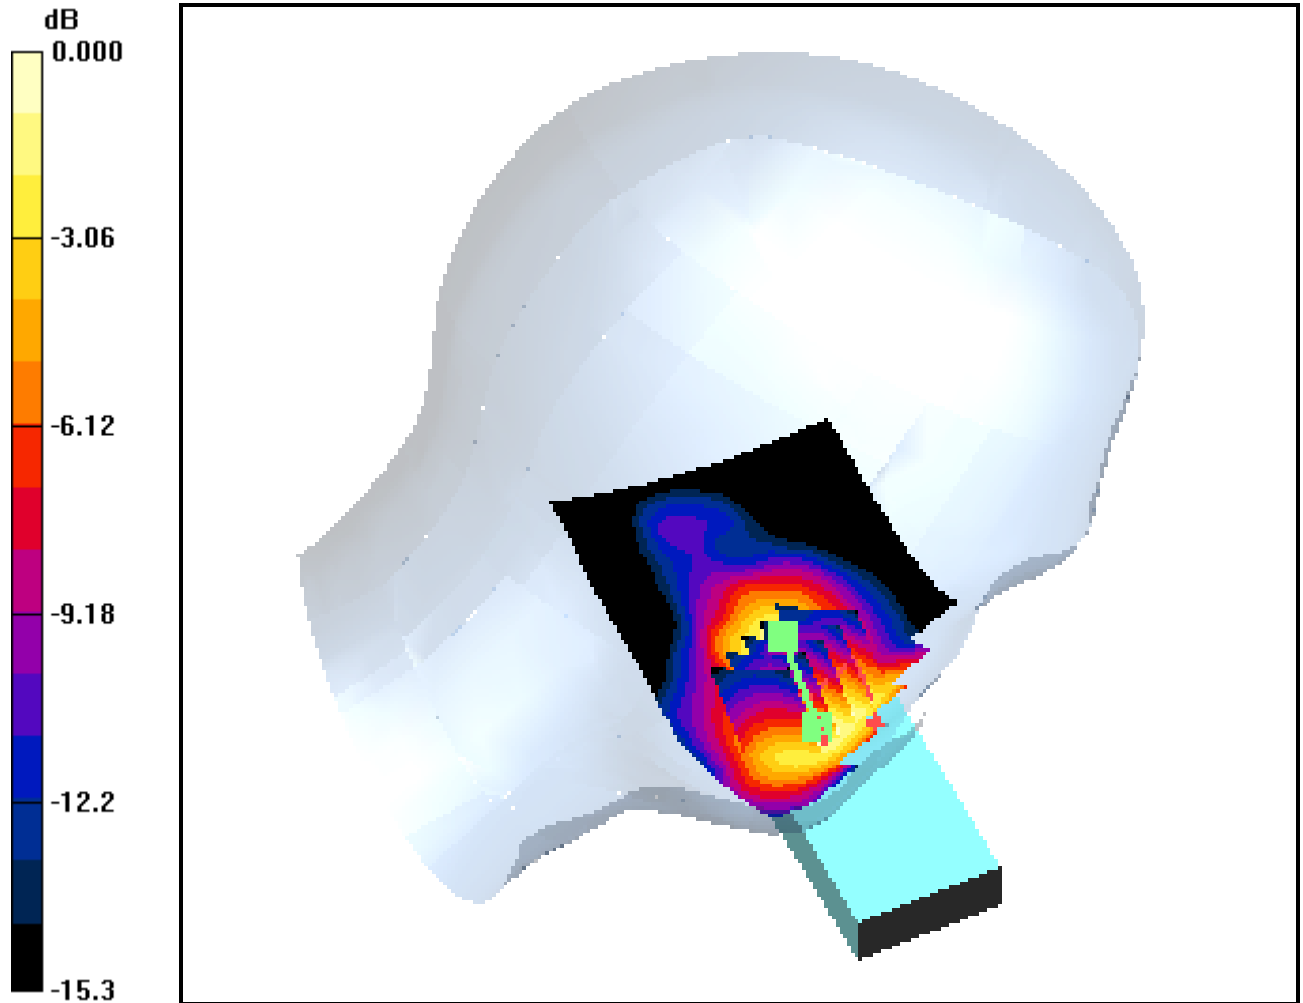

0 dB = 0.621mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Left Touch PCS Ch.661, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.080 dB

Peak SAR (extrapolated) = 0.740 W/kg

SAR(1 g) = 0.437 mW/g; SAR(10 g) = 0.226 mW/g

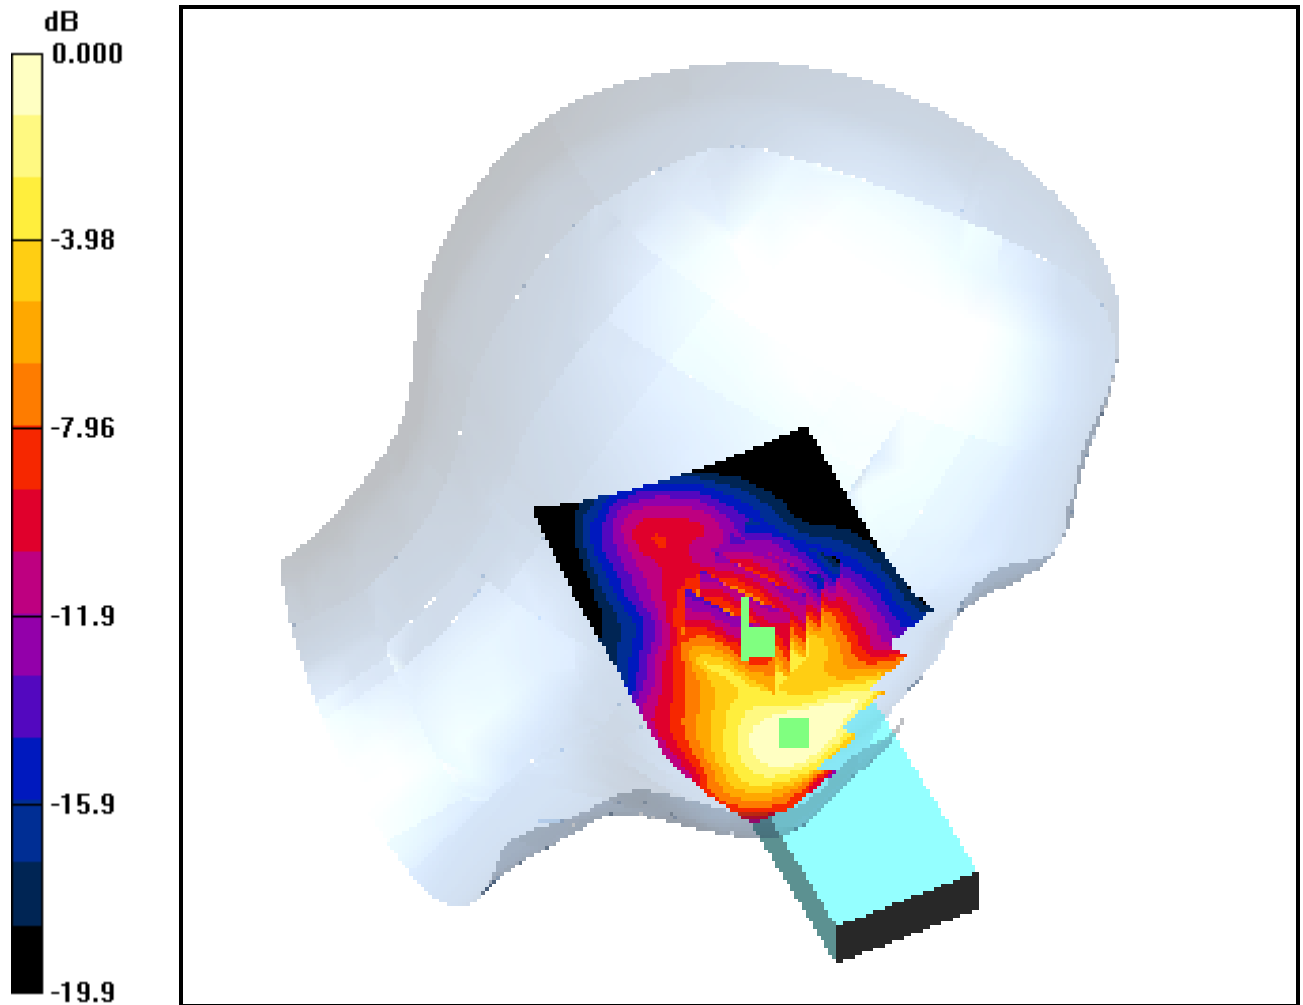

0 dB = 0.483mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Left Touch PCS Ch.661, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.033 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.799 mW/g; SAR(10 g) = 0.499 mW/g

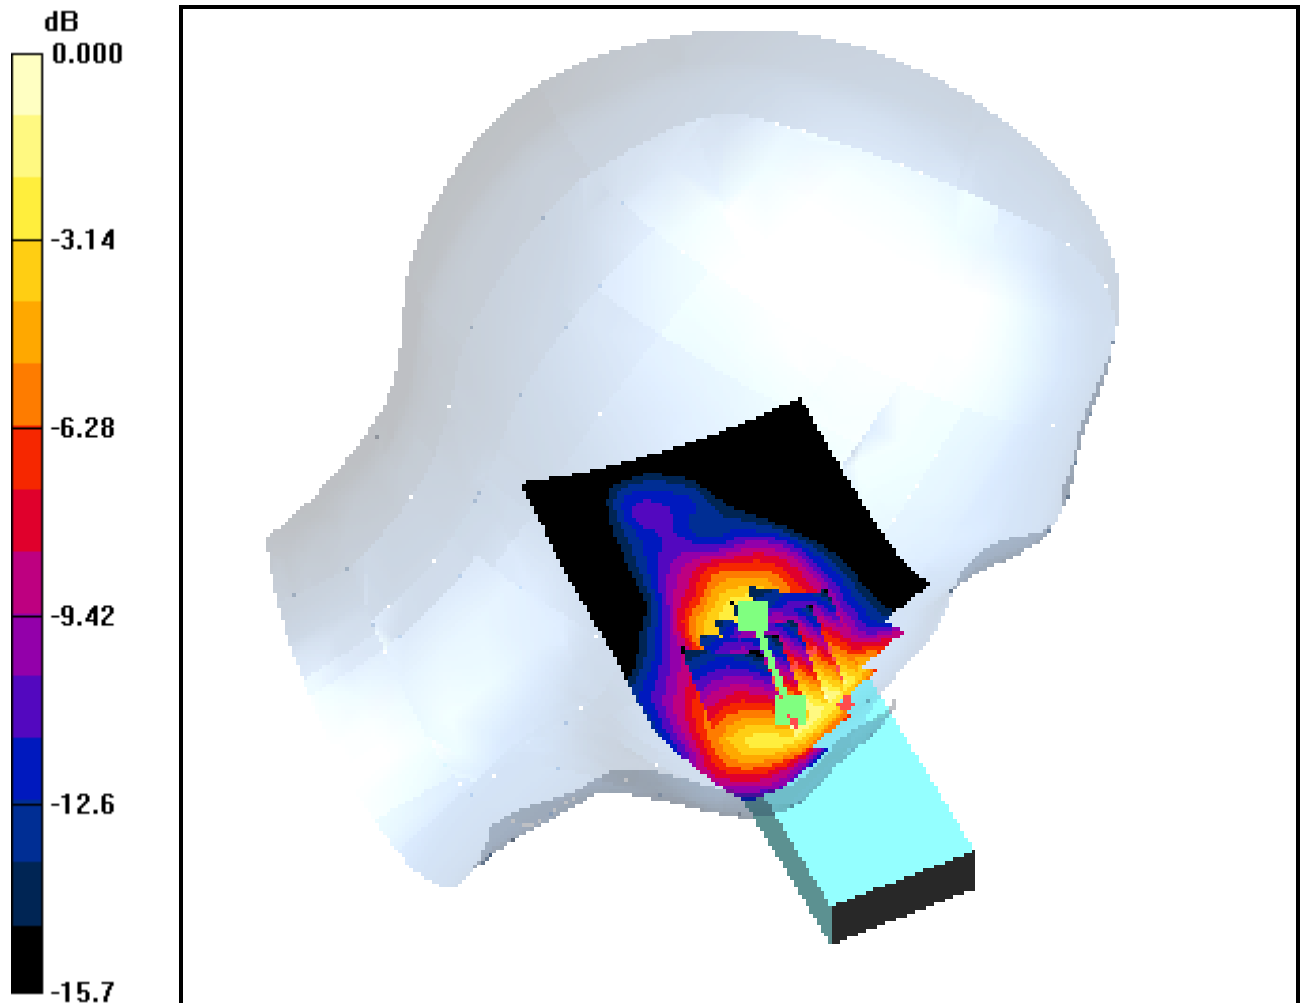

0 dB = 0.874mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Left Touch PCS Ch.661, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.033 dB

Peak SAR (extrapolated) = 0.981 W/kg

SAR(1 g) = 0.566 mW/g; SAR(10 g) = 0.292 mW/g

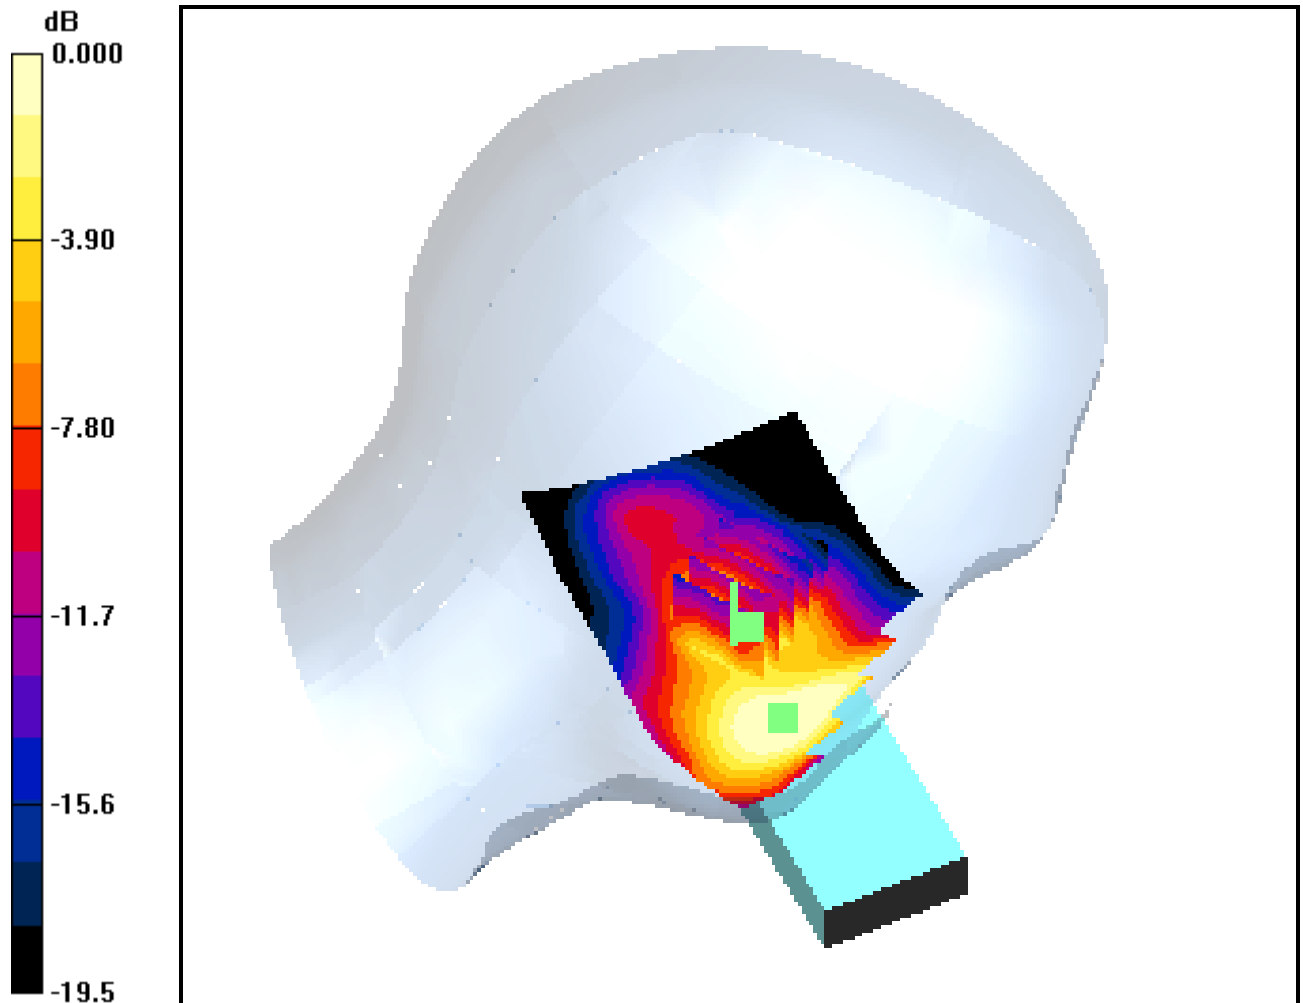

0 dB = 0.613mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Left Touch PCS Ch.810, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.028 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.725 mW/g; SAR(10 g) = 0.446 mW/g

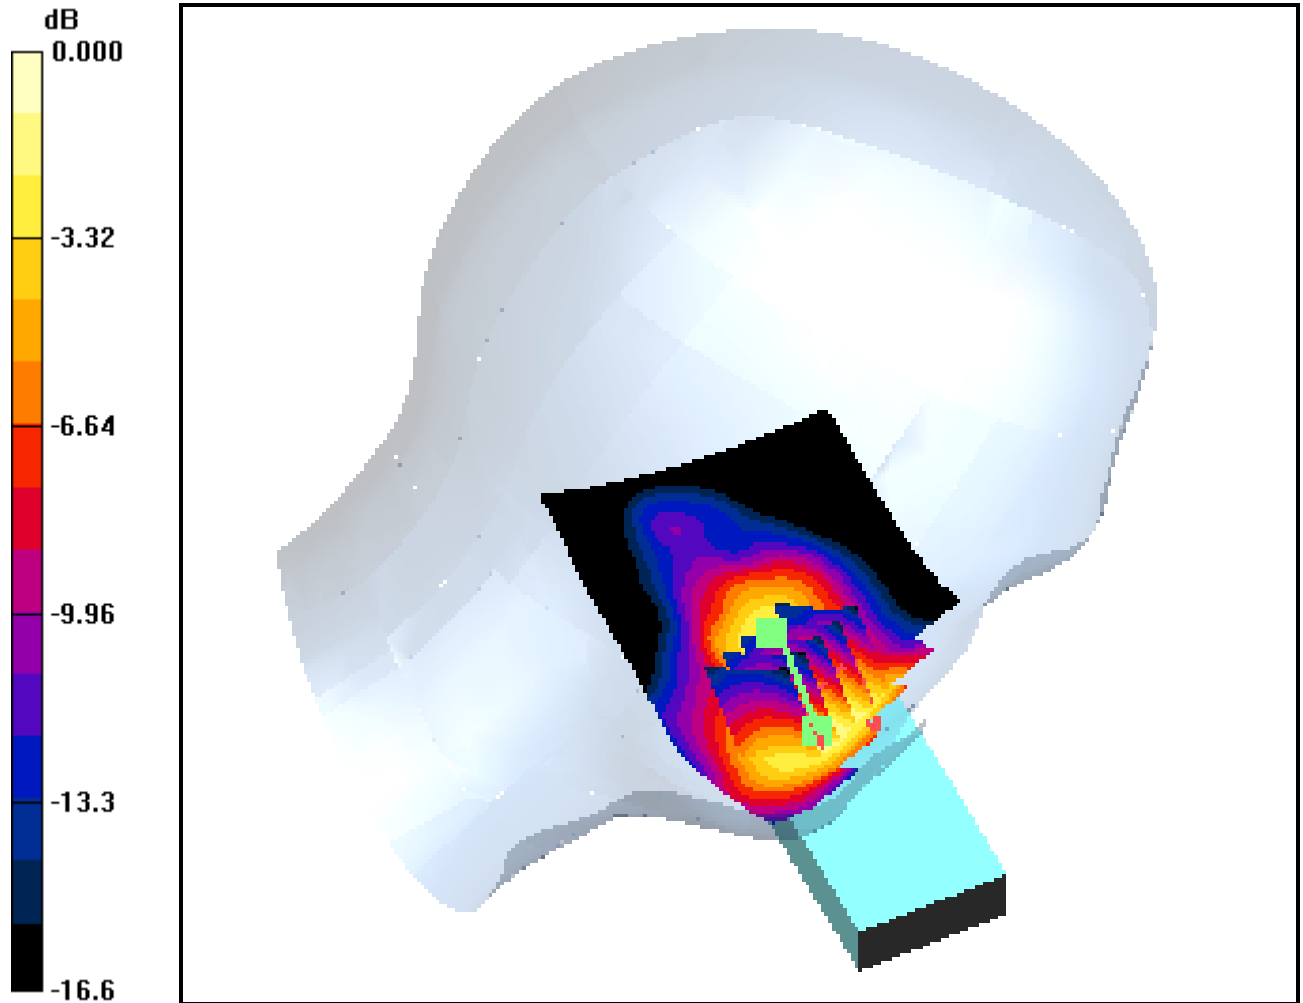

0 dB = 0.798mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Left Touch PCS Ch.810, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.867 W/kg

SAR(1 g) = 0.519 mW/g; SAR(10 g) = 0.270 mW/g

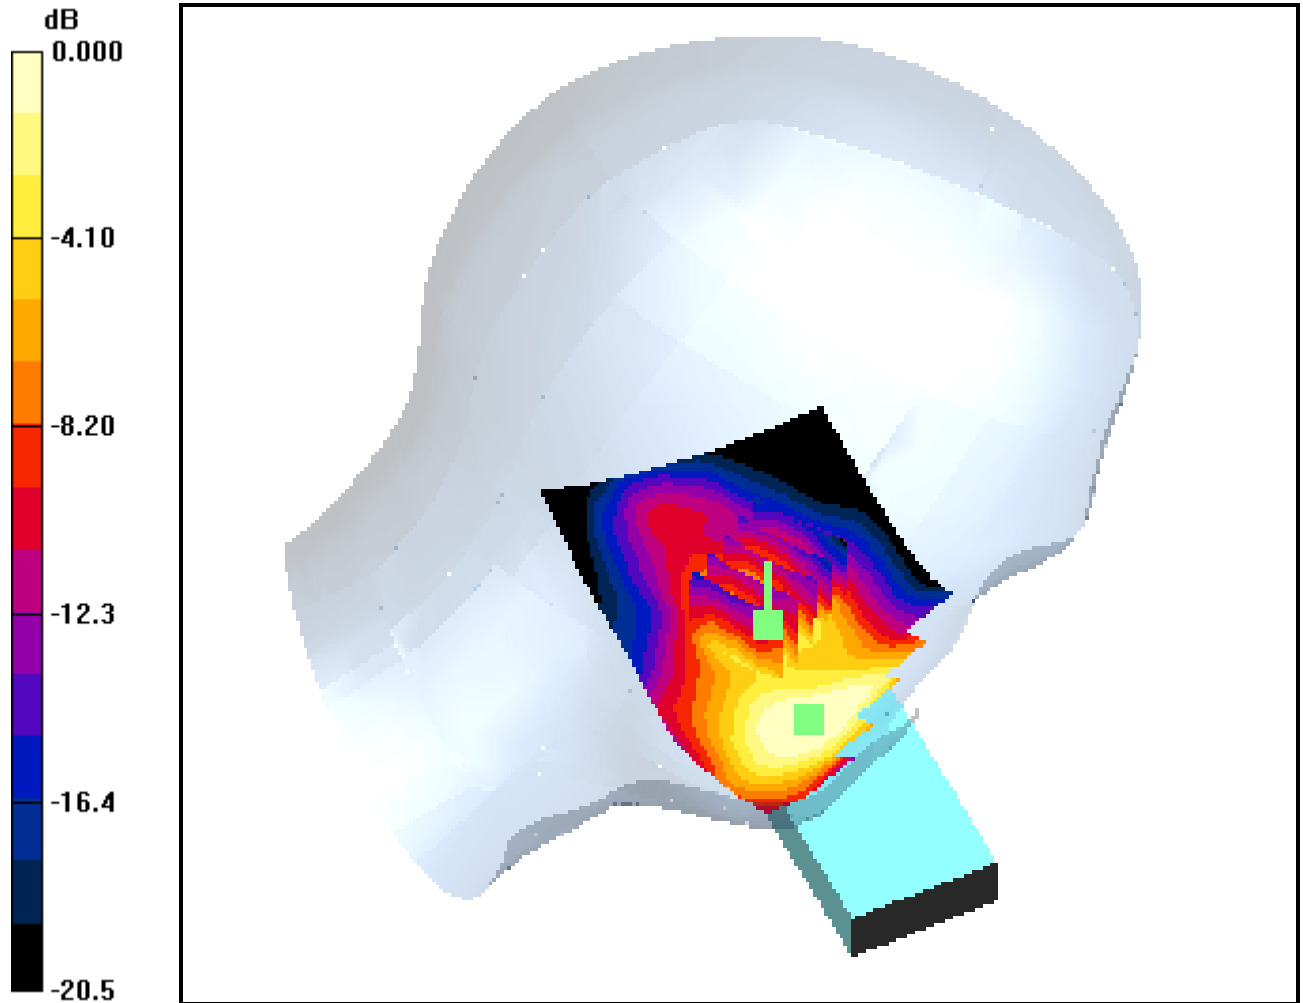

0 dB = 0.574mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Left Tilt PCS Ch.661, Ant Intenna, Standard Battery


Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.094 mW/g; SAR(10 g) = 0.051 mW/g

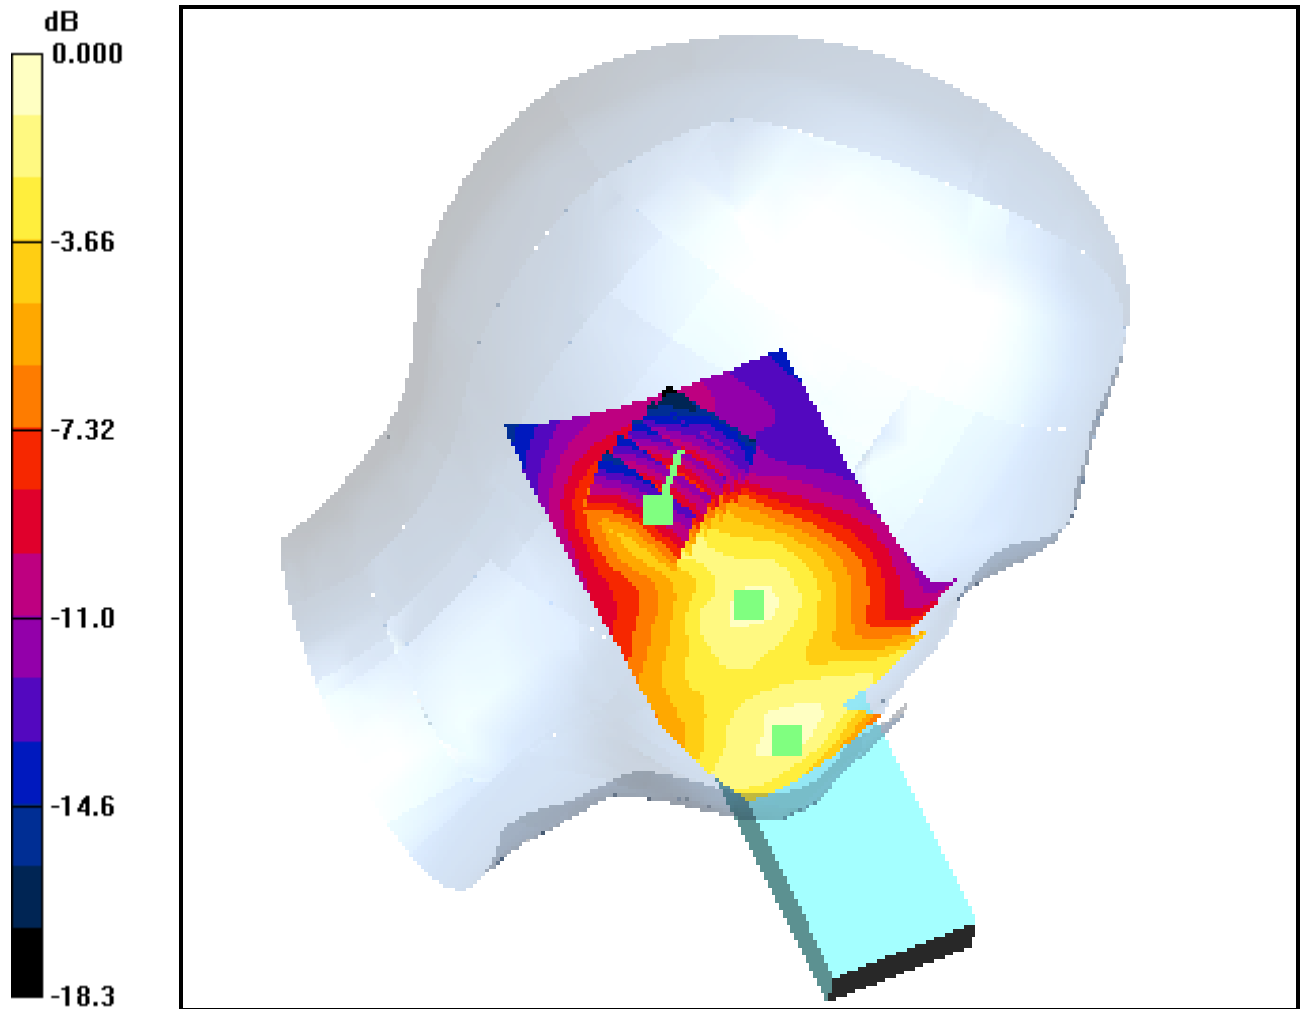

0 dB = 0.108mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Left Tilt PCS Ch.661, Ant Intenna, Standard Battery


Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.115 W/kg

SAR(1 g) = 0.084 mW/g; SAR(10 g) = 0.054 mW/g

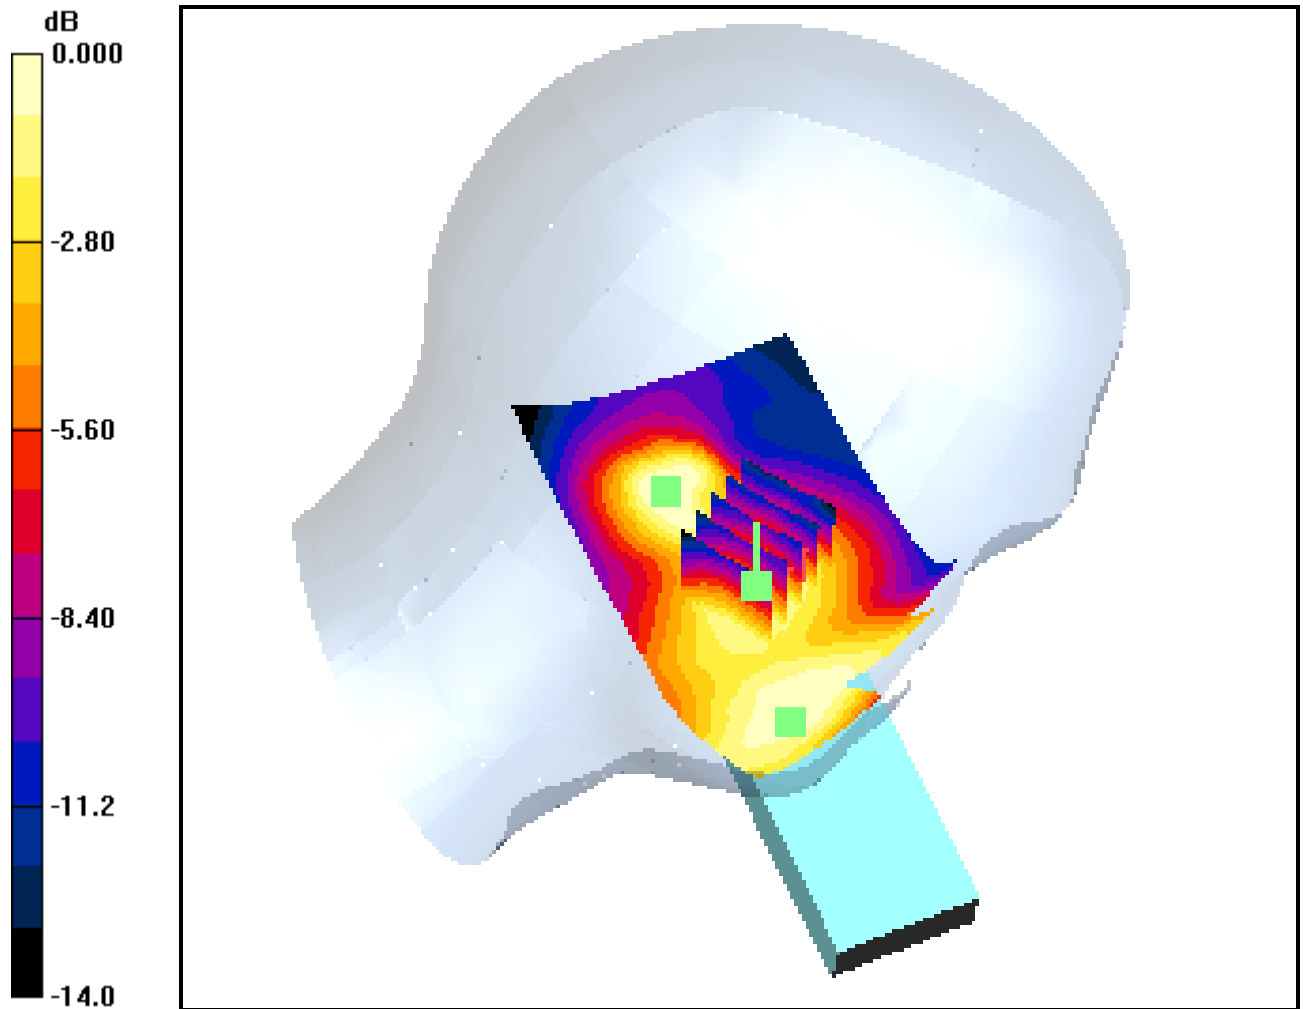

0 dB = 0.091mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Left Tilt PCS Ch.661, Ant Intenna, Standard Battery


Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 2: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.084 mW/g; SAR(10 g) = 0.056 mW/g

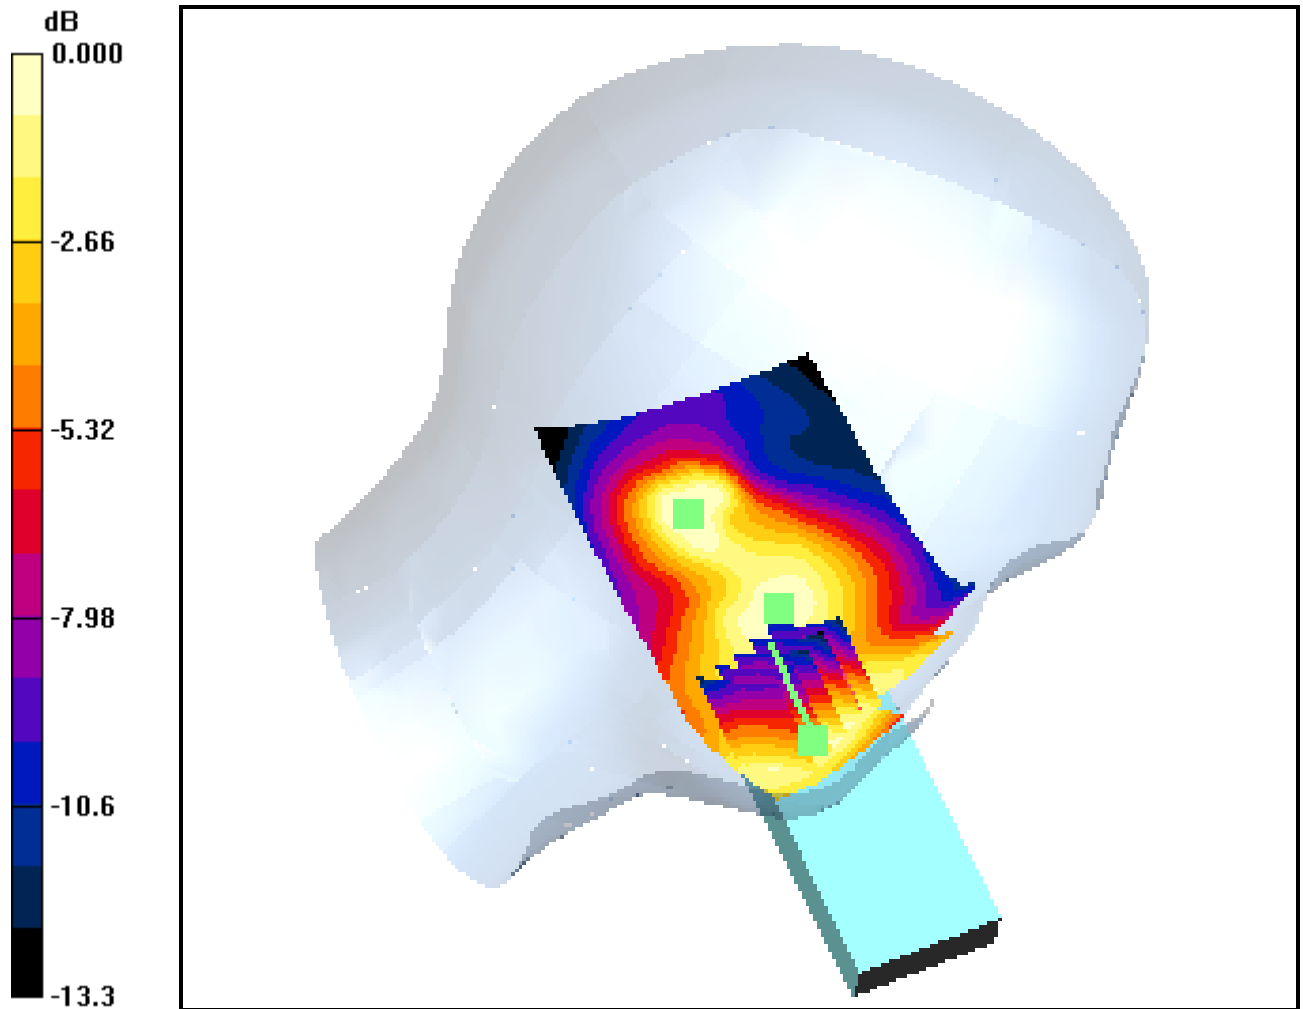

0 dB = 0.089mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Left Touch PCS Ch.661, Ant Intenna, Standard Battery With BT ON


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.217 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.771 mW/g; SAR(10 g) = 0.485 mW/g

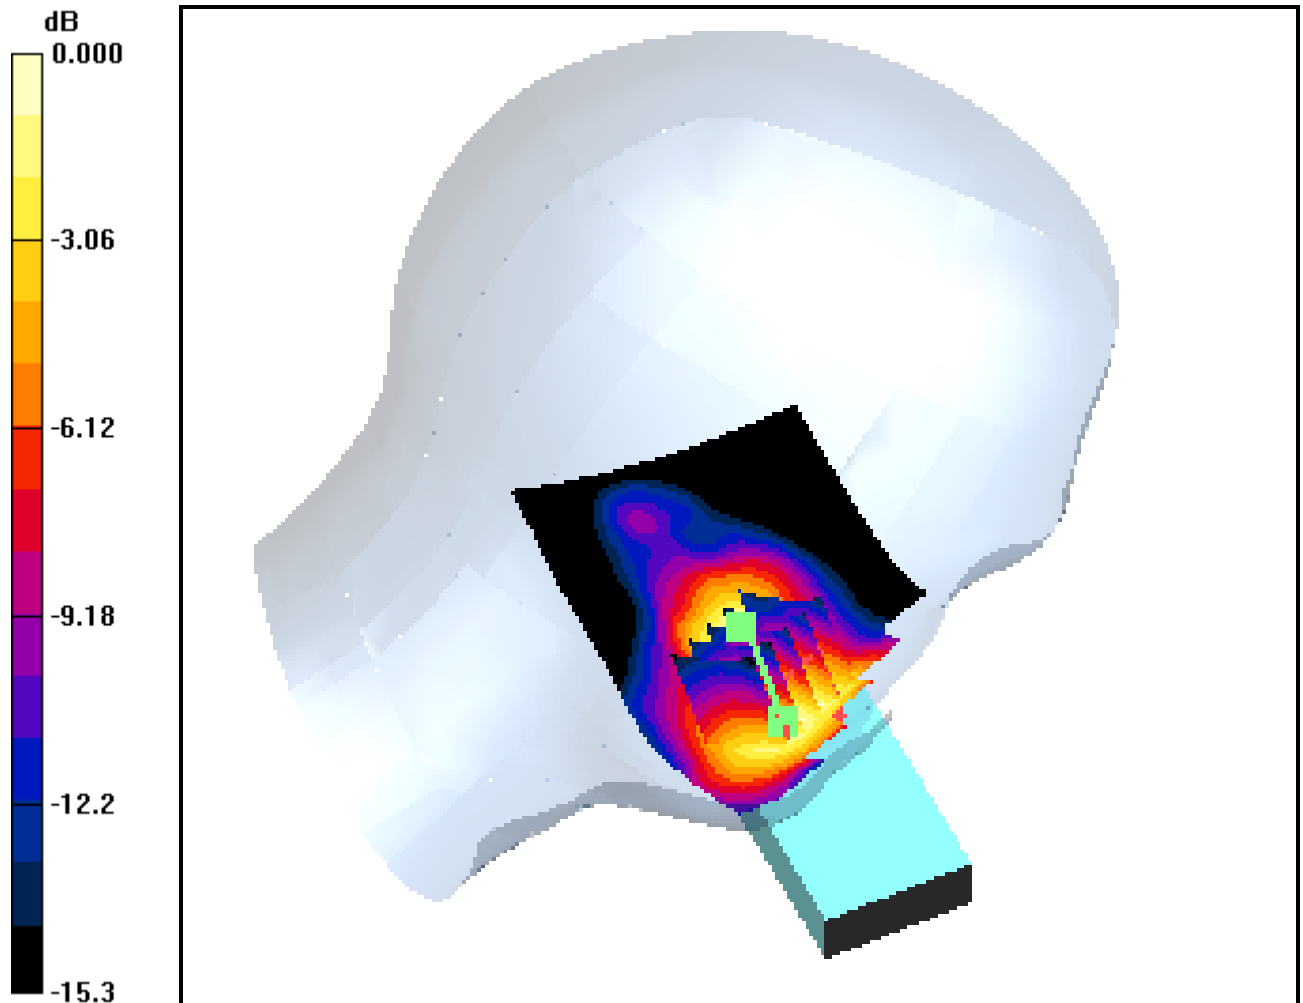

0 dB = 0.837mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Test Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

1.5cm from Body, PCS Ch.512, Ant Intenna, Standard Battery GPRS Mode


Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.214 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.808 mW/g

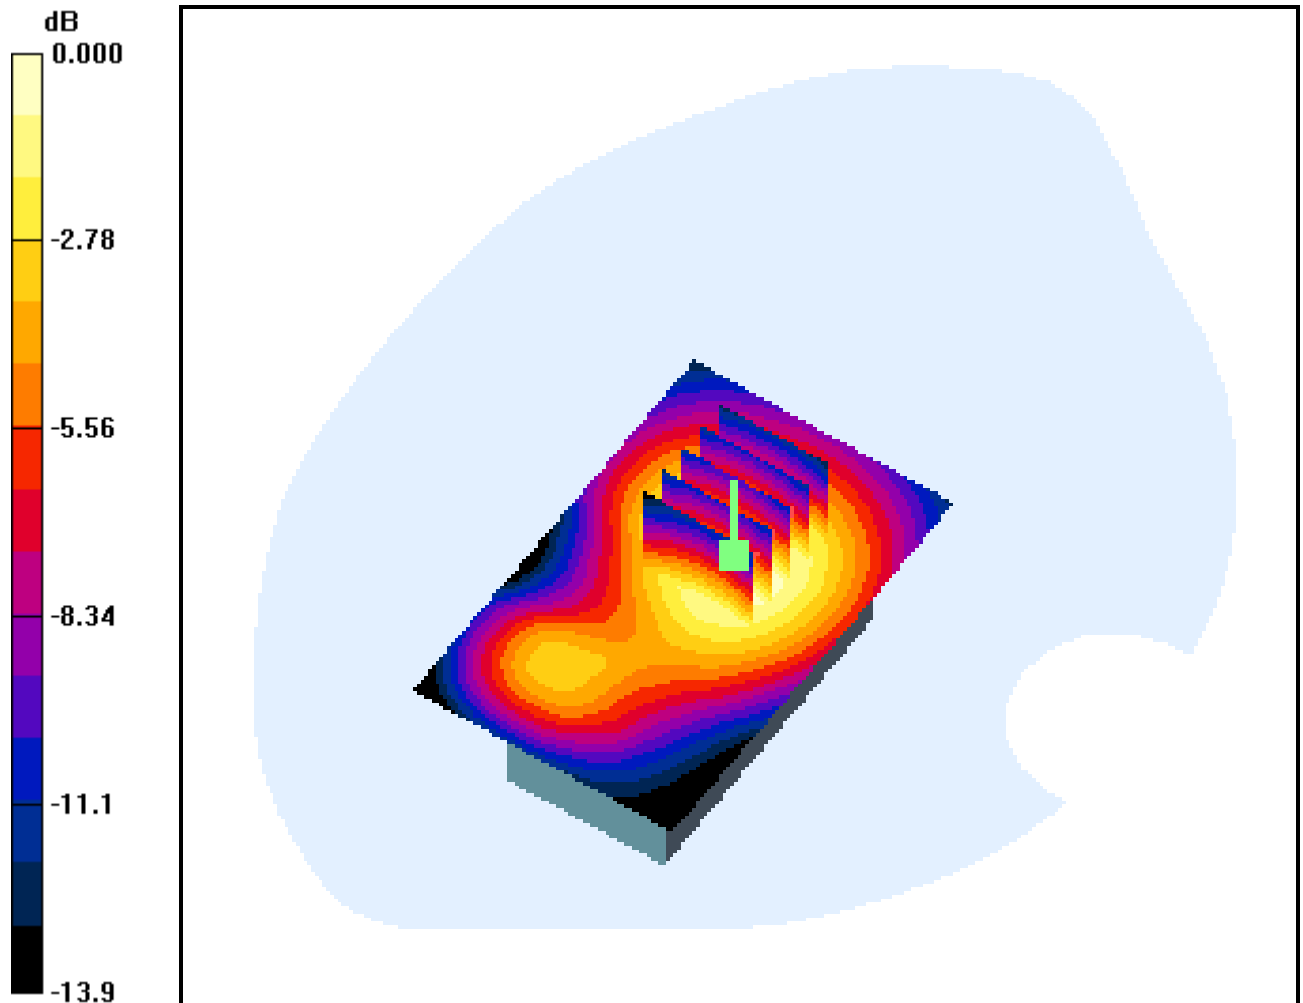

0 dB = 1.33mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 51.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Test Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

1.5cm from Body, PCS Ch.661, Ant Intenna, Standard Battery GPRS Mode


Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.204 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.67 mW/g

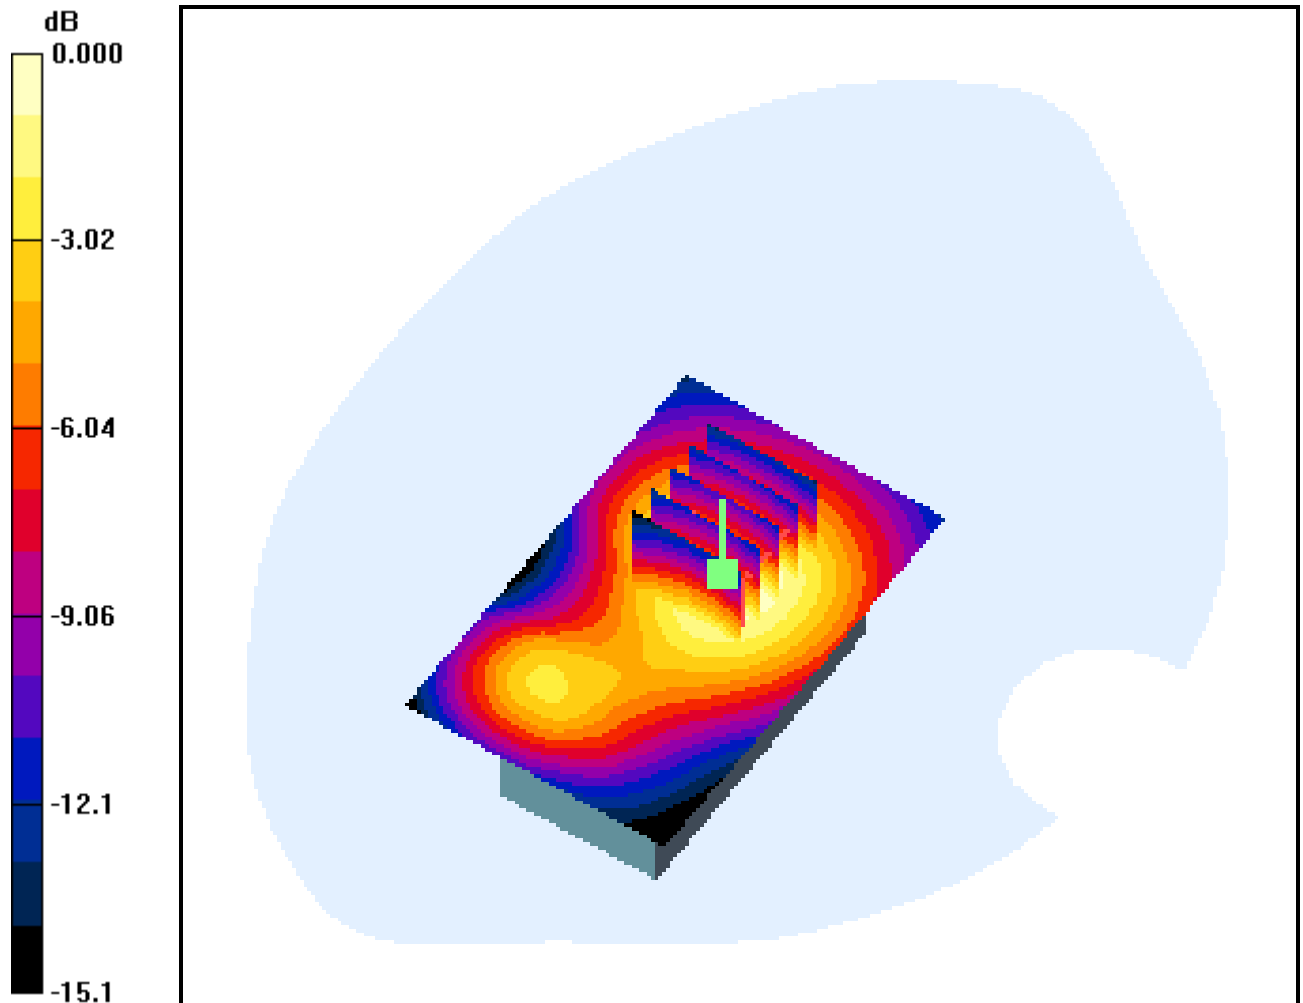

0 dB = 1.29mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 51.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Test Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

1.5cm from Body, PCS Ch.810, Ant Intenna, Standard Battery GPRS Mode


Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.051 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.67 mW/g; SAR(10 g) = 0.432 mW/g

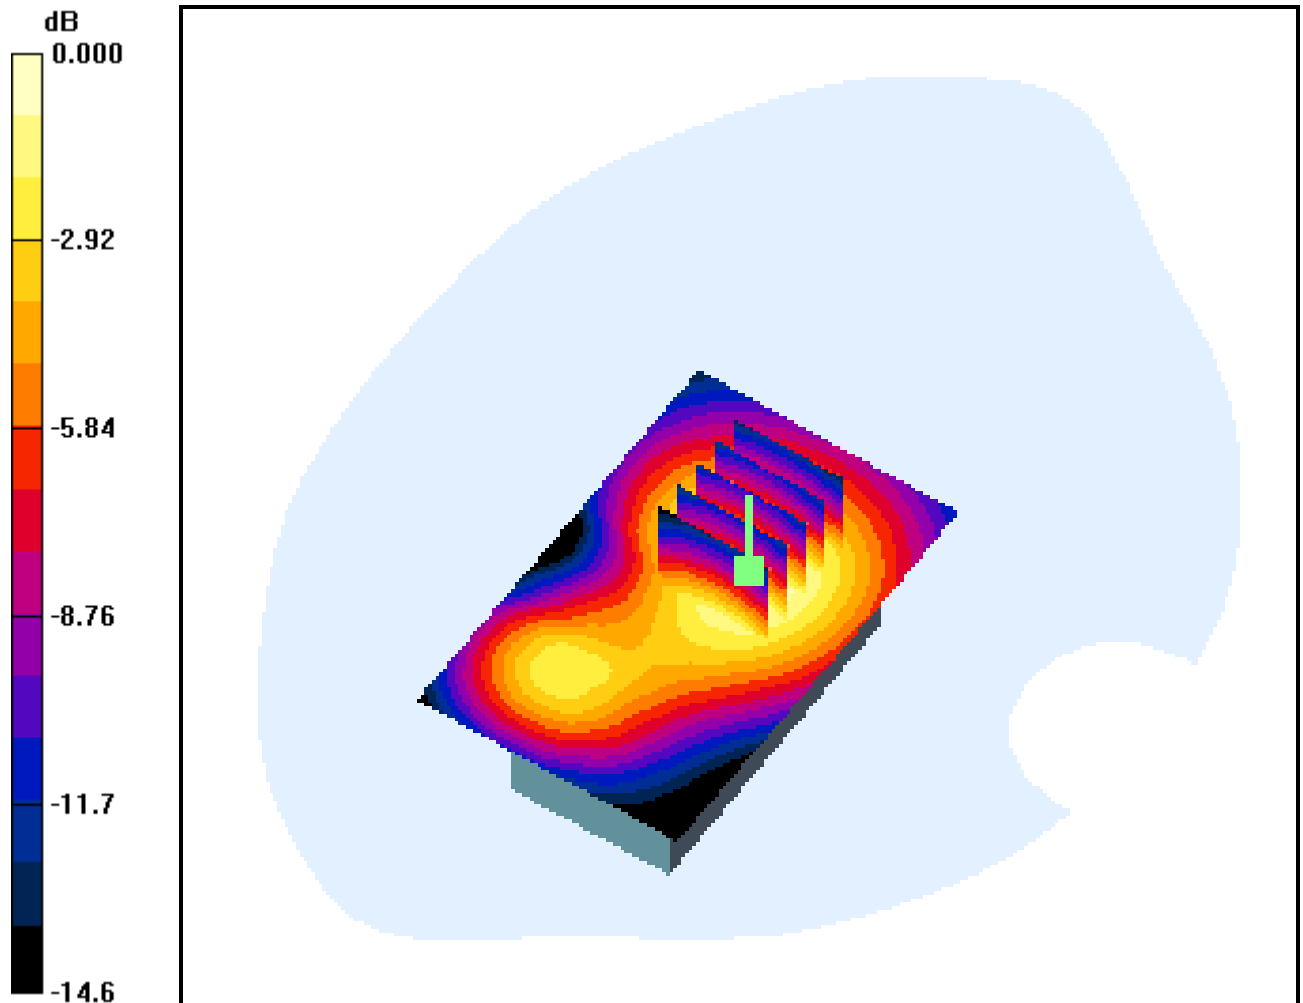

0 dB = 0.801mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Test Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

1.5cm from Body, PCS Ch.512, Ant Intenna, Standard Battery GPRS Mode With BT ON


Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.129 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.804 mW/g

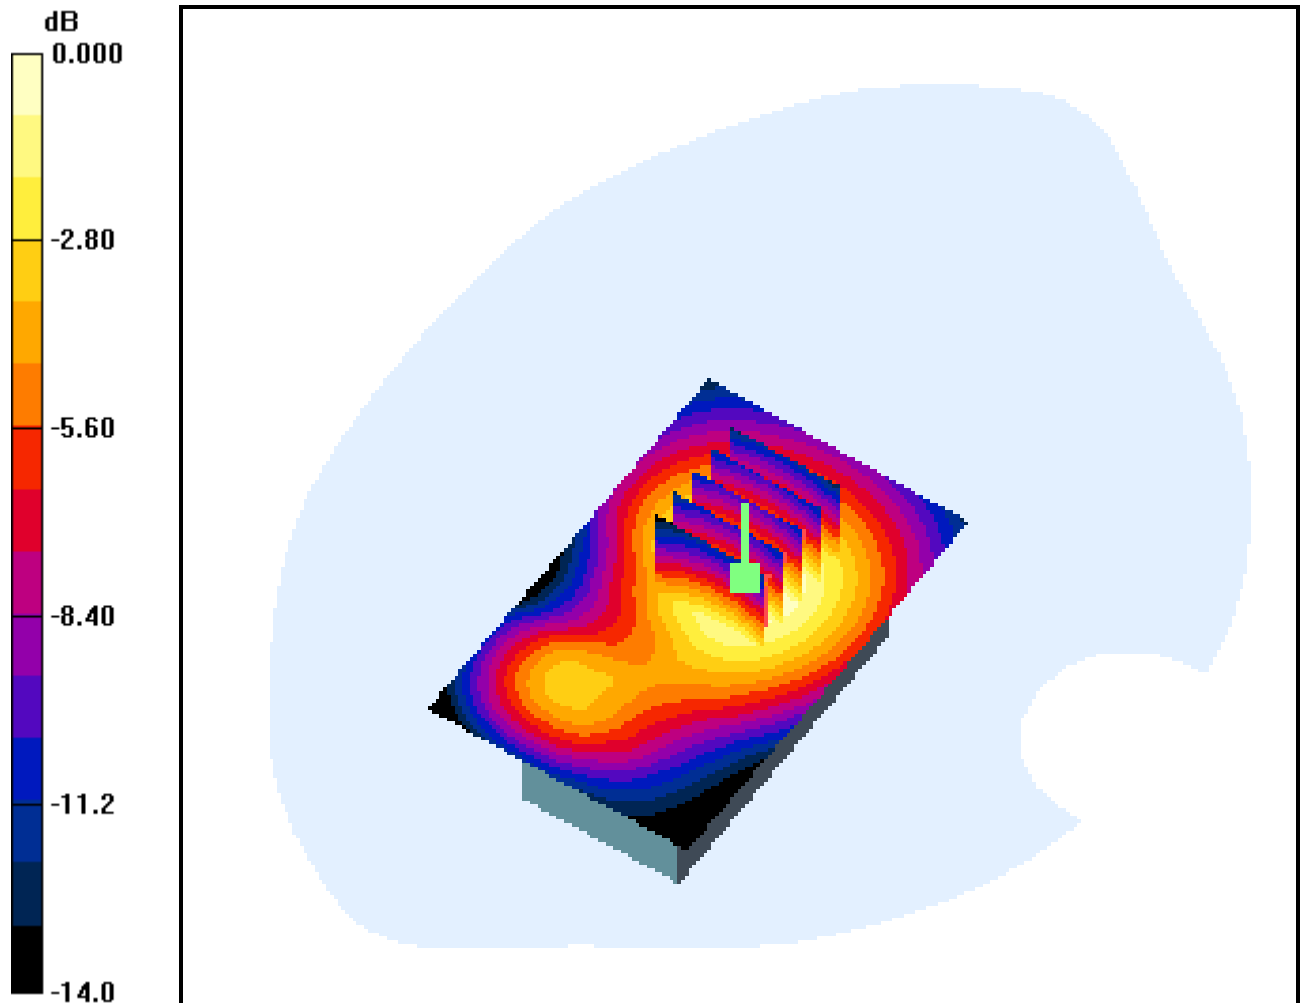

0 dB = 1.31mW/g

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.892 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

Left Touch GSM Ch.251, Ant Intenna, Standard Battery With BT ON


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.166 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.867 mW/g; SAR(10 g) = 0.565 mW/g

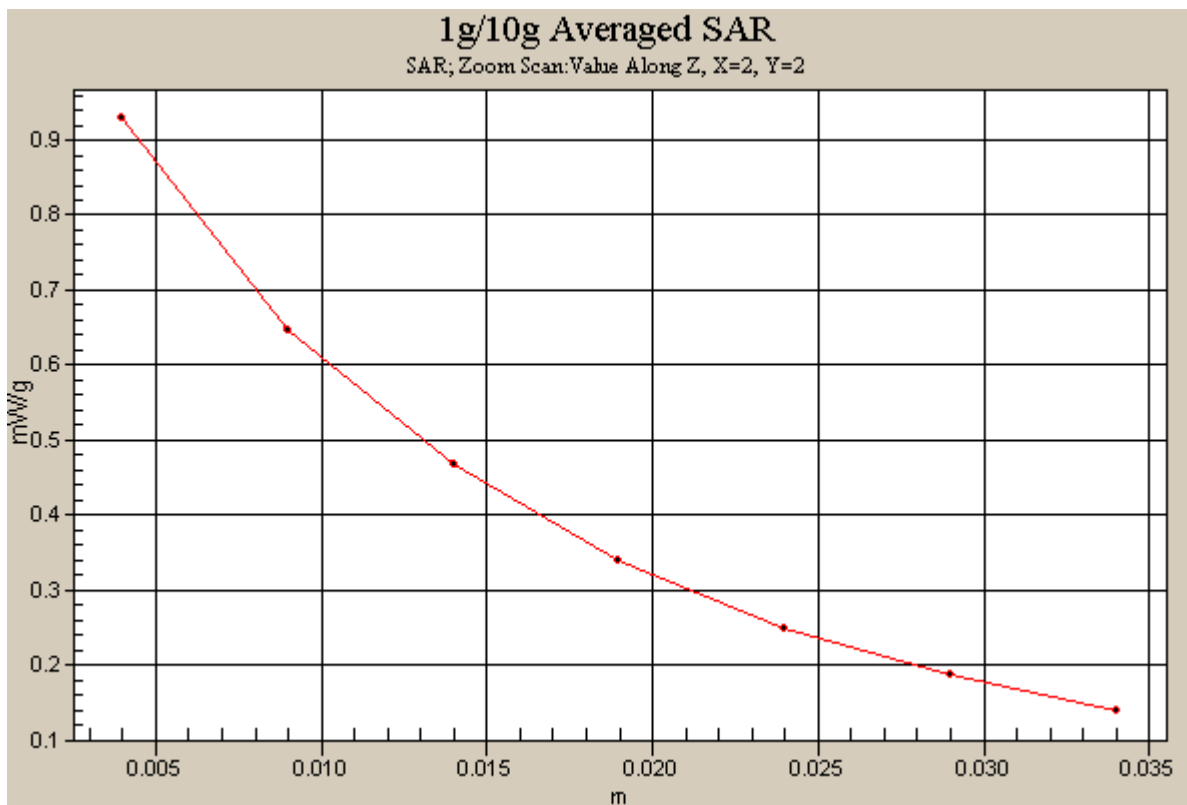

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.991 \text{ mho/m}$; $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.22, 6.22, 6.22); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Test Date: 2007-07-19; Ambient Temp: 22.6; Tissue Temp: 22.3

1.5cm from Body, GSM Ch.251, Ant Intenna, Standard Battery GPRS Mode


Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.286 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.789 mW/g; SAR(10 g) = 0.540 mW/g

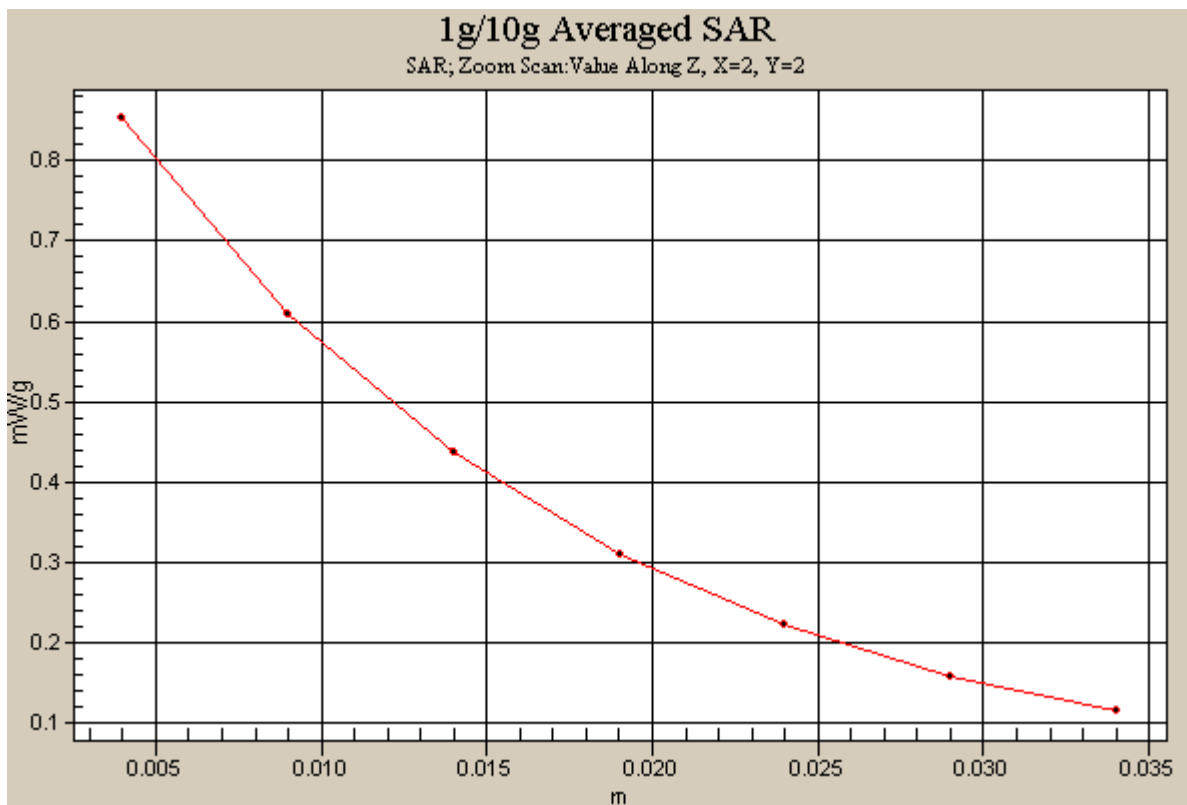

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

Left Touch PCS Ch.661, Ant Intenna, Standard Battery


Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.033 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.799 mW/g; SAR(10 g) = 0.499 mW/g

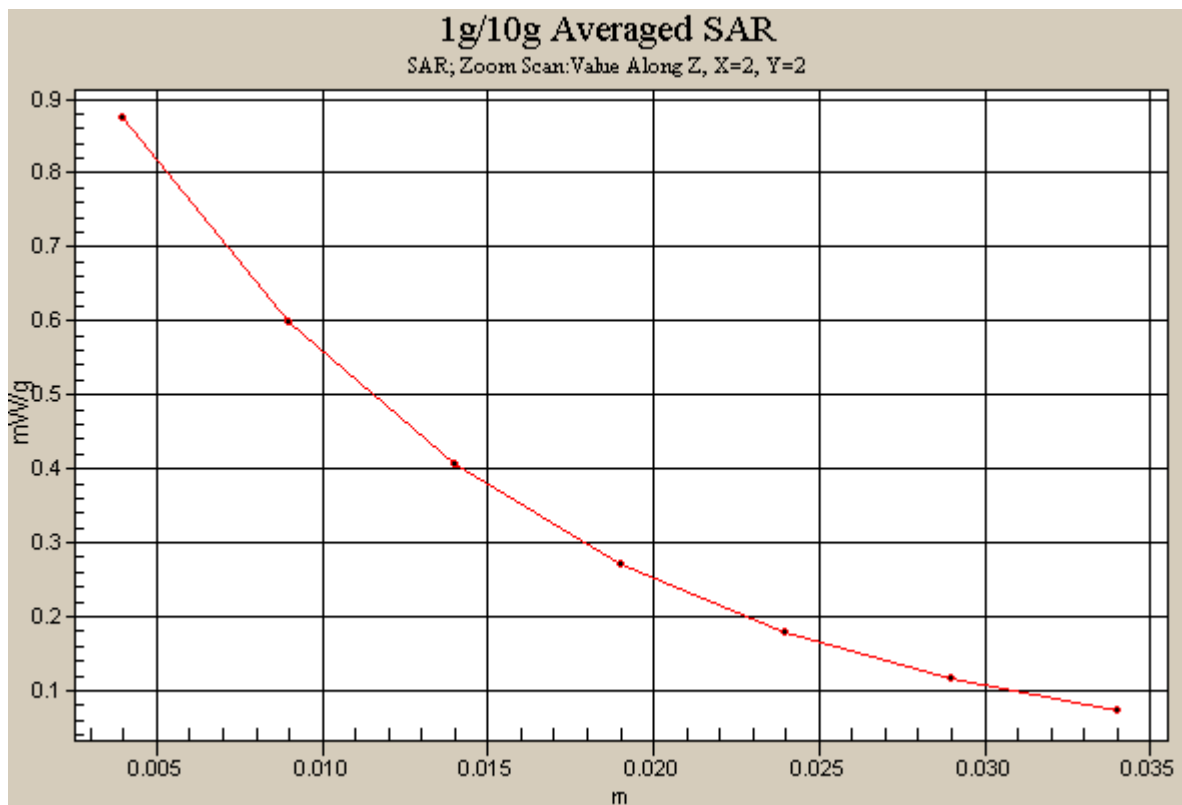

DIGITAL EMC CO., LTD

DUT: i405; Type: Folder Type

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Test Date: 2007-07-18; Ambient Temp: 22.7; Tissue Temp: 22.3

1.5cm from Body, PCS Ch.512, Ant Intenna, Standard Battery GPRS Mode

Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.214 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.808 mW/g

