

DIGITAL EMC CO., LTD

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.896 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

Dipole Validation


Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.014 dB

Peak SAR (extrapolated) = 3.61 W/kg

SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.59 mW/g

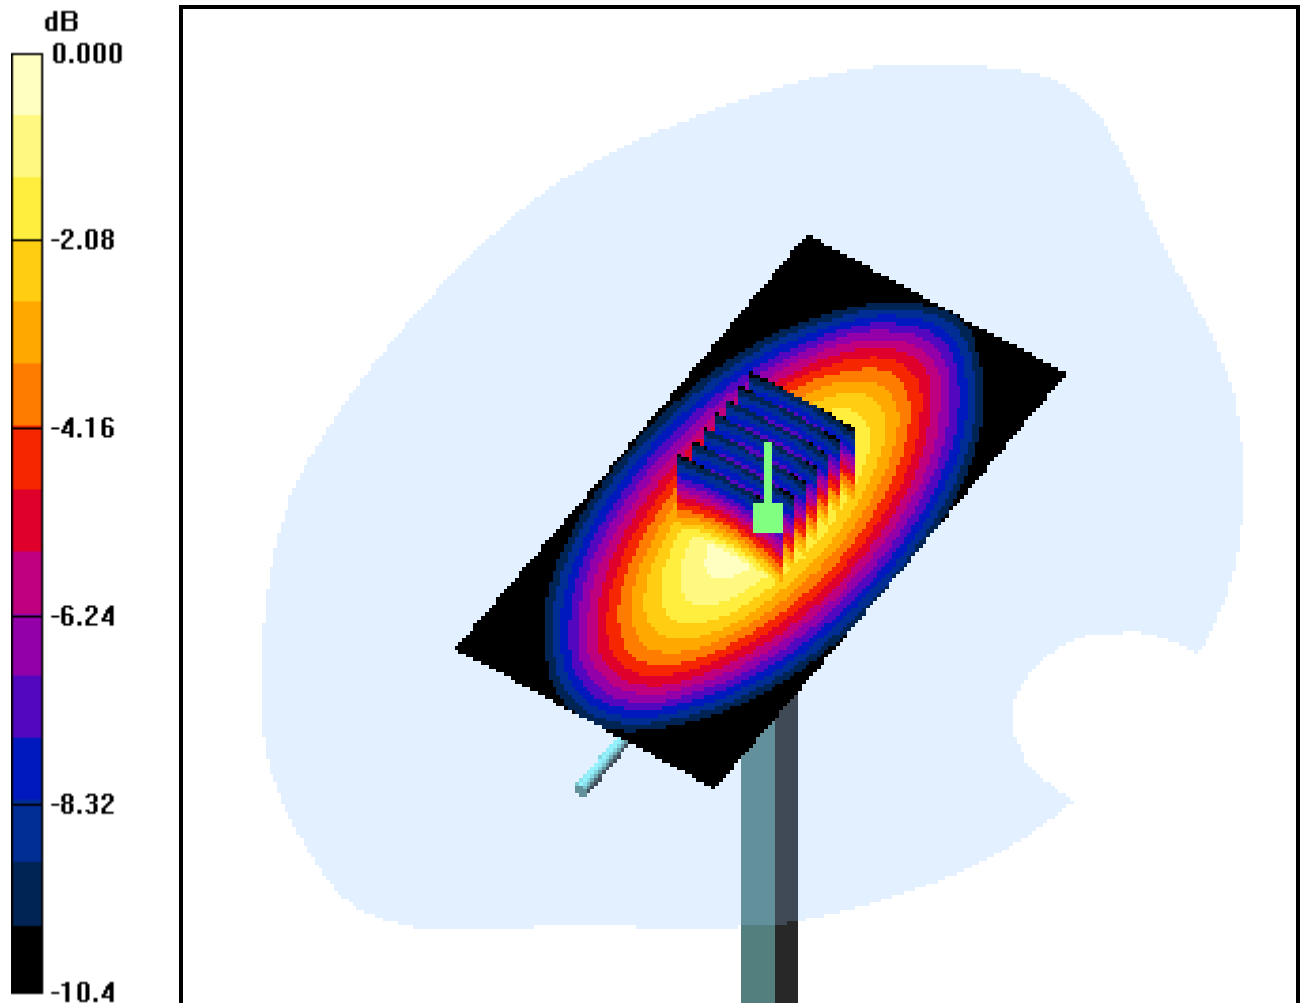

0 dB = 2.60mW/g

DIGITAL EMC CO., LTD

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d029

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

Dipole Validation


Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.003 dB

Peak SAR (extrapolated) = 18.8 W/kg

SAR(1 g) = 9.83 mW/g; SAR(10 g) = 4.85 mW/g

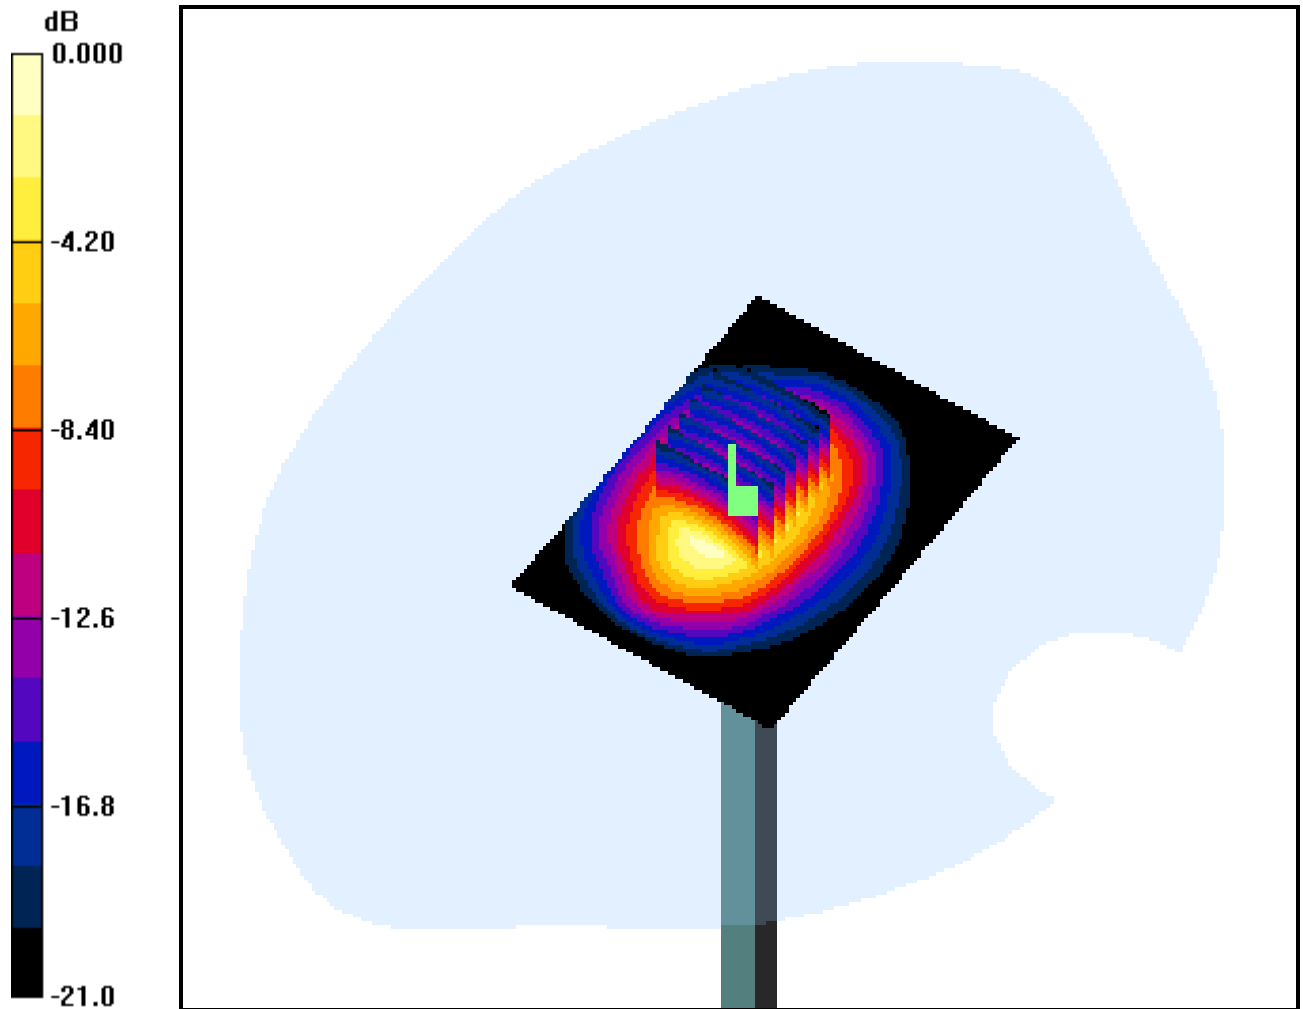

0 dB = 11.1mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.886 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

Right Touch GSM Ch.128, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.042 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.827 mW/g

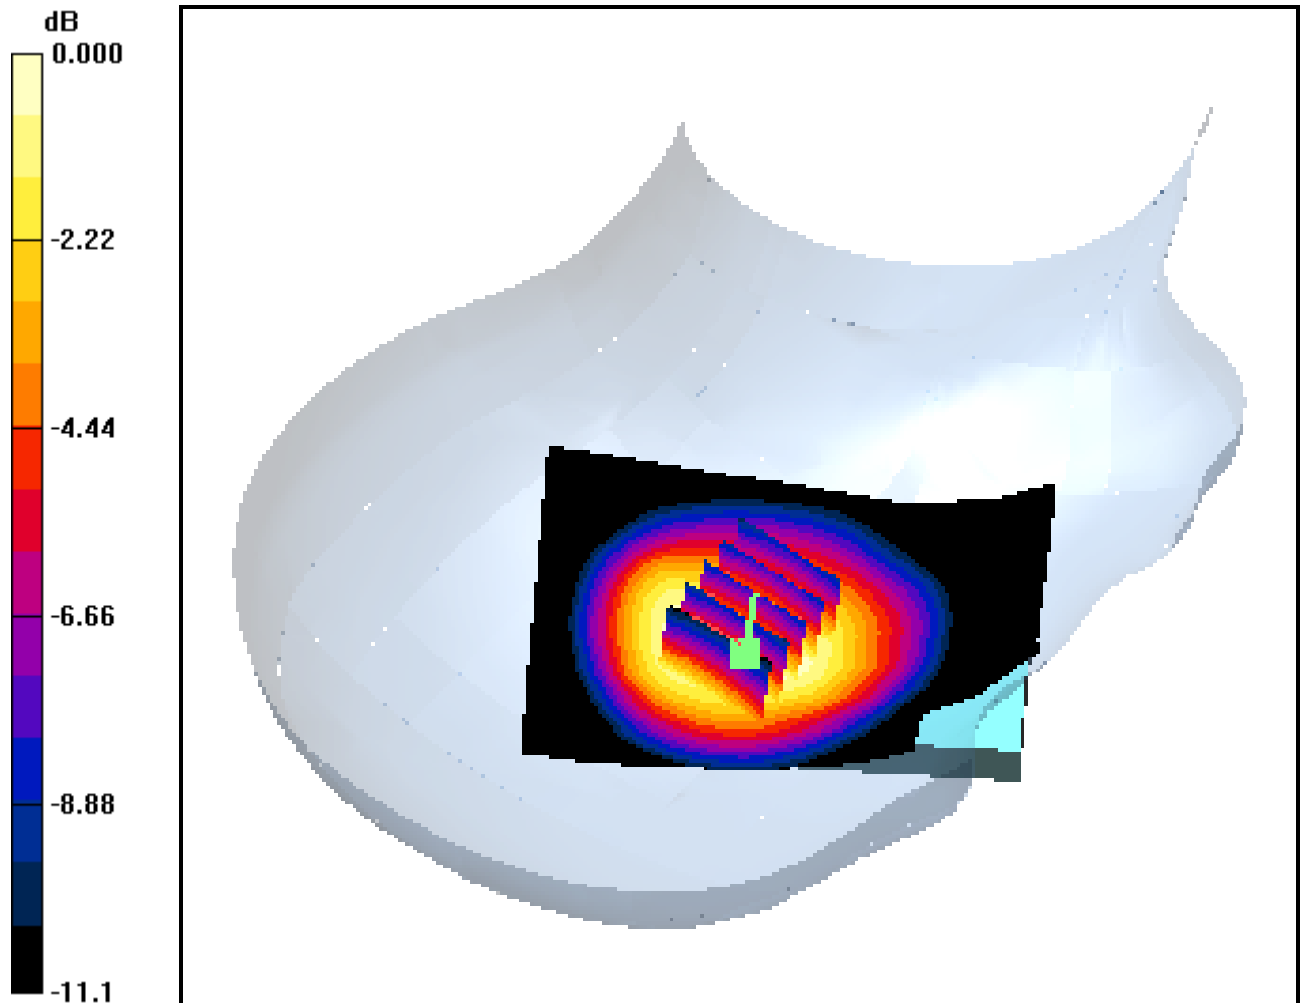

0 dB = 1.24mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.897 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

Right Touch GSM Ch.190, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.236 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.786 mW/g

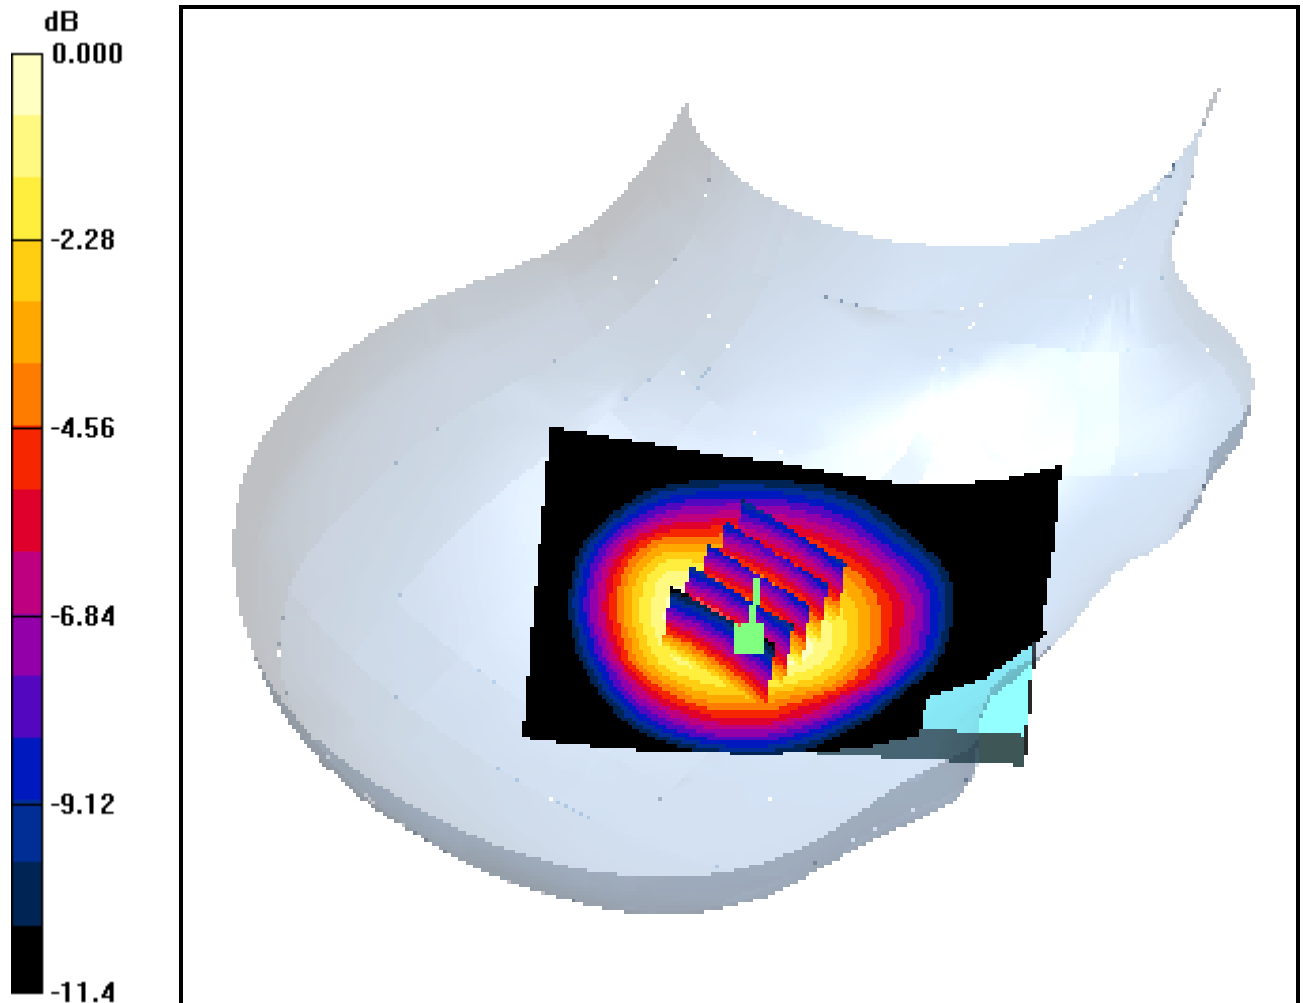

0 dB = 1.20mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.908 \text{ mho/m}$; $\epsilon_r = 41.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

Right Touch GSM Ch.251, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.113 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 1 mW/g; SAR(10 g) = 0.701 mW/g

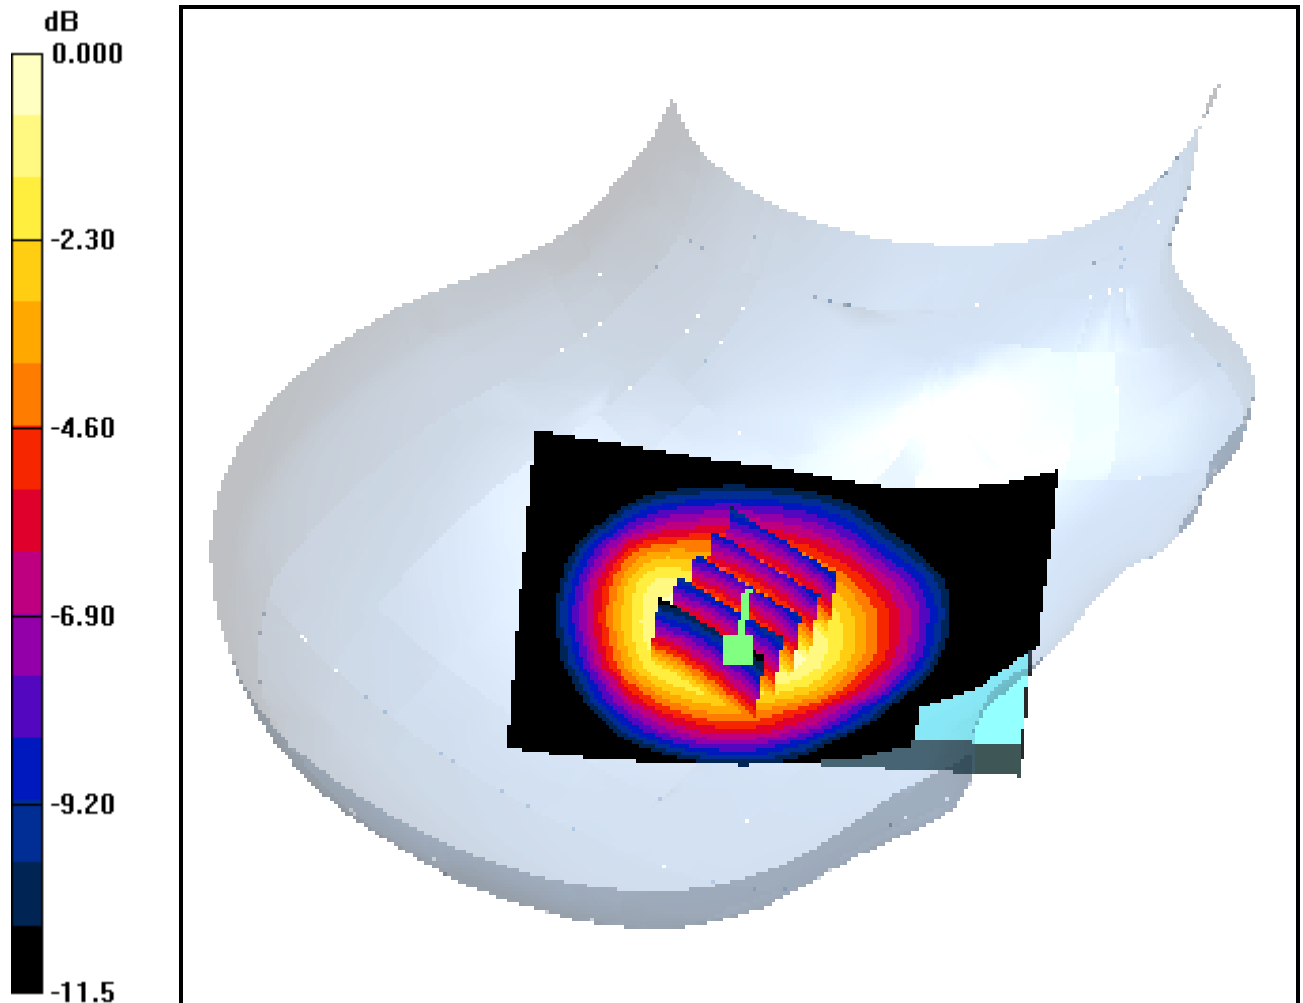

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.886 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

Right Tilt GSM Ch.128, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.016 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.674 mW/g; SAR(10 g) = 0.466 mW/g

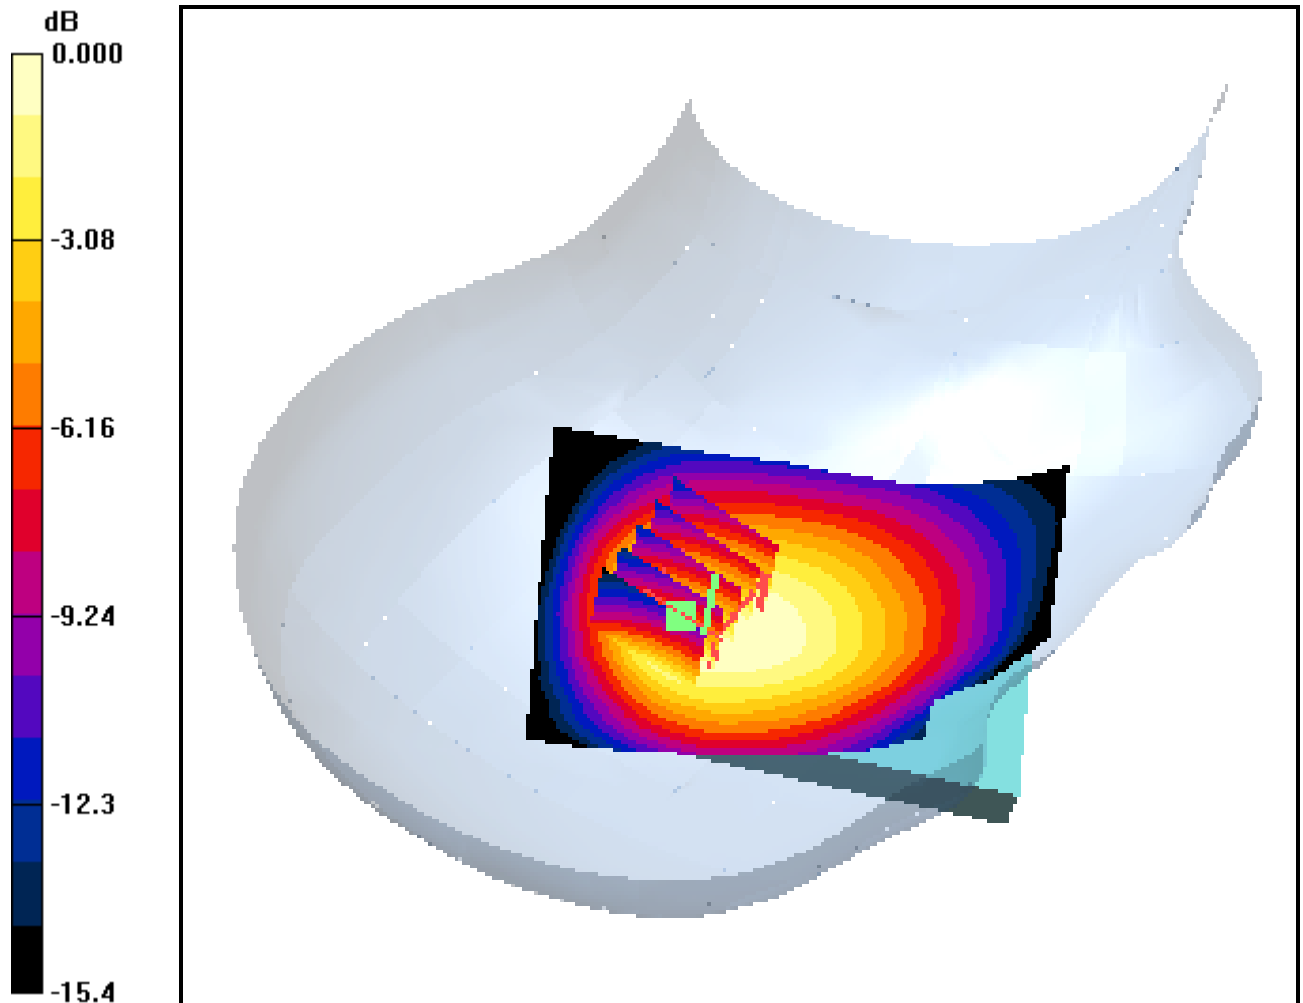

0 dB = 0.711mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.897 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

Right Tilt GSM Ch.190, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.614 mW/g; SAR(10 g) = 0.422 mW/g

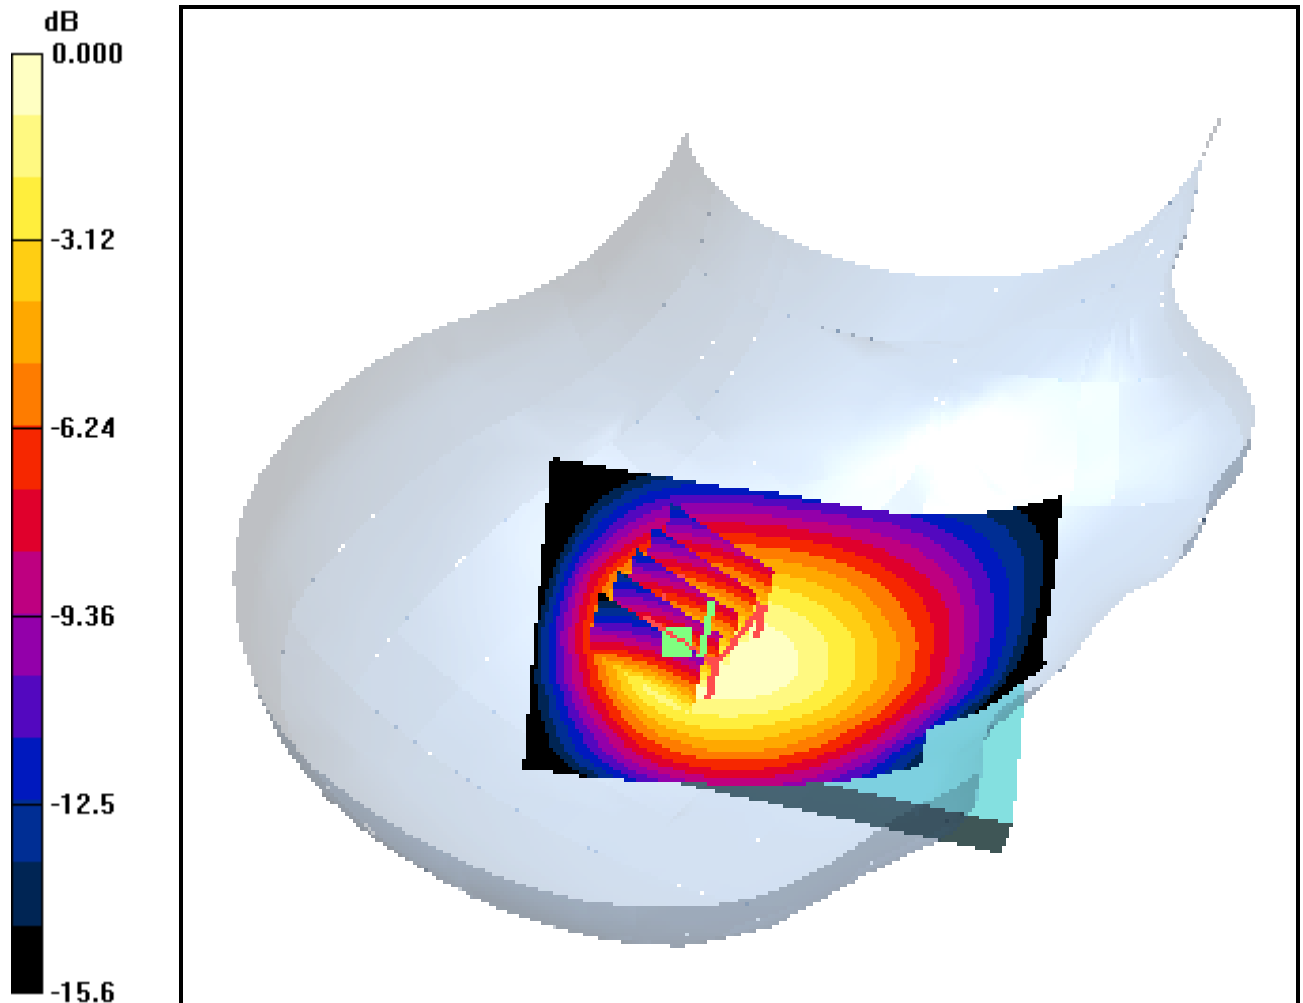

0 dB = 0.649mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.908 \text{ mho/m}$; $\epsilon_r = 41.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

Right Tilt GSM Ch.251, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.006 dB

Peak SAR (extrapolated) = 0.914 W/kg

SAR(1 g) = 0.541 mW/g; SAR(10 g) = 0.370 mW/g

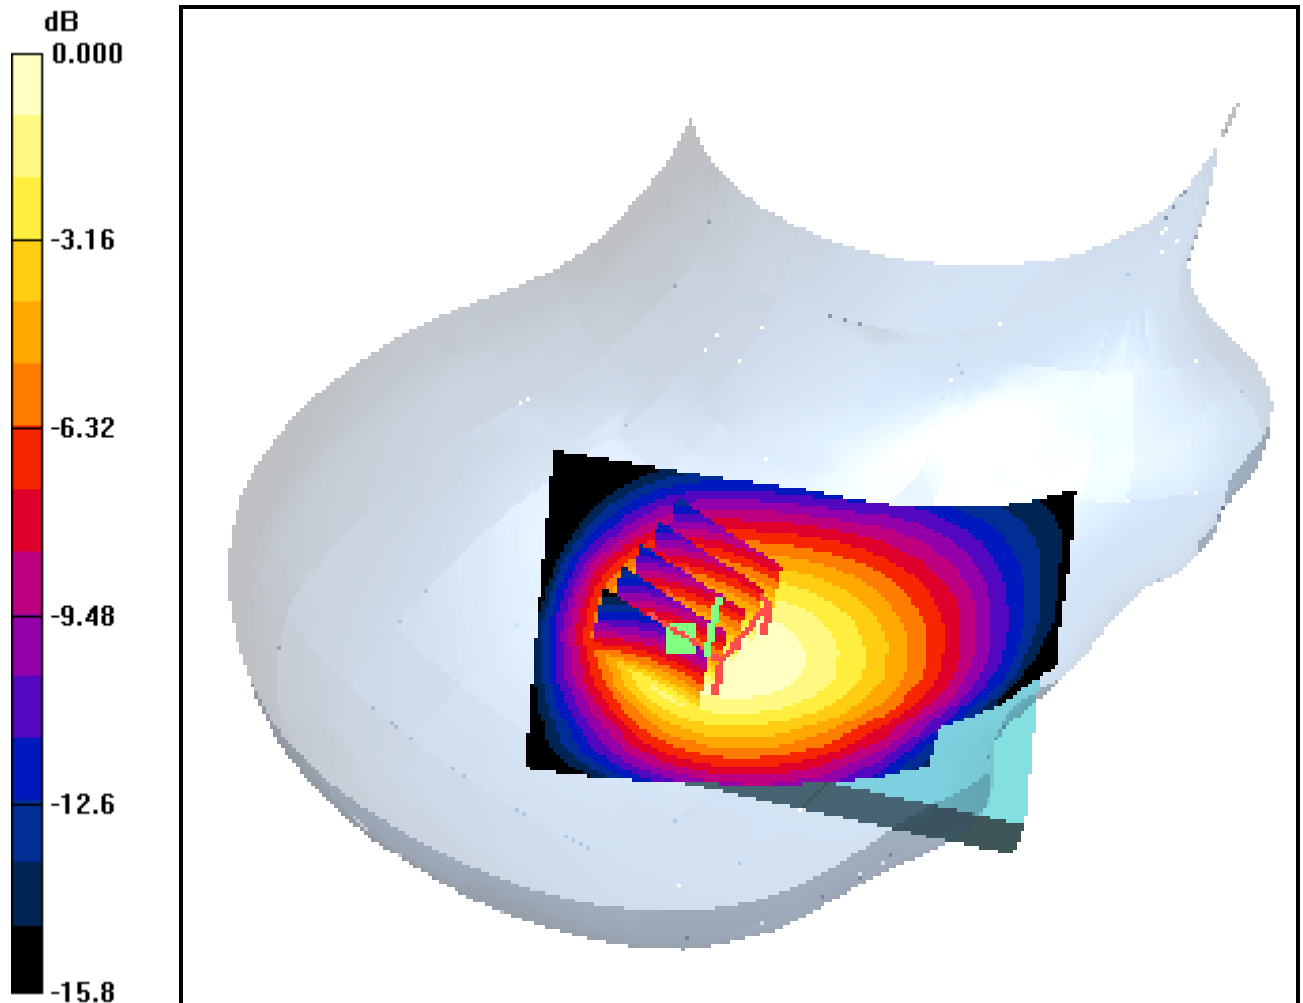

0 dB = 0.575mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.886 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

Left Touch GSM Ch.128, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.103 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.826 mW/g

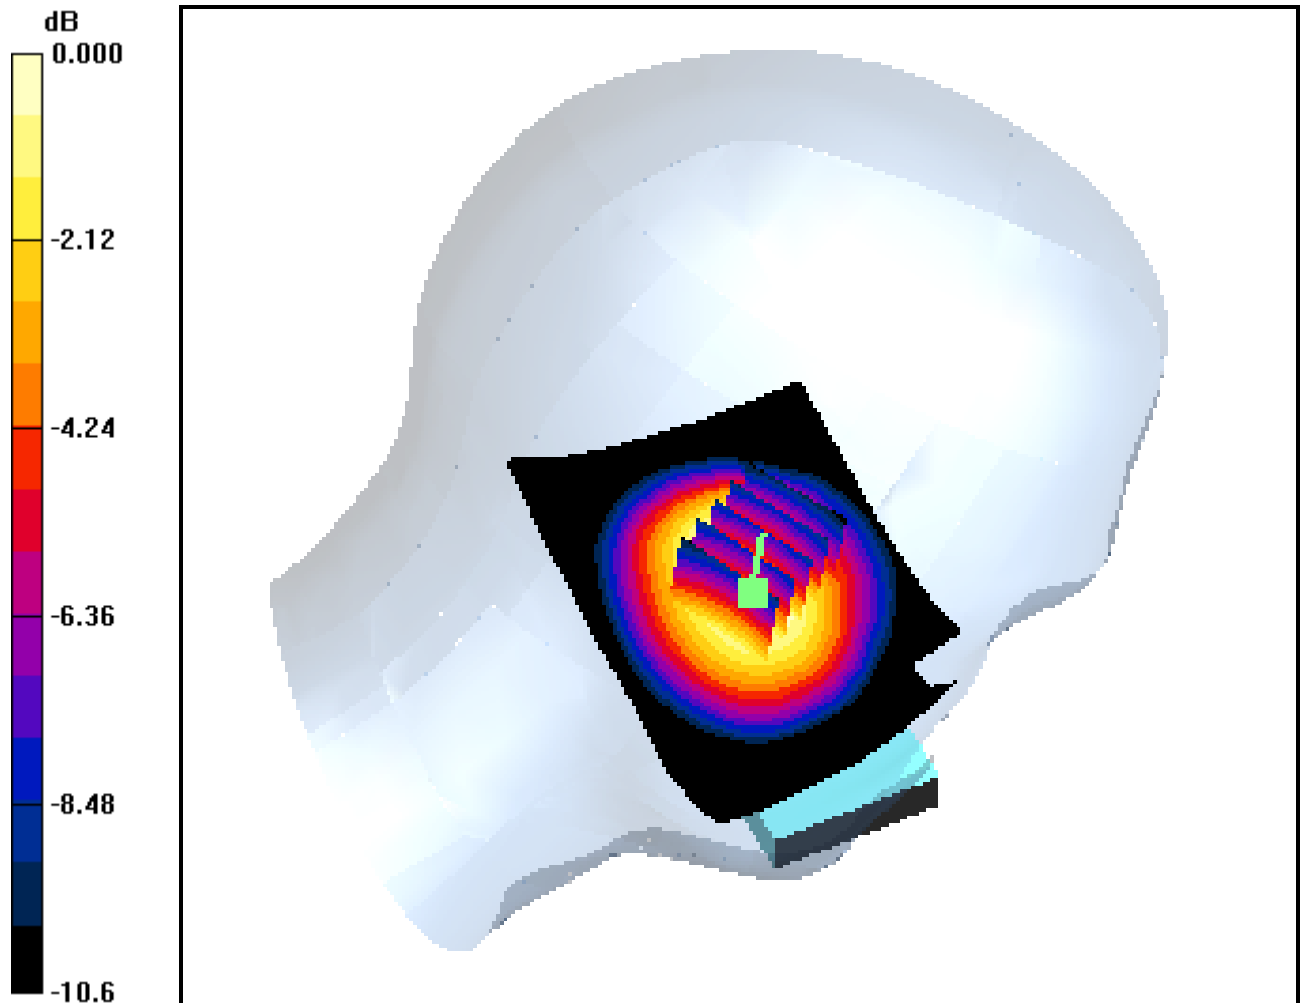

0 dB = 1.25mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.897 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

Left Touch GSM Ch.190, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.022 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.757 mW/g

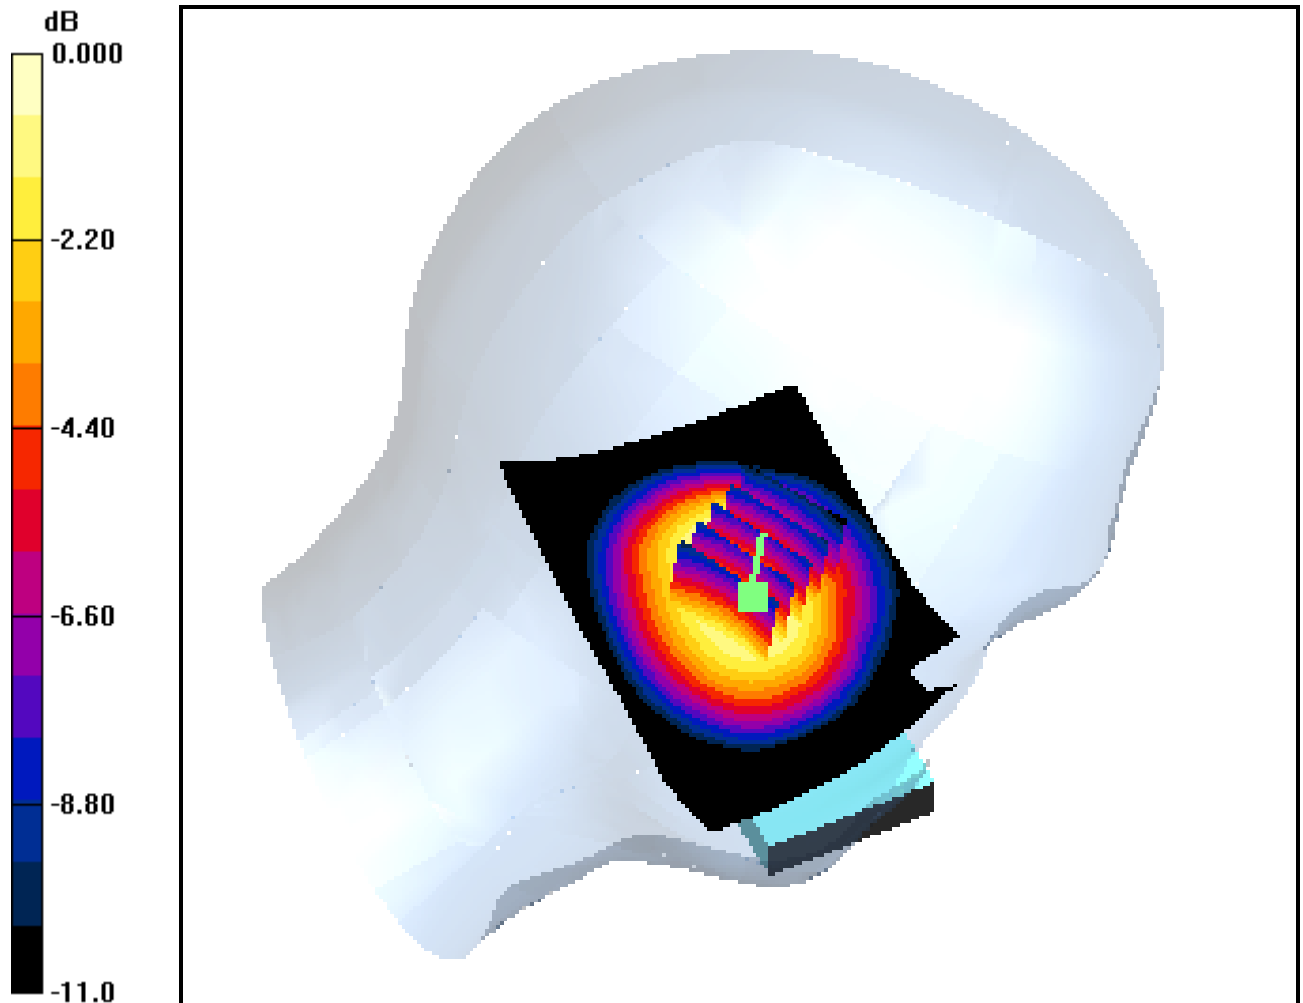

0 dB = 1.14mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.908 \text{ mho/m}$; $\epsilon_r = 41.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

Left Touch GSM Ch.251, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.013 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.709 mW/g

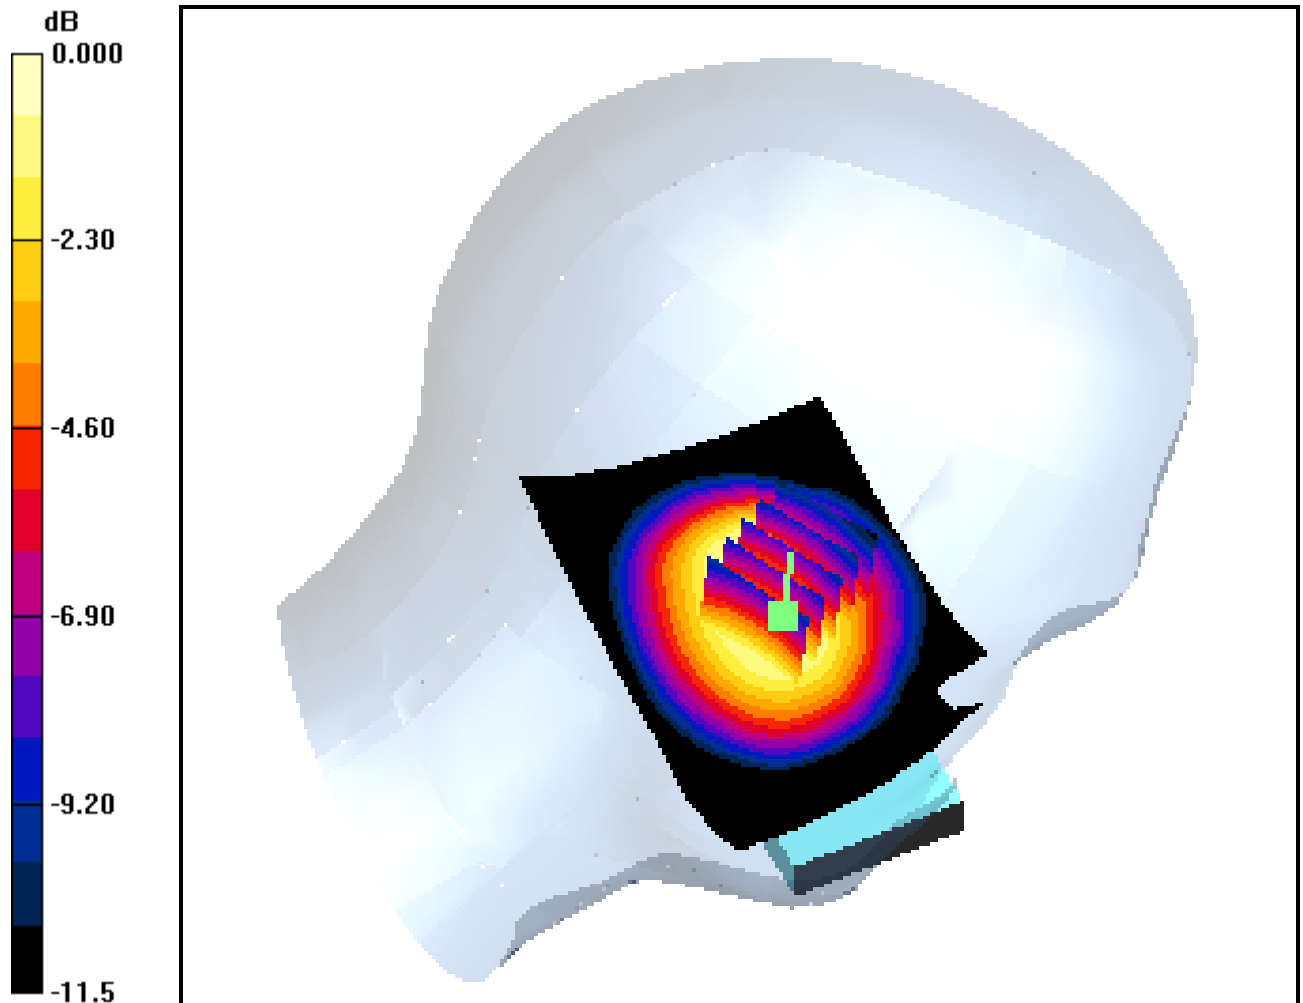

0 dB = 1.06mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.886 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

Left Tilt GSM Ch.128, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.032 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 0.796 mW/g; SAR(10 g) = 0.474 mW/g

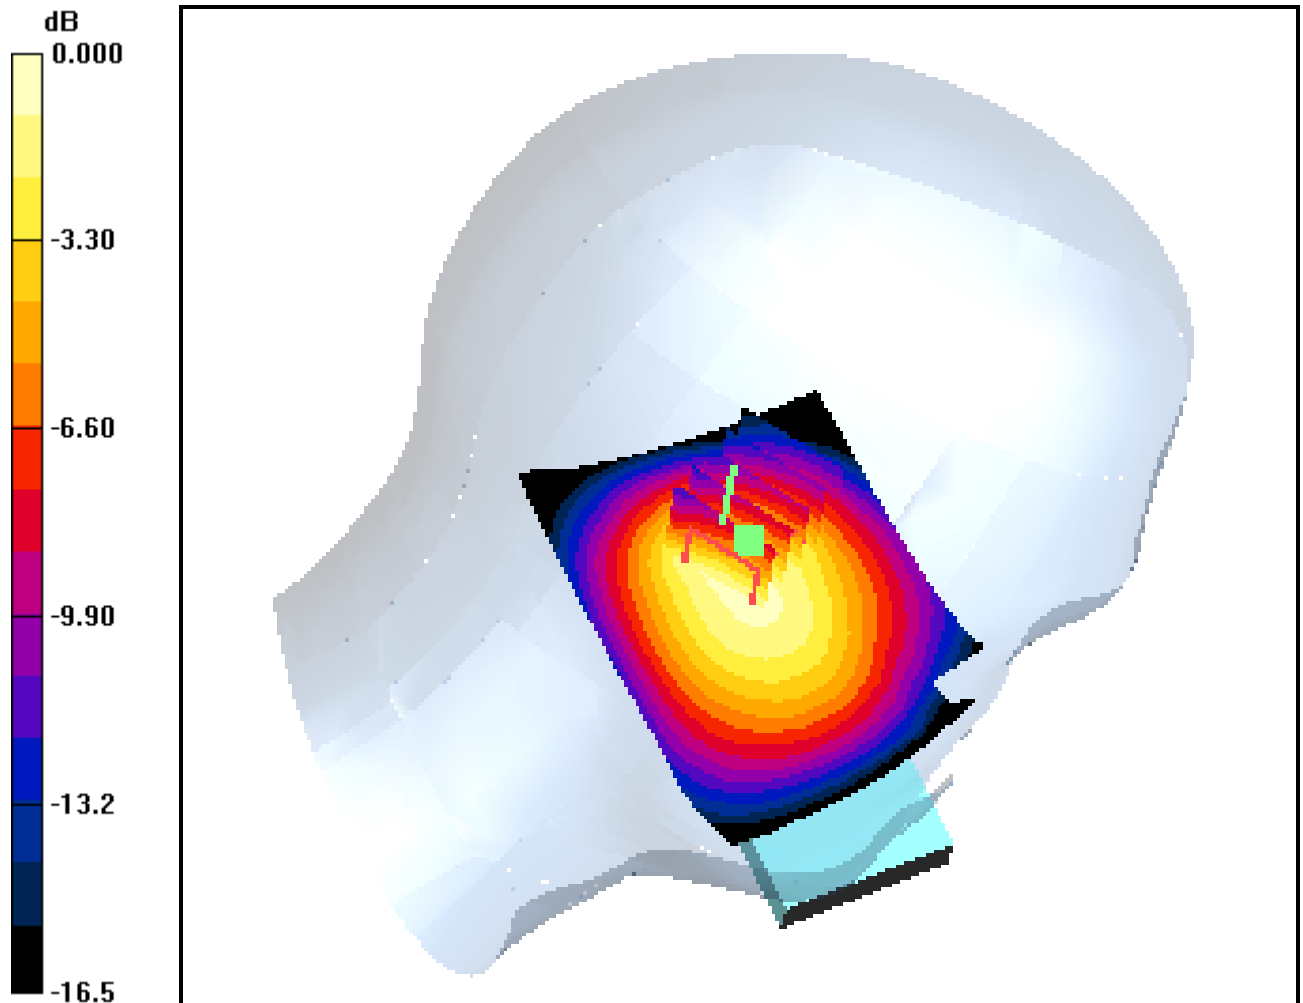

0 dB = 0.800mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.897 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

Left Tilt GSM Ch.190, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.077 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 0.735 mW/g; SAR(10 g) = 0.428 mW/g

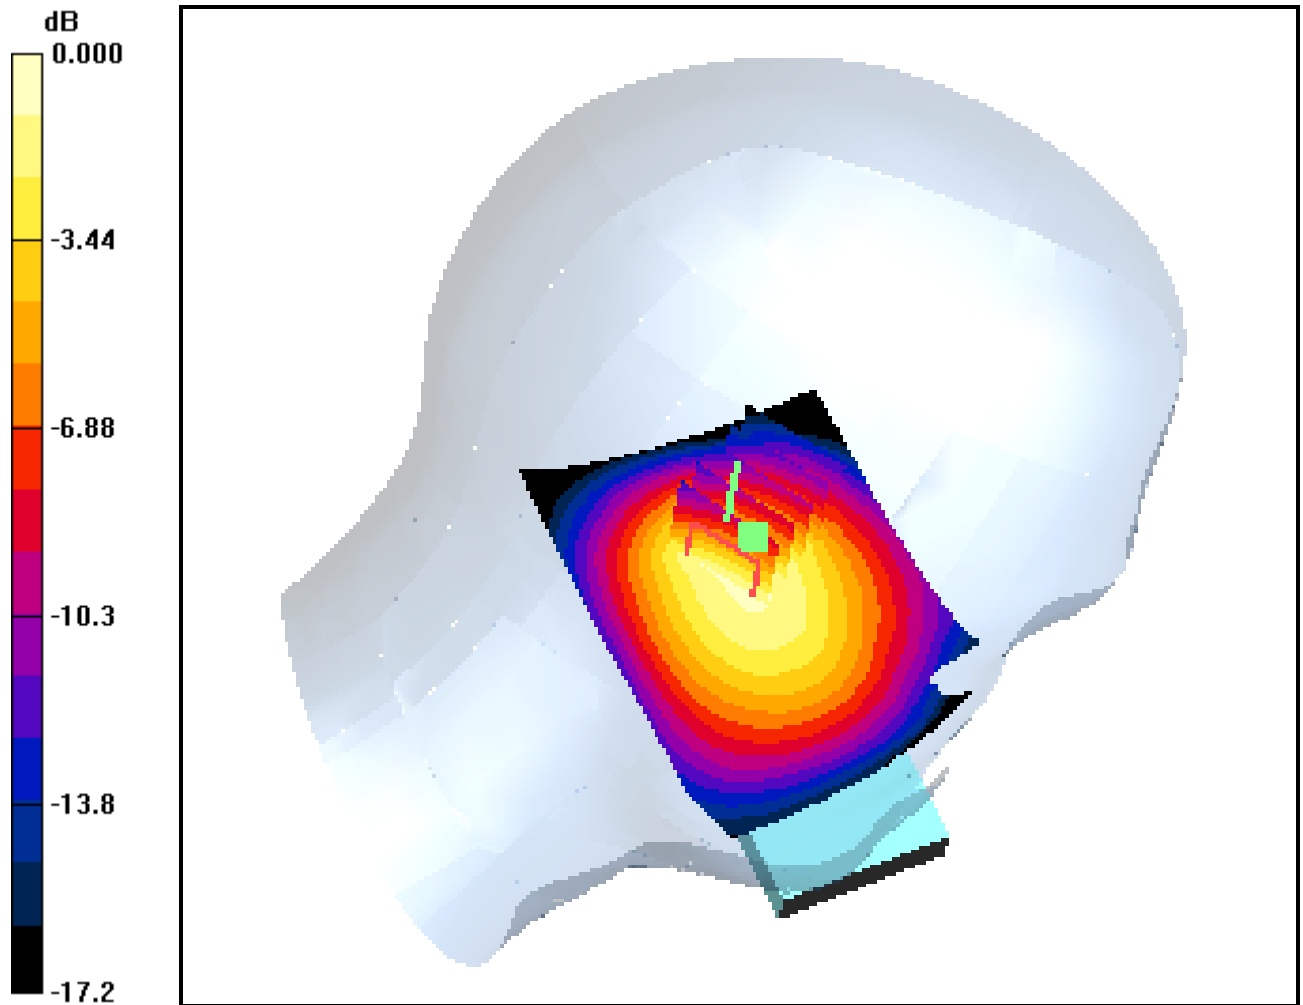

0 dB = 0.766mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.908 \text{ mho/m}$; $\epsilon_r = 41.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

Left Tilt GSM Ch.251, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.006 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.647 mW/g; SAR(10 g) = 0.378 mW/g

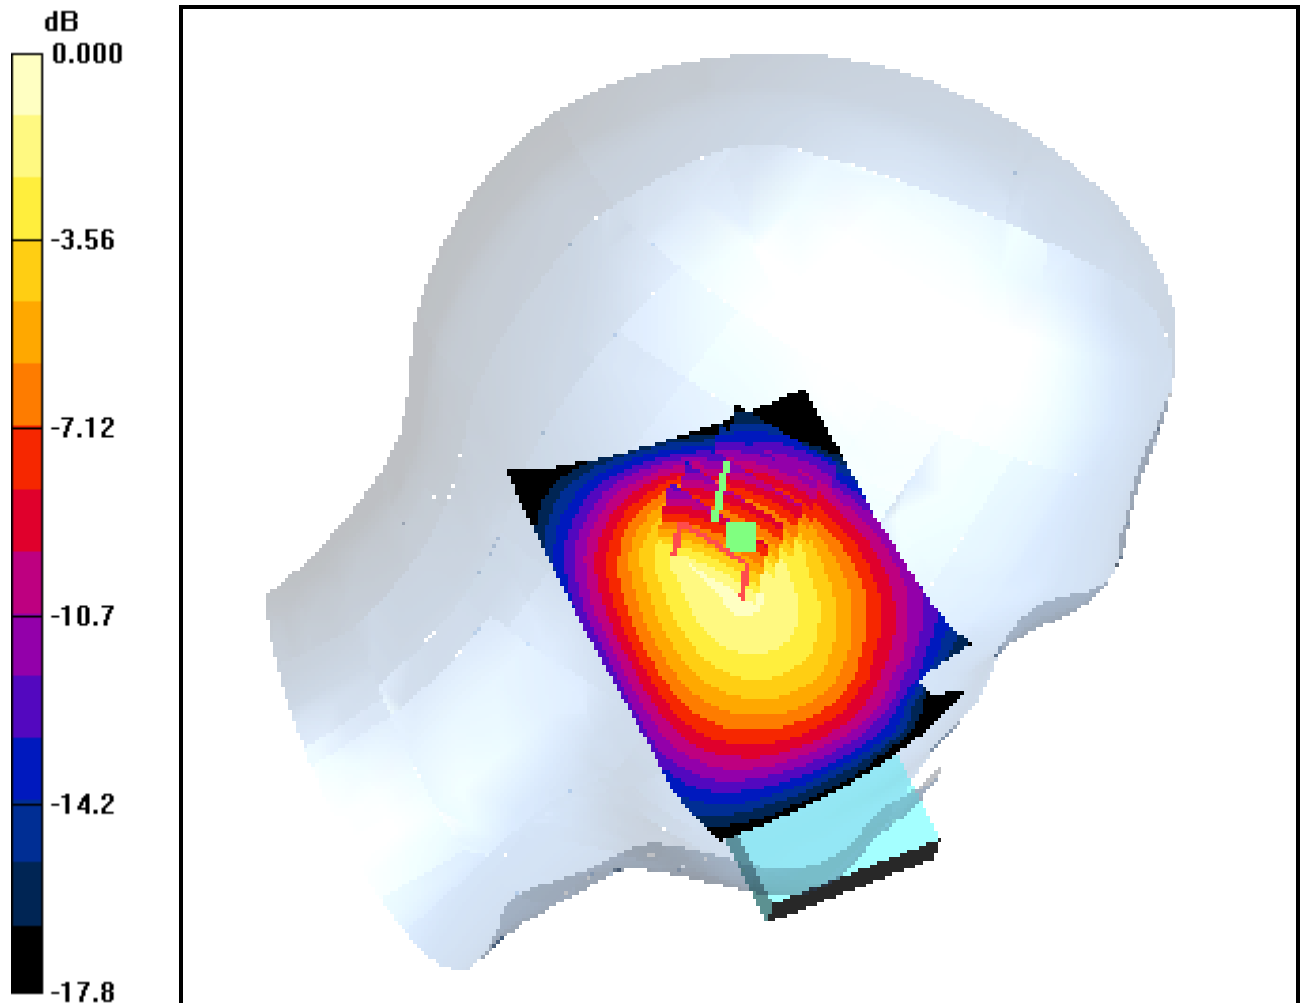

0 dB = 0.684mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.964 \text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.22, 6.22, 6.22); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

2.5cm from Body, GSM Ch.128, Ant Internal, Standard Battery GPRS Mode


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.035 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.805 mW/g

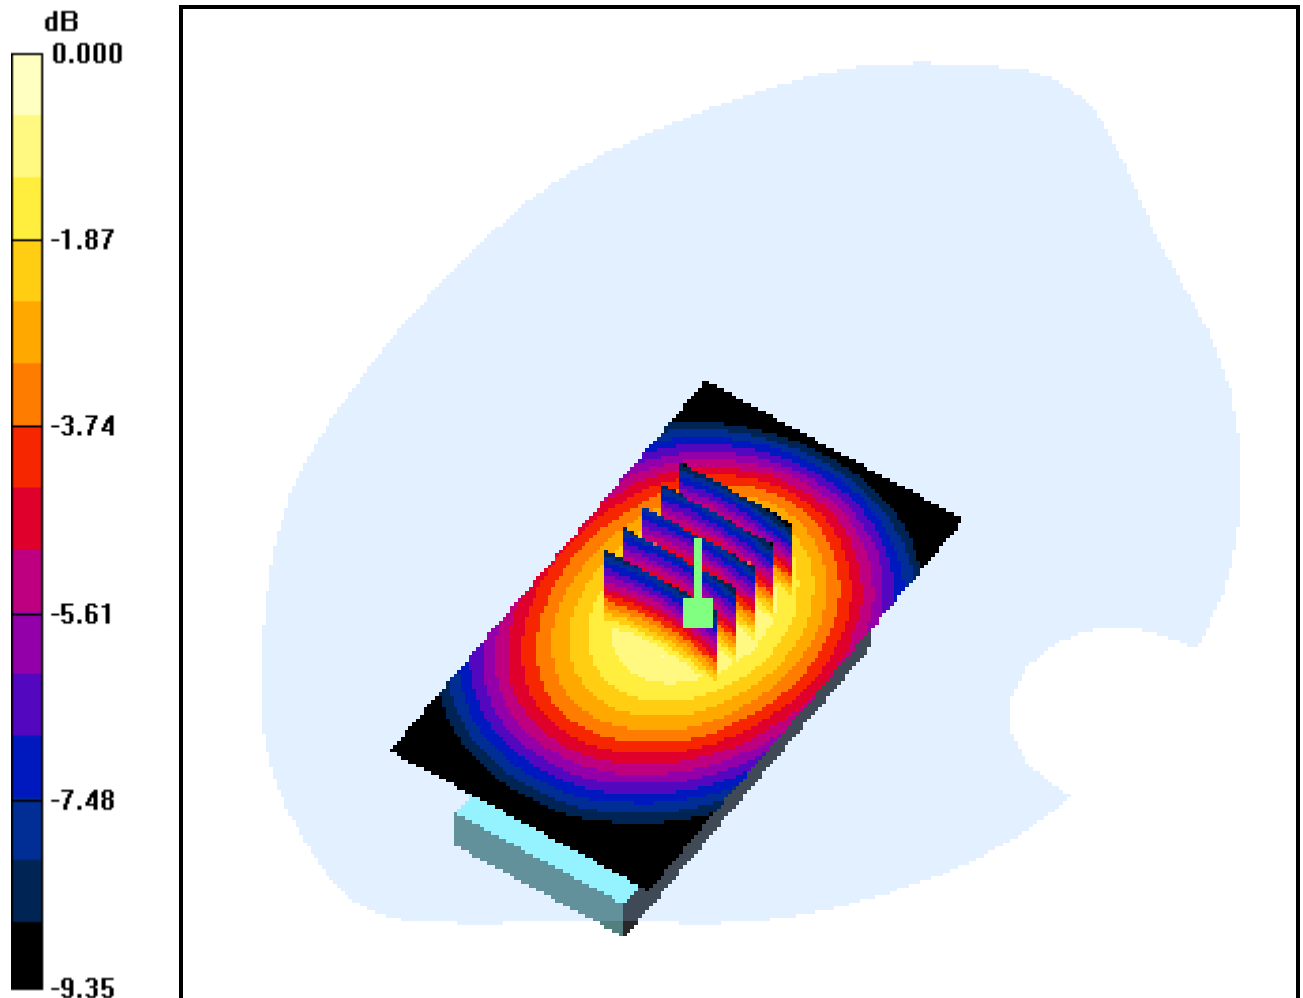

0 dB = 1.19mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.976 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.22, 6.22, 6.22); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

2.5cm from Body, GSM Ch.190, Ant Internal, Standard Battery GPRS Mode


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.140 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.777 mW/g

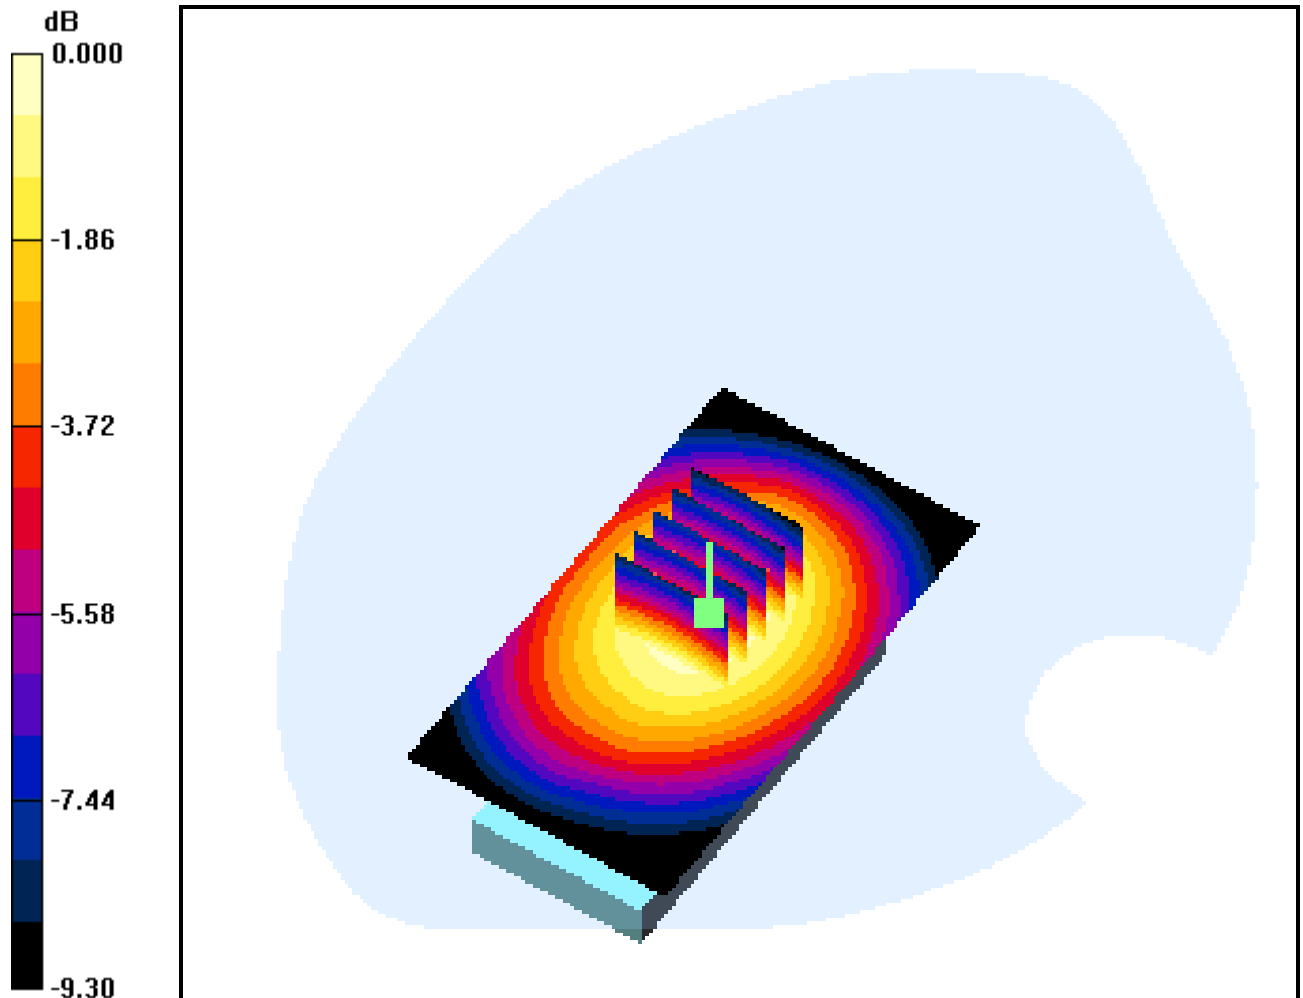

0 dB = 1.15mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.988 \text{ mho/m}$; $\epsilon_r = 53.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.22, 6.22, 6.22); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

2.5cm from Body, GSM Ch.251, Ant Internal, Standard Battery GPRS Mode


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.020 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.818 mW/g; SAR(10 g) = 0.586 mW/g

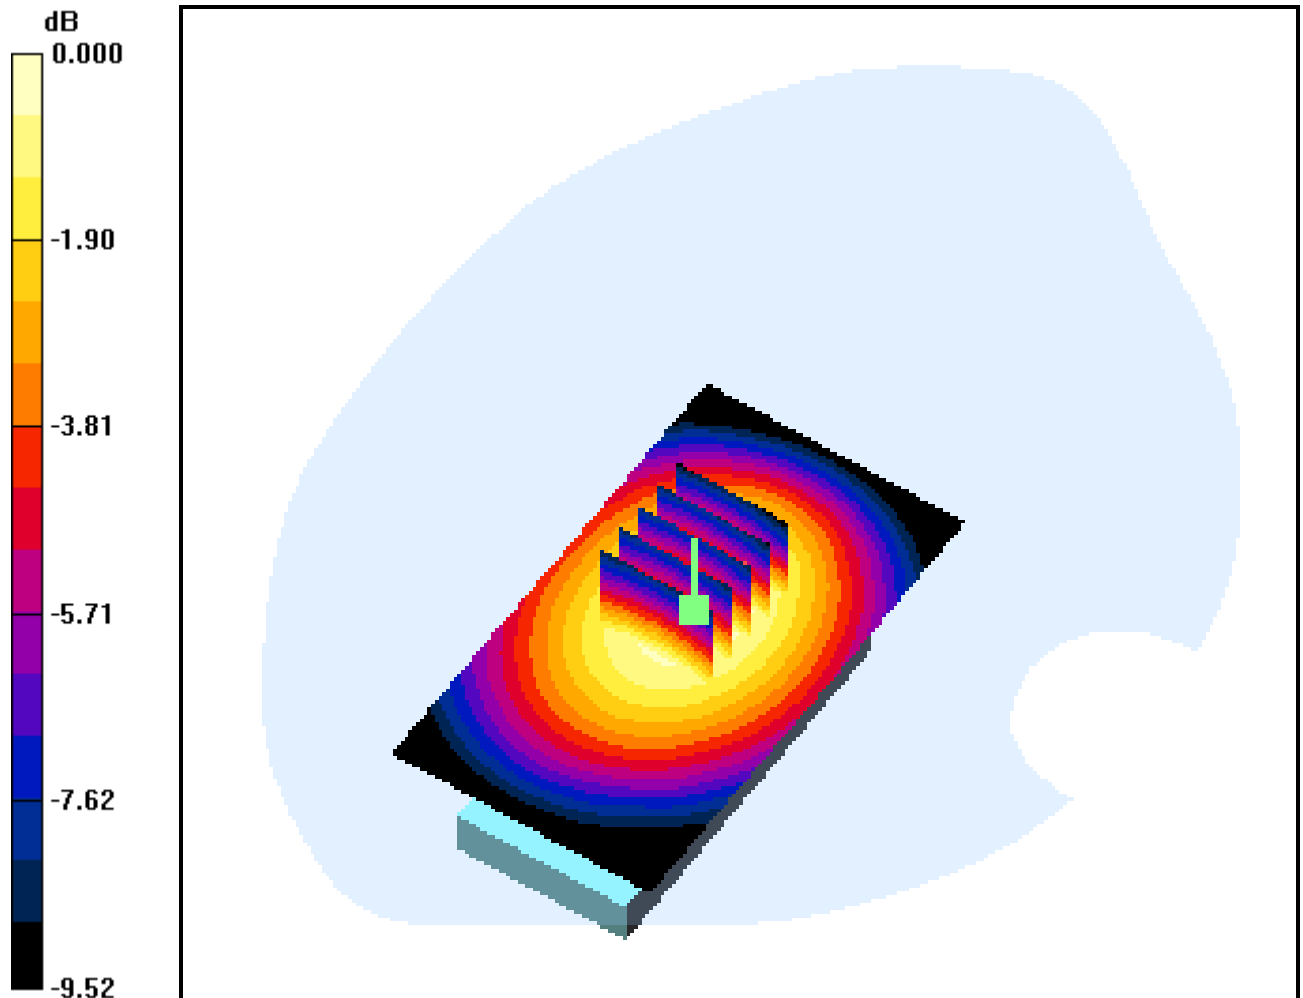

0 dB = 0.863mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.964 \text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.22, 6.22, 6.22); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

2.5cm from Body, GSM Ch.128, Ant Internal, Standard Battery


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.082 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.342 mW/g; SAR(10 g) = 0.246 mW/g

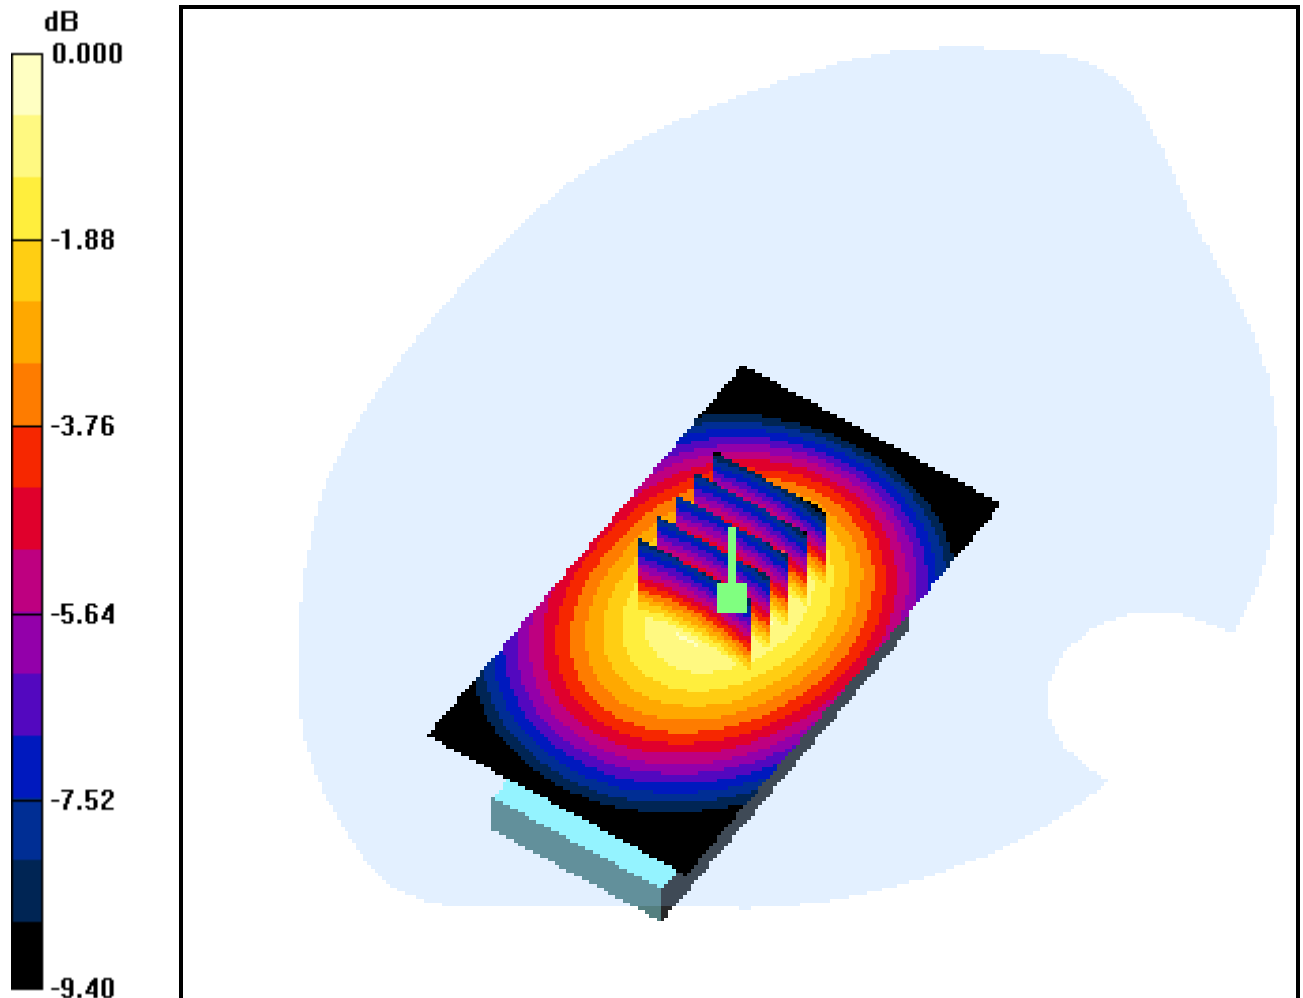

0 dB = 0.364mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

Right Touch PCS Ch.512, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.090 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.929 mW/g; SAR(10 g) = 0.489 mW/g

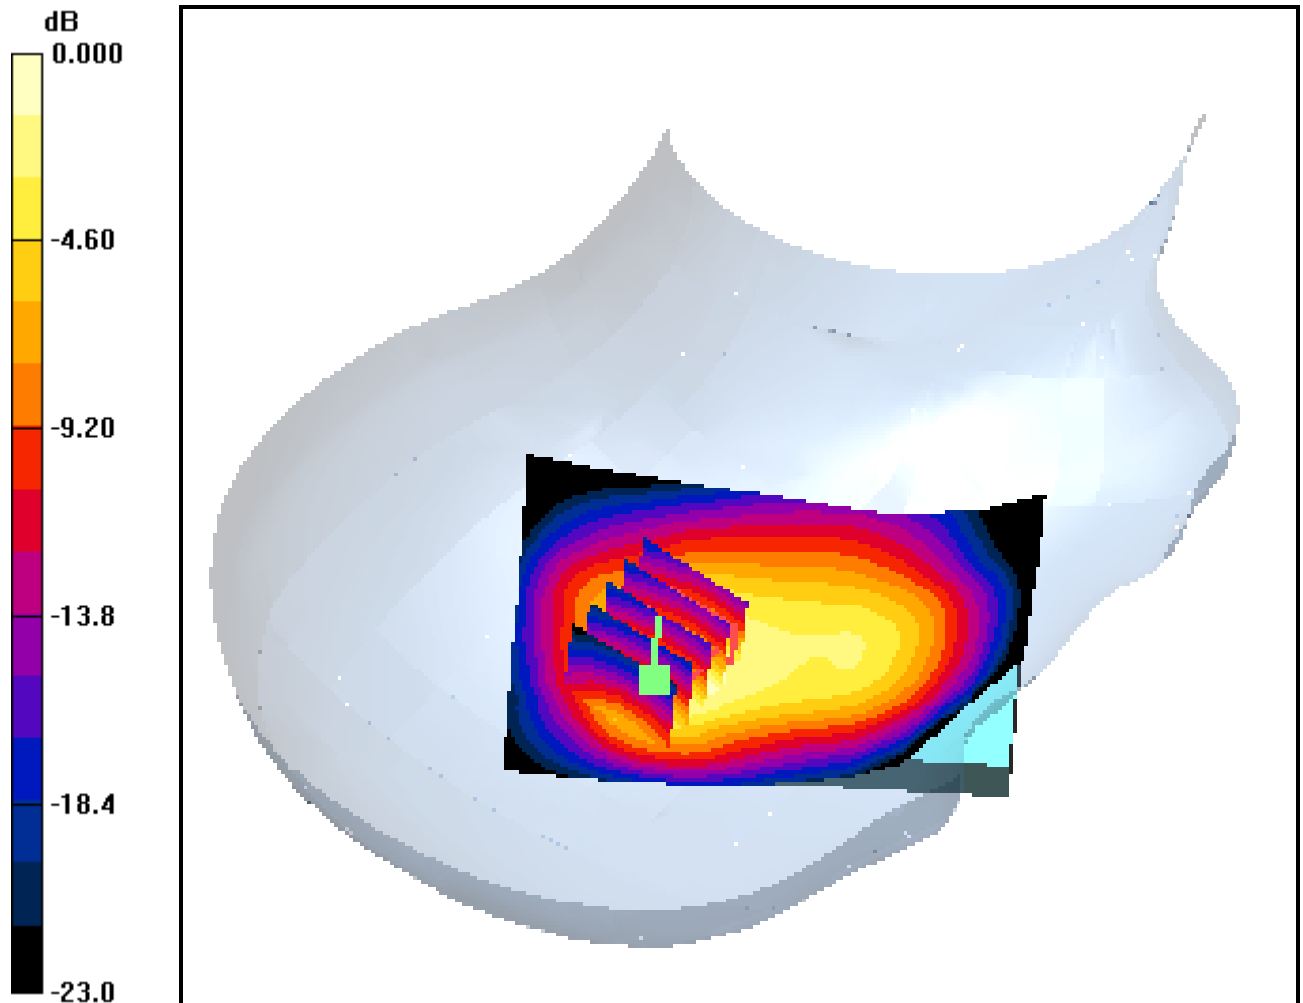

0 dB = 1.04mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

Right Touch PCS Ch.661, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.032 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.584 mW/g

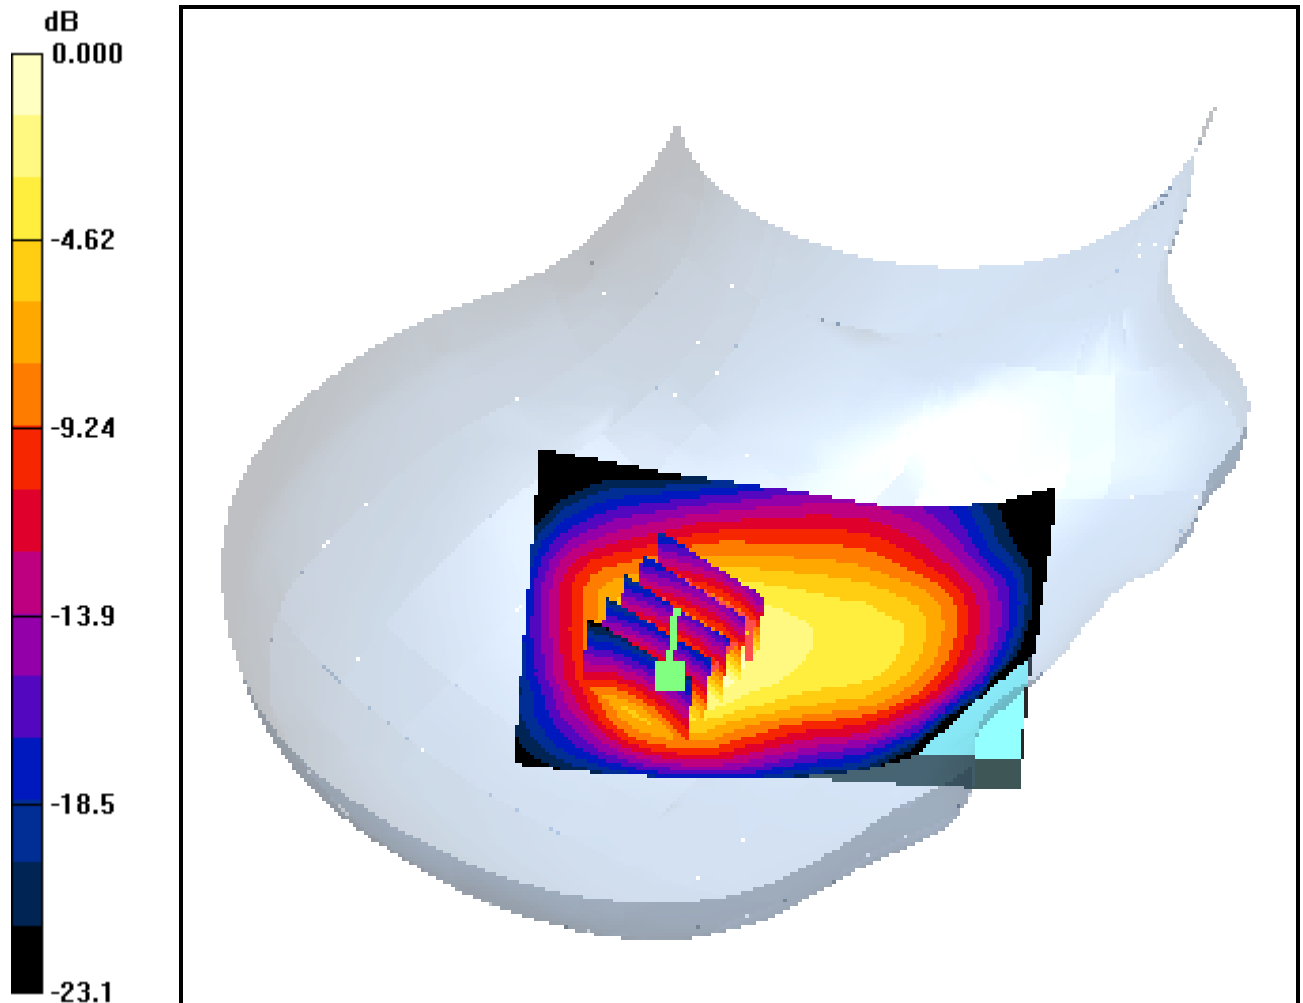

0 dB = 1.23mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

Right Touch PCS Ch.810, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.047 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.608 mW/g

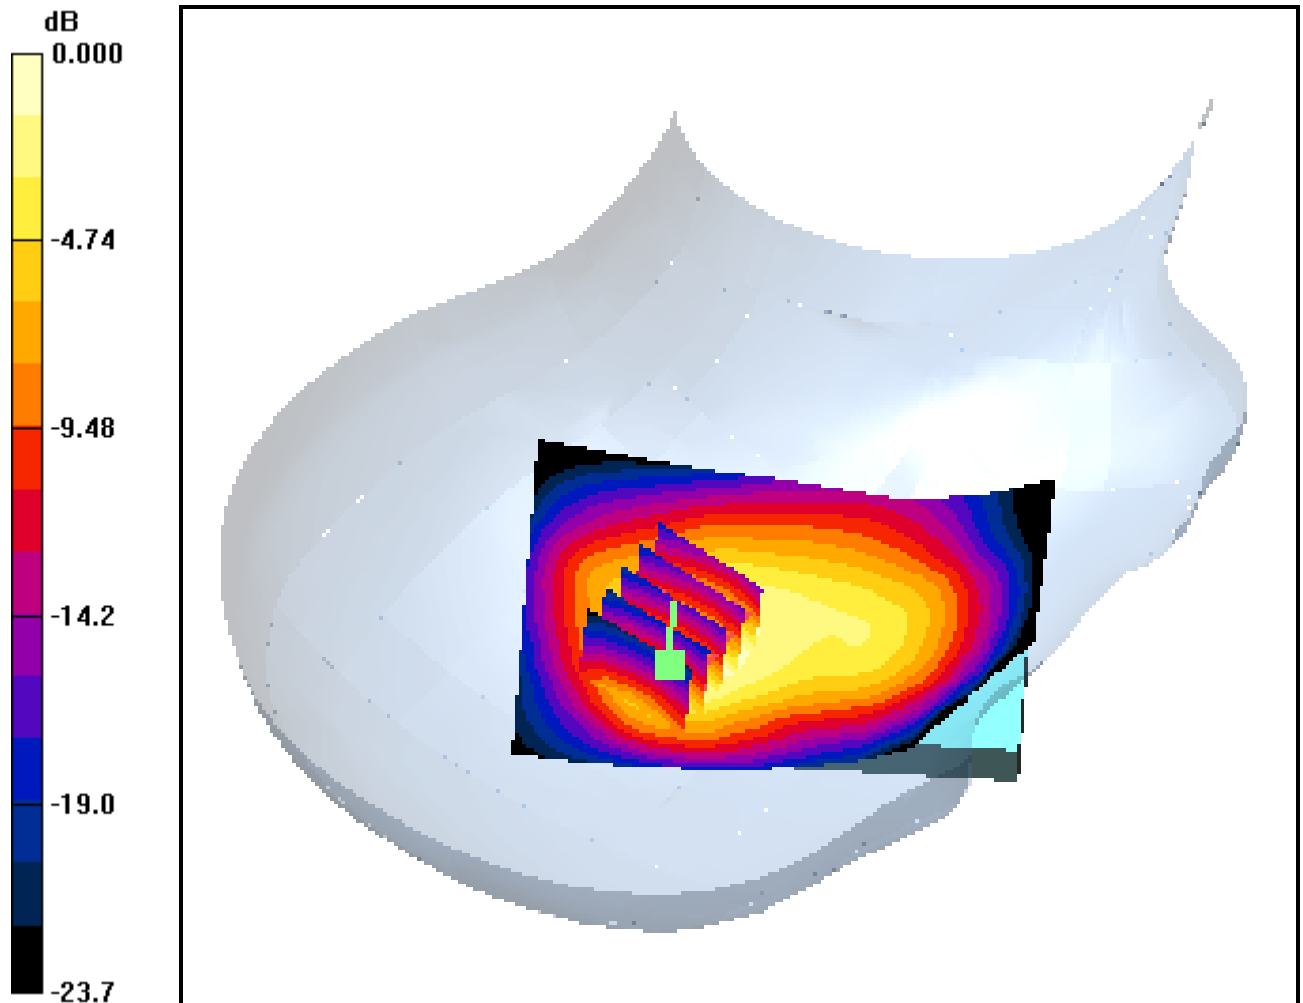

0 dB = 1.24mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

Right Tilt PCS Ch.512, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.022 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.834 mW/g; SAR(10 g) = 0.410 mW/g

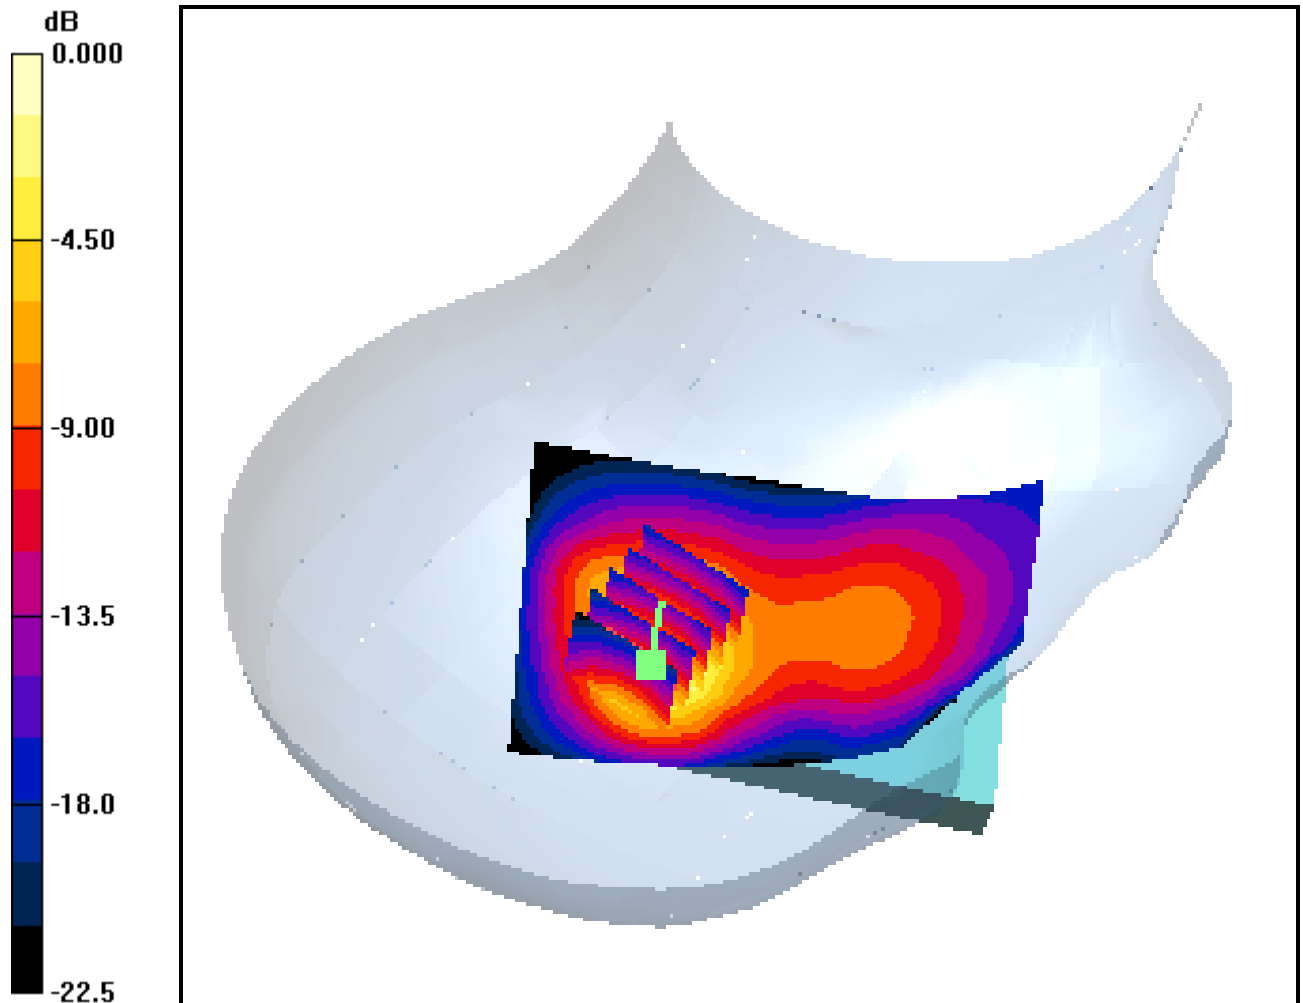

0 dB = 0.941mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

Right Tilt PCS Ch.661, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.041 dB

Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.525 mW/g

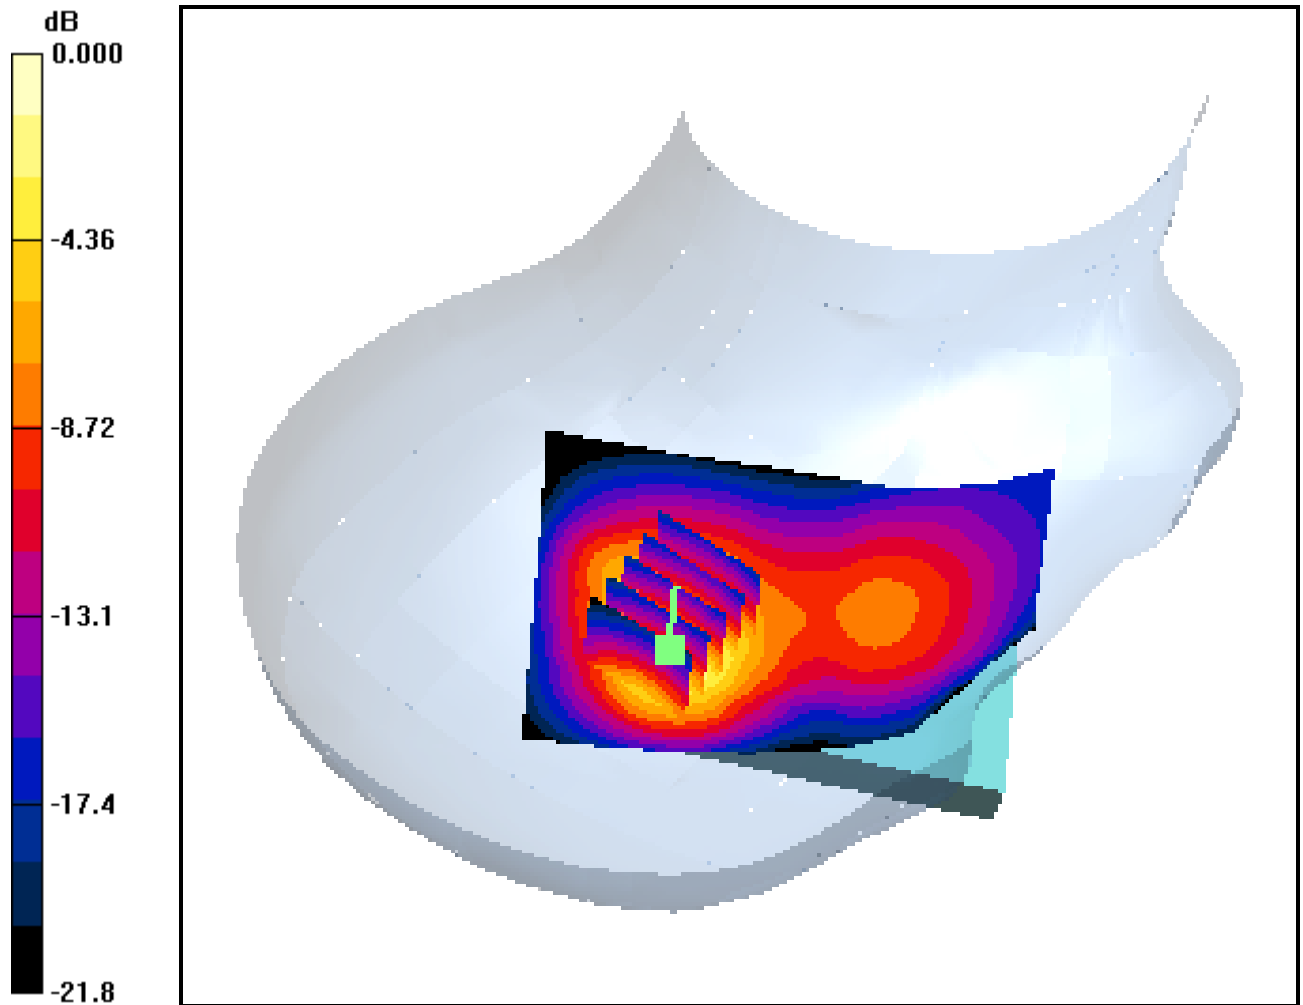

0 dB = 1.18mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

Right Tilt PCS Ch.810, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.014 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.546 mW/g

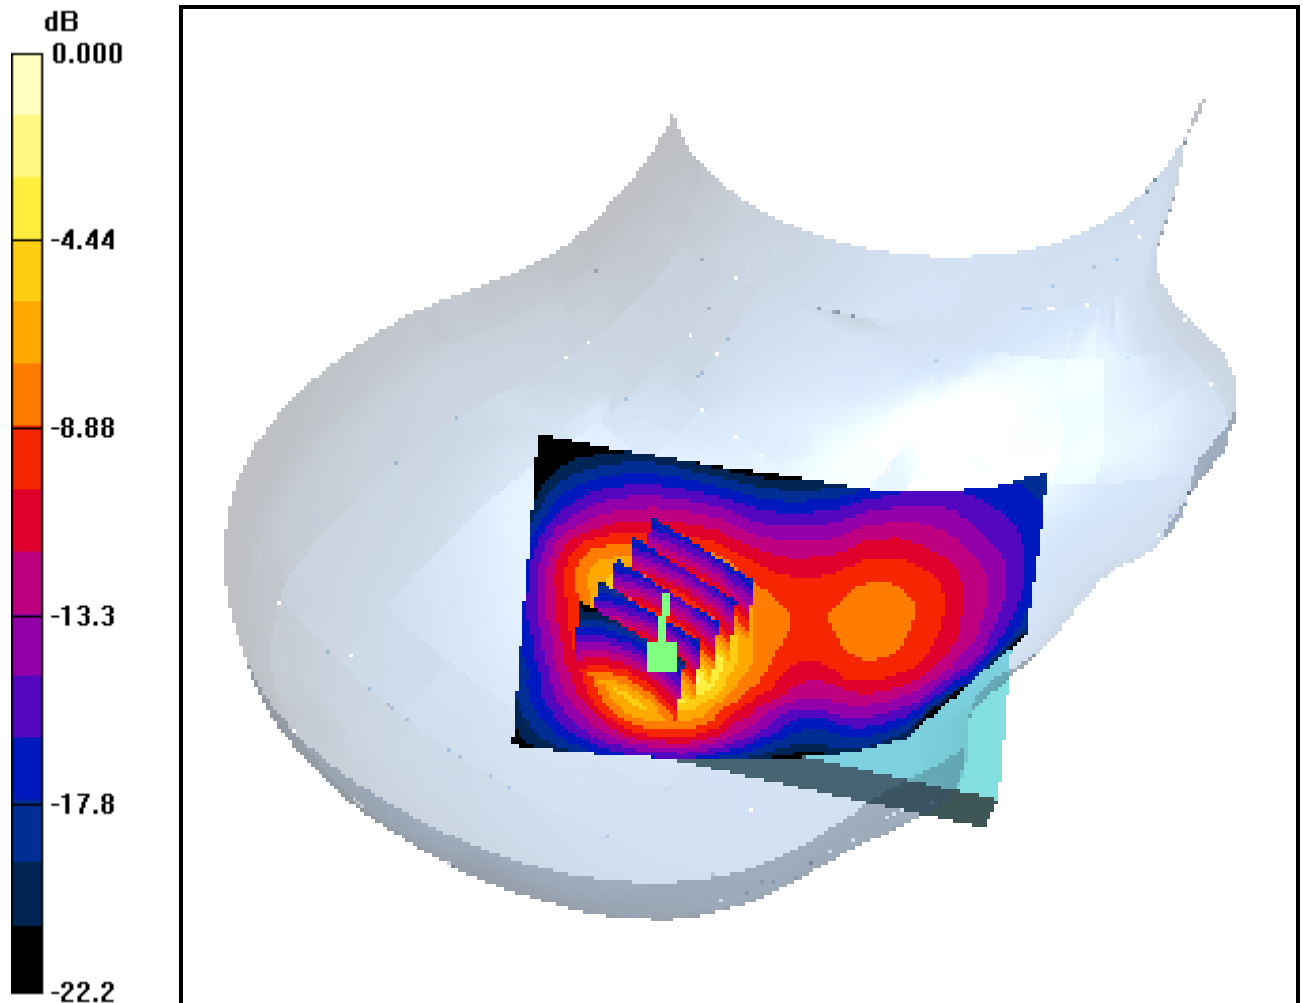

0 dB = 1.24mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

Left Touch PCS Ch.512, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.034 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.880 mW/g; SAR(10 g) = 0.492 mW/g

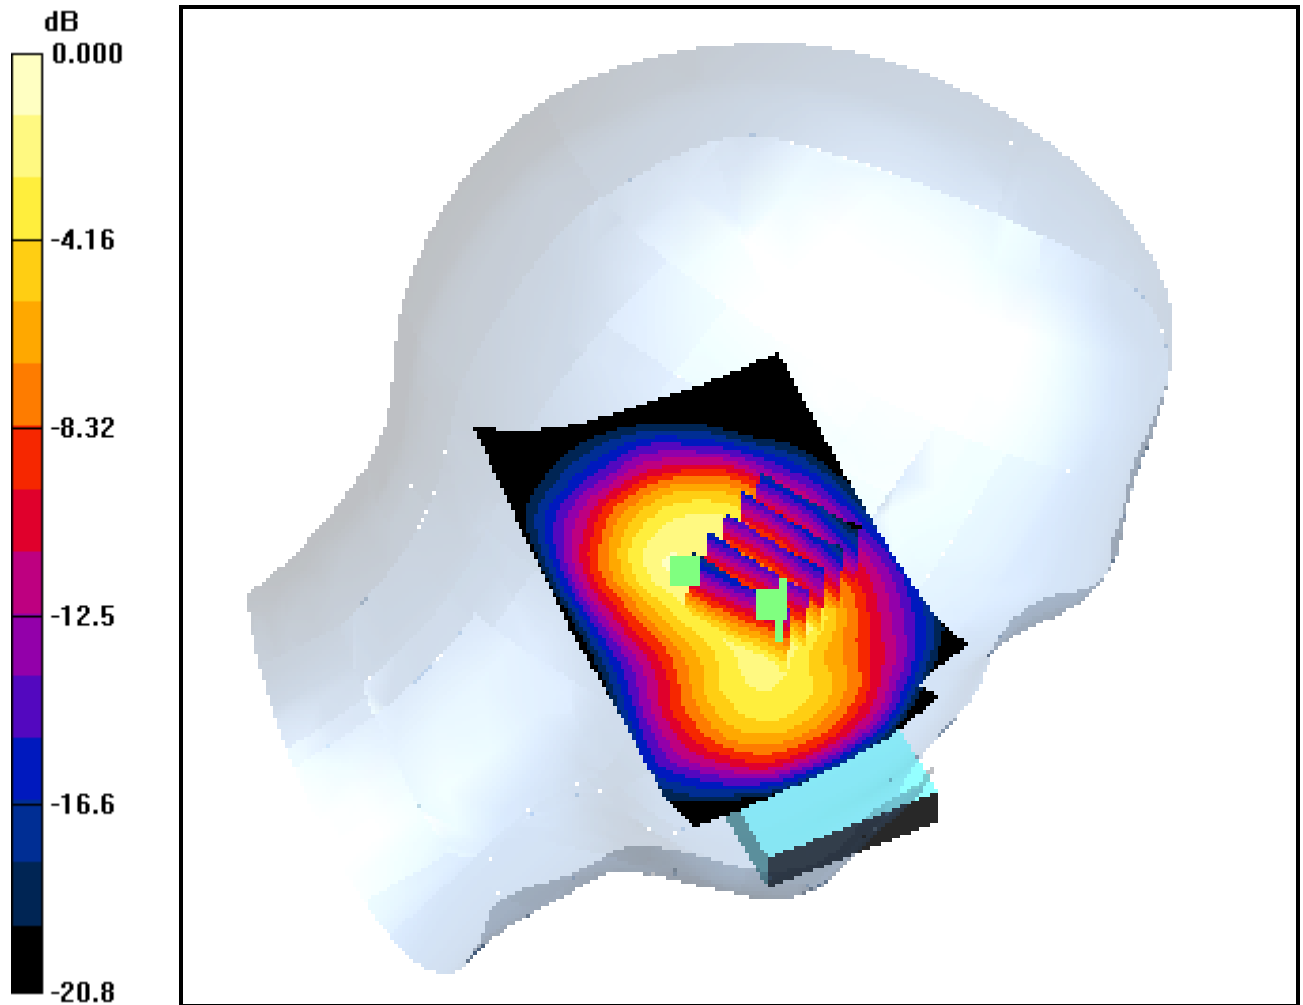

0 dB = 0.992mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

Left Touch PCS Ch.512, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.034 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.805 mW/g; SAR(10 g) = 0.436 mW/g

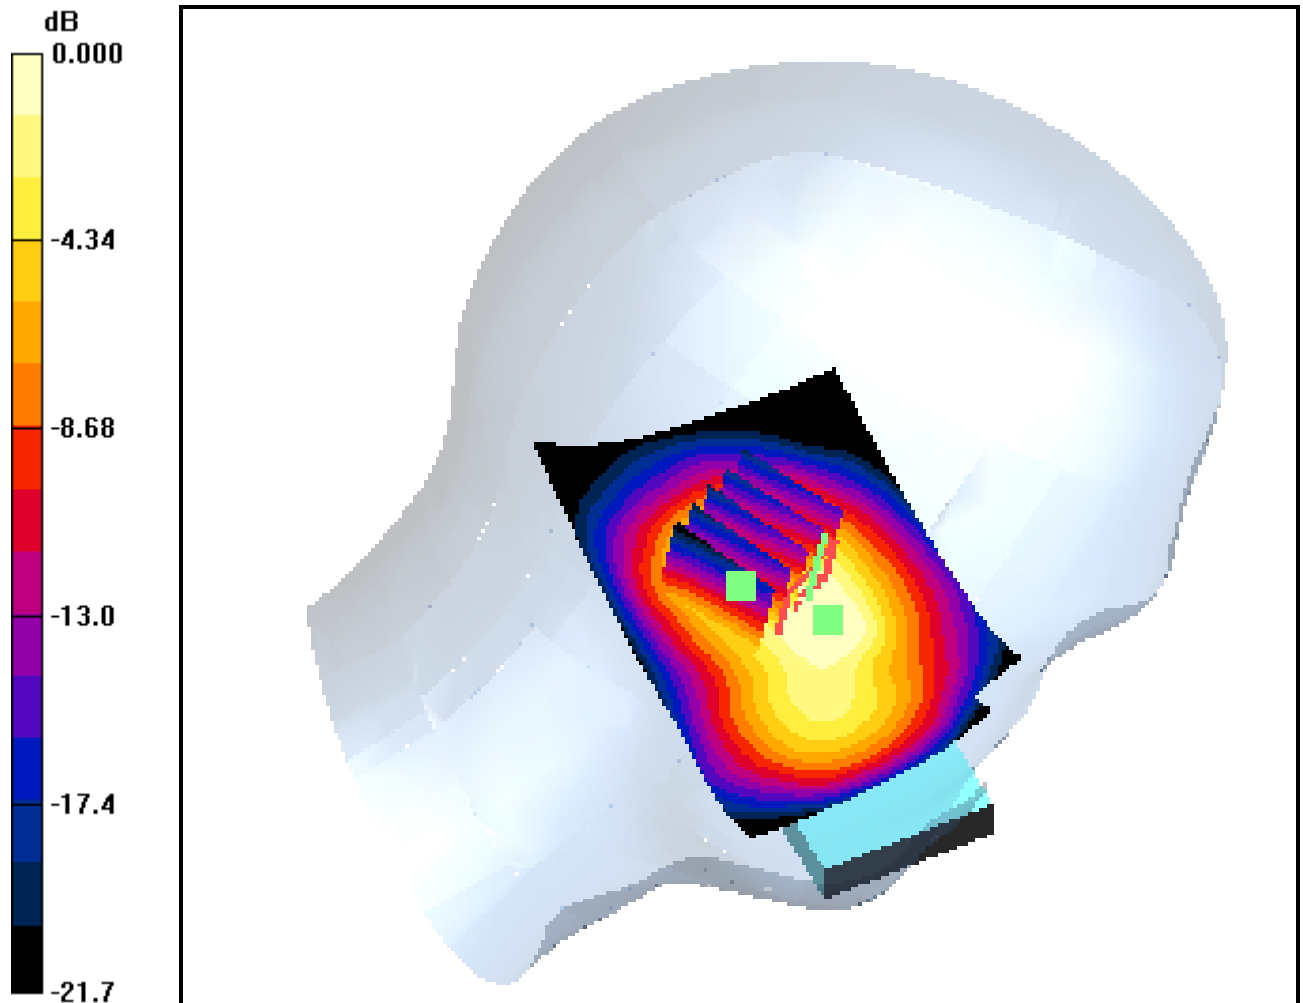

0 dB = 0.896mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

Left Touch PCS Ch.661, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.007 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.597 mW/g

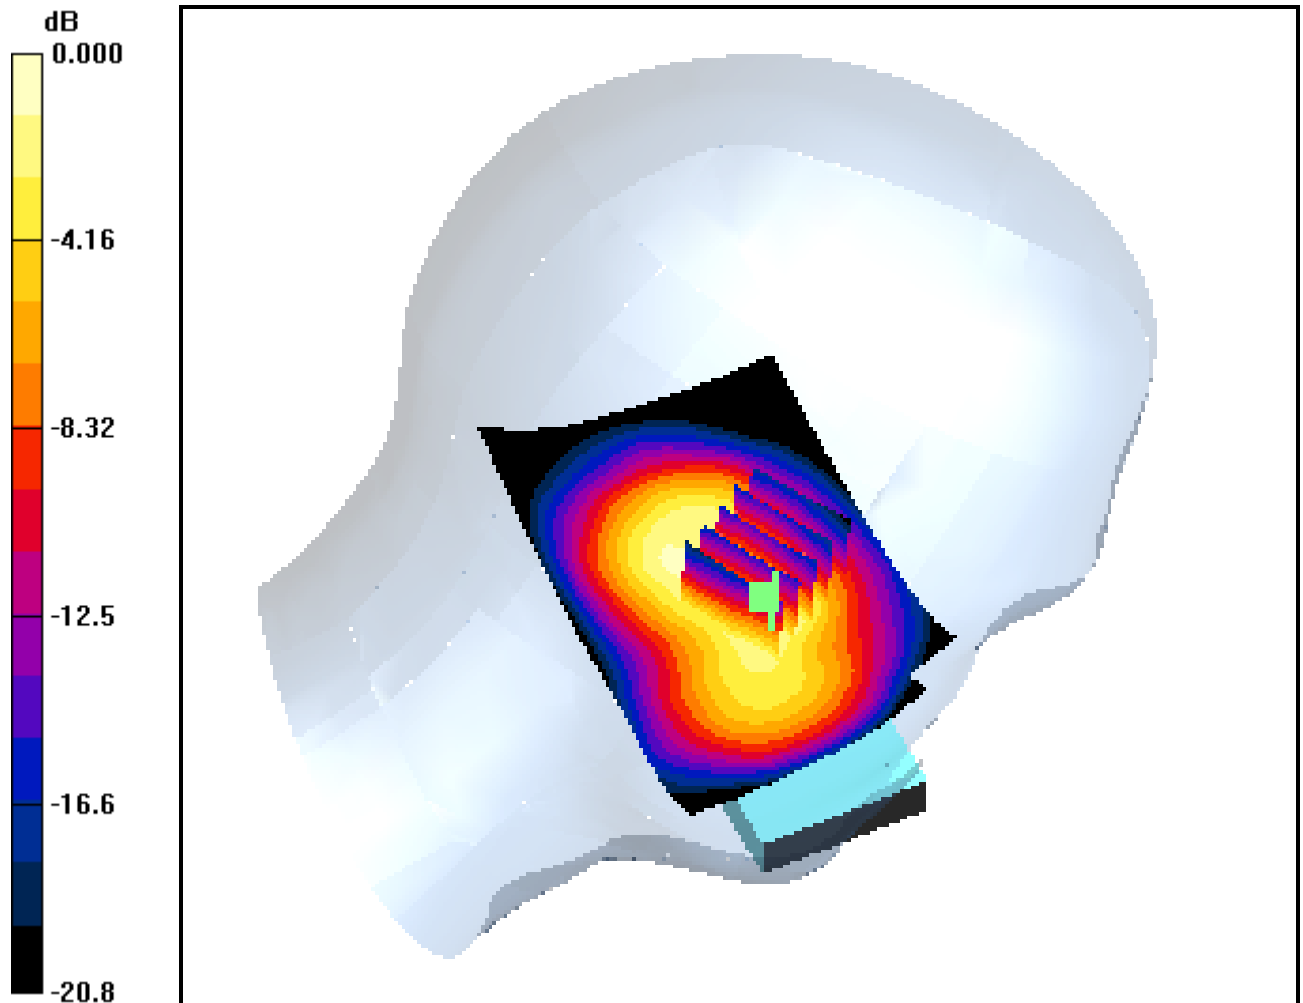

0 dB = 1.15mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

Left Touch PCS Ch.810, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.032 dB

Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.686 mW/g

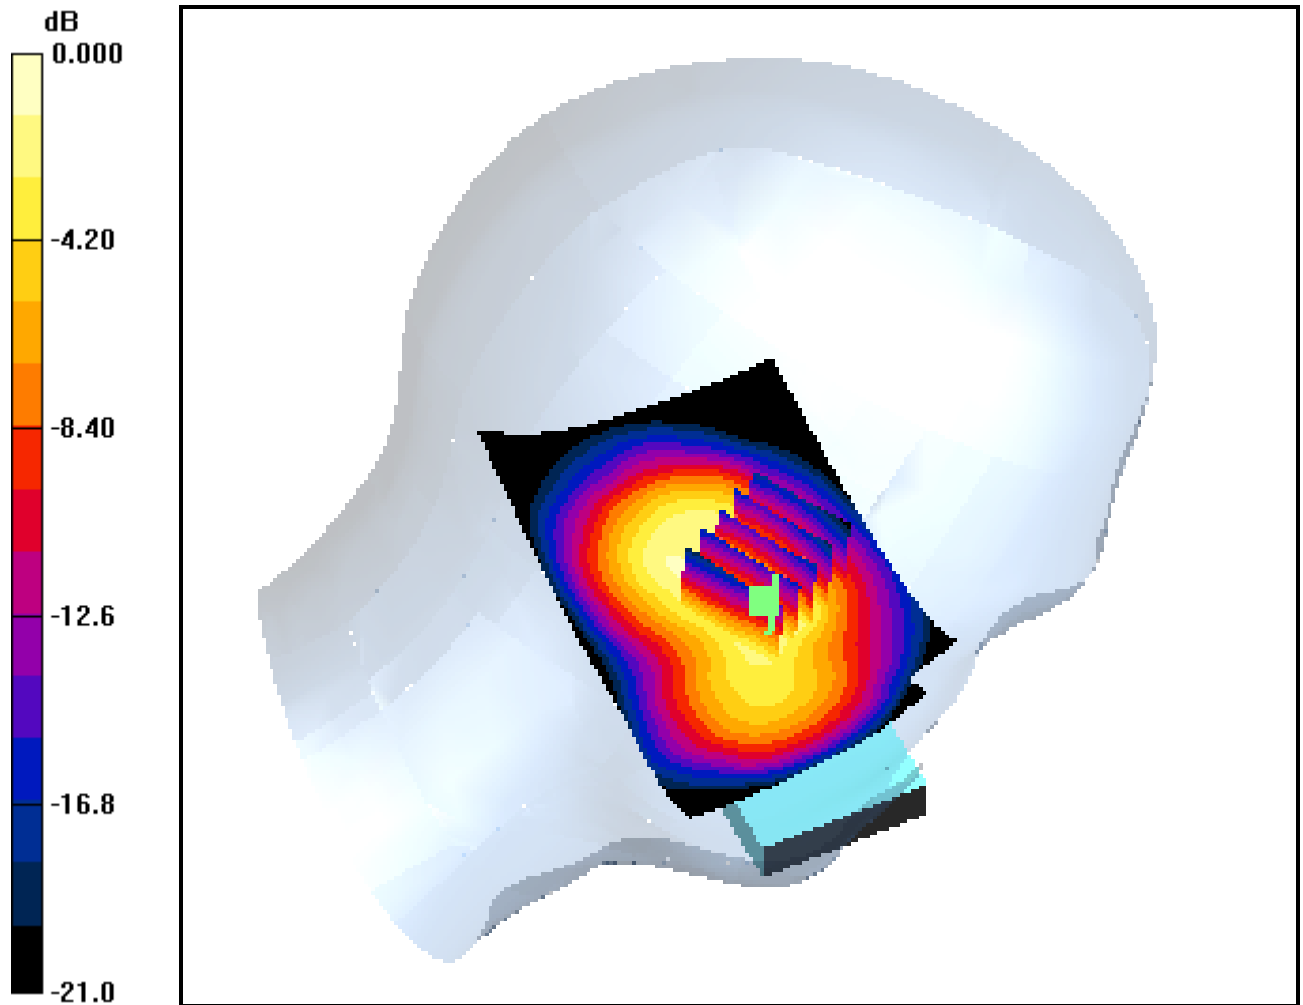

0 dB = 1.32mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

Left Tilt PCS Ch.512, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.008 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.683 mW/g; SAR(10 g) = 0.372 mW/g

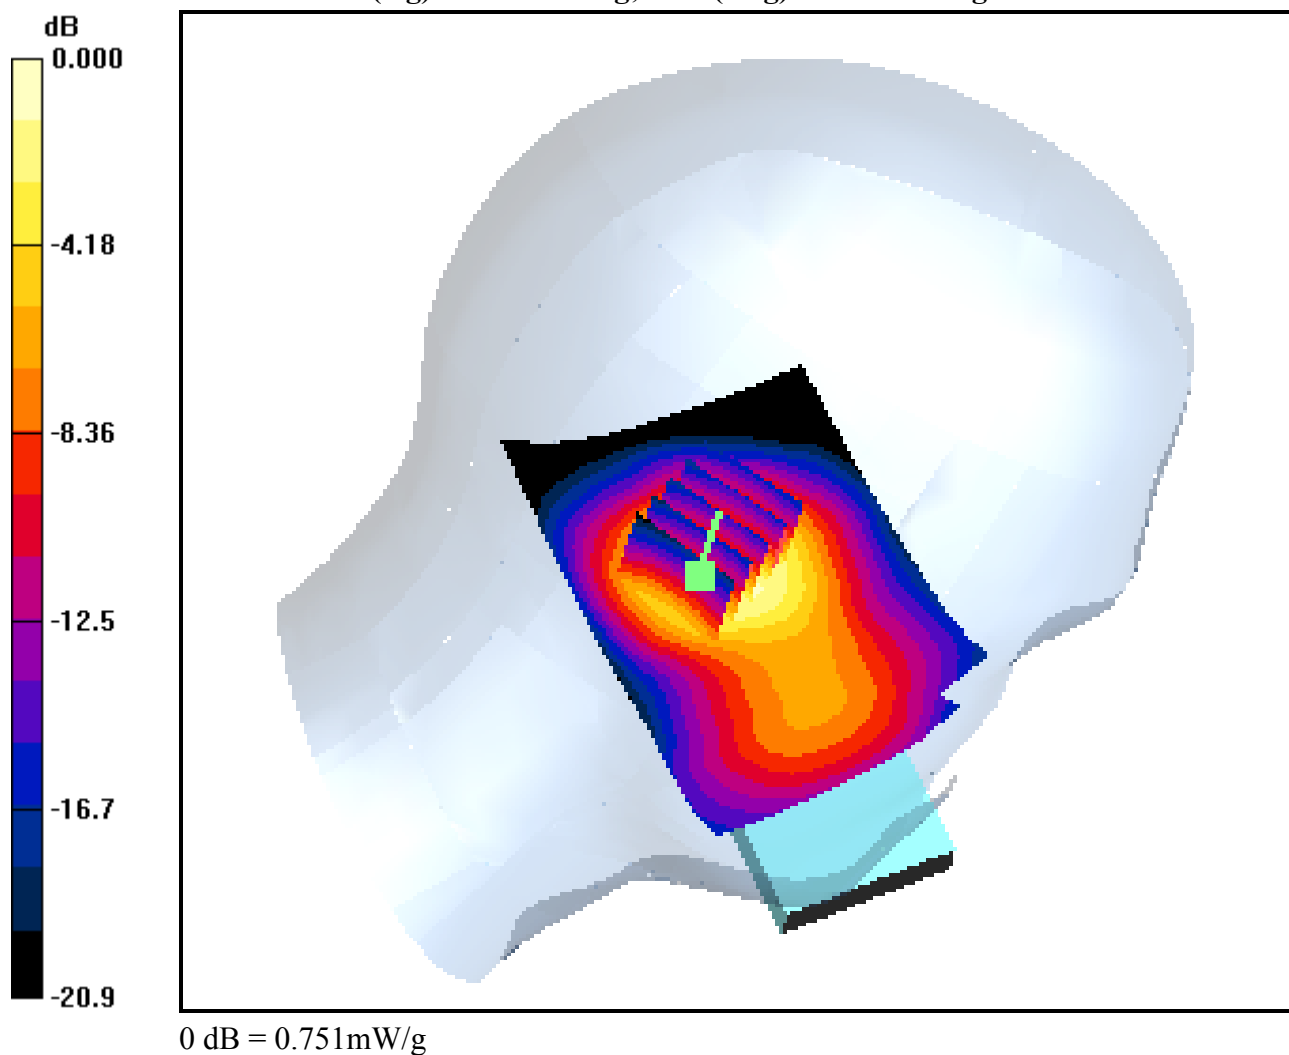

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

Left Tilt PCS Ch.661, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.045 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.818 mW/g; SAR(10 g) = 0.443 mW/g

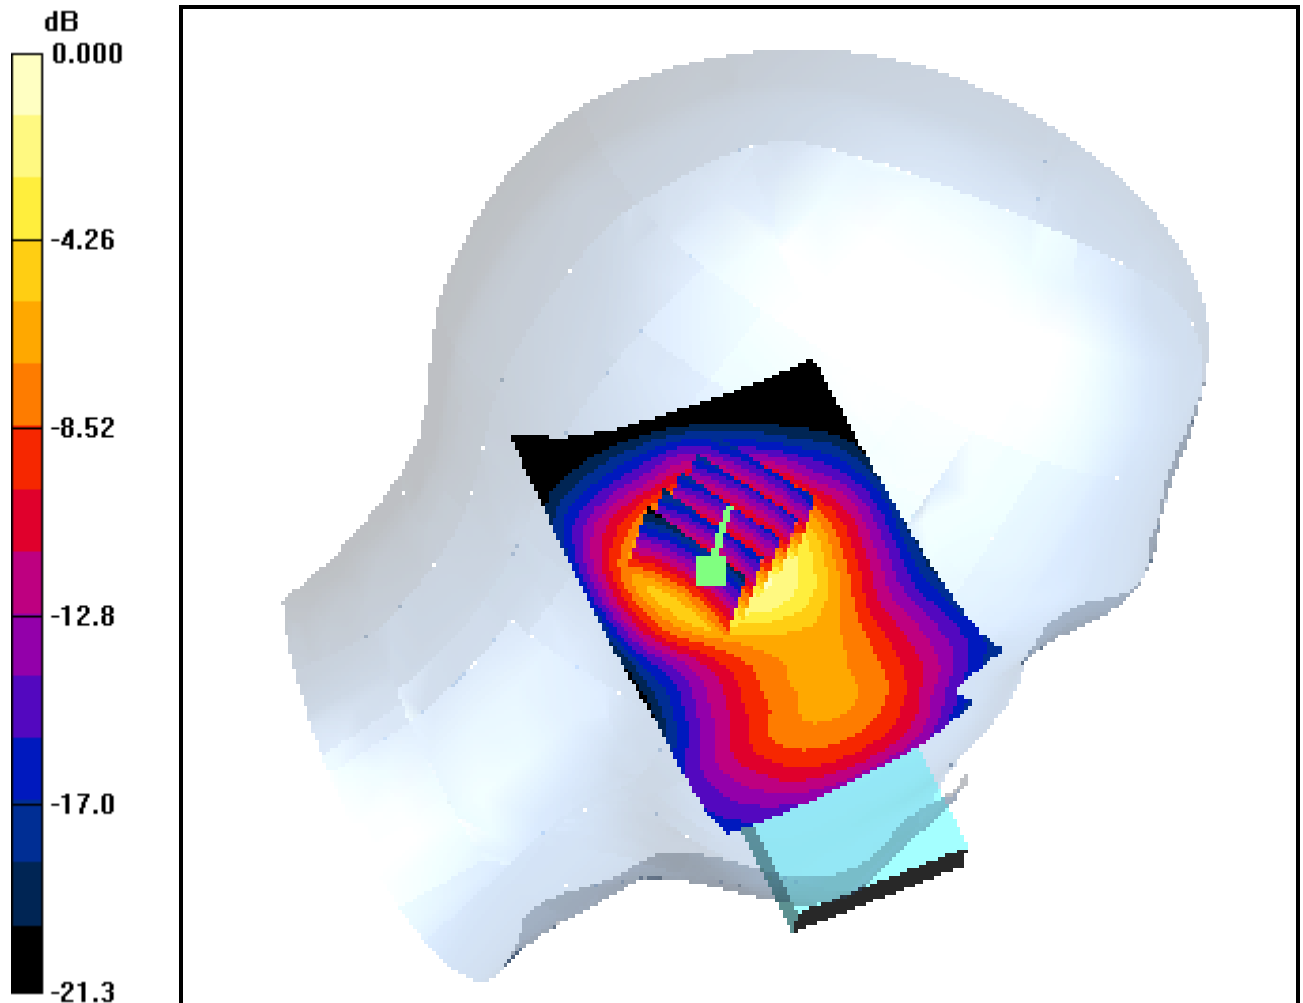

0 dB = 0.902mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

Left Tilt PCS Ch.810, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.033 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.899 mW/g; SAR(10 g) = 0.491 mW/g

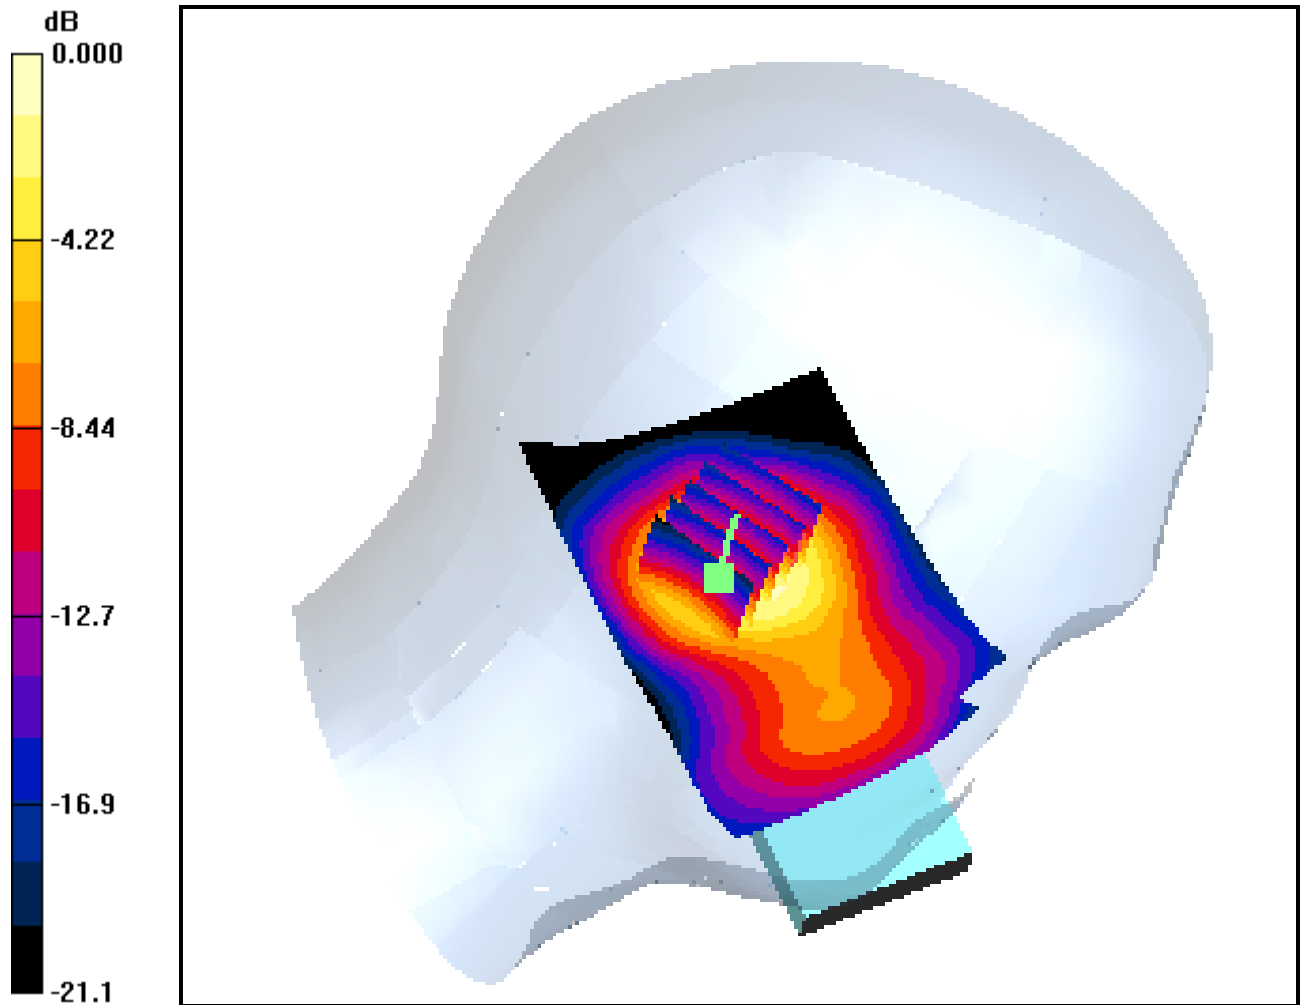

0 dB = 0.975mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 52.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

2.5cm from Body, PCS Ch.512, Ant Internal, Standard Battery GPRS Mode


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.060 dB

Peak SAR (extrapolated) = 0.461 W/kg

SAR(1 g) = 0.269 mW/g; SAR(10 g) = 0.158 mW/g

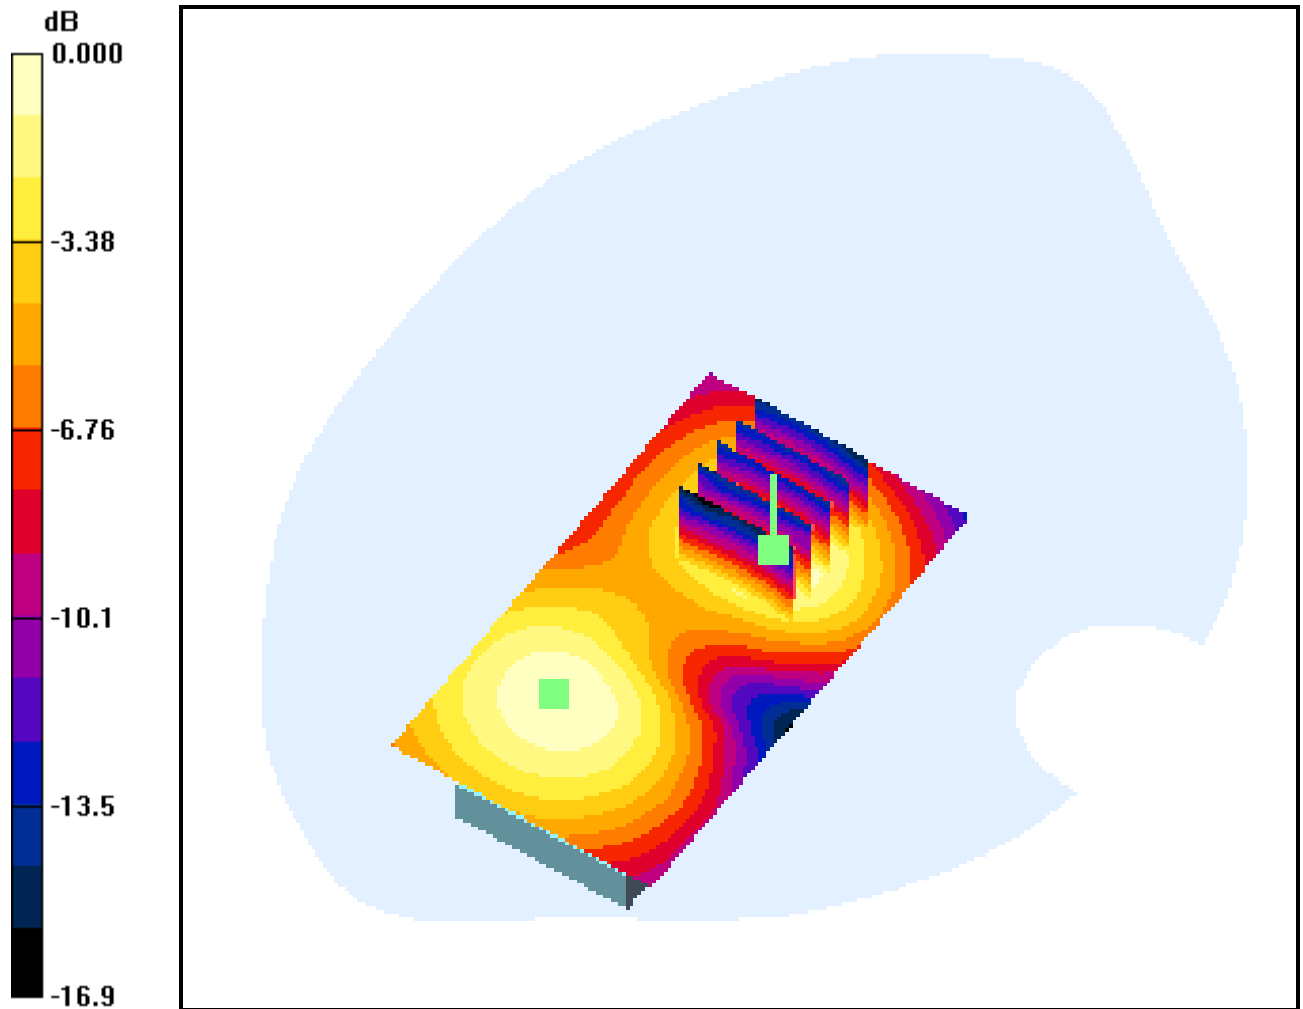

0 dB = 0.291mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 52.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

2.5cm from Body, PCS Ch.512, Ant Internal, Standard Battery GPRS Mode


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.060 dB

Peak SAR (extrapolated) = 0.390 W/kg

SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.158 mW/g

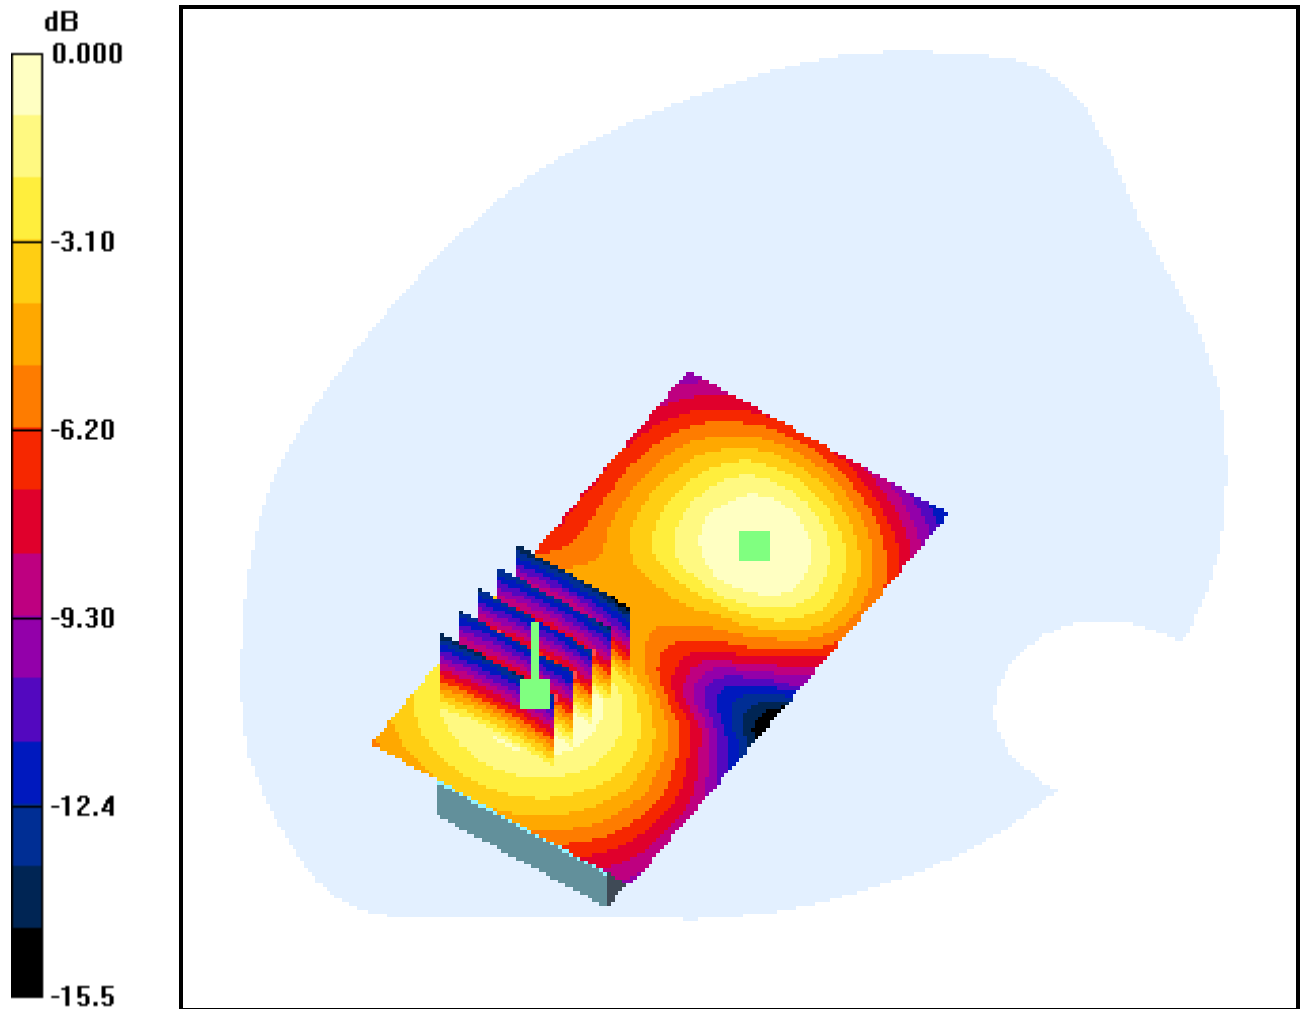

0 dB = 0.272mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

2.5cm from Body, PCS Ch.661, Ant Internal, Standard Battery GPRS Mode


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.193 mW/g

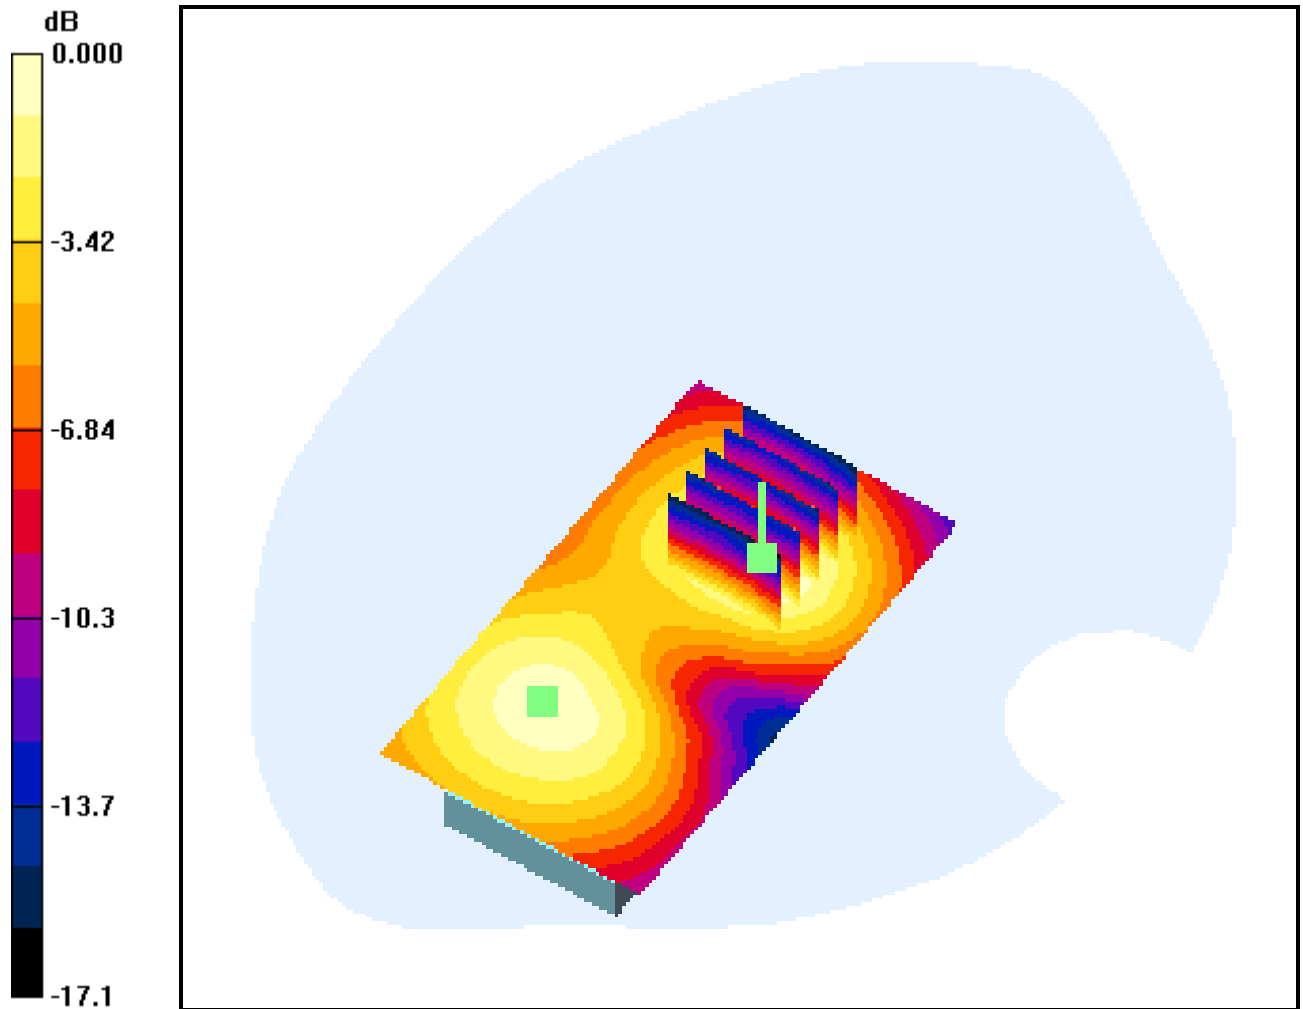

0 dB = 0.351mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

2.5cm from Body, PCS Ch.661, Ant Internal, Standard Battery GPRS Mode


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.445 W/kg

SAR(1 g) = 0.287 mW/g; SAR(10 g) = 0.178 mW/g

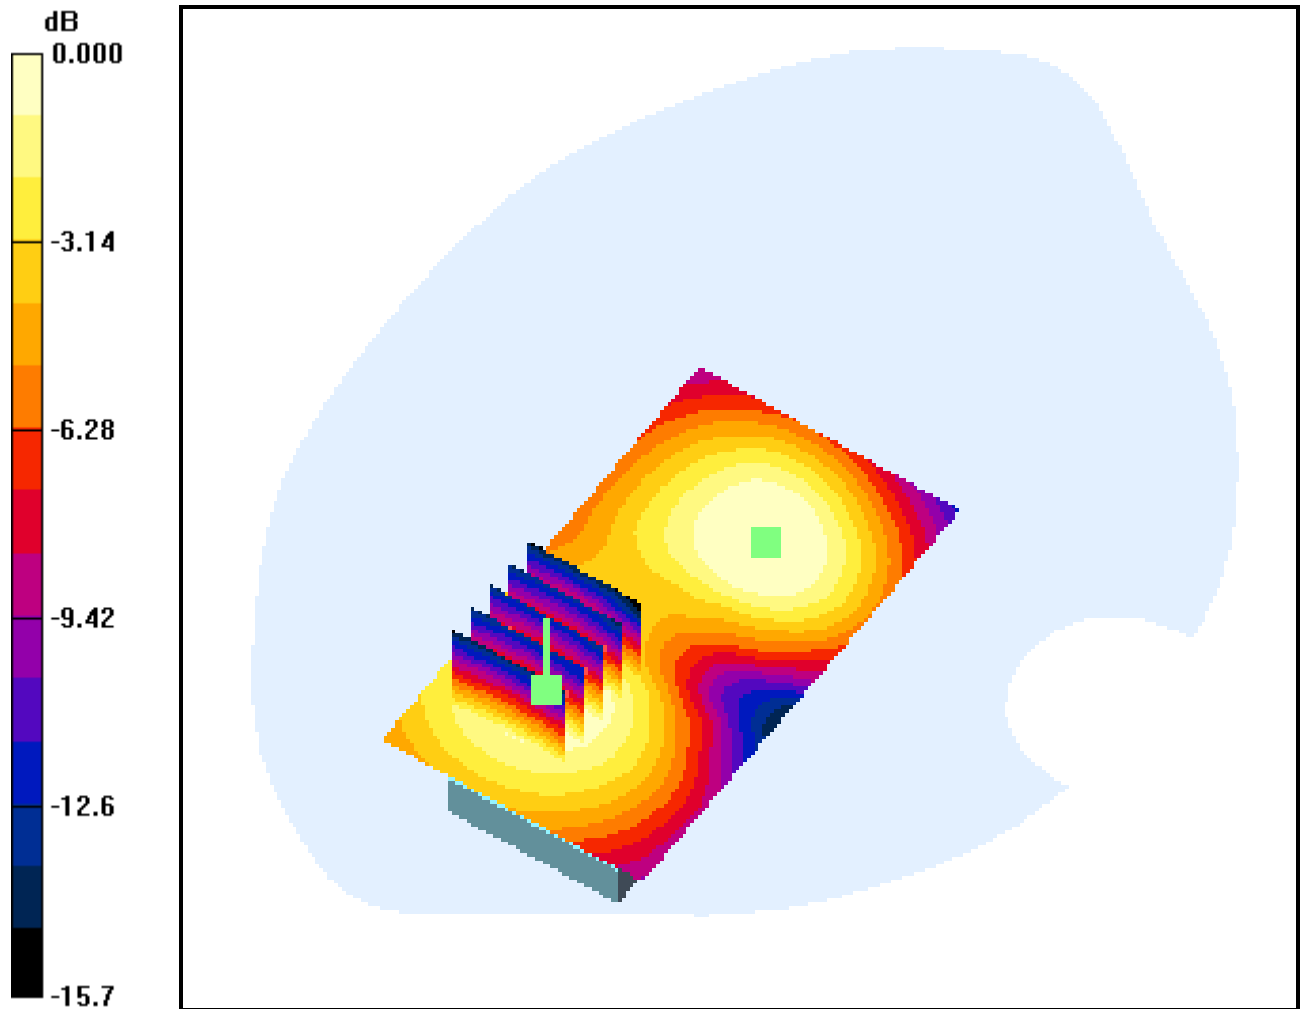

0 dB = 0.312mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.57 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

2.5cm from Body, PCS Ch.810, Ant Internal, Standard Battery GPRS Mode


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.619 W/kg

SAR(1 g) = 0.360 mW/g; SAR(10 g) = 0.210 mW/g

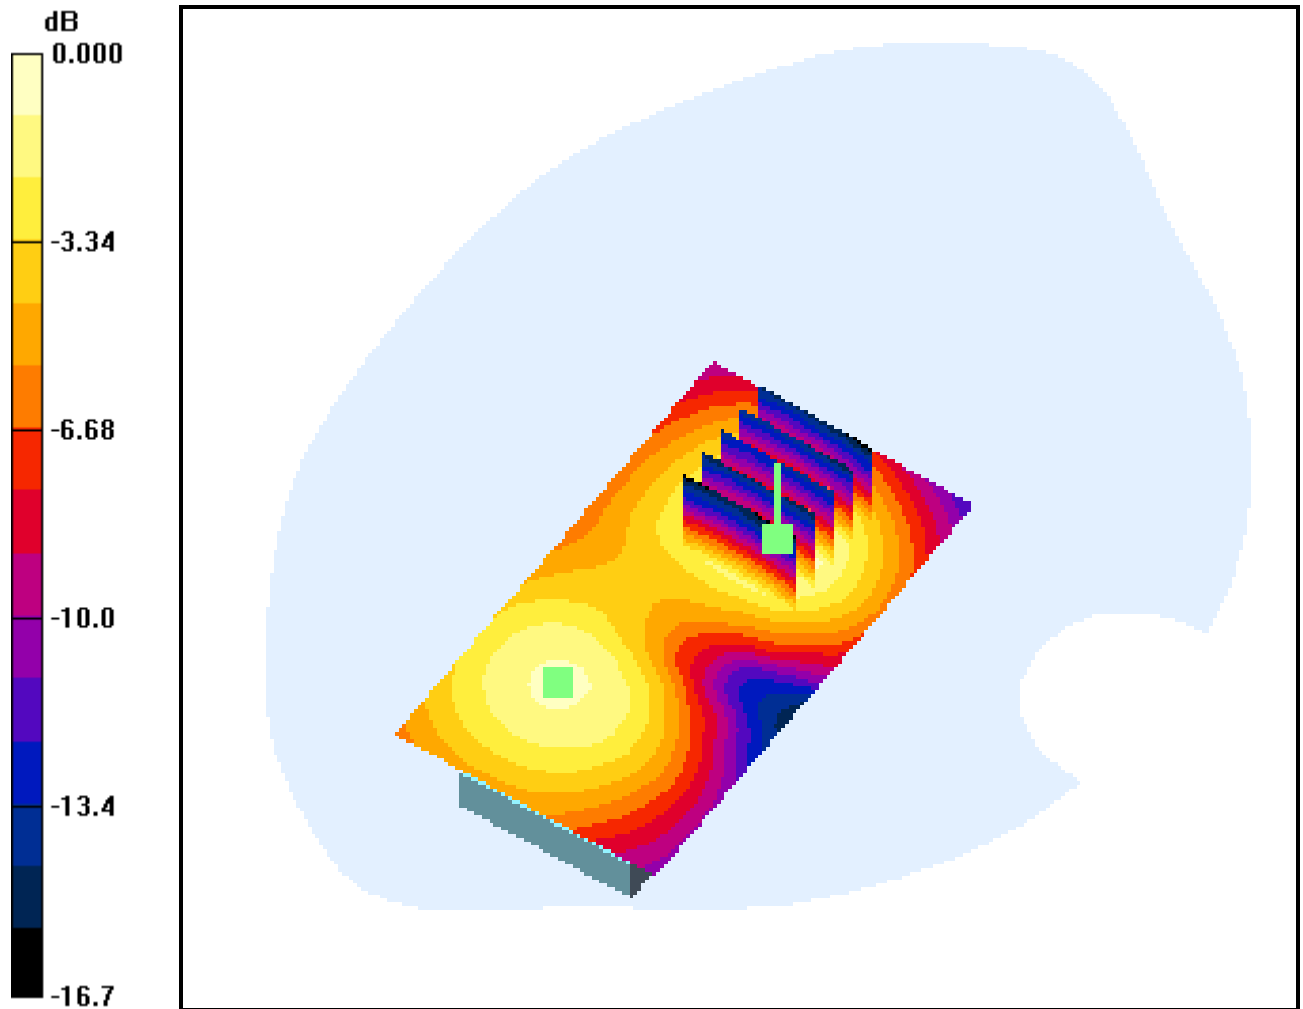

0 dB = 0.390mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.57 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

2.5cm from Body, PCS Ch.810, Ant Internal, Standard Battery GPRS Mode


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.183 mW/g

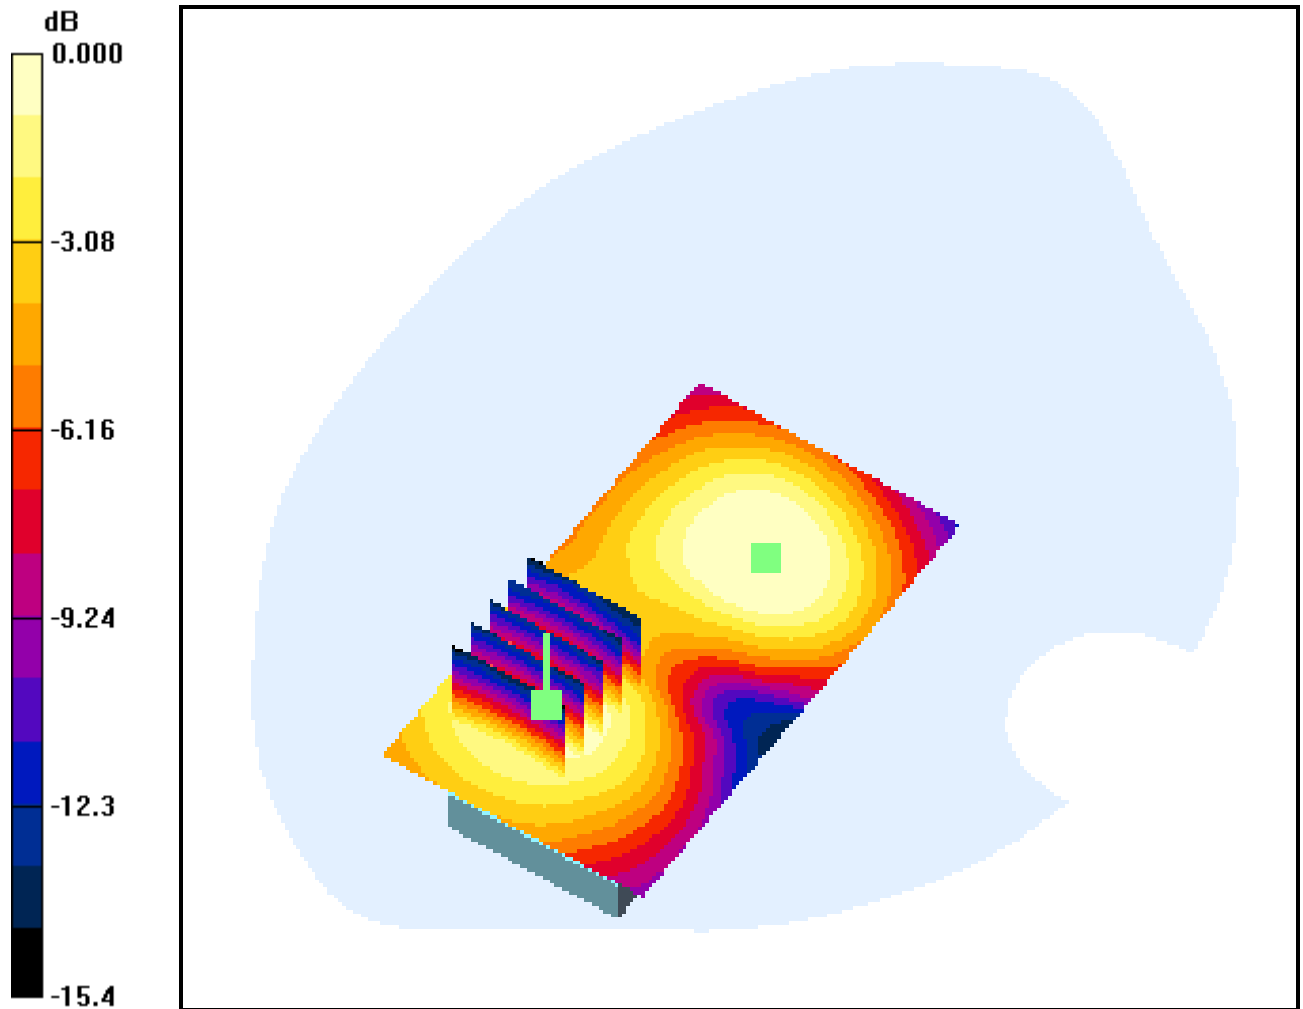

0 dB = 0.318mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.57 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

2.5cm from Body, PCS Ch.512, Ant Internal, Standard Battery


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.284 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.107 mW/g; SAR(10 g) = 0.063 mW/g

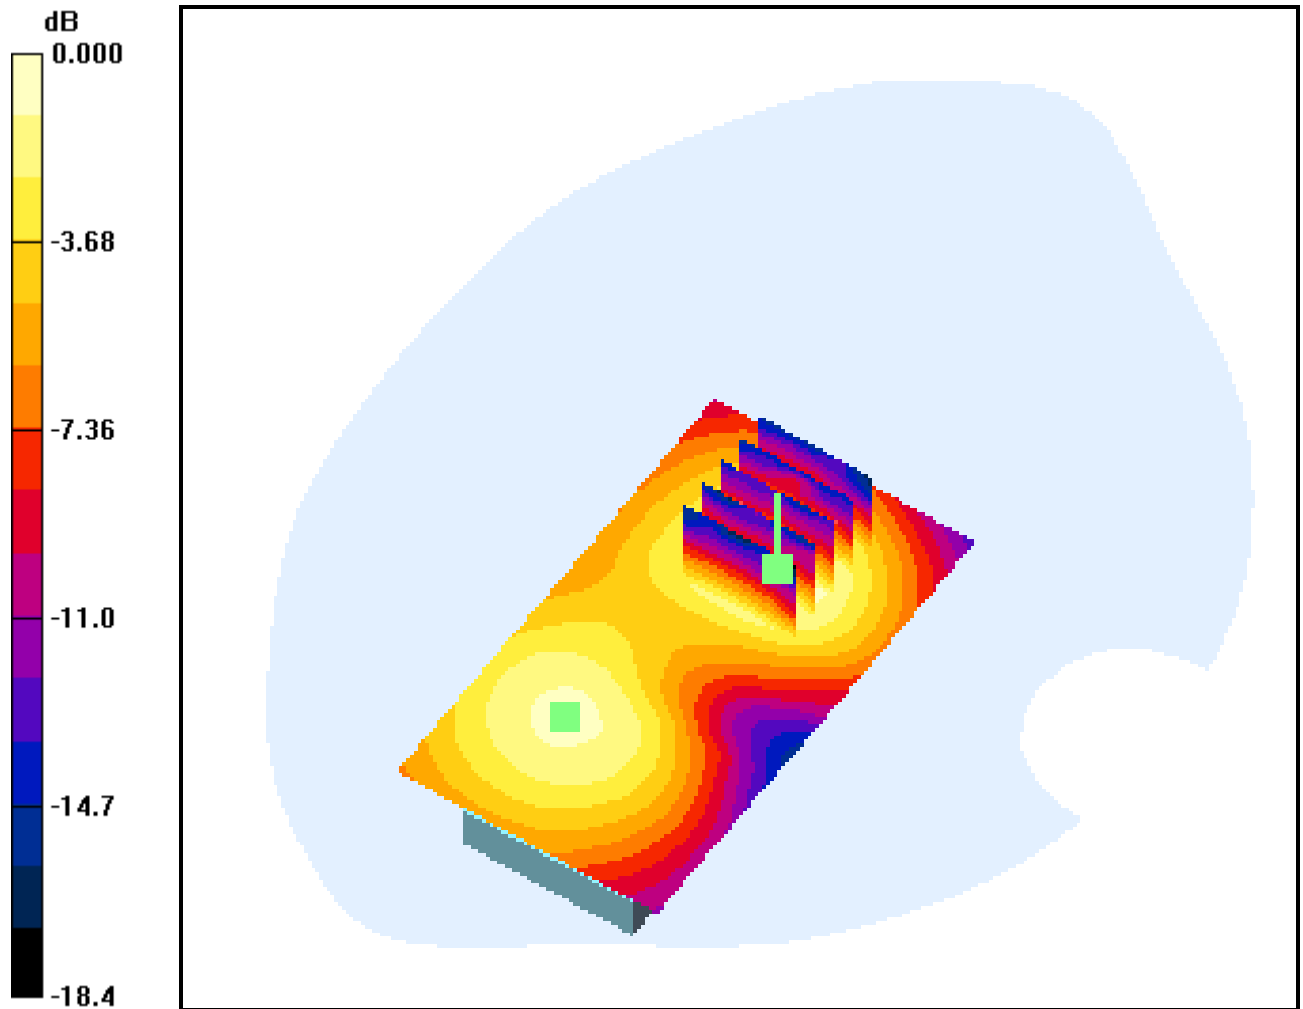

0 dB = 0.116mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.57 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

2.5cm from Body, PCS Ch.810, Ant Internal, Standard Battery


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.284 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.056 mW/g

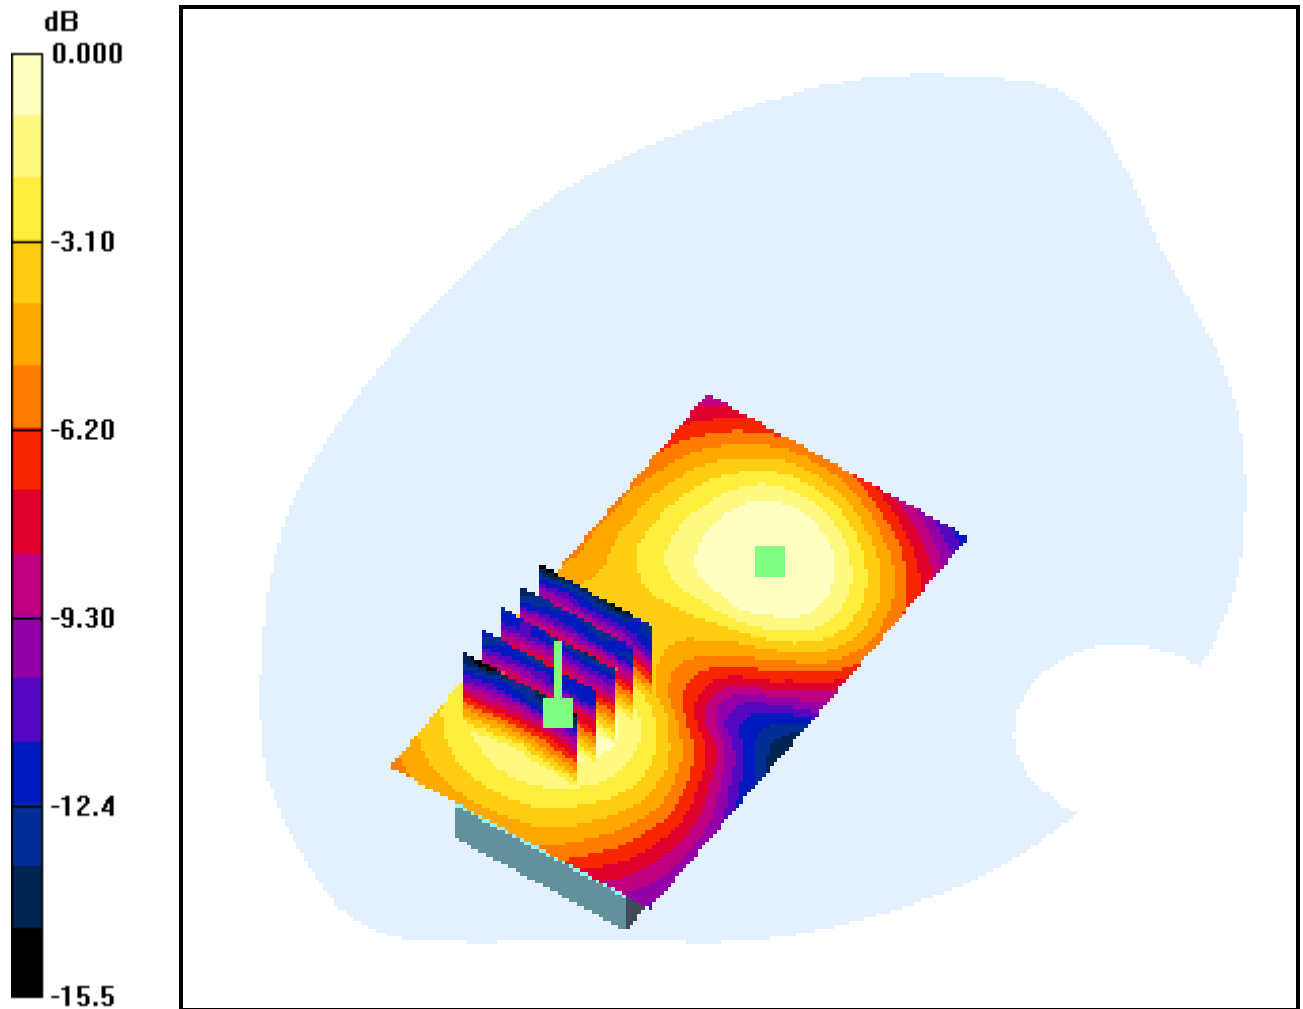

0 dB = 0.097mW/g

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.886$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

Left Touch GSM Ch.128, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.103 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.826 mW/g

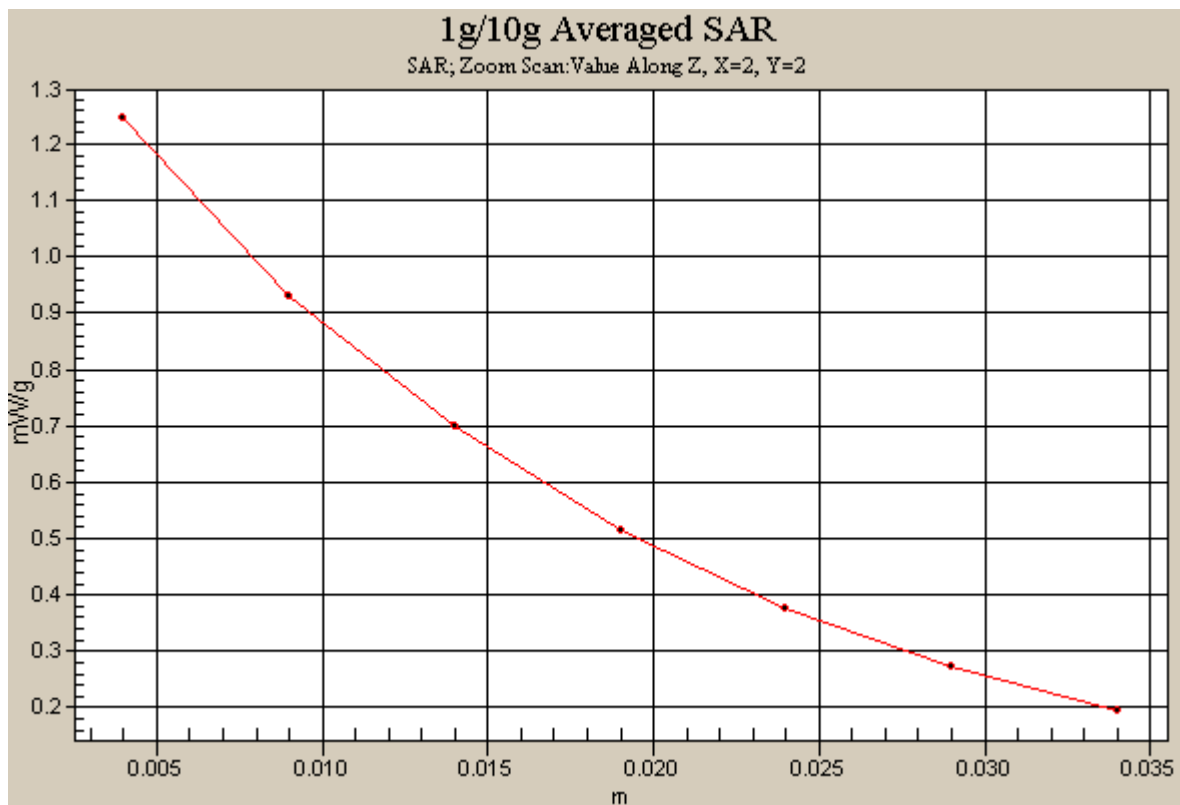

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.964$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.22, 6.22, 6.22); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-27; Ambient Temp: 21.5; Tissue Temp: 21.3

2.5cm from Body, GSM Ch.128, Ant Internal, Standard Battery GPRS Mode


Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.035 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.805 mW/g

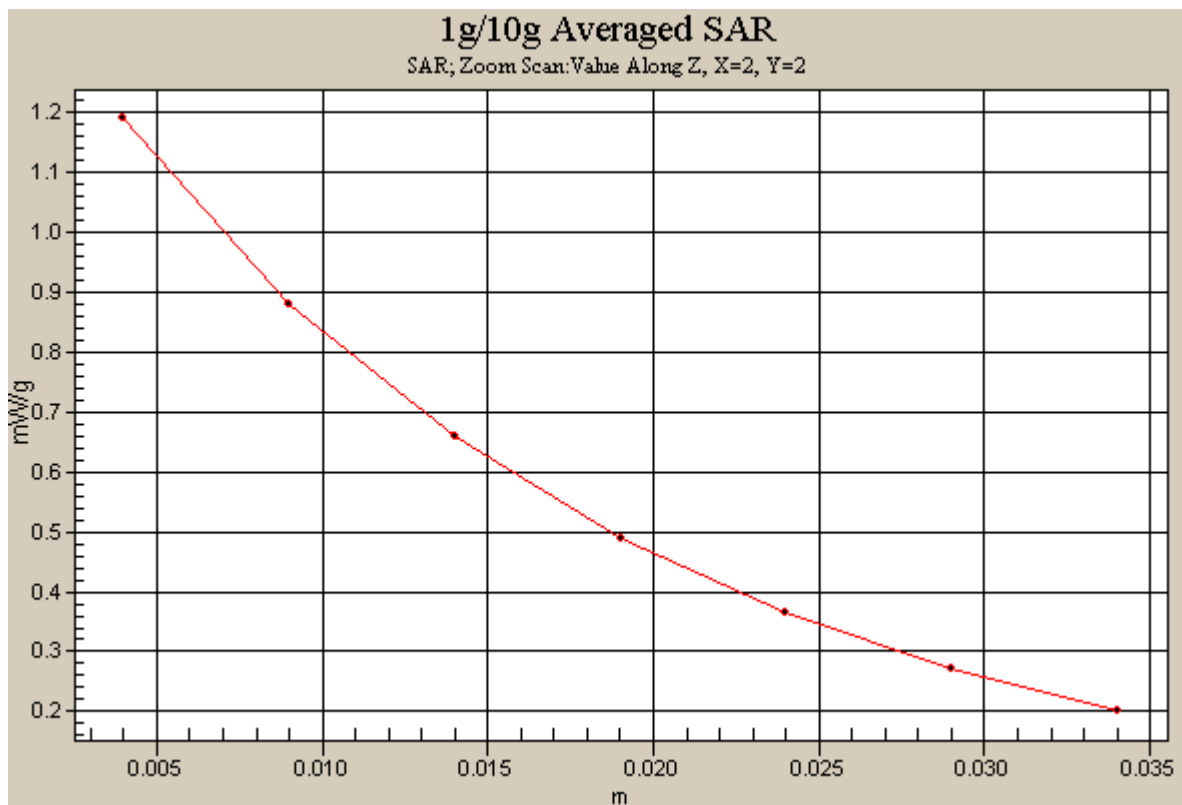

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

Left Touch PCS Ch.810, Ant Internal, Standard Battery


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.032 dB

Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.686 mW/g

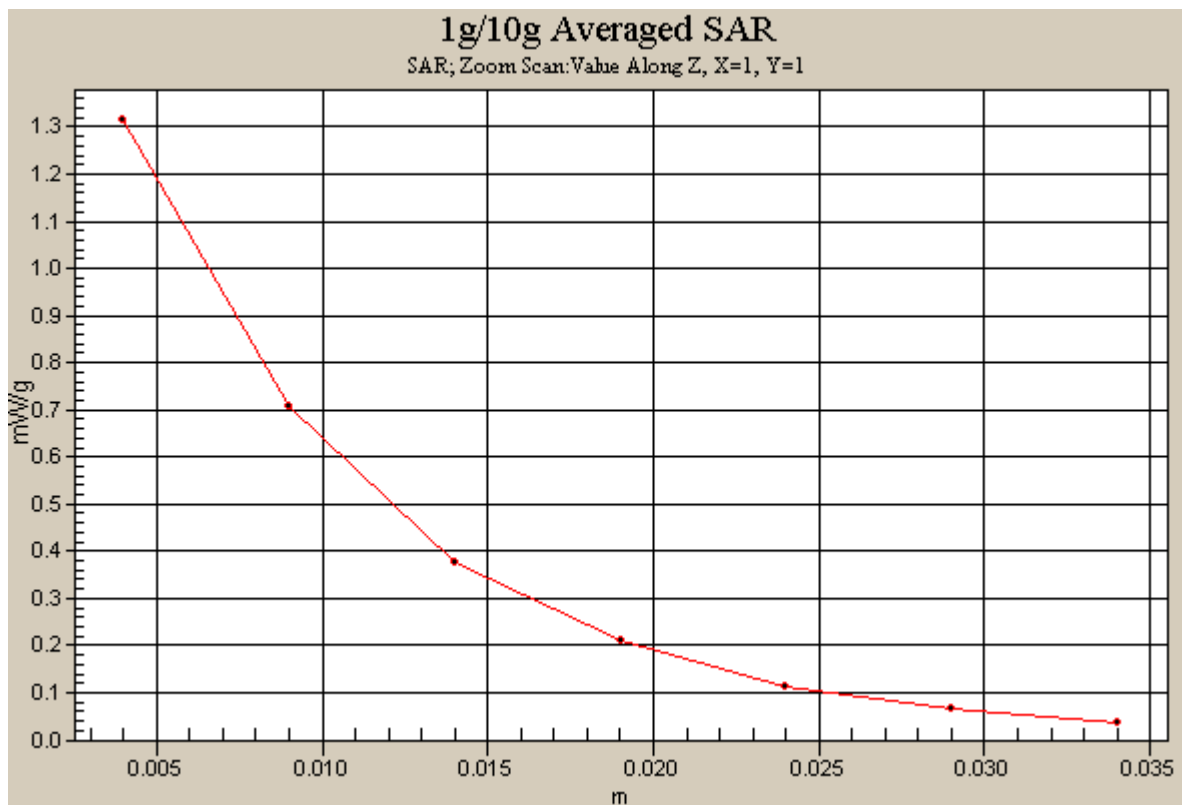

DIGITAL EMC CO., LTD

DUT: K500; Type: Bar Type

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.57 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2007-12-26; Ambient Temp: 21.5; Tissue Temp: 21.4

2.5cm from Body, PCS Ch.810, Ant Internal, Standard Battery GPRS Mode

Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.619 W/kg

SAR(1 g) = 0.360 mW/g; SAR(10 g) = 0.210 mW/g

