



PEP Testing Laboratory

RFI / EMI TEST REPORT

APPLICANT : PRIDE EXPRESSION TECHNOLOGY LTD.

E. U. T. : VGA CARD

TRADE NAME : N/A

FCC ID : NPR9810006000A

REGULATION : CFR 47, Part 15 Subpart B, Class B

TEST SITE : PEP Testing Laboratory

TEST ENGINEER : [Signature]

TEST DATE : [Signature]

ISSUED DATE : OCT. / 27 / 1998

REPORT No. : 980074

FEDERAL COMMUNICATIONS COMMISSION

7435 Oakland Mills Road
Columbia, MD 21046
Telephone: 301-725-1585 (ext-218)
Facsimile 301-344-2050

November 25, 1996

IN REPLY REFER TO
31040/SIT
1300F2

PEP Testing Laboratory
12-3 Fl., No. 27-1, Lane 169
Kang-Ning St., Hsi-chi Town
Taipei Hsien, Taiwan, R.O.C.

Attention: M. Y. Tsui


Re: Measurement facility located at above address
(3 meter site)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4-1992. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has been also added to our list of those who perform these measurement services for the public on a fee basis. This list is published periodically and is also available on the Laboratory's Public Access Link as described in the enclosed Public Notice.

Sincerely,



Thomas W. Phillips
Electronics Engineer
Customer Service Branch

Enclosure:
PAL PN



PEP Testing Laboratory

VERIFICATION

WE HEREBY VERIFY THAT:

The E. U. T. listed below has completed RFI testing by PEP Testing Laboratory and the interference emissions can pass **FCC Class B** limitations.

The tested configurations and the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4 - 1992.

Any data in this RFI report is "reference" " only.

APPLICANT : PRIDE EXPRESSION TECHNOLOGY LTD.*

PRODUCT : VGA CARD*

FCC ID : NPR9810006000A*

MODEL : EXP6000A*

M. Y. Tsui

M. Y. TSUI
Manager

PEP Testing Laboratory

12-3FL., NO. 27-1, Lane 169, Kang-Ning St.,
Hsi-Chi, Taipei Hsien, Taiwan, R. O. C.
TEL : 886-2-26922097 FAX : 886-2-26956236



PEP Testing Laboratory

TABLE OF CONTENTS

1. GENERAL

1.1 General Information	1
1.2 Place of Measurement	1
1.3 Labeling Requirements	2
1.4 Information to User	3

2. CONDUCTED EMISSIONS TEST

2.1 Setup of the Test Facilities	4
2.2 Test Procedures	5

3. RADIATED EMISSIONS TEST

3.1 Setup of the Test Facilities	6
3.2 Test Procedures	7

4. DESCRIPTION FOR EUT TESTING CINFIGURATION

5. SUPPORTING DEVICES TO TEST

6. TEST CONFIGURATION

** Conducted Emission Test Photo. and Data	
** Radiated Emission Test Photo. and Data	

7. APPENDIX

A. Photos of EUT Appearance	10
-----------------------------	----



PEP Testing Laboratory

1. GENERAL

1.1 GENERAL INFORMATION:

APPLICANT : PRIDE EXPRESSION TECHNOLOGY LTD.

5F, NO 183, SEC. 1, TA TUNG ROAD,
HSI CHIH, TAIPEI HSIEN, TAIWAN R. O. C.

MANUFACTURER : PRIDE EXPRESSION TECHNOLOGY LTD.

5F, NO 183, SEC. 1, TA TUNG ROAD,
HSI CHIH, TAIPEI HSIEN, TAIWAN R. O. C.

MEASUREMENT PROCEDURE : ANSI C63,4 - 1992

TESTED FOR COMPLIANCE WITH : Title 47 of CFR
Part 15, Subpart B, Class B

1.2 PLACE OF MEASUREMENT


PEP Testing Laboratory



PEP Testing Laboratory

1.3 LABELING REQUIREMENT

A FCC ID label shall be permanently attached and conspicuously located on the equipment:

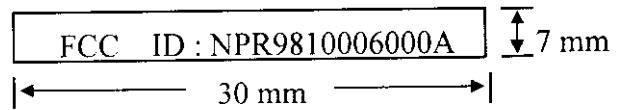



PEP Testing Laboratory

1.4 INFORMATION TO THE USER

The following FCC statement should be declared in a conspicuous location in the user's manual.

Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

Warning : A shielded-type power cord is required in order to meet FCC emission limits and also to prevent interference to the nearby radio and television reception. It is essential that only the supplied power cord be used.

Use only shielded cables to connect I/O devices to this equipment.

You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.



PEP Testing Laboratory

For equipment **FCC ID : NPR9810006000A**


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



PEP Testing Laboratory

2. CONDUCTION EMISSIONS TEST

2.1 GENERAL SETUP OF THE TEST FACILITIES

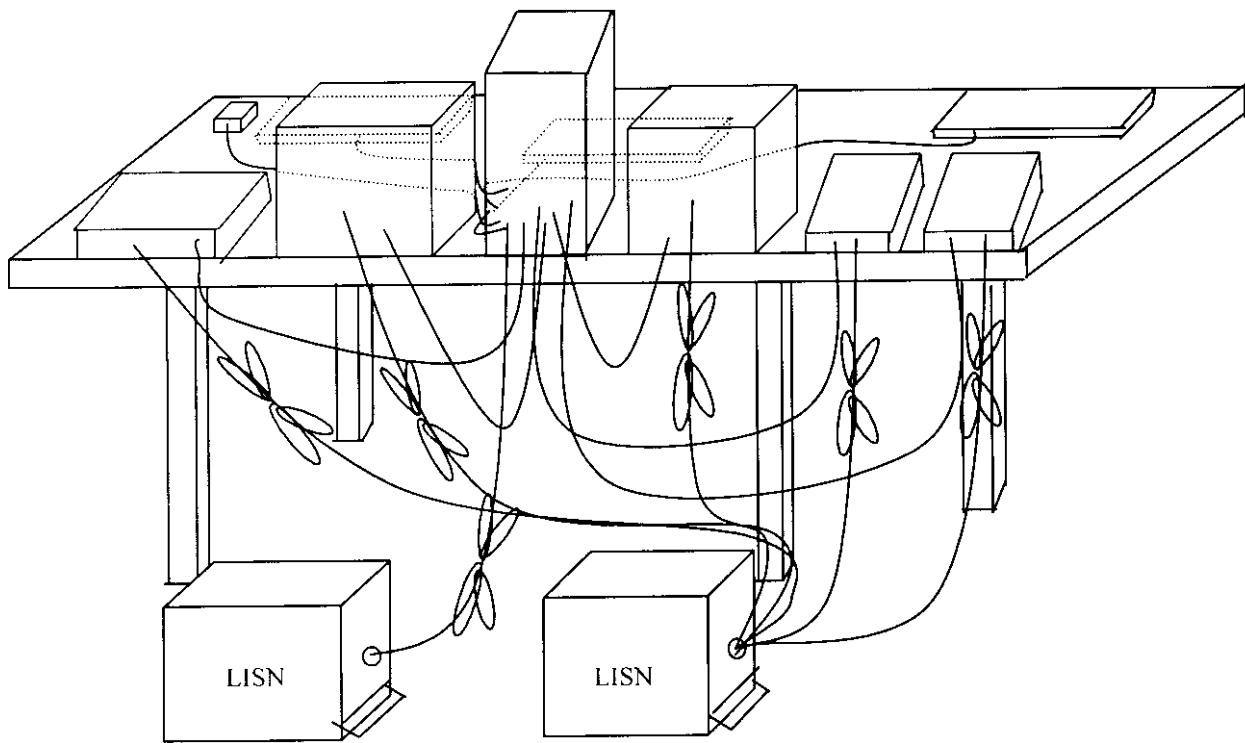



PEP Testing Laboratory

2.2 TEST PROCEDURES

The system was setup as described above, with the EMI diagnostic software.

Both the line of power cord, hot and neutral, were run with the EMI tests software.

To get the maximum power line conducted emission, we changed the configuration by varying the monitor power cord fed from floor outlet and from the outlet on the power supply of this computer.


The highest emissions were recorded in the RFI test report.



PEP Testing Laboratory

3. RADIATED EMISSIONS TEST

3.1 GENERAL SETUP OF THE FACILITIES

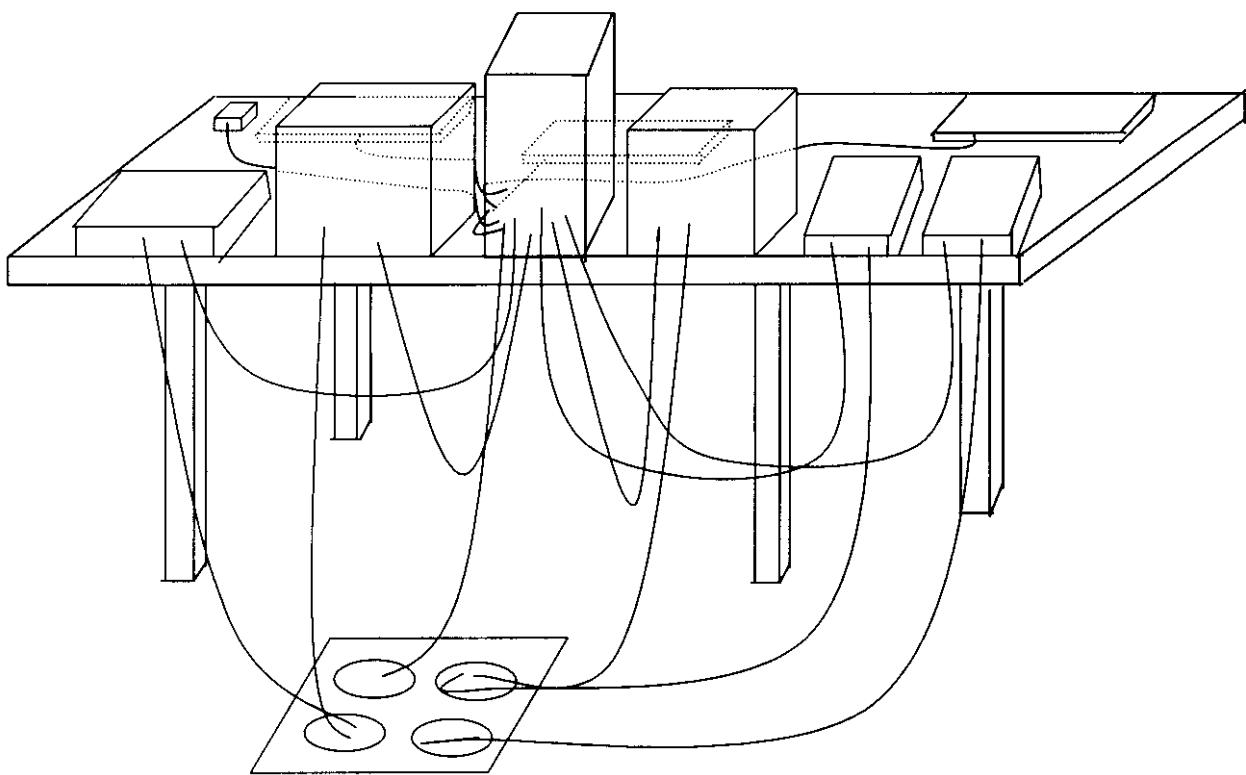



PEP Testing Laboratory

3.2 TEST PROCEDURES

Radiated emissions test was carried out by **PEP Testing Laboratory** at the open field test site authorized by FCC.

The EUT and supporting equipments were setup with the EMI diagnostic software .

- a. setting up the EUT under normally position, and scanning it from 30 MHz to 1000 MHz, then recording those narrow band noises which cannot be 6 dBuV below lower bound. Both horizontal and vertical antenna are measured from 1 meter height to 4.0 meter height, and turntable rotate 360 degrees .
- b. fixing the EUT rear face to antenna and antenna 1.0 meter height . We adjusted I/O cables to find the highest coupling noise and moved the height of antenna from 1 to 4 meters, then rotated the turntable simultaneously .
- c. checking following step b. all points which were recorded in step a.
- d. changing the peripherals position, and routine steps a. b. c.

The highest emissions were recorded in the RFI test report .

Please refer the page 9.

** I/O DATA CABLES INFORMATION - - -

For the radiated emission test , the worst data recorded in the Page R-1. *

C-1.*

(E) In the RF test report , we provided the worst conducted emission testing data in page

Quasi-Peak value , making sure it can under 6 dBuV at least .

(D) If the peak value of the noise can't under Non-consumer equipment limit 3 dBuV more , we'll change Biconical antenna or Log-periodic antenna for Dipole antenna and record its

radiated emission test was done at the open field site .

(C) After the EUT was set up , we did the conducted emission test in the shielded room and the worst case placement finding as the ANSI C63.4 requirement ; similarly , the

(B) The EUT built in a PC system and I/O ports connected to relevant peripheral devices under test and recorded the worst case data in this RF testing report .

EUT , please refer user's manual .

(A) The EUT was VGA card , FCC ID: NPF9810006000A , composed of one 15 pins connector , S-video connector and audio output jack , for more detail information about the

** TEST PROCEDURE - - -

4. DESCRIPTION FOR EUT TESTING CONFIGURATION



PEP Testing Laboratory

5. SUPPORTING DEVICES TO TEST

SUPPORT UNIT 1. ---- PERSONAL COMPUTER

Manufacturer : ASUS
Model Number : P2L97
Power Supply Type : Switching
Power Core : Shielded, Detachable, 1.2m
Data Cable : Shielded, Detachable, 1.2m
FCC ID : N/A

SUPPORT UNIT 2. ---- MONITOR

Manufacturer : Acer Peripherals Inc.
Model Number : 7134T
Power Supply Type : Switching
Power Core : Shielded, Detachable, 1.2m
Data Cable : Shielded, Undetachable, 1m
FCC ID : JVP7134T

SUPPORT UNIT 3. ---- PRINTER

Manufacturer : Hewlett-Packard Singapore Pte Ltd.
Model Number : HP 2225C⁺
Power Supply Type : Linear
Power Core : Non-Shielded, Detachable, 1.2m
Data Cable : Shielded, Detachable, 1m
FCC ID : DSI6XU2225



PEP Testing Laboratory

SUPPORT UNIT 4. ---- MODEM x 2

Manufacturer : ACEEX
Model Number : 1414
Power Supply Type : Linear
Power Core : Non-Shielded, Detachable, 1.2m
Data Cable : Shielded, Detachable, 1m
FCC ID : IFAXDM1414

SUPPORT UNIT 5. ---- KEYBOARD

Manufacturer : Acer Peripherals Inc.
Model Number : 6311-KW
Power Supply Type : N/A
Power Core : N/A
Data Cable : Shielded, Undetachable, 1.2m
FCC ID : JVPKBS-WIN

SUPPORT UNIT 6. ---- MOUSE

Manufacturer : ACER
Model Number : M-S34
Power Supply Type : N/A
Power Core : N/A
Data Cable : Shielded, Undetachable, 1m
FCC ID : DZL211029



PEP Testing Laboratory

SUPPORT UNIT 7. ---- TV

Manufacturer : SONY
Model Number : PVM-14N2E
Power Supply Type : Switching
Power Core : Shielded, Detachable, 1.2m
Data Cable : Shielded, Detachable, 1.2m
FCC ID : N/A

SUPPORT UNIT 8. ---- U S B KEYBOARD x 2

Manufacturer : BTC
Model Number : 7932
Power Supply Type : N/A
Power Core : N/A
Data Cable : Shielded, Undetachable, 1.2m
FCC ID : N/A

EQUIPMENT UNDER TEST ---- VGA CARD

Manufacturer : PRIDE EXPRESSION TECHNOLOGY LTD.
Model Number : EXP6000ASD
Data Cable : Shielded
FCC ID : NPR9810006000A



PEP Testing Laboratory

6. TEST CONFIGURATION

Radiated emission detector function :

(1) 30MHZ~1GHZ : Quasi-Peak Value
Resolution BW : 120KHZ Video BW : 300KHZ

(2) above 1GHZ : Quasi-Peak value and Average Value
Resolution BW : 1MHZ Video BW : 1MHZ
* either Q. P. or average value will be recorded
in the report

Conducted emission detector function :

(1) 450KHZ~30MHZ : Quasi-Peak Value
Resolution BW : 9KHZ Video BW : 30KHZ

The else descriptions : The EUT's display resolution is changeable by software and the highest resolution is 1280 x 1024 , we tested three typical display resolution [800 x 600 , 1024 x 768 , 1280 x 1024] and provided the worst case data [1280 x 1024] in this report .

Conducted Emission Test Photo. : Page C-1

Test Data : Hot C-1.1
Neutral C-1.2

Radiated Emission Test Photo. : Page R-1

Test Data : Horizontal R-1.1
Vertical R-1.2



PEP Testing Laboratory

CONDUCTED EMISSIONS TEST DATA

Note : HOT LINE TEST

Freq. (MHz)	Reading (uV)	Reading (dB uV)	Limit (dBuV)	Margin (dBuV)
0.83	32.62	30.27	48.00	-17.73
2.18	38.10	31.62	48.00	-16.38
3.32	20.09	26.06	48.00	-21.94
4.88	14.28	23.10	48.00	-24.90
7.63	16.16	24.17	48.00	-23.83
8.81	15.13	23.60	48.00	-24.40
9.91	15.32	23.71	48.00	-24.29
10.62	15.88	24.02	48.00	-23.98
13.45	15.25	23.67	48.00	-24.33
15.27	15.40	23.75	48.00	-24.25
18.22	16.86	24.54	48.00	-23.46
19.91	16.63	24.42	48.00	-23.58
21.47	16.10	24.14	48.00	-23.86
24.43	15.40	23.75	48.00	-24.25

Note :

1. Margin (dBuV) = Reading (dBuV) - Limit (dBuV)
2. Sign “ - ” in the Margin column means that the emission is under the Limitation.



PEP Testing Laboratory

CONDUCTED EMISSIONS TEST DATA

Note : NEUTRAL LINE TEST

Freq. (MHz)	Reading (uV)	Reading (dB uV)	Limit (dBuV)	Margin (dBuV)
0.53	38.01	31.60	48.00	-16.40
1.80	68.54	36.72	48.00	-11.28
2.48	68.07	36.66	48.00	-11.34
9.78	14.06	22.96	48.00	-25.04
11.21	16.82	24.52	48.00	-23.48
12.40	15.84	24.00	48.00	-24.00
14.80	17.82	25.02	48.00	-22.98
15.56	15.50	23.81	48.00	-24.19
16.96	16.78	24.50	48.00	-23.50
18.26	18.03	25.12	48.00	-22.88
18.60	16.71	24.46	48.00	-23.54
20.12	18.55	25.37	48.00	-22.63
22.82	15.57	23.85	48.00	-24.15
25.69	15.92	24.04	48.00	-23.96

Note :

1. Margin (dBuV) = Reading (dBuV) - Limit (dBuV)
2. Sign “ - ” in the Margin column means that the emission is under the Limitation.



PEP Testing Laboratory

RADIATED EMISSIONS TEST DATA

Antenna polarization : HORIZONTAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
41.410	28.96	-11.04	40.00	34.83	13.63	0.50	20.00
67.910	25.65	-14.35	40.00	38.28	6.50	0.88	20.00
122.310	29.93	-13.57	43.50	37.27	11.48	1.18	20.00
168.033	33.00	-10.50	43.50	40.52	10.92	1.55	20.00
183.010	29.94	-13.56	43.50	38.19	10.12	1.63	20.00
208.500	32.22	-11.28	43.50	39.61	10.74	1.87	20.00
263.200	38.66	-7.34	46.00	42.85	13.47	2.34	20.00
330.415	33.70	-12.30	46.00	36.20	14.76	2.73	20.00
476.338	34.84	-11.16	46.00	33.78	17.95	3.11	20.00
610.400	33.98	-12.02	46.00	30.49	19.88	3.61	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line



PEP Testing Laboratory

RADIATED EMISSIONS TEST DATA

Antenna polarization : VERTICAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
66.160	31.44	- 8.56	40.00	44.15	6.42	0.86	20.00
73.010	34.29	- 5.71	40.00	46.42	6.79	0.90	20.00
122.510	34.63	- 8.87	43.50	41.95	11.50	1.18	20.00
133.870	37.50	- 6.00	43.50	43.83	12.35	1.32	20.00
168.550	29.45	-14.05	43.50	37.00	10.90	1.56	20.00
208.000	35.49	- 8.01	43.50	42.91	10.71	1.87	20.00
325.600	31.66	-14.34	46.00	34.28	14.65	2.73	20.00
608.200	34.57	-11.43	46.00	31.13	19.84	3.61	20.00
824.013	36.64	-11.36	46.00	27.85	22.39	4.40	20.00
917.600	35.32	-10.68	46.00	27.23	23.58	4.51	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line



PEP Testing Laboratory

Measuring Instruments Listing :

Instrument	Manufacturer & Model	Serial Number	Band Width	Next Cal. Date	Cal. Interval
Receiver	ROHDE & SCHWARZ ETS 30	8633421012	20 MHz to 1 GHz	Nov. 2 1998	1 year
Spectrum Analyzer *	Agilent 3261A	91720076	9 MHz to 2.6 GHz	Dec. 03 1998	1 year
Spectrum Analyzer *	HP 8591A	3225A03039	9 MHz to 1.8 GHz	Jan. 04 1999	1 year
Bi-Log Antenna	CHASE Electr. CBL 6111B	1968	20 MHz to 1 GHz	Aug. 23 1999	1 year
Horn Antenna	COM-Power AH-118	10056	1 GHz to 18 GHz	Jun. 16 1999	1 year
LISN	EMCO 3825/2	93112150	9 KHz to 100 MHz	Oct. 31 1998	1 year
LISN	Kokuya KNW-242	8-837-7	9 KHz to 30 MHz	Jan. 03 1999	1 year

- * The Model 3261A has build-in the detector function of the average and additional Q. P. adapter inside the spectrum analyzer.
- * The Model 8591A has build-in the detector function of the Q. P. adapter.