

# EMC TEST REPORT

For

## **Microwave Oven**

**Model Number: MEW50N-A, MEW50S-A,**

**MEW50B-A, MEW50D-A, MEW50M-A**

**FCC ID: NRTSZJENSMWO20LA**

**Report Number : WT108001164**

Test Laboratory : Shenzhen Academy of Metrology and Quality Inspection  
Site Location : National Testing Center for Digital Electronic Products  
Site Location : Bldg. Metrology and Quality Inspection, Longzhu Road, Shenzhen, Guangdong, China  
Tel : 0086-755-26941599  
Fax : 0086-755-26941545  
Web : [www.smq.com.cn](http://www.smq.com.cn)

## TEST REPORT DECLARATION

Applicant : Shenzhen Jens Electric Co., Ltd.  
Address : Block 71, Changxing Industrial Zone, Gongming Town, Baoan, Shenzhen, China.  
Manufacturer : Shenzhen Jens Electric Co., Ltd.  
Address : Block 71, Changxing Industrial Zone, Gongming Town, Baoan, Shenzhen, China.  
EUT Description : Microwave oven  
Model Number : MEW50N-A, MEW50S-A, MEW50B-A, MEW50D-A, MEW50M-A  
FCC ID : NRTSJENSMWO20LA


Test Standards:

**FCC Part 18 18.301, 18.305, 18.307**

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003), FCC MP-5 and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 18.301, 18.305, 18.307.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Tested by:

  
(Ryan Chen)


Date: Jun.23.2010

Checked by:

  
(Dewelly Yang)

Date: Jun.23.2010

Approved by:

  
(Peter Lin)

Date: Jun.23.2010

## TABLE OF CONTENTS

<b>TEST REPORT DECLARATION</b> .....	<b>2</b>
<b>1. TEST RESULTS SUMMARY</b> .....	<b>4</b>
<b>2. GENERAL INFORMATION</b> .....	<b>5</b>
2.1. Report information.....	5
2.2. Laboratory Accreditation and Relationship to Customer .....	5
2.3. Measurement Uncertainty .....	6
<b>3. PRODUCT DESCRIPTION</b> .....	<b>7</b>
3.1. EUT Description.....	7
3.2. Related Submittal(s) / Grant (s) .....	7
3.3. Block Diagram of EUT Configuration .....	7
3.4. Operating Condition of EUT.....	7
3.5. Support Equipment .....	7
3.6. Test Conditions .....	8
3.7. Modifications .....	8
<b>4. TEST EQUIPMENT USED</b> .....	<b>9</b>
4.1. Test Equipment Used to Measure Conducted Disturbance .....	9
4.2. Test Equipment Used to Measure Radiated Disturbance .....	9
4.3. Test Equipment Used to Measure Input Power.....	9
<b>5. CONDUCTED DISTURBANCE TEST</b> .....	<b>10</b>
5.1. Test Standard and Limit .....	10
5.2. Test Procedure .....	10
5.3. Test Arrangement.....	10
5.4. Test Data .....	10
<b>6. INPUT POWER MEASUREMENT</b> .....	<b>26</b>
6.1. TEST PROCEDURE.....	26
6.2. Test Data .....	26
<b>7. RF POWER OUTPUT MEASUREMENT AND RESULT</b> .....	<b>27</b>
<b>8. RADIATED DISTURBANCE TEST</b> .....	<b>29</b>
8.1. Test Standard and Limit .....	29
8.2. Test Procedure .....	29
8.3. Test Arrangement.....	29
8.4. Field strength limit .....	30
8.5. Test Data .....	31
<b>9. OPERATING FREQUENCY TEST</b> .....	<b>36</b>
9.1. Test Standard .....	36
9.2. Test Procedure .....	36
9.3. Test Data .....	36

## 1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
Conducted Disturbance	18.307	Pass
Radiated disturbance	18.305	Pass
Operating Frequency	18.301	Pass

## 2. GENERAL INFORMATION

### 2.1. Report information

- 2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.
- 2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 2.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

### 2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at Bldg. of Metrology & Quality Inspection, Longzhu Road, Nanshan District, Shenzhen, Guangdong, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number are 97379(open area test site) and 274801(semi anechoic chamber).

The Laboratory is listed in Voluntary Control Council for Interference by Information Technology Equipment (VCCI), and the registration number are R-1974 (open area test site), R-1966 (semi anechoic chamber), C-2117 (mains ports conducted interference measurement) and T-180 (telecommunication ports conducted interference measurement).

The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is IC4174.

TUV Rhineland accredits the Laboratory for conformance to IEC and EN standards, the registration number is E2024086Z02.

### **2.3. Measurement Uncertainty**

Conducted Emission  
9kHz~30MHz 3.5dB

Radiated Emission  
30MHz~1000MHz 4.5dB  
1GHz~18GHz 4.6dB

### 3. PRODUCT DESCRIPTION

#### 3.1. EUT Description

Description : Microwave oven  
Applicant : MEW50N-A, MEW50S-A, MEW50B-A, MEW50D-A, MEW50M-A  
Model Number : Shenzhen Jens Electric Co., Ltd.  
Input : AC120V/60Hz  
Rated Microwave Power : 700W  
Magnetron : JENS JM002

Remark: The sameness and differences between MEW50N-A, MEW50S-A, MEW50B-A, MEW50D-A and MEW50M-A are as follows:


- 1, Above two models belong to the same series products, most relevant parameter, such as microwave input power, output power, cavity capacity, interlock switch, and all safety component, are exactly the same.
- 2, Above two products are all digital controlled.
- 3, The difference between both models:

The model name, control board and oven door's appearance.

#### 3.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: NRTSZJENSMWO20LA filing to comply with Section 18.301, 18.305, 18.307 of the FCC Part 18, Subpart C Rules.

#### 3.3. Block Diagram of EUT Configuration

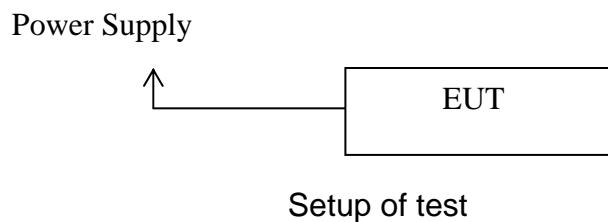

#### 3.4. Operating Condition of EUT

Test mode 1: P10 (Full power microwave output)

#### 3.5. Support Equipment

N/A

### **3.6. Test Conditions**

Date of test: Apr.07, 2010-May.20, 2010

Date of EUT Receive: Apr.01, 2010

Temperature: 23-26 °C

Relative Humidity: 53-56%

### **3.7. Modifications**

No modification was made.

## 4. TEST EQUIPMENT USED

### 4.1. Test Equipment Used to Measure Conducted Disturbance

Table 2 Conducted Disturbance Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB2603	EMI Test Receiver	Rohde & Schwarz	ESCS30	Jan.22, 2010	1 Year
SB4357	AMN	Rohde & Schwarz	ESH2-Z5	Jan.22, 2010	1 Year

### 4.2. Test Equipment Used to Measure Radiated Disturbance

Table 3 Radiated Disturbance Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB3436	EMI Test Receiver	Rohde & Schwarz	ESI26	Jan.22, 2010	1 Year
SB3440	Bilog Antenna	Chase	CBL6112B	Jan.22, 2010	1 Year
SB3435	Horn Antenna	Rohde & Schwarz	HF906	Jan.22, 2010	1 Year

### 4.3. Test Equipment Used to Measure Input Power

Table 4 Input Power Test Equipment

No.	Equipment	Manufacturer	Model No.	LAST CALIB	Period
SB2588	Power	CI	5001ix-CTS-400	Jan.25,2010	1 Year
SB2588/01	Three Phase Harmonic flicker test system	CI	PACS-3	Jan.25,2010	1 Year
SB2588/02	Power	CI	5001ix-CTS-400-NO	Jan.25,2010	1 Year
SB2588/03	Power	CI	5001ix-CTS-400-NO	Jan.25,2010	1 Year

## 5. CONDUCTED DISTURBANCE TEST

### 5.1. Test Standard and Limit

#### 5.1.1. Test Standard

FCC Part 18

#### 5.1.2. Test Limit

Table 5 Conducted Disturbance Test Limit (Part 18 consumer device)

Frequency	Limit (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

\* Decreasing linearly with logarithm of the frequency

### 5.2. Test Procedure

The EUT was set up according to the guideline of ANSI C63.4: 2003 & FCC MP-5 for conducted emissions. The EUT is put on a table of non-conducting material that is 40cm high. The vertical conducting wall of shielding is located 80cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESCS30) is used to test the emissions form both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

### 5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

### 5.4. Test Data

The emissions don't show in below are too low against the limits, the test curves are shown in the APPENDIX I

Table 6 Conducted Disturbance Test Data


Model No.: MEW50N-A

Test Mode: 1

Frequency (MHz)	Line				Neutral				
	Quasi-Peak		Average		Frequency (MHz)	Quasi-Peak		Average	
	Reading (dB $\mu$ V)	Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Limit (dB $\mu$ V)		Reading (dB $\mu$ V)	Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Limit (dB $\mu$ V)
0.150	37.2	66	12.9	56	0.158	42.6	65.6	15.1	55.6
0.186	35.9	64.2	12.0	54.2	0.186	40.6	64.2	14.4	54.2
0.250	33.4	61.8	12.6	51.8	0.246	41.2	61.9	15.4	51.9
0.290	32.9	60.5	10.4	50.5	0.286	40.1	60.6	13.7	50.6
0.346	31.9	59.1	10.4	49.1	0.462	38.1	56.7	13.1	46.7
0.526	29.0	56	9.1	46	0.510	40.3	56	13.2	46

## Conducted Disturbance

EUT: M/N:MEW50N-A  
Op Cond: 100P  
Test Spec: L  
Comment: AC 120V/60Hz

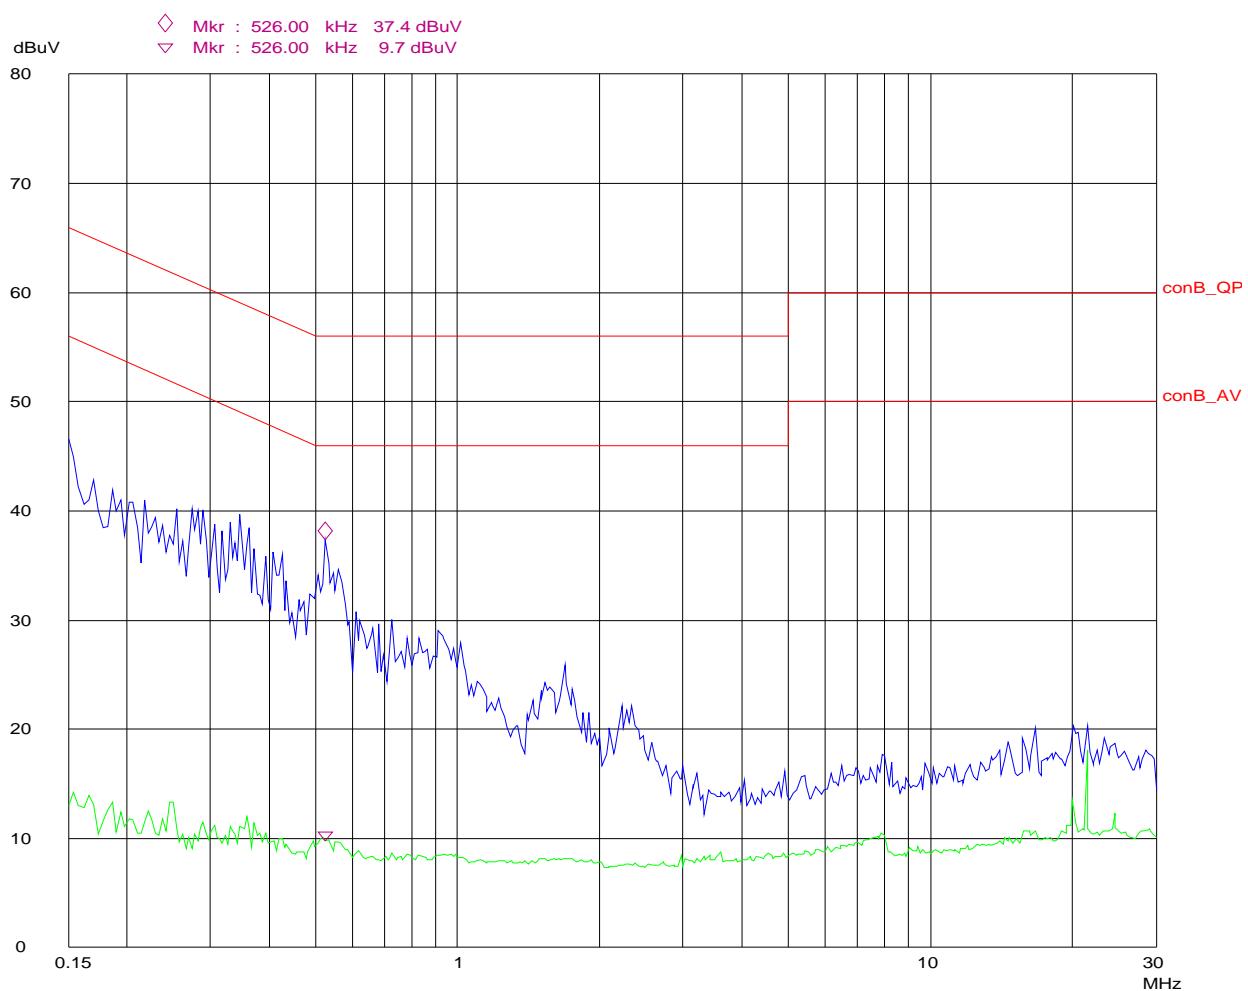

## Conducted Disturbance

EUT: M/N:MEW50N-A  
Op Cond: 100P  
Test Spec: N  
Comment: AC 120V/60Hz

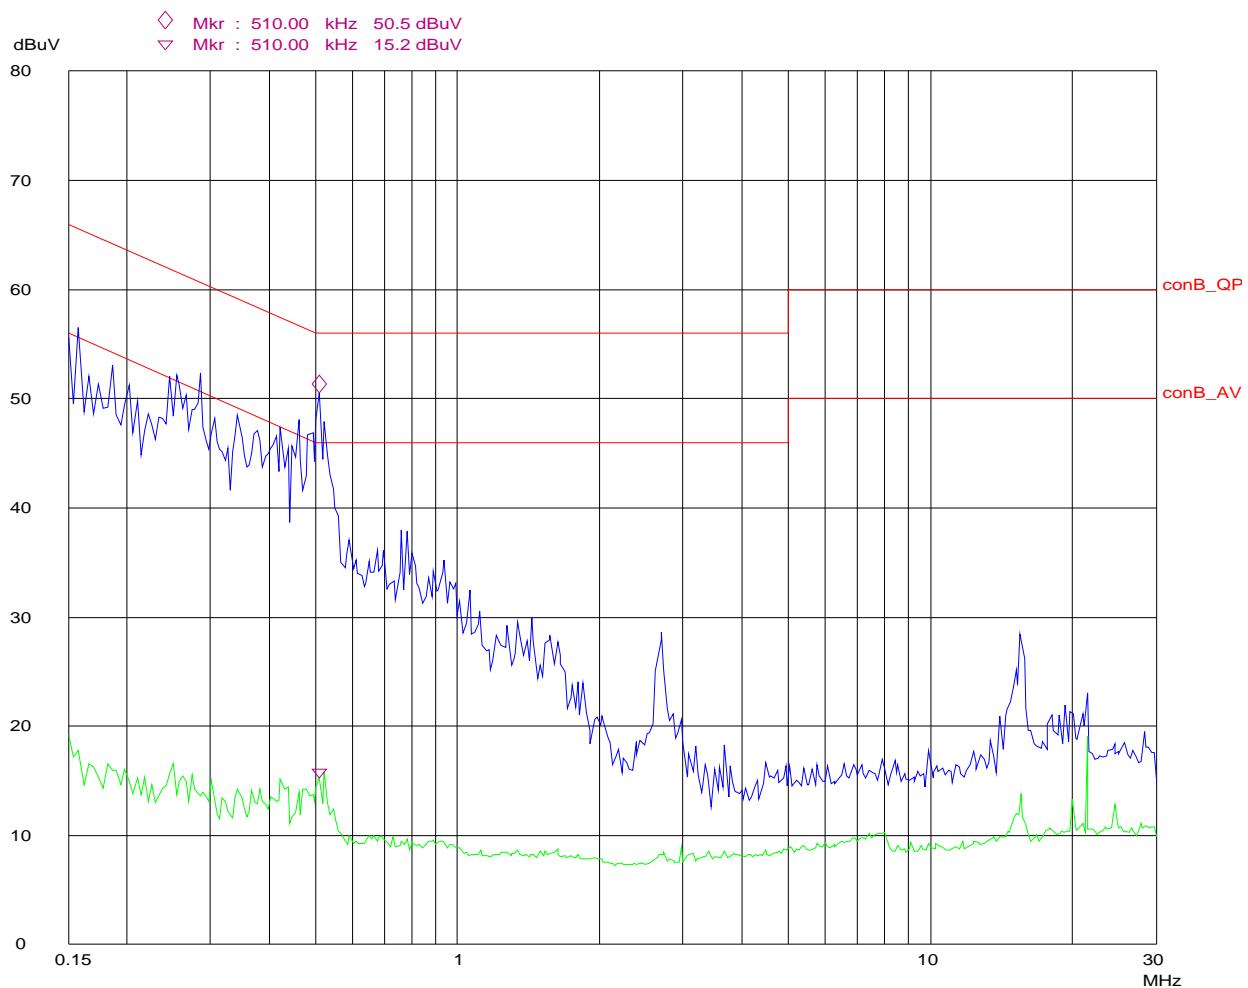


Table 7 Conducted Disturbance Test Data


Model No.: MEW50S-A

Test Mode: 1

Frequency (MHz)	Line				Neutral				
	Quasi-Peak		Average		Frequency (MHz)	Quasi-Peak		Average	
	Reading (dB $\mu$ V)	Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Limit (dB $\mu$ V)		Reading (dB $\mu$ V)	Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Limit (dB $\mu$ V)
0.162	35.4	65.4	11.0	55.4	0.154	40.7	65.8	13.1	55.8
0.178	37.8	64.6	11.6	54.6	0.190	38.8	64.0	12.1	54.0
0.250	30.4	61.8	14.8	51.8	0.250	32.3	61.8	16.5	51.8
0.322	27.8	59.7	8.9	49.7	0.330	28.3	59.5	9.1	49.5
0.350	29.3	59.0	9.1	49.0	0.466	28.6	56.6	9.1	46.6
0.546	25.6	56	8.5	46	0.502	31.9	56	9.8	46

## Conducted Disturbance

EUT: M/N:MEW50S-A  
Op Cond: 100P  
Test Spec: L  
Comment: AC 120V/60Hz

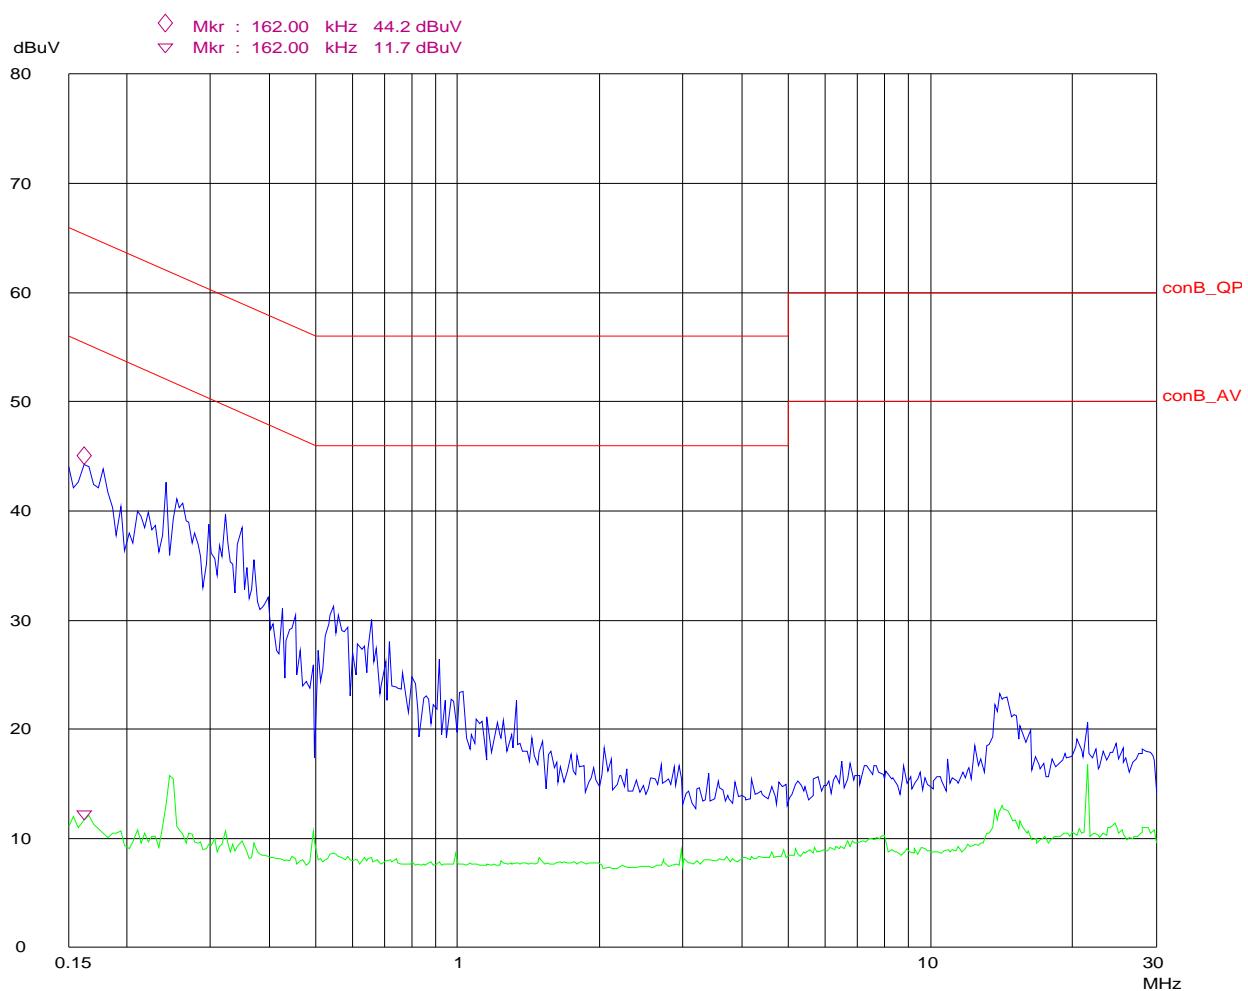

## Conducted Disturbance

EUT: M/N:MEW50S-A  
Op Cond: 100P  
Test Spec: N  
Comment: AC 120V/60Hz

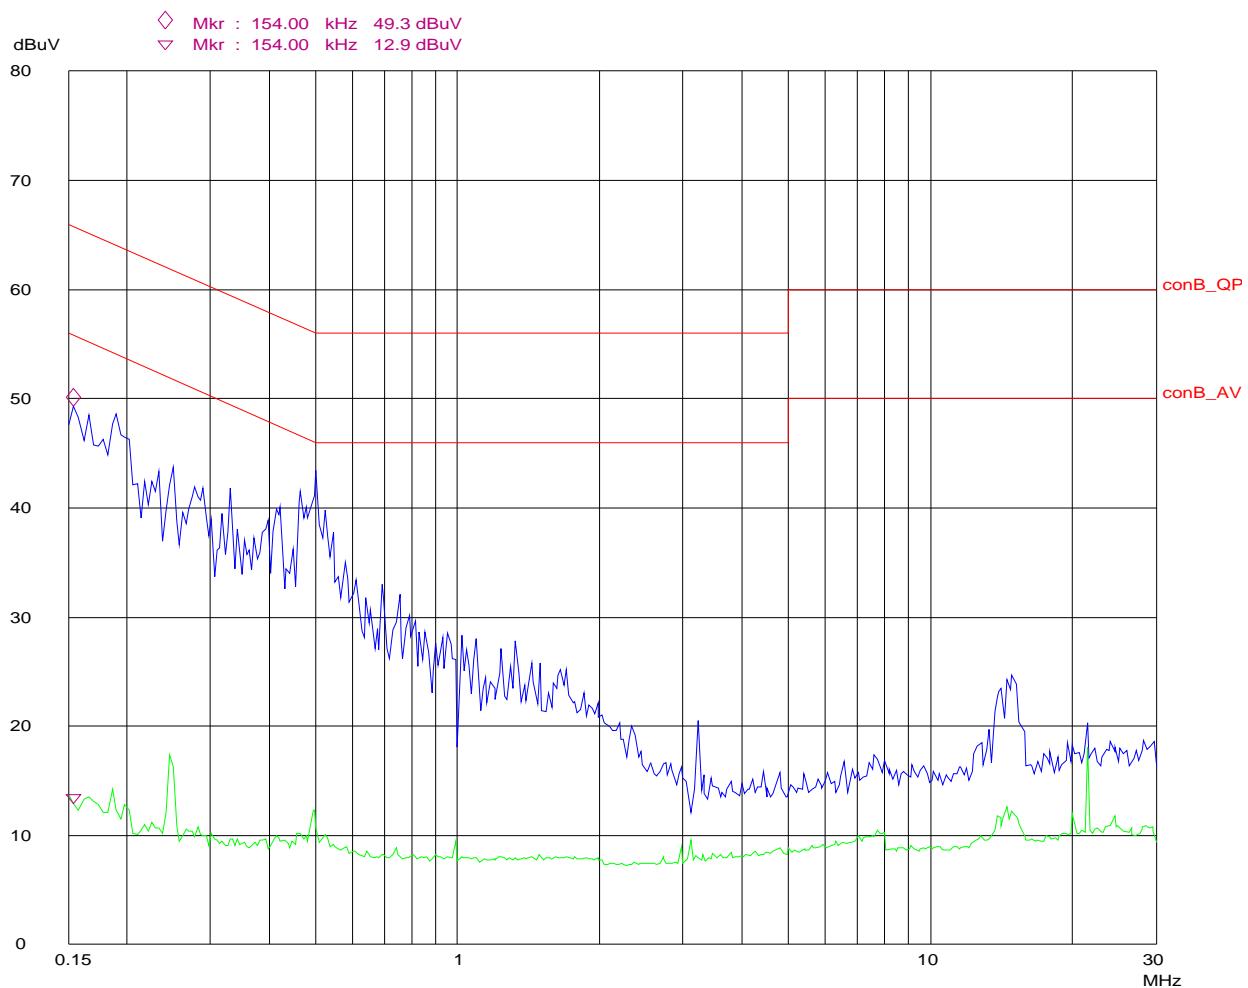


Table 8 Conducted Disturbance Test Data


Model No.: MEW50B-A

Test Mode: 1

Frequency (MHz)	Line				Neutral				
	Quasi-Peak		Average		Frequency (MHz)	Quasi-Peak		Average	
	Reading (dB $\mu$ V)	Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Limit (dB $\mu$ V)		Reading (dB $\mu$ V)	Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Limit (dB $\mu$ V)
0.162	42.1	65.4	13.9	55.4	0.154	38.6	65.8	13.4	55.8
0.206	41.0	63.4	13.2	53.4	0.214	36.9	63.0	12.0	53.0
0.226	42.5	62.6	13.9	52.6	0.310	31.8	60.0	9.9	50.0
0.294	37.9	60.4	10.4	50.4	0.478	34.1	56.4	11.0	46.4
0.358	33.9	58.8	10.3	48.8	0.514	34.7	56	11.8	46
0.554	29.5	56	9.3	46	2.282	23.9	56	8.8	46

## Conducted Disturbance

EUT: M/N:MEW50B-A  
Op Cond: 100P  
Test Spec: L  
Comment: AC 120V/60Hz

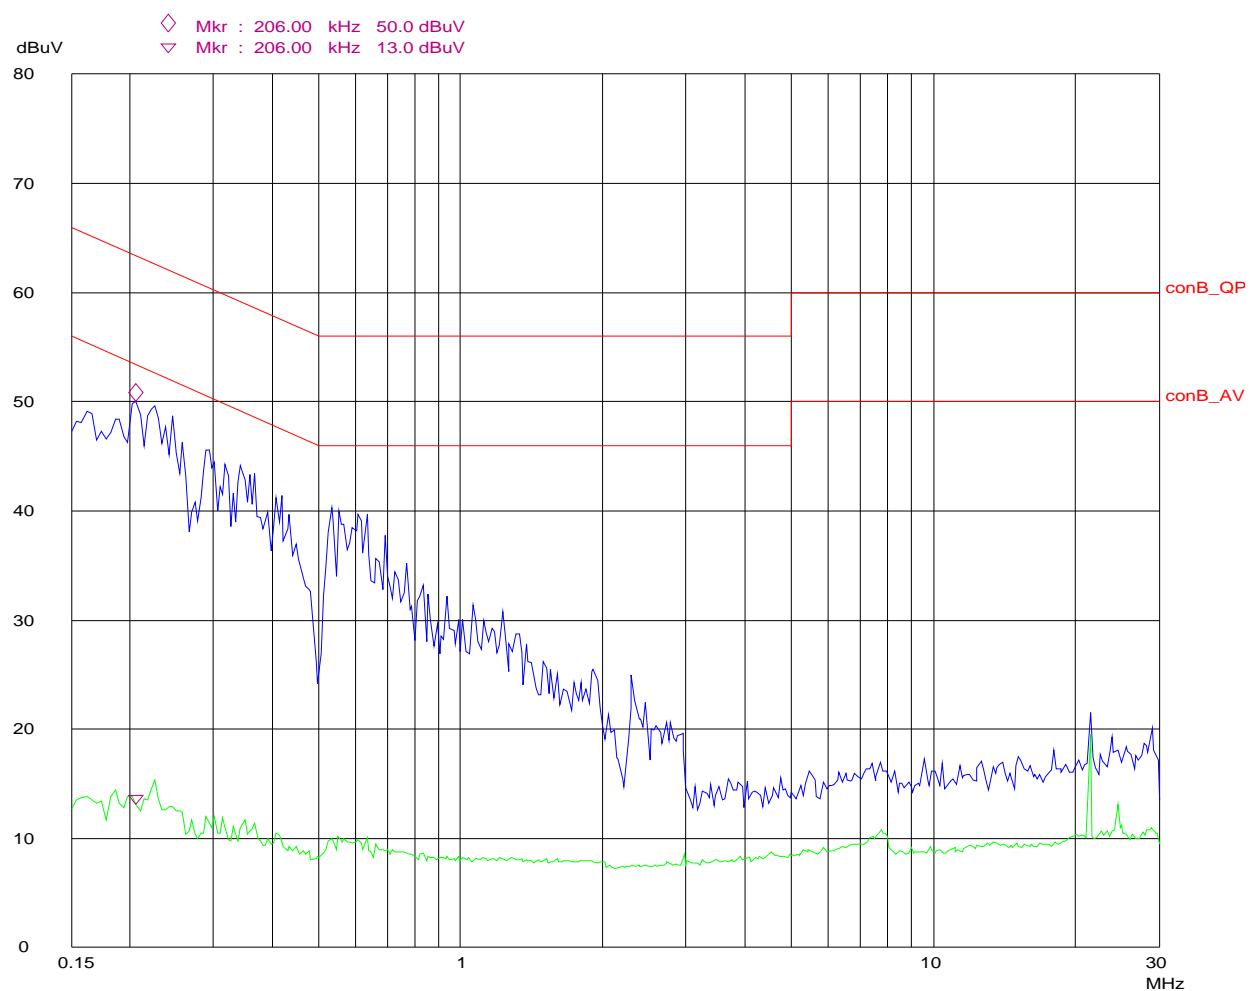

## Conducted Disturbance

EUT: M/N:MEW50B-A  
Op Cond: 100P  
Test Spec: N  
Comment: AC 120V/60Hz

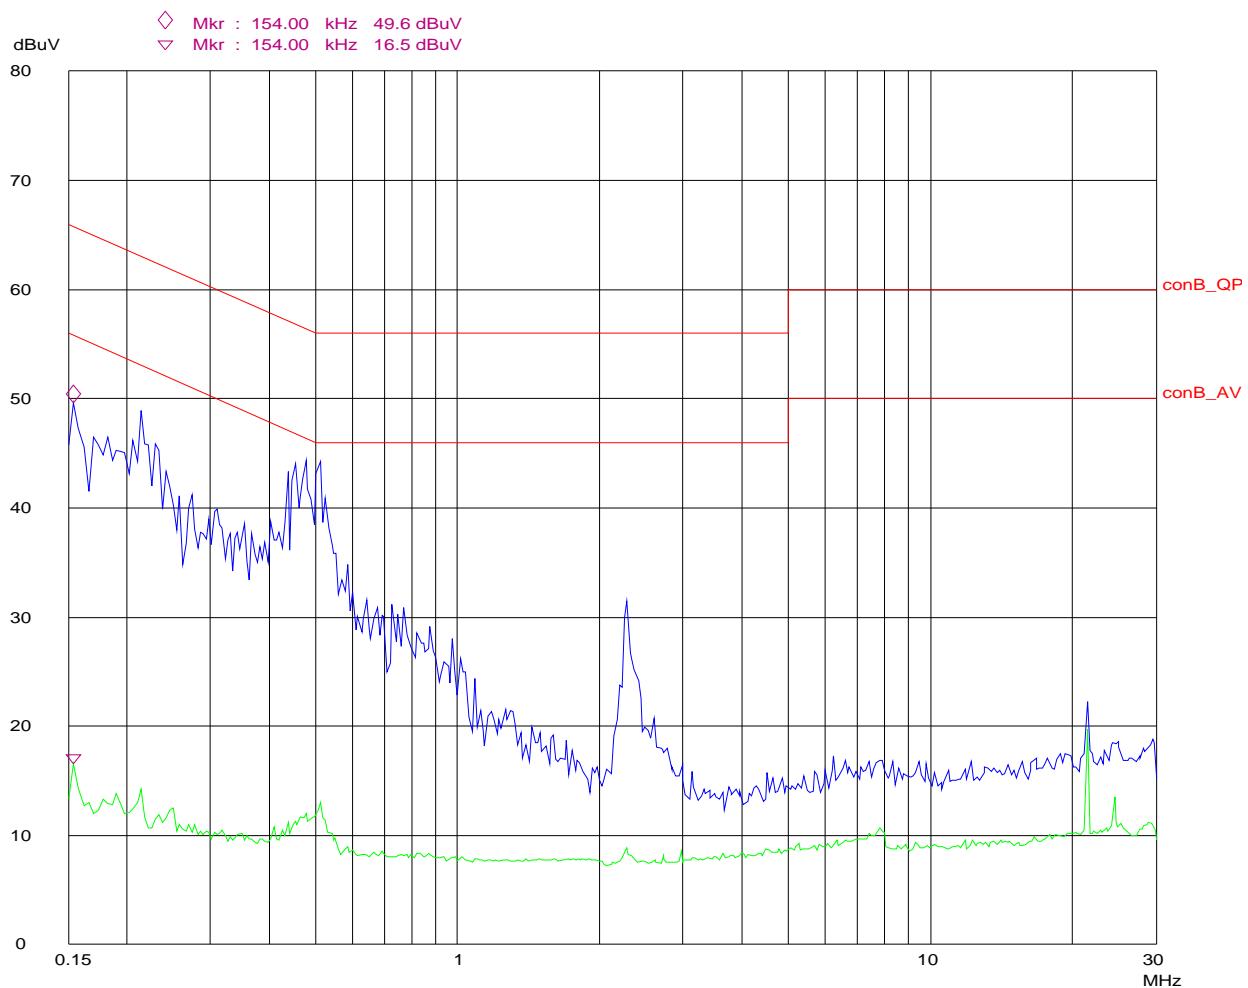


Table 9 Conducted Disturbance Test Data


Model No.: MEW50D-A

Test Mode: 1

Frequency (MHz)	Line				Neutral				
	Quasi-Peak		Average		Frequency (MHz)	Quasi-Peak		Average	
	Reading (dB $\mu$ V)	Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Limit (dB $\mu$ V)		Reading (dB $\mu$ V)	Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Limit (dB $\mu$ V)
0.150	44.2	66	16.1	56	0.150	44.3	66	16.7	56
0.210	41.4	63.2	14.4	53.2	0.222	41.7	62.7	14.7	52.7
0.382	35.9	58.2	11.4	48.2	0.302	36.2	60.2	12.8	50.2
0.534	33.8	56	10.6	46	0.342	35.4	59.2	10.9	49.2
0.594	33.0	56	10.3	46	0.506	40.8	56	14.4	46
1.898	28.6	56	9.7	46	1.810	36.9	56	11.5	46

## Conducted Disturbance

EUT: M/N:MEW50D-A  
Op Cond: 100P  
Test Spec: L  
Comment: AC 120V/60Hz

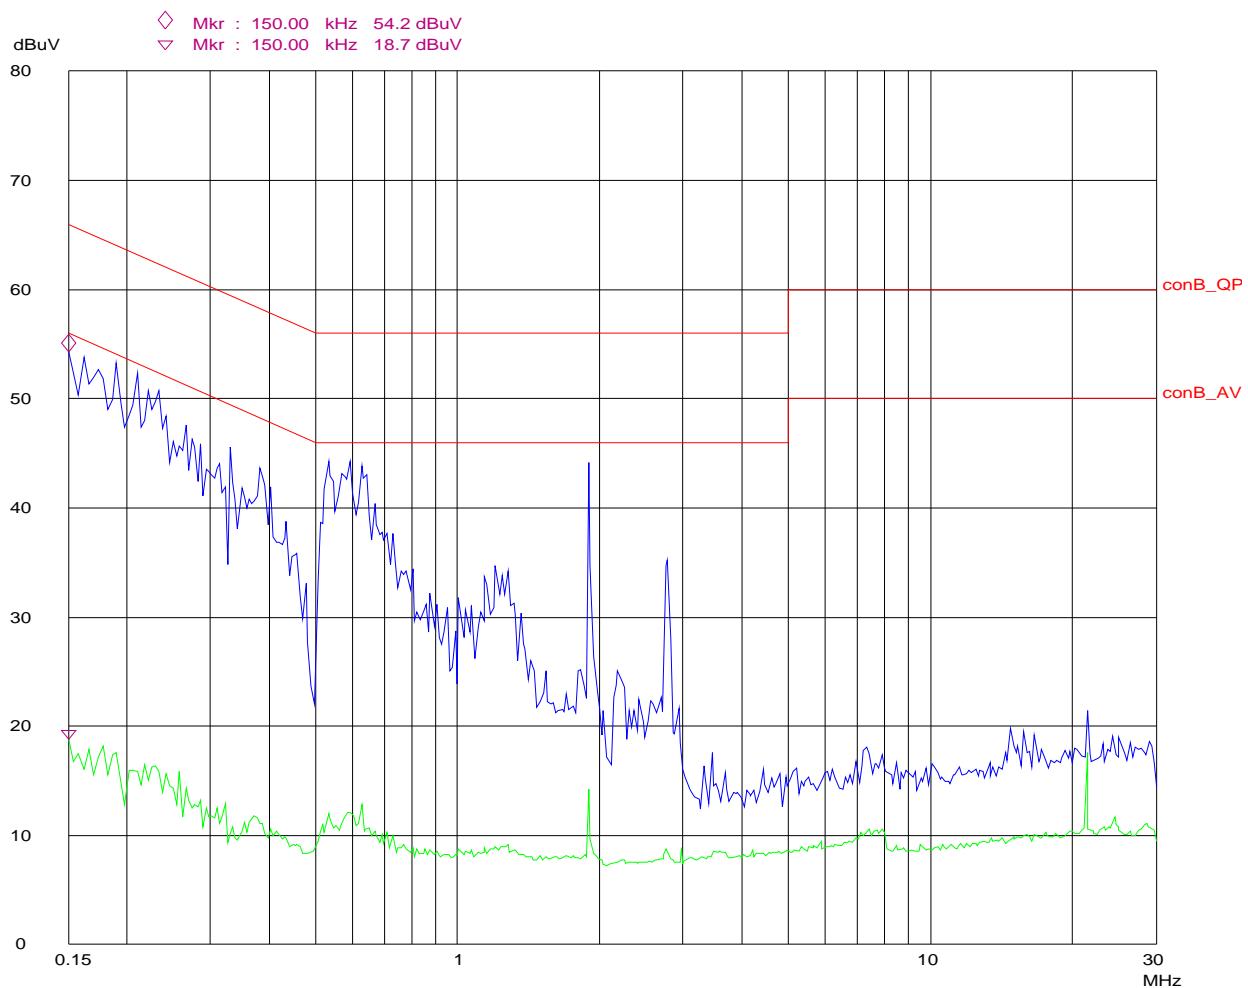

## Conducted Disturbance

EUT: M/N:MEW50D-A  
Op Cond: 100P  
Test Spec: N  
Comment: AC 120V/60Hz

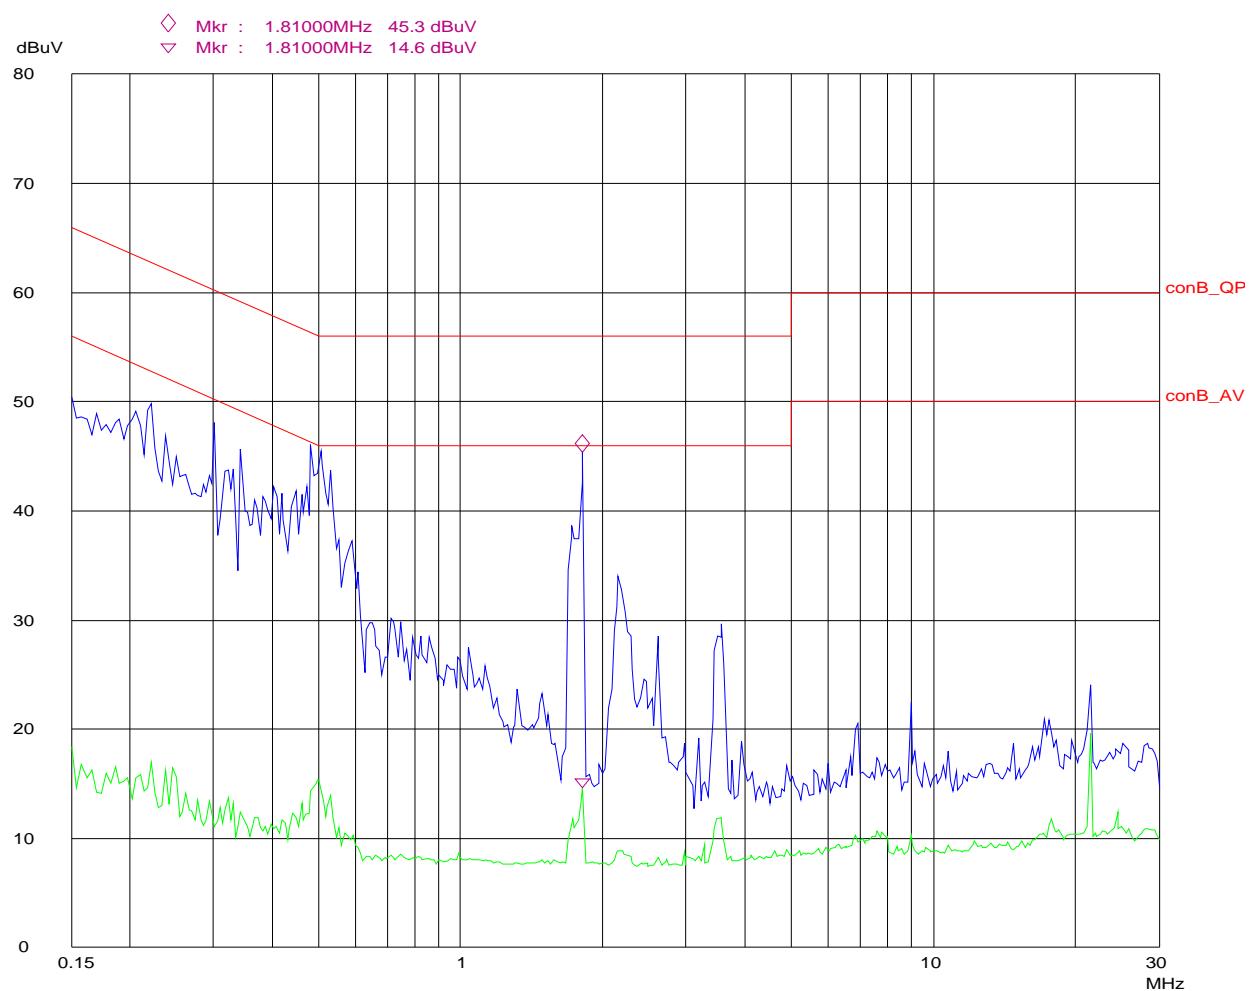


Table 10 Conducted Disturbance Test Data


Model No.: MEW50M-A

Test Mode: 1

Frequency (MHz)	Line				Neutral				
	Quasi-Peak		Average		Frequency (MHz)	Quasi-Peak		Average	
	Reading (dB $\mu$ V)	Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Limit (dB $\mu$ V)		Reading (dB $\mu$ V)	Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Limit (dB $\mu$ V)
0.166	42.6	65.2	15.3	55.2	0.158	44.0	65.6	15.6	55.6
0.254	36.9	61.6	11.7	51.6	0.178	41.7	64.6	13.8	54.6
0.338	32.2	59.3	10.1	49.3	0.206	36.7	63.4	12.3	53.4
0.378	30.3	58.3	9.6	48.3	0.294	34.3	60.4	10.7	50.4
0.510	33.0	56	10.5	46	0.410	30.1	57.6	9.4	47.6
1.718	23.4	56	7.9	46	0.582	27.4	56	9.3	46


## Conducted Disturbance

EUT: M/N:MEW50M-A  
Op Cond: 100P  
Test Spec: L  
Comment: AC 120V/60Hz

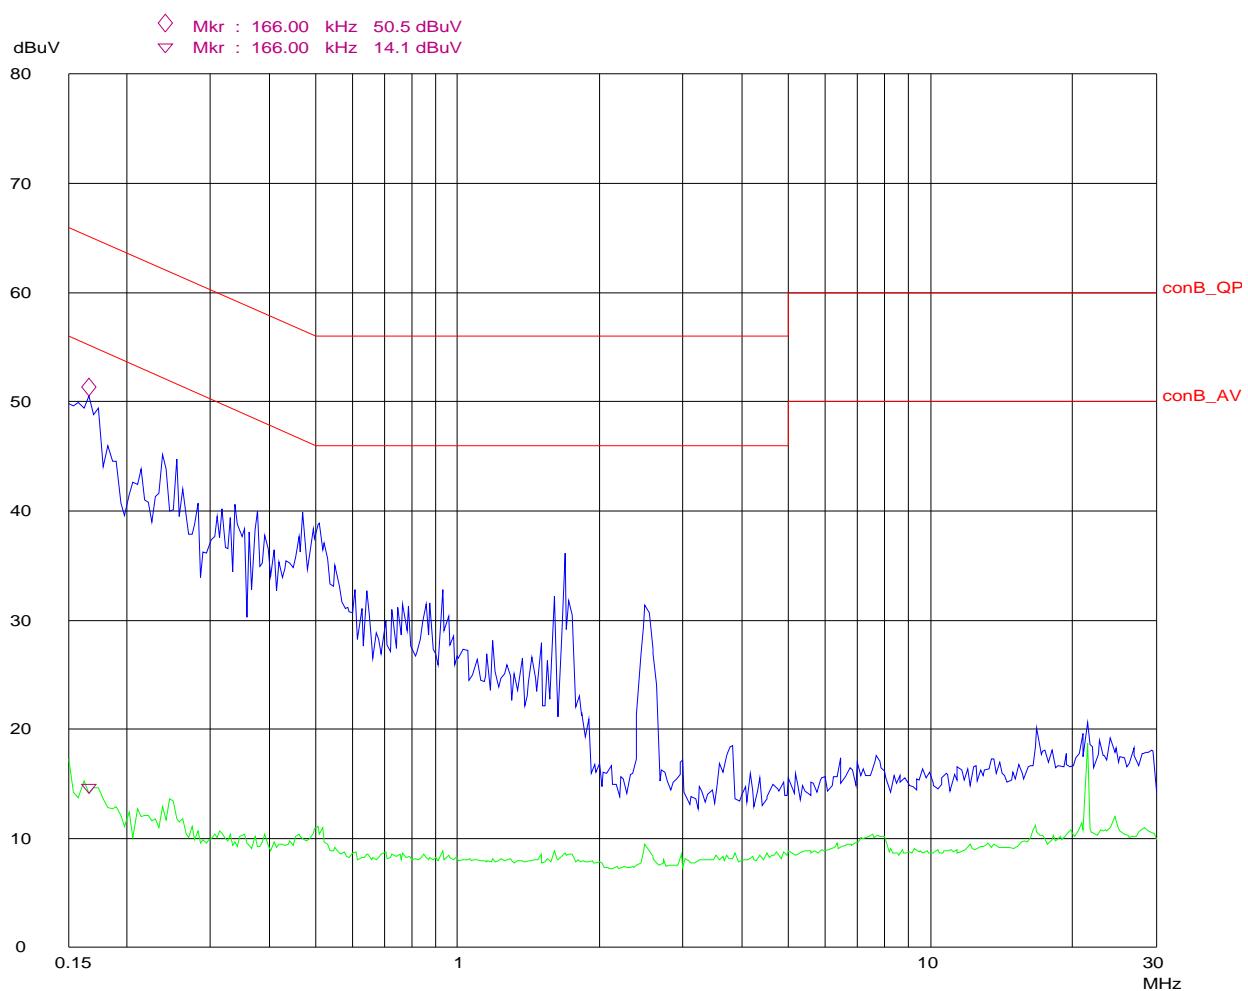

## Conducted Disturbance

EUT: M/N:MEW50M-A  
Op Cond: 100P  
Test Spec: N  
Comment: AC 120V/60Hz

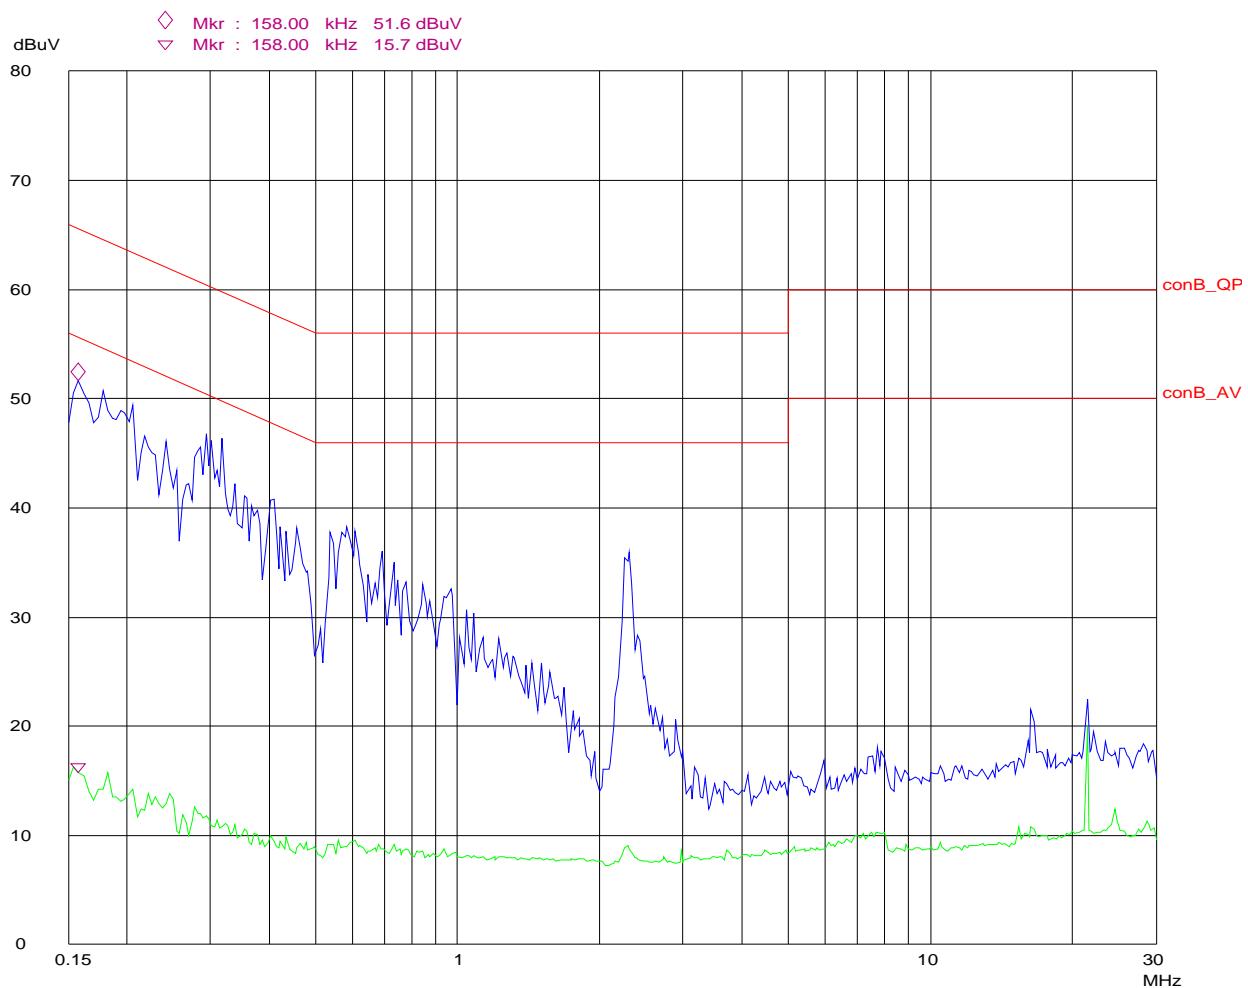

## 6. INPUT POWER MEASUREMENT

### 6.1. TEST PROCEDURE

The EUT was set up according to the FCC MP-5 and FCC Part 18 for Input power measurement. Input power and current was measured using a power analyzer. A 1000ml water load was placed in the center of the oven and oven was operated at maximum output power.

A 1000ml water load was chosen for its compatibility with the procedure commonly used by manufacturers to determine their input ratings.

### 6.2. Test Data

Model No.: MEW50N-A

Magnetron type: JENS JM002

Input Voltage (Vac/Hz)	Measured Input Power (watts)	Rated Input Power (watts)
120/60	1183	1080

Model No.: MEW50S-A

Magnetron type: JENS JM002

Input Voltage (Vac/Hz)	Measured Input Power (watts)	Rated Input Power (watts)
120/60	1198	1080

Model No.: MEW50B-A

Magnetron type: JENS JM002

Input Voltage (Vac/Hz)	Measured Input Power (watts)	Rated Input Power (watts)
120/60	1188	1080

Model No.: MEW50D-A

Magnetron type: JENS JM002

Input Voltage (Vac/Hz)	Measured Input Power (watts)	Rated Input Power (watts)
120/60	1193	1080

Model No.: MEW50M-A

Magnetron type: JENS JM002

Input Voltage (Vac/Hz)	Measured Input Power (watts)	Rated Input Power (watts)
120/60	1180	1080

## 7. RF POWER OUTPUT MEASUREMENT AND RESULT

The Calorimetric Method was used to determine maximum output power. A 1000 ml water load was placed in the center of the oven. A thermometer was used to measure temperature rise.

$$Power(W) = \frac{(4.2 \text{ Joules/Cal}) * (VolumeInml) * (TemperatureRise)}{TimeinSeconds}$$

Model No.: MEW50N-A

Magnetron type: JENS JM002

Quantity of Water(ml)	Starting Temperature (°C)	Final Temperature (°C)	Elapsed Time(Second)
1000	21.9	40.0	120

$$Power(W) = \frac{(4.2) * (1000) * (18.1)}{120}$$

$$Power (W) = 633.5$$

Model No.: MEW50S-A

Magnetron type: JENS JM002

Quantity of Water(ml)	Starting Temperature (°C)	Final Temperature (°C)	Elapsed Time(Second)
1000	21.4	39.5	120

$$Power(W) = \frac{(4.2) * (1000) * (18.1)}{120}$$

$$Power (W) = 633.5$$

Model No.: MEW50B-A

Magnetron type: JENS JM002

Quantity of Water(ml)	Starting Temperature (°C)	Final Temperature (°C)	Elapsed Time(Second)
1000	21.9	40.1	120

$$Power(W) = \frac{(4.2) * (1000) * (18.2)}{120}$$

$$Power (W) = 637.0$$

Model No.: MEW50D-A

Magnetron type: JENS JM002

Quantity of Water(ml)	Starting Temperature (°C)	Final Temperature (°C)	Elapsed Time(Second)
1000	22.5	40.5	120

$$Power(W) = \frac{(4.2) * (1000) * (18.0)}{120}$$

$$Power (W) = 630.0$$

Model No.: MEW50M-A

Magnetron type: JENS JM002

Quantity of Water(ml)	Starting Temperature (°C)	Final Temperature (°C)	Elapsed Time(Second)
1000	22.0	40.0	120

$$Power(W) = \frac{(4.2) * (1000) * (18.0)}{120}$$

$$Power (W) = 630.0$$

## 8. RADIATED DISTURBANCE TEST

### 8.1. Test Standard and Limit

#### 8.1.1. Test Standard

FCC Part 18

#### 8.1.2. Test Limit

Table 11 Radiated Disturbance Test Limit

Operating Frequency	RF Power generated by equipment(watts)	Field strength limit ( $\mu$ V/m)	Distance (m)
Any ISM Frequency	Below 500	25	300
	500 or more	$25 \times \text{SQRT}(\text{power}/500)$	300

### 8.2. Test Procedure

The EUT was set up according to the guideline of ANSI C63.4: 2003 & FCC MP-5 for radiated emissions. The EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test. During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	R B/W	Video B/W	IF B/W
30 – 1000 MHz	100 kHz	300 kHz	120 kHz
Above 1 GHz	1 MHz	30Hz	
Start Frequency.....			1 GHz
Stop Frequency.....			24.5 GHz
Sweep Speed.....			Auto
Video Bandwidth.....			30 Hz
Resolution Bandwidth.....			1 MHz

All data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz and average detection mode above 1GHz.

### 8.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

#### 8.4. Field strength limit

Model No.: MEW50N-A		
RF output power (W)	LFS	dB(uV/M)@3m
633.5	$\begin{aligned} \text{LFS} &= 25 \times \text{SQRT}(\text{power output} / 500) \\ &= 25 \times \text{SQRT}(633.5 / 500) \\ &= 28.14 \end{aligned}$	69.0

Model No.: MEW50S-A		
RF output power (W)	LFS	dB(uV/M)@3m
633.5	$\begin{aligned} \text{LFS} &= 25 \times \text{SQRT}(\text{power output} / 500) \\ &= 25 \times \text{SQRT}(633.5 / 500) \\ &= 28.14 \end{aligned}$	69.0

Model No.: MEW50B-A		
RF output power (W)	LFS	dB(uV/M)@3m
637.0	$\begin{aligned} \text{LFS} &= 25 \times \text{SQRT}(\text{power output} / 500) \\ &= 25 \times \text{SQRT}(637.0 / 500) \\ &= 28.2 \end{aligned}$	69.0

Model No.: MEW50D-A		
RF output power (W)	LFS	dB(uV/M)@3m
630.0	$\begin{aligned} \text{LFS} &= 25 \times \text{SQRT}(\text{power output} / 500) \\ &= 25 \times \text{SQRT}(630.0 / 500) \\ &= 28.06 \end{aligned}$	69.0

Model No.: MEW50M-A		
RF output power (W)	LFS	dB(uV/M)@3m
630.0	$\begin{aligned} \text{LFS} &= 25 \times \text{SQRT}(\text{power output} / 500) \\ &= 25 \times \text{SQRT}(630.0 / 500) \\ &= 28.06 \end{aligned}$	69.0

## 8.5. Test Data

Emissions don't show below are too low against the limits, the data was shown the worst case only.

Table 12 Radiated Disturbance Test Data

Model No.: MEW50N-A						
Test Mode: 1						
Frequency MHz	Emission Level dB( $\mu$ V/m)	Cable loss	Antenna factor	Reading dB $\mu$ V	Polarizatio n	Limits dB ( $\mu$ V/m)
226.479	29.4	2.6	11.0	15.8	Horizontal	69.0
240.881	32.8	2.7	12.4	17.8	Horizontal	69.0
524.849	49.8	3.8	17.7	28.3	Horizontal	69.0
814.228	46.3	4.9	20.3	21.1	Horizontal	69.0
4883.266	66.2	-31.0	33.3	63.9	Horizontal	69.0
2177.863	44.5	-32.2	28.5	48.2	Horizontal	69.0
2679.358	34.2	-31.8	29.9	36.1	Horizontal	69.0
53.567	40.4	1.2	6.9	32.3	Vertical	69.0
211.422	24.6	2.6	10.0	12.0	Vertical	69.0
488.777	47.7	3.7	17.6	26.4	Vertical	69.0
795.591	38.4	4.8	20.1	13.5	Vertical	69.0
2177.354	50.7	-32.2	28.5	54.4	Vertical	69.0
2685.17	38.1	-31.8	29.9	40.0	Vertical	69.0
4882.188	58.2	-31.0	33.3	55.9	Vertical	69.0

Table 13 Radiated Disturbance Test Data

Model No.: MEW50S-A						
Test Mode: 1						
Frequency MHz	Emission Level dB( $\mu$ V/m)	Cable loss	Antenna factor	Reading dB $\mu$ V	Polarizatio n	Limits dB ( $\mu$ V/m)
45.831	17.8	1.2	10.5	6.1	Vertical	69.0
126.453	29.6	1.9	12.6	15.2	Vertical	69.0
280.561	31.4	2.8	13.4	15.2	Vertical	69.0
321.943	21.6	2.9	14.4	4.3	Vertical	69.0
2184.212	46.1	-32.2	28.5	49.8	Vertical	69.0
2741.645	36.1	-31.8	29.9	38.0	Vertical	69.0
4891.256	64.9	-31.0	33.3	62.6	Vertical	69.0
523.647	33.4	3.8	17.7	11.9	Horizontal	69.0
729.258	29.7	4.5	20.0	5.2	Horizontal	69.0
786.573	28.7	4.8	20.2	3.7	Horizontal	69.0
882.765	30.2	5.0	20.8	4.4	Horizontal	69.0
2142.147	35.6	-32.2	28.5	39.3	Horizontal	69.0
4890.981	57.9	-31.0	33.3	55.6	Horizontal	69.0
8559.998	40.2	-28.3	37.5	31.0	Horizontal	69.0

Table 14 Radiated Disturbance Test Data

Model No.: MEW50B-A						
Test Mode: 1						
Frequency MHz	Emission Level dB( $\mu$ V/m)	Cable loss	Antenna factor	Reading dB $\mu$ V	Polarizatio n	Limits dB ( $\mu$ V/m)
560.521	31.8	3.9	18.5	9.4	Horizontal	69.0
732.265	39.5	4.5	20.1	15.0	Horizontal	69.0
767.735	29.0	4.7	20.3	4.0	Horizontal	69.0
787.776	29.5	4.8	20.2	4.5	Horizontal	69.0
2378.517	33.3	-32.2	28.5	37.0	Horizontal	69.0
2545.939	33.8	-31.8	29.9	35.7	Horizontal	69.0
4883.681	64.4	-31.0	33.3	62.1	Horizontal	69.0
8565.569	45.2	-28.3	37.5	36.0	Horizontal	69.0
57.495	17.2	1.2	6.0	10.0	Vertical	69.0
469.539	22.0	3.6	17.4	1.0	Vertical	69.0
562.925	27.6	3.9	18.5	5.2	Vertical	69.0
774.549	30.2	4.7	20.2	5.3	Vertical	69.0
4885.545	56.3	-31.0	33.3	54.0	Vertical	69.0
2381.563	31.8	-32.2	28.5	35.5	Vertical	69.0

Table 15 Radiated Disturbance Test Data

Model No.: MEW50D-A						
Test Mode: 1						
Frequency MHz	Emission Level dB( $\mu$ V/m)	Cable loss	Antenna factor	Reading dB $\mu$ V	Polarizatio n	Limits dB ( $\mu$ V/m)
53.246	27.8	1.2	6.9	19.7	Vertical	69.0
79.739	24.7	1.4	9.0	14.3	Vertical	69.0
563.727	29.4	3.9	18.5	7.0	Vertical	69.0
796.793	40.6	4.8	20.1	15.7	Vertical	69.0
254.108	30.7	2.7	13.2	14.8	Vertical	69.0
413.827	26.3	3.3	17.3	5.7	Vertical	69.0
784.769	43.8	4.7	20.2	18.9	Vertical	69.0
817.835	36.1	4.9	20.3	10.9	Horizontal	69.0
2207.815	49.3	-32.2	28.5	53.0	Horizontal	69.0
2690.88	57.5	-31.8	29.9	59.4	Horizontal	69.0
4888.491	59.8	-31.0	33.3	57.5	Horizontal	69.0
2697.913	40.1	-31.8	29.9	42.0	Horizontal	69.0
4885.985	62.5	-31.0	33.3	60.2	Horizontal	69.0
14720.094	52.7	-26.9	41.1	38.5	Horizontal	69.0

Table 16 Radiated Disturbance Test Data

Model No.: MEW50M-A						
Test Mode: 1						
Frequency MHz	Emission Level dB( $\mu$ V/m)	Cable loss	Antenna factor	Reading dB $\mu$ V	Polarizatio n	Limits dB ( $\mu$ V/m)
120.441	27.4	1.9	12.8	12.8	Horizontal	69.0
309.819	22.7	2.9	13.8	6.0	Horizontal	69.0
626.653	24.6	4.3	19.1	1.2	Horizontal	69.0
816.633	26.7	4.9	20.3	1.5	Horizontal	69.0
2141.982	28.3	-32.2	28.5	32.0	Horizontal	69.0
4890.855	54.5	-31.0	33.3	52.2	Horizontal	69.0
8567.212	49.5	-28.3	37.5	40.3	Horizontal	69.0
459.919	26.2	3.4	17.1	5.7	Vertical	69.0
673.146	27.5	4.3	19.2	4.1	Vertical	69.0
828.056	34.2	4.9	20.4	8.9	Vertical	69.0
2139.257	30.7	-32.2	28.5	34.4	Vertical	69.0
4904.282	59.5	-31.0	33.3	57.2	Vertical	69.0
8567.613	50.7	-28.3	37.5	41.5	Vertical	69.0

## 9. OPERATING FREQUENCY TEST

### 9.1. Test Standard

#### 9.1.1. Test Standard

FCC Part 18

### 9.2. Test Procedure

The EUT was set up according to the FCC MP-5 and FCC Part 18 for Operating frequency measurement.

#### 1) Variation in Operating Frequency with Time

The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 1000ml water load was placed in the center of the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.

#### 2) Variation in Operating Frequency with Line Voltage

The EUT was operated/ warmed by at least 10minutes of use with a 1000ml water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.

### 9.3. Test Data

Table 17 Variation in Operating Frequency with Time (MEW50N-A)

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2405.3	2462.8

Table 18 Variation in Operating Frequency with Line Voltage (MEW50N-A)

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2408.4	2463.8

Note: Line voltage varied from 96Vac to 150Vac

Table 19 Variation in Operating Frequency with Time (MEW50S-A)

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2402.1	2460.4

Table 20 Variation in Operating Frequency with Line Voltage (MEW50S-A)

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2406.5	2461.6

Note: Line voltage varied from 96Vac to 150Vac

Table 21 Variation in Operating Frequency with Time (MEW50B-A)

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2404.1	2456.9

Table 22 Variation in Operating Frequency with Line Voltage (MEW50B-A)

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2406.5	2461.2

Note: Line voltage varied from 96Vac to 150Vac

Table 23 Variation in Operating Frequency with Time (MEW50D-A)

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2409.7	2458.4

Table 24 Variation in Operating Frequency with Line Voltage (MEW50D-A)

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2408.8	2459.3

Note: Line voltage varied from 96Vac to 150Vac

Table 25 Variation in Operating Frequency with Time (MEW50M-A)

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2405.3	2462.4


Table 26 Variation in Operating Frequency with Line Voltage (MEW50M-A)

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2408.1	2465.7


Note: Line voltage varied from 96Vac to 150Vac

## Operating Frequency


MEW50N-A

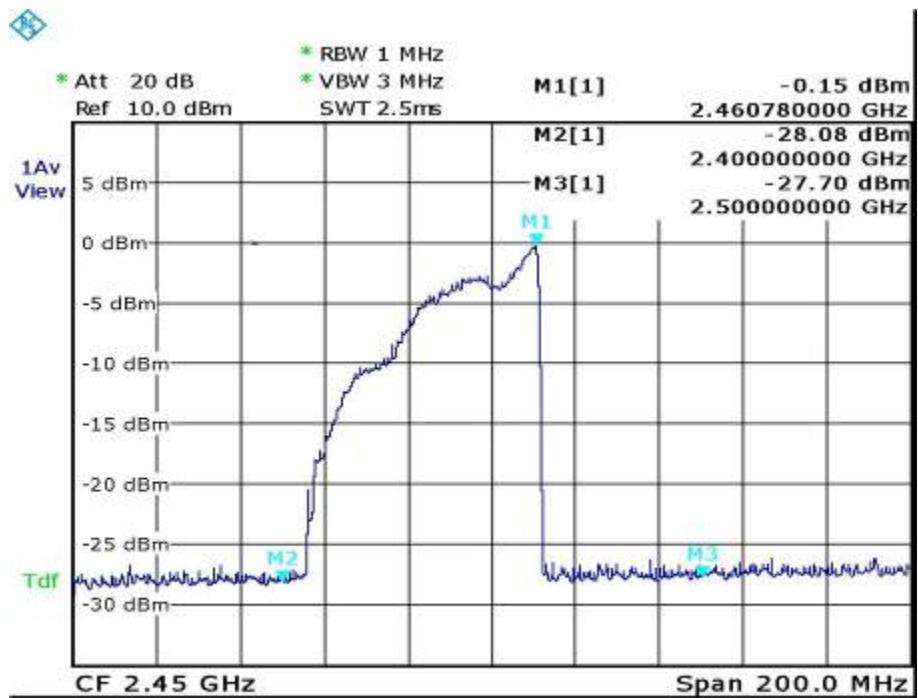


MEW50S-A

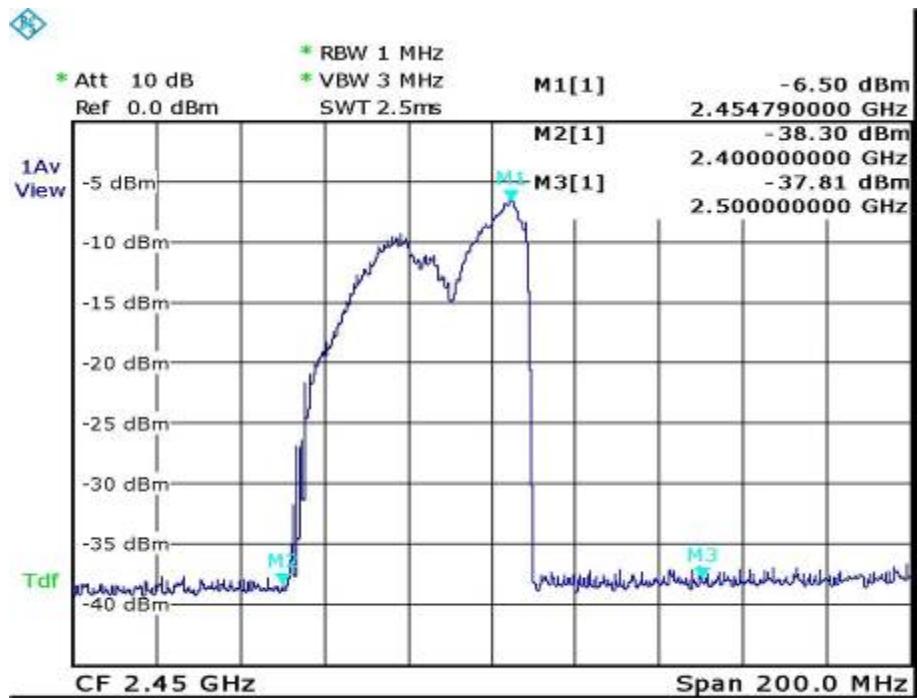

## MEW50B-A

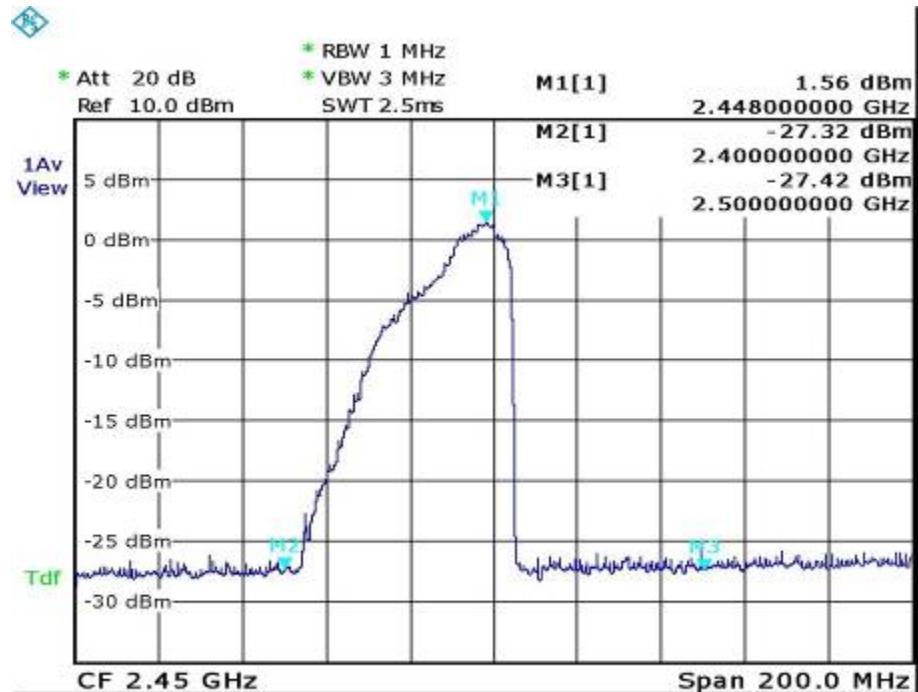

## MEW50D-A

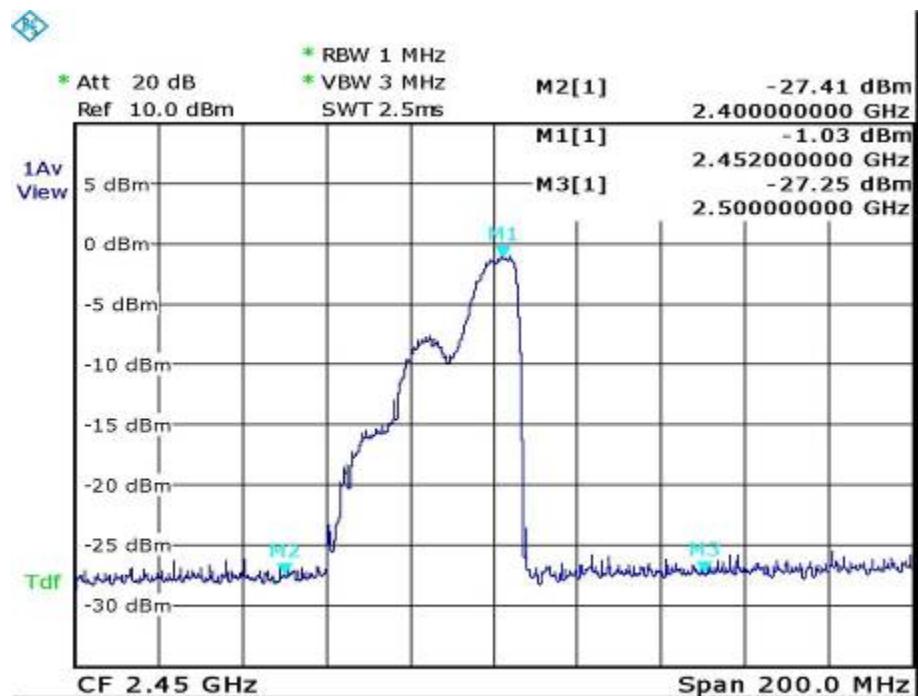

## MEW50M-A

