

**Home Wireless Networks Inc.
FCC Part 15, Certification Application
95-0001-XXX**

December 6, 1998

MEASUREMENT/TECHNICAL REPORT

COMPANY NAME: **Home Wireless Networks Inc.**

MODEL: **95-0001-XXX**

FCC ID: **NSK0001A**

DATE: **December 6, 1998**

This report concerns (check one): Original grant Class II change _____

Equipment type: **Spread Spectrum Transmitter**

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes No

If yes, defer until: _____
date

N.A. agrees to notify the Commission by N.A.
Date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

United States Technologies, Inc.
3505 Francis Circle
Alpharetta, GA 30004

Phone Number: (770) 740-0717
Fax Number: (770) 740-1508

TABLE OF CONTENTS

LETTER OF CONFIDENTIALITY

SECTION 1

GENERAL INFORMATION

- 1.1 Product Description
- 1.2 Related Submittal(s)/Grant(s)

SECTION 2

TESTS AND MEASUREMENTS

- 2.1 Configuration of Tested System and Test Procedure
- 2.2 Test Facility
- 2.3 Test Equipment
- 2.4 Modifications
- 2.5 Antenna Description
- 2.6 Peak Power (Antenna Conducted at Antenna Terminal)
- 2.7 Antenna Conducted Spurious Emissions
- 2.8 Peak Radiated Spurious Emissions
- 2.9 Average Radiated Spurious Emissions
- 2.10 Minimum 6 dB Bandwidth
- 2.11 Power Spectral Density
- 2.12 Processing Gain
- 2.13 Power Line Conducted Emissions for Transmitter
- 2.14 Radiated Emissions for Digital Device & Receiver (if Applicable)
- 2.15 Power Line Conducted for Digital Device & Receiver (if Applicable)

SECTION 3

LABELING INFORMATION

SECTION 4

BLOCK DIAGRAM(S)/ SCHEMATIC(S)

SECTION 5

PHOTOGRAPHS

SECTION 6

USER'S MANUAL

LIST OF FIGURES AND TABLES

FIGURES

Test Configuration
Photograph(s) for Spurious and Fundamental Emissions
Photograph(s) for Conducted Emissions
Peak Power
Conducted Spurious Emissions
Peak Radiated Spurious Emissions
Average Radiated Spurious Emissions
6 dB Bandwidth
Power Spectral Density

TABLES

EUT and Peripherals
Test Instruments
Peak Power Output
Power Spectral Density
Peak Radiated Spurious Emissions
Average Radiated Spurious Emissions
Power Line Conducted Emissions for Transmitter
Radiated Emissions for Digital Device and Receiver
Power Line Conducted Emissions for Digital Device and Receiver

SECTION 1

GENERAL INFORMATION

GENERAL INFORMATION

1.1 Product Description

The Equipment Under Test (EUT) is a Home Wireless Networks, Inc., Model 95-0001-XXX, FCC ID: NSK0001A. The Home Wireless Networks, Inc. Model 95-0001-XXX is a wireless handset designed to work with the Home Wireless Networks® integrated communication system. The handset can support up to four telephone lines and can also be used for system administration of the network.

The following is a list of the channels designed into the EUT:

Channel	Channel Frequency (MHz)
0	905.728
1	906.240
2	906.752
3	907.264
4	907.776
5	908.288
6	908.800
7	909.312
8	909.824
9	910.336
10	910.848
11	911.360
12	911.872
13	912.384
14	912.896
15	913.408
16	913.920
17	914.432
18	914.944
19	915.456
20	915.968
21	916.480
22	916.992
23	917.504
24	918.016
25	918.528
26	919.040
27	919.552
28	920.064
29	920.576
30	921.088
31	921.600
32	922.112
33	922.624
34	923.136
35	923.648

1.2 Related Submittal(s)/Grant(s)

The EUT will be used with part of a system to send and receive voice and/or data. The transceiver presented in this report will be used with another transceiver which has been submitted under FCC ID: NSK0005A.

The EUT is subject to the following authorizations:

- a) Certification as a transmitter
- b) Verification as a receiver and digital device

The information contained in this report is presented for both the certification & verification authorization(s) of the EUT.

SECTION 2

TESTS AND MEASUREMENTS

TEST AND MEASUREMENTS

2.1 Configuration of Tested System and Test Procedure

The sample was tested per ANSI C63.4, Methods of Measurement from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (1992). Conducted and radiated emissions data were taken with the test receiver or spectrum analyzer's resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off throughout the evaluation process. Interconnecting cables were manipulated as necessary to maximize emissions. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious and fundamental emissions are shown in Figure 2. Since the EUT was a hand held device, it was rotated about all 3 axis for all radiated tests in order to obtain the worse case emissions.

The sample used for testing was received by U.S. Technologies on October 20, 1998 in good condition.

2.2 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA. This site has been fully described and submitted to the FCC, and accepted in their letter marked 31040/SIT. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number IC2982.

2.3 Test Equipment

Table 2 describes test equipment used to evaluate this product.

2.4 Modifications

To bring the EUT into compliance to meet the class B limits of Part 15, the modifications specified on the following ECO were made by Home Wireless Networks, Inc.



Engineering Change Order

REQUESTOR *	DATE	EXT	PRODUCT	DIVISION	PRIORITY			
Punit Shah	10/21/98		96-0001-000		1	X	2	3

IMPACT		TYPE OF CHANGE			OTHER			
X	HARDWARE		RELEASE		DESIGN CHANGE		PRE-REQ	
	SOFTWARE	X	IMPROVEMENT		OTHER		CO-REQ	
	TECH PUBS		DOC ONLY CHG				BABT	
	OTHER		COST REDUCTION					

Problem Definition and System Symptoms:

5th harmonic of VCO exceeding FCC emissions limits


Suggested Corrective Action:

Add 1 pF cap (HWN part #10-0000-007) to ground on VCO output (U3-pin 4). Reference designator C84.

APPROVALS

DEPARTMENT	NAME	DATE	DEPARTMENT	NAME	DATE
Reliability			Quality Assurance		
X Regulatory	<i>Punit Shah</i>	10/21/98	Purchasing		
X Design Engineer	<i>Punit Shah</i>	10/21/98	Production Control		
Technical Pubs			Production		
SQA			X Product Manager	<i>R.L.T.</i>	10/26/98
Enterprise Service			Other:		
Finance					

FIGURE 1
TEST CONFIGURATION



Test Date: October 20 & 21, 1998
UST Project: 98-569
Customer: Home Wireless Networks, Inc.
Model: 95-0001-XXX

FIGURE 2a

Photograph(s) for Spurious and Fundamental Emissions (Front)



Test Date: October 20 & 21, 1998
UST Project: 98-569
Customer: Home Wireless Networks, Inc.
Model: 95-0001-XXX

FIGURE 2b

Photograph(s) for Spurious and Fundamental Emissions (Back)



Test Date: October 20, 1998
UST Project: 98-569
Customer: Home Wireless Networks, Inc.
Model: 95-0001-XXX

FIGURE 2c

Photograph(s) for Digital Device Emissions (Front)



Test Date: October 20, 1998
UST Project: 98-569
Customer: Home Wireless Networks, Inc.
Model: 95-0001-XXX

FIGURE 2d

Photograph(s) for Digital Device Emissions (Rear)



Test Date: **October 20, 1998**
UST Project: **98-569**
Customer: **Home Wireless Networks, Inc.**
Model: **95-0001-XXX**

FIGURE 2e

Photograph(s) for Conducted Emissions

Testing was considered Not Applicable

FCC ID: NSK0001A
TABLE 1

EUT and Peripherals

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID:	CABLES P/D
Transceiver (EUT) Home Wireless Networks, Inc.	95-0001-XXX	None	NSK0001A (Pending)	None

TABLE 2
TEST INSTRUMENTS

TYPE	MANUFACTURER	MODEL	SN.
SPECTRUM ANALYZER	HEWLETT-PACKARD	8593E	3205A00124
SPECTRUM ANALYZER	HEWLETT-PACKARD	8558B	2332A09900
S A DISPLAY	HEWLETT-PACKARD	853A	2404A02387
COMB GENERATOR	HEWLETT-PACKARD	8406A	1632A01519
RF PREAMP	HEWLETT-PACKARD	8447D	1937A03355
RF PREAMP	HEWLETT-PACKARD	8449B	3008A00480
HORN ANTENNA	EMCO	3115	3723
BICONICAL ANTENNA	EMCO	3110	9307-1431
LOG PERIODIC ANTENNA	EMCO	3146	9110-3600
BILOG	CHASE	CBL6112A	2238
LISN	SOLAR ELE.	8012	865577
LISN	SOLAR ELE.	8028	910494
LISN	SOLAR ELE.	8028	910495
THERMOMETER	FLUKE	52	5215250
MULTIMETER	FLUKE	85	53710469
FUNCTION GENERATOR	TEKTRONIX	CFG250	CFG250TW15059
PLOTTER	HEWLETT-PACKARD	7475A	2325A65394

2.5 Antenna Description (Paragraph 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The Model Home Wireless Networks, Inc. 95-0001-XXX incorporates an internal antenna only.

Manufacturer: Home Wireless Networks, Inc.
3145 Avalon Ridge Place
Norcross, GA 30071

Type: Metal Patch Antenna

Model Number: None

Gain: -1 dBi

Connector: Metal Contacts on PCB (Internal Antenna Only)

2.6 Peak power within the band 902 - 928 MHz per FCC Section 15.247(b)

Peak power within the band 902 - 928 MHz has been measured with a spectrum analyzer by connecting the spectrum analyzer directly via a short cable to the antenna output terminals or across the antenna leads on the PCB as specified by the manufacturer. The spectrum analyzer was set for a 50Ω impedance with the $VBW \geq RBW$ 6 dB bandwidth. The results of the measurements are given in Table 3 and Figure 3a through Figure 3c. If the spectrum analyzer did not have a RBW greater than the 6 dB bandwidth for the largest fundamental bandwidth, then the data was taken using the channel power function of the spectrum analyzer.

The EUT did not incorporate any antennas of directional gain greater than 6 dBi, therefore the output power has not been reduced as required by 15.247(b)(3).

TABLE 3
PEAK POWER OUTPUT

Test Date: **October 21, 1998**
UST Project: **98-569**
Customer: **Home Wireless Networks, Inc.**
Model: **95-0001-XXX**

Frequency of Fundamental (MHz)	Measurement (dBm)*	Measurement (Watt)*	FCC Limit (Watt)
905.73	16.03	0.041	1.0
914.94	16.24	0.042	1.0
923.65	16.72	0.047	1.0

* Measurement Cable loss was unknown and assumed to be < 0.5 dB


Tester

Signature:  **Name:** Tim R. Johnson

FCC ID: NSK0001A

Figure 3a.


Peak Power per FCC Section 15.247(b) (Low)

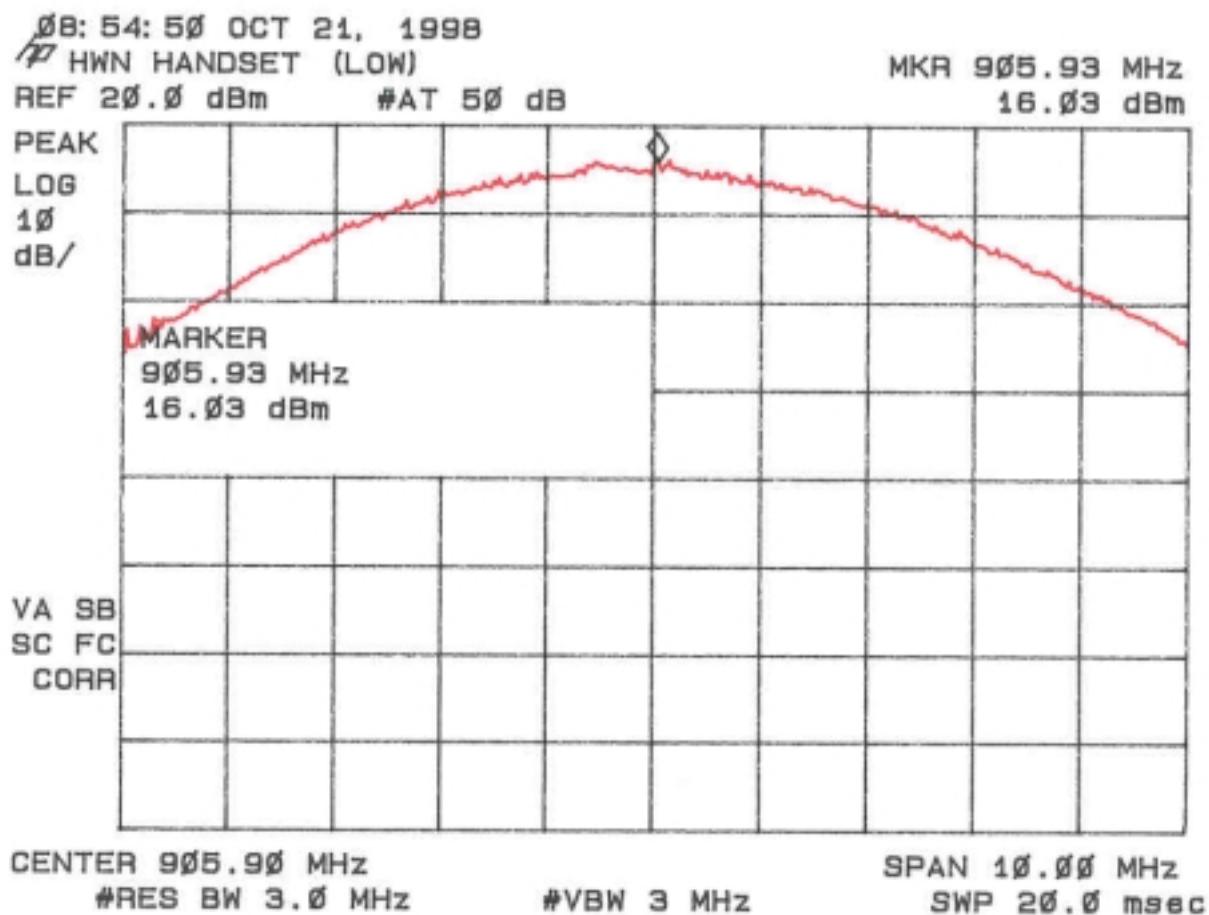

FCC ID: NSK0001A

Figure 3b.


Peak Power per FCC Section 15.247(b) (Mid)

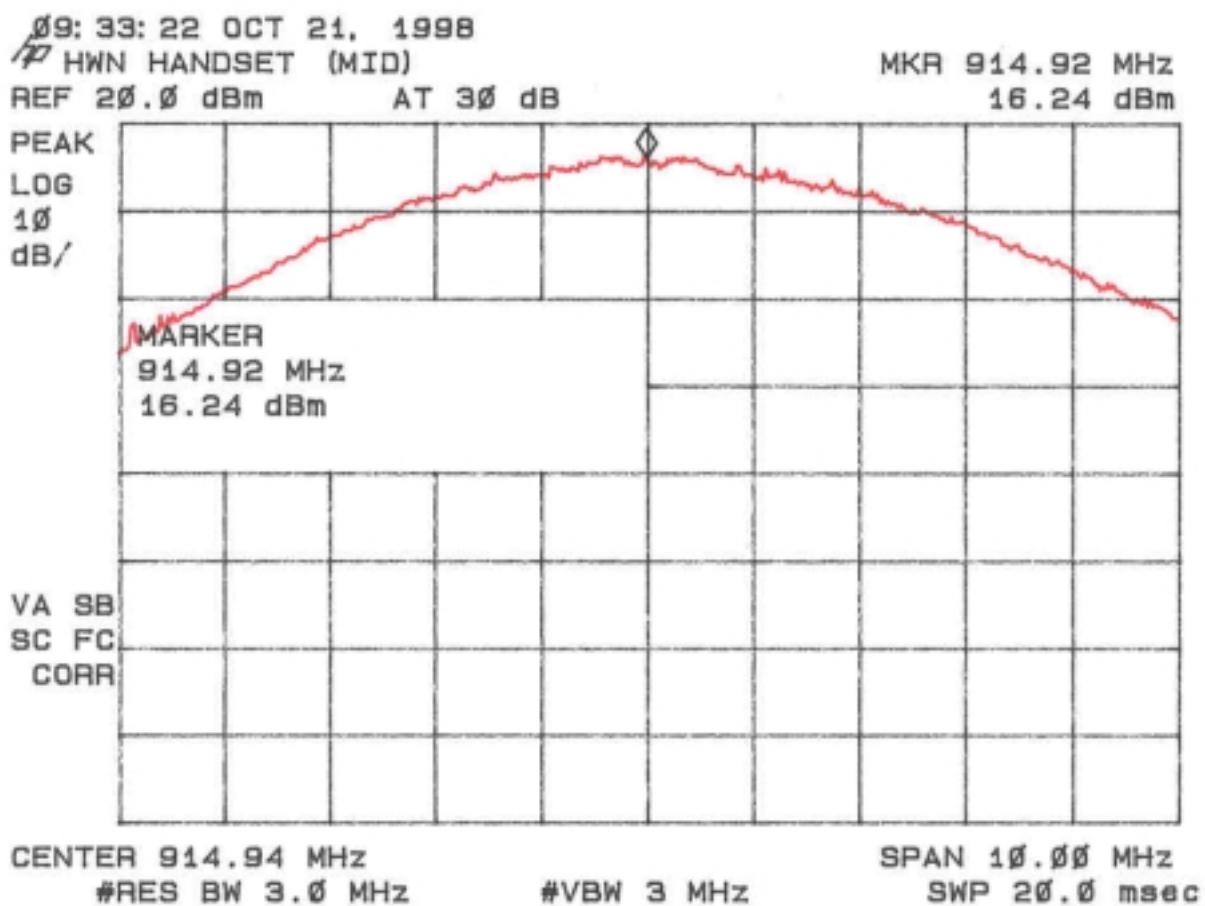

FCC ID: NSK0001A

Figure 3c.

Peak Power per FCC Section 15.247(b) (High)

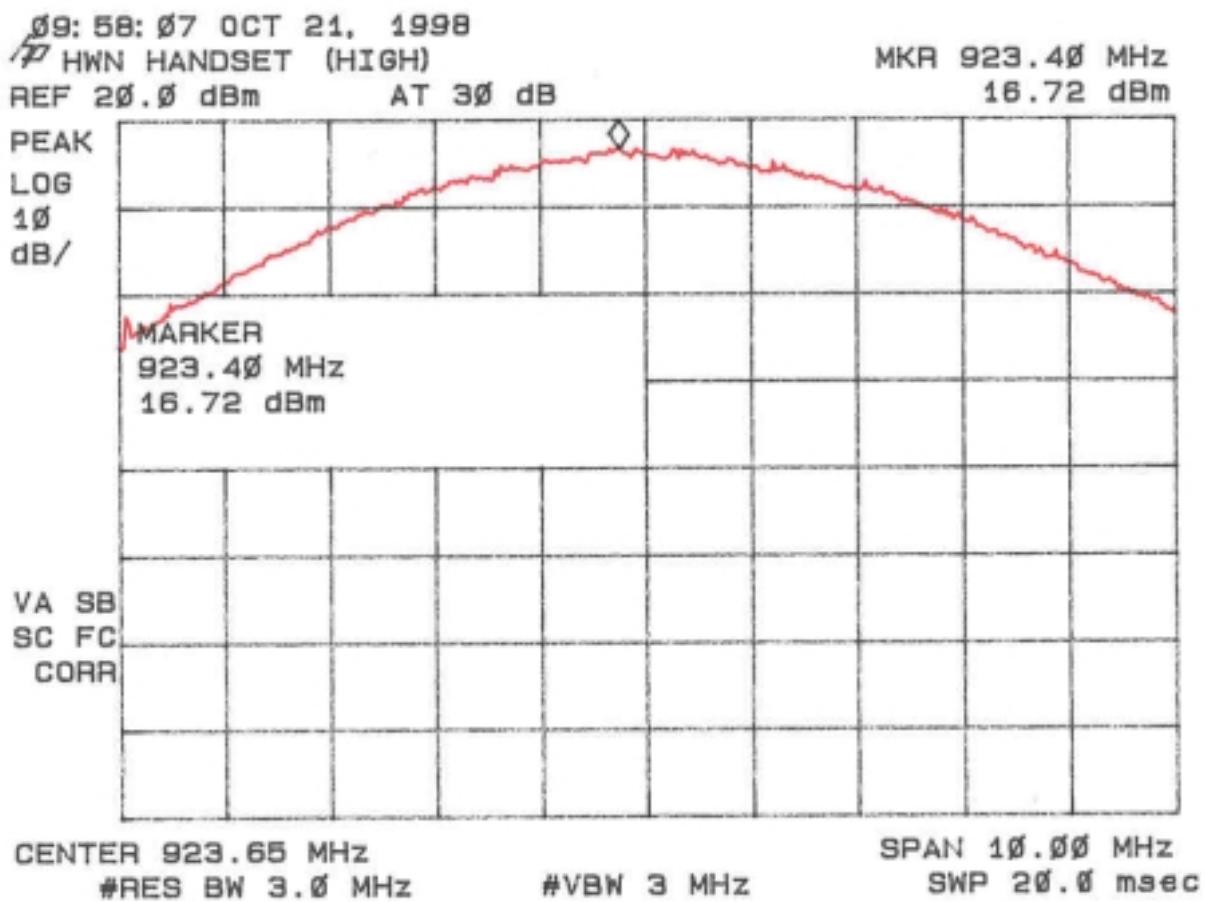


**2.7 Antenna Conducted Spurious Emissions in the Frequency Range 30 - 10000 MHz
(FCC Section 15.247(c))**

Spurious emissions in the frequency range 30 – 10000 MHz have been measured with a spectrum analyzer by connecting the spectrum analyzer directly via a short cable to the antenna output terminals or across the antenna leads on the PCB as specified by the manufacturer. The spectrum analyzer was set for a 50Ω impedance with the $RBW = 100$ kHz & $VBW > RBW$. All spurious emissions measured were greater than 20 dB down from the fundamental. The results of conducted spurious emissions are given in Figure 4a through Figure 4l.

FCC ID: NSK0001A

Figure 4a


Conducted Spurious Emissions 15.247(c) Low

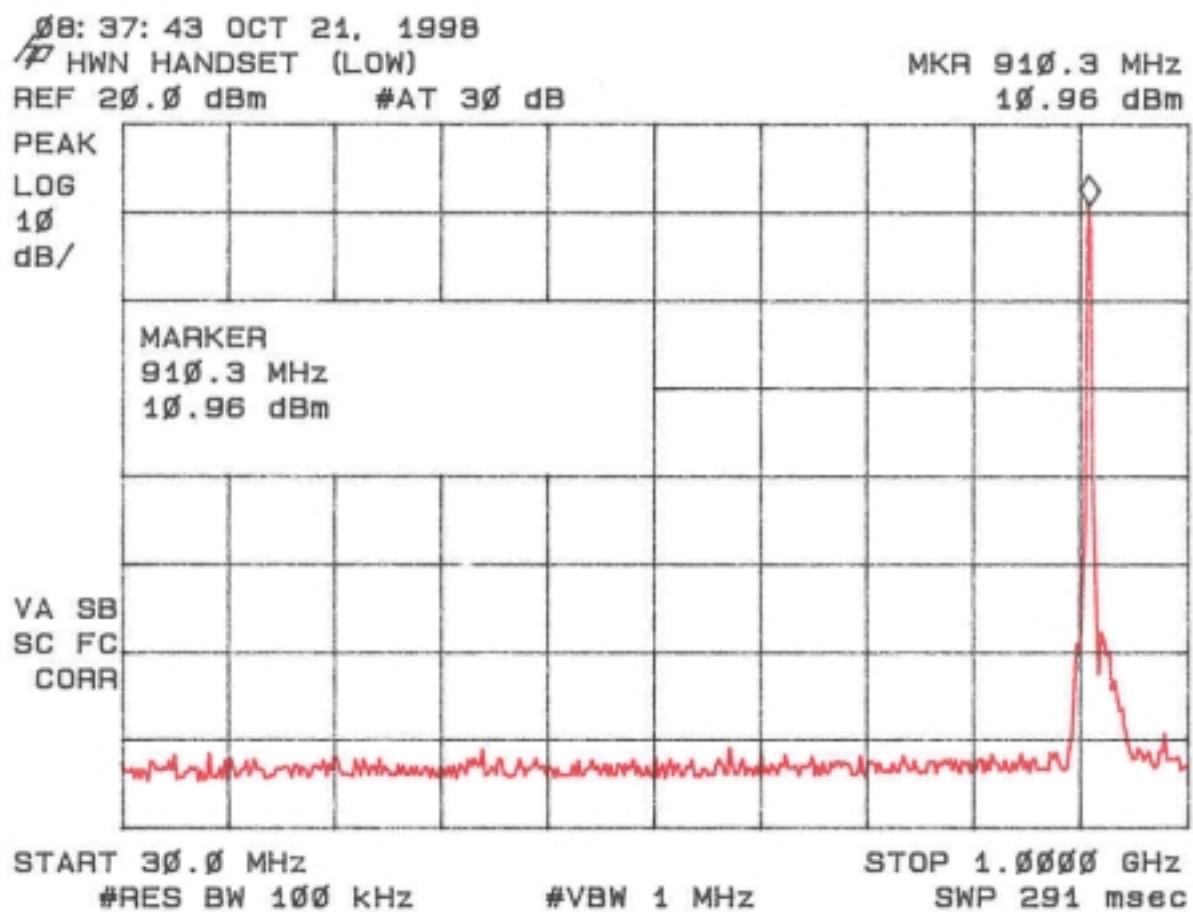

FCC ID: NSK0001A

Figure 4b


Conducted Spurious Emissions 15.247(c) Low

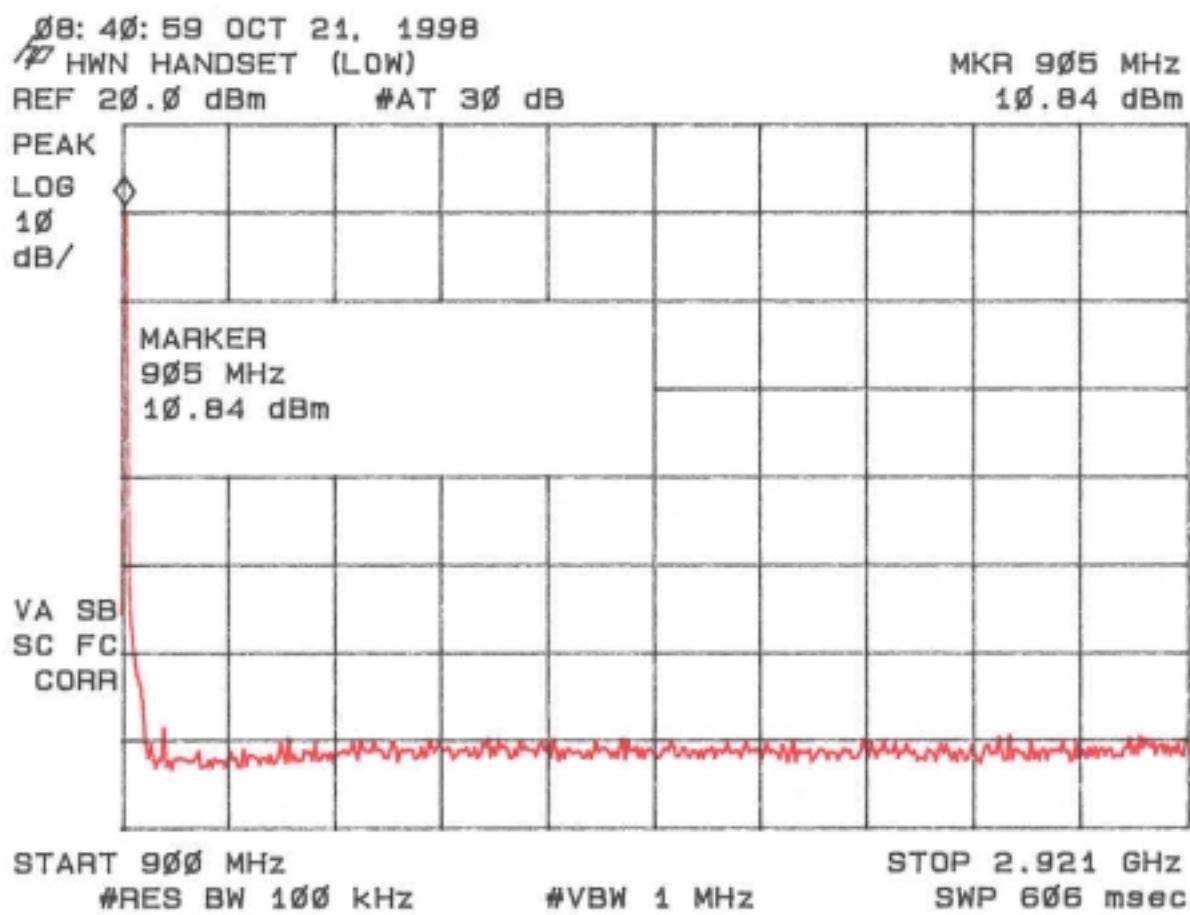

FCC ID: NSK0001A

Figure 4c


Conducted Spurious Emissions 15.247(c) Low

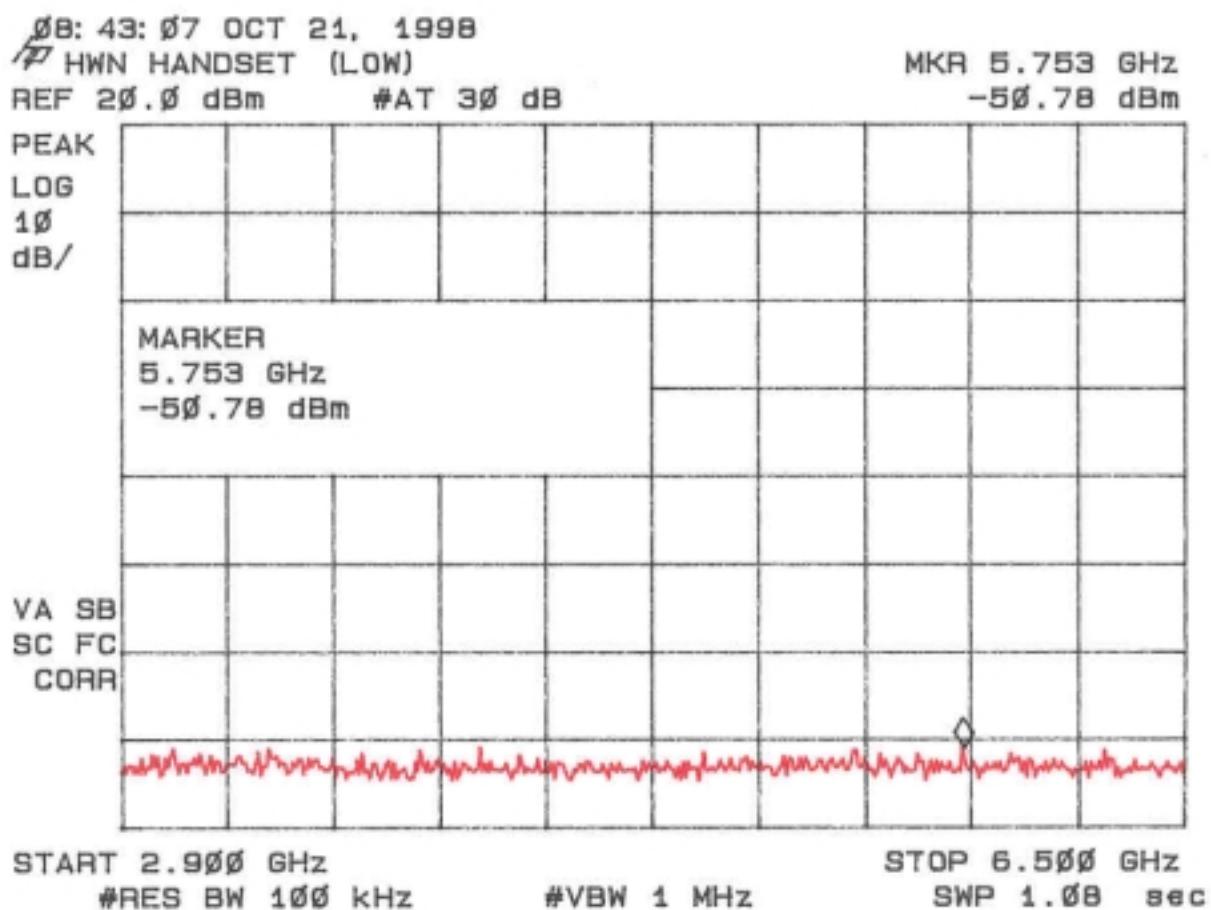

FCC ID: NSK0001A

Figure 4d


Conducted Spurious Emissions 15.247(c) Low

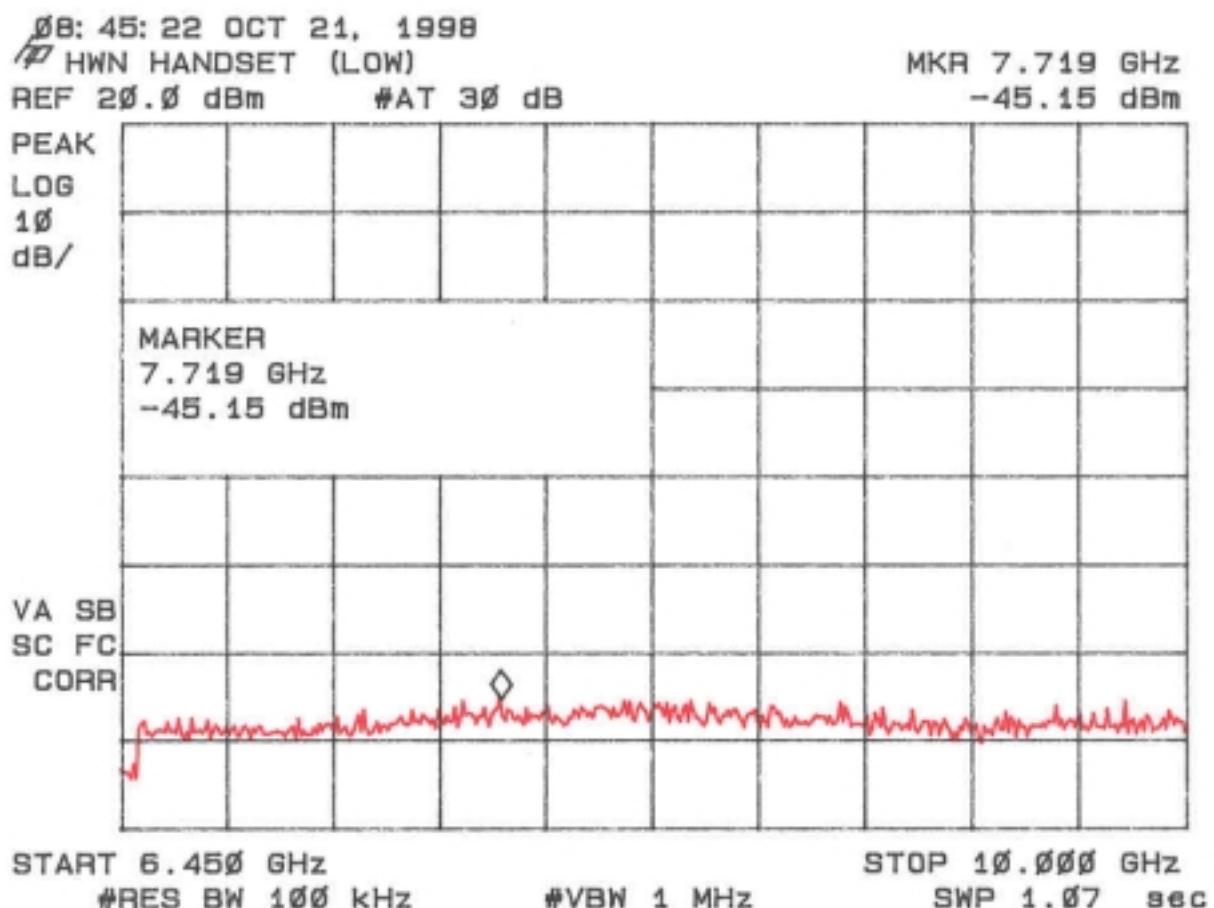

FCC ID: NSK0001A

Figure 4e


Conducted Spurious Emissions 15.247(c) Mid

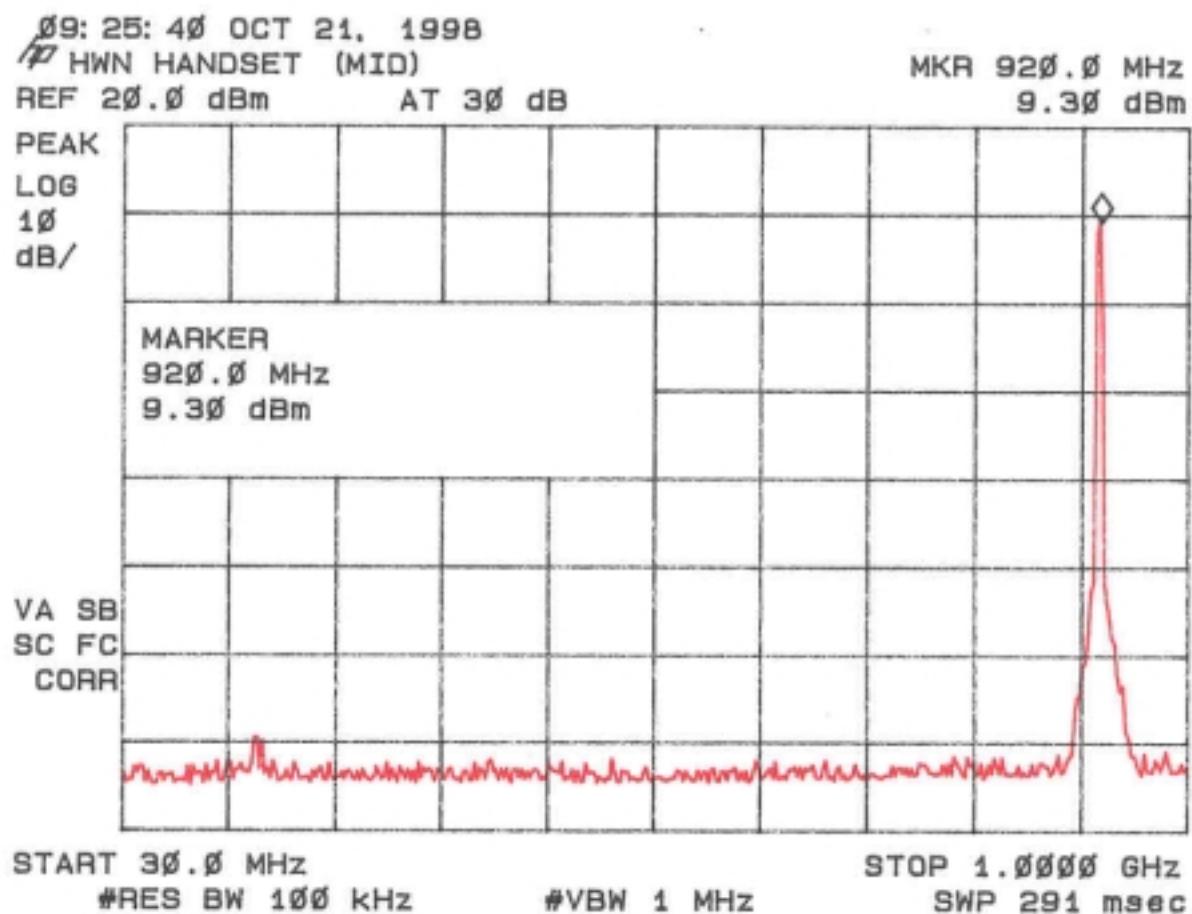

FCC ID: NSK0001A

Figure 4f


Conducted Spurious Emissions 15.247(c) Mid

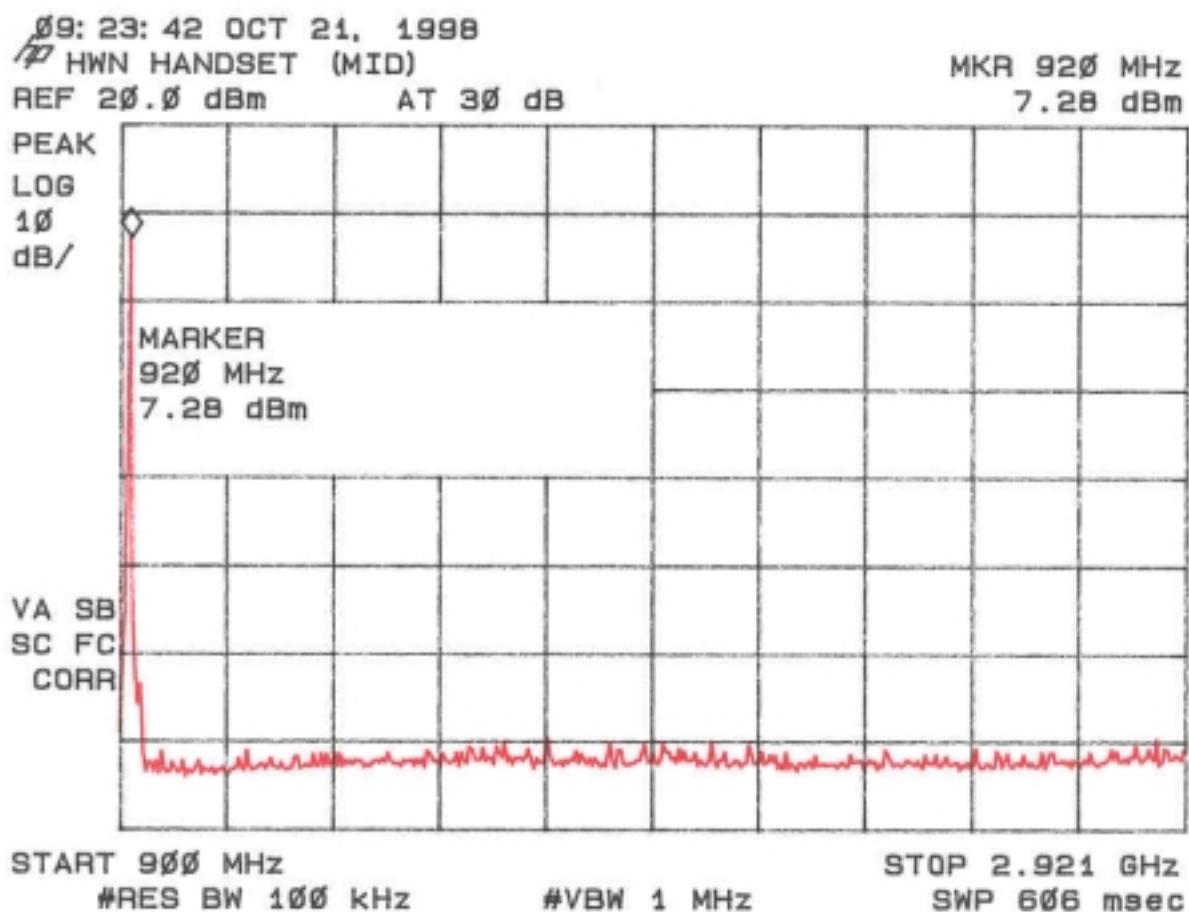

FCC ID: NSK0001A

Figure 4g


Conducted Spurious Emissions 15.247(c) Mid

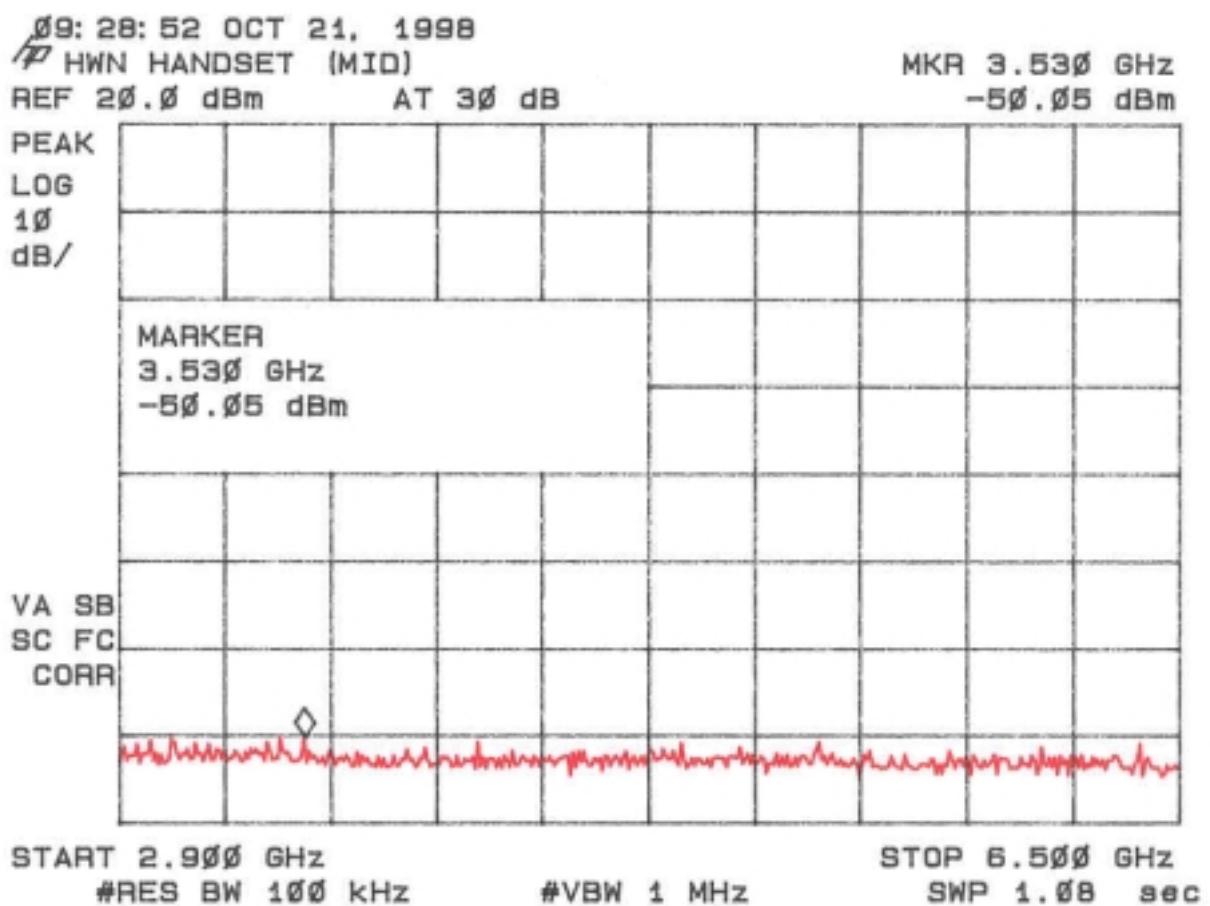

FCC ID: NSK0001A


Figure 4h

Conducted Spurious Emissions 15.247(c) Mid

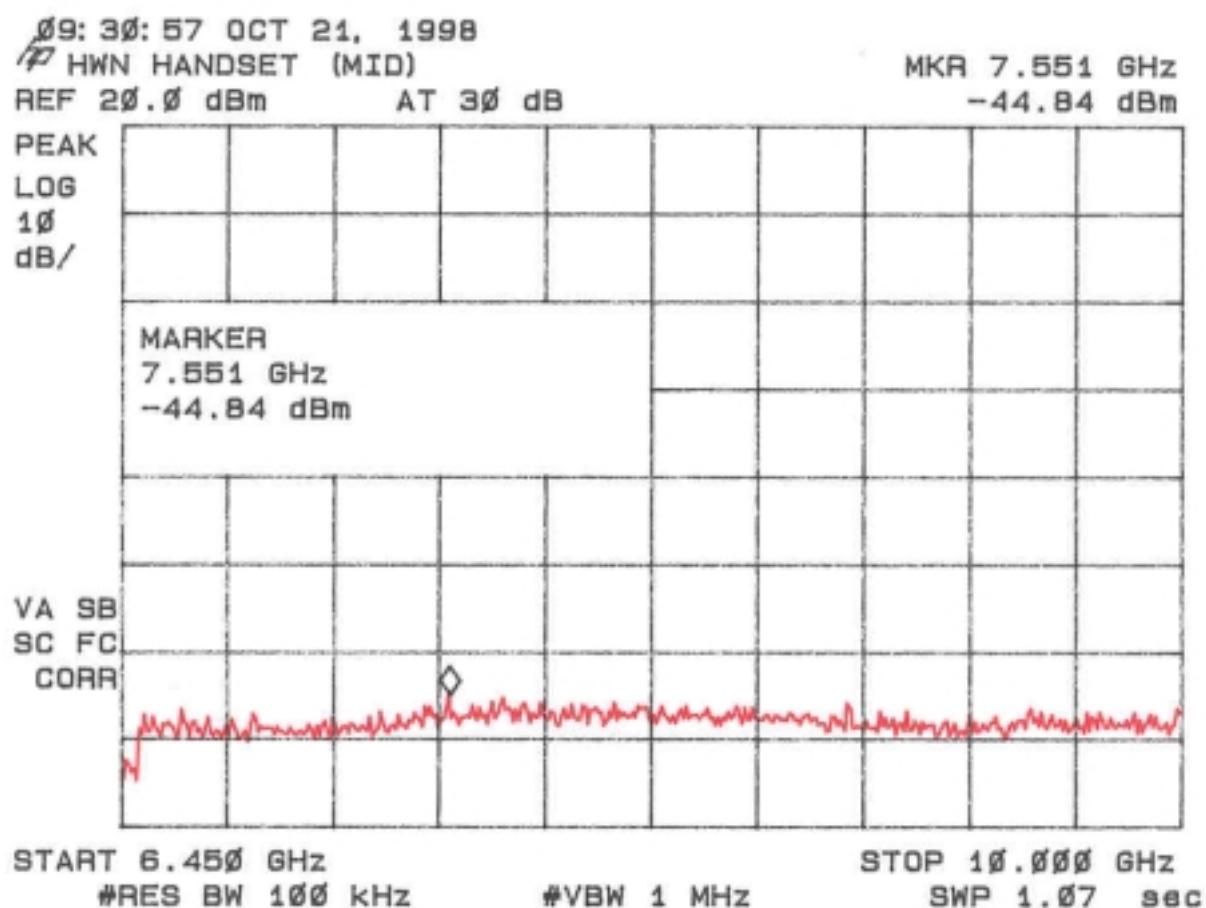


FCC ID: NSK0001A

Figure 4i
Conducted Spurious Emissions 15.247(c) High

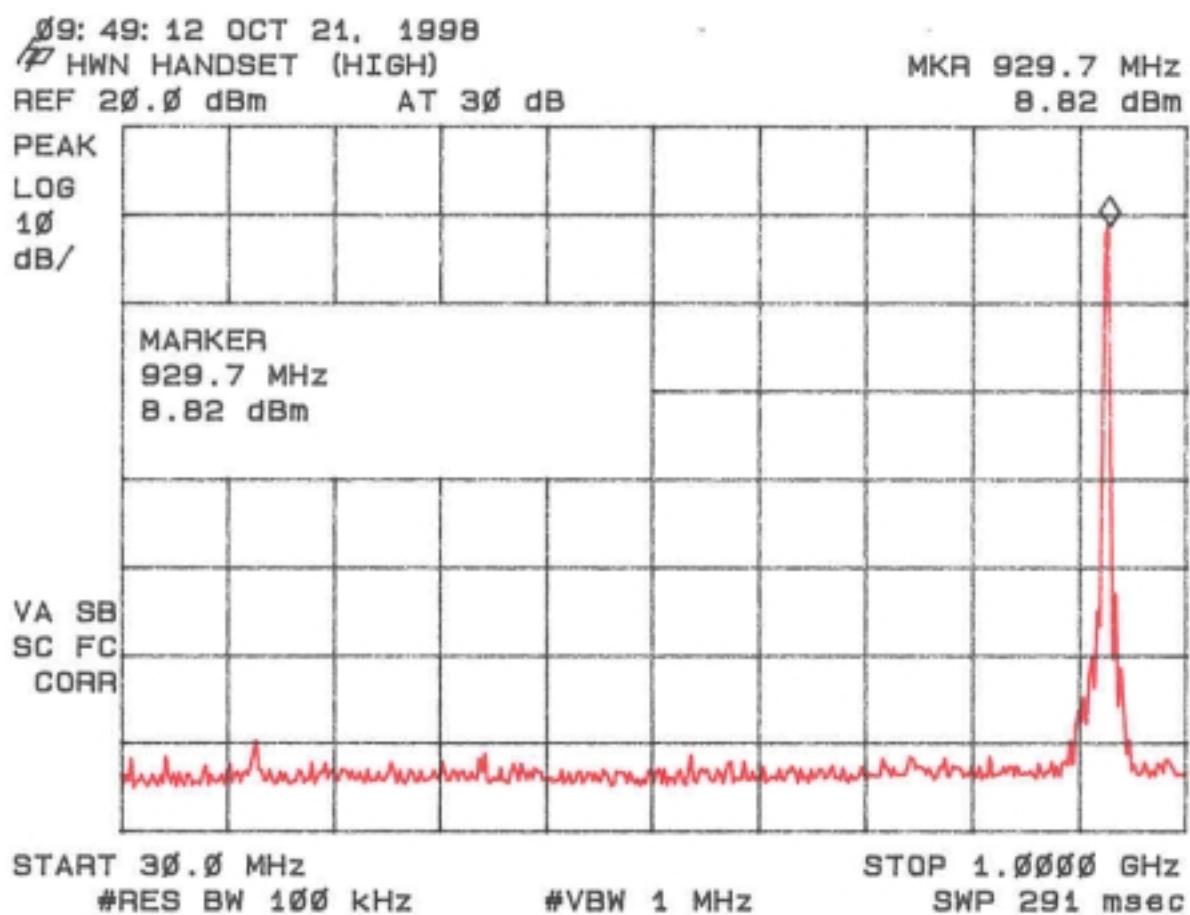


FCC ID: NSK0001A

Figure 4j
Conducted Spurious Emissions 15.247(c) High

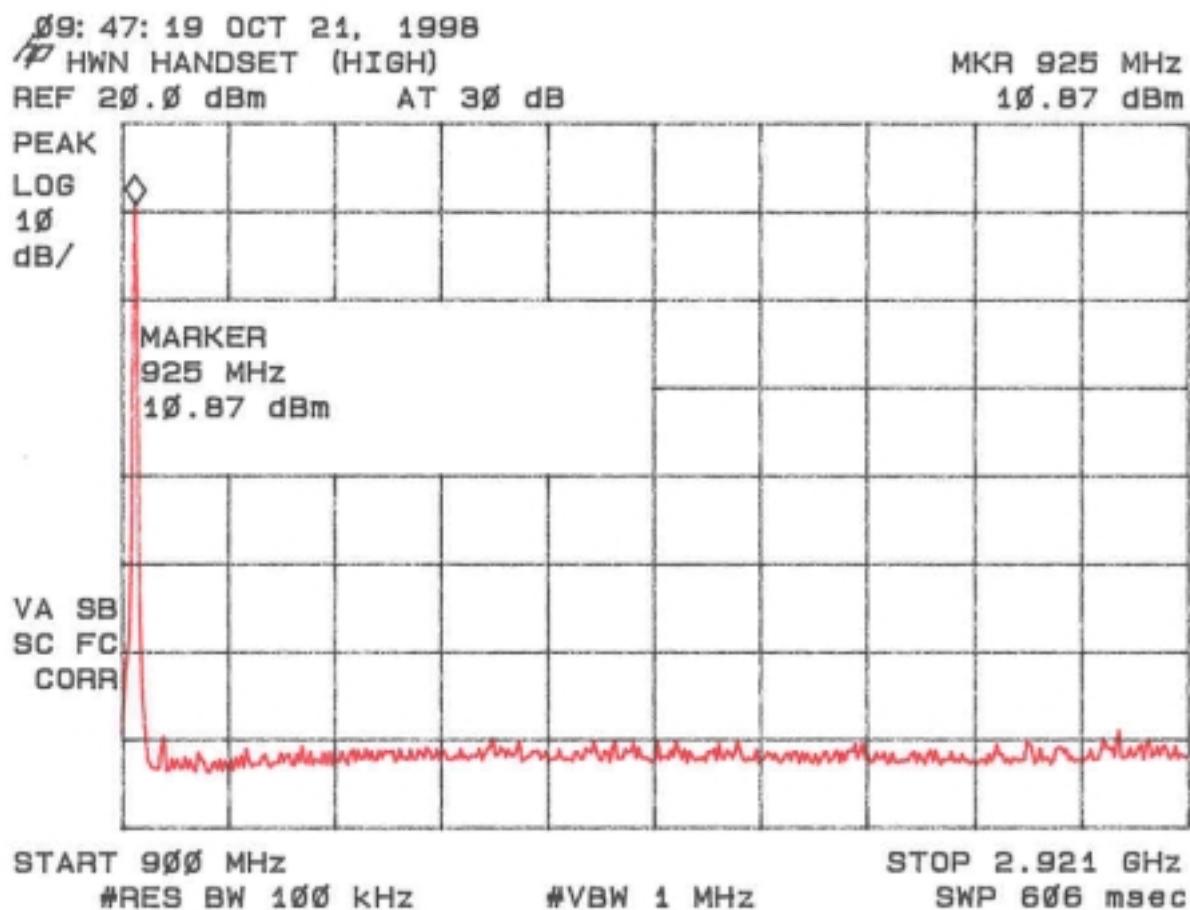


FCC ID: NSK0001A

Figure 4k
Conducted Spurious Emissions 15.247(c) High

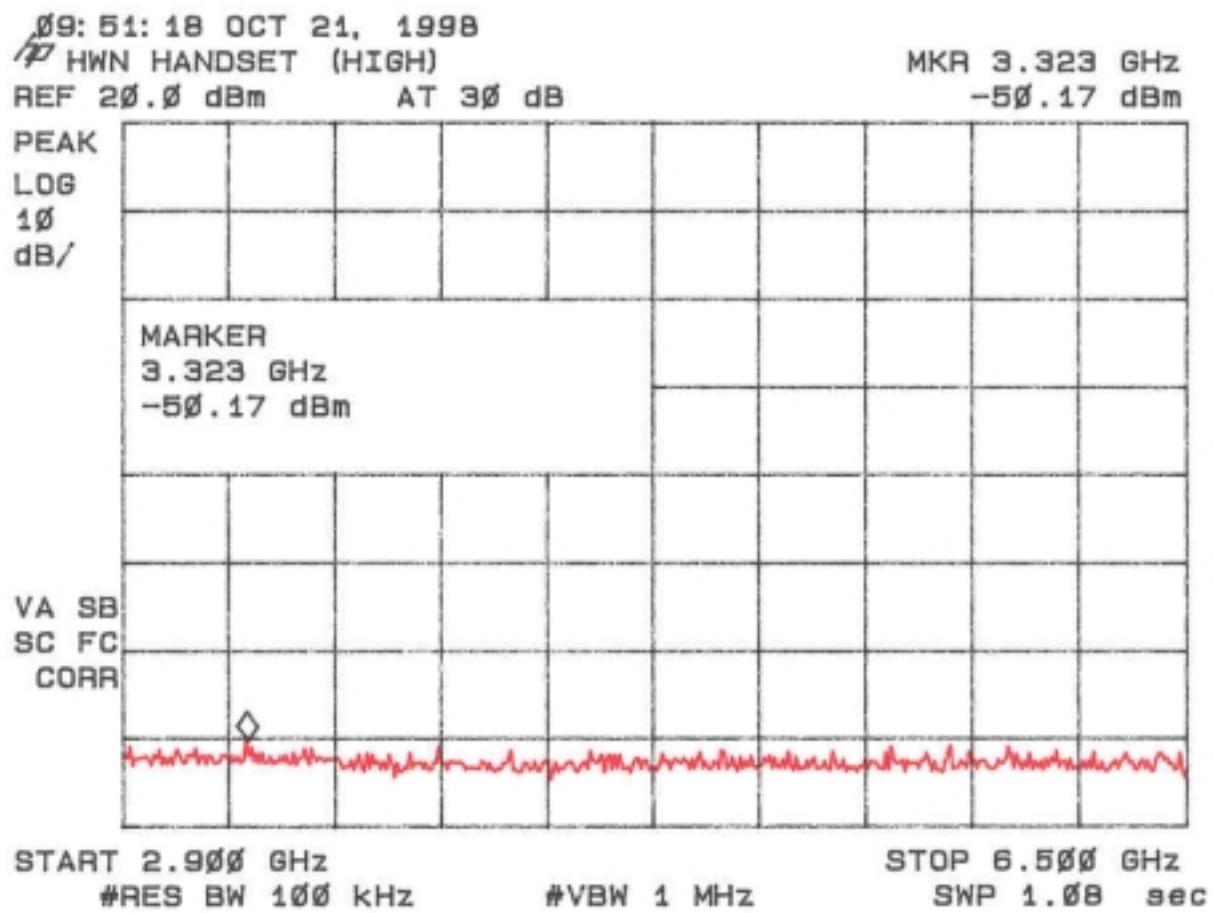

FCC ID: NSK0001A

Figure 4I
Conducted Spurious Emissions 15.247(c) High

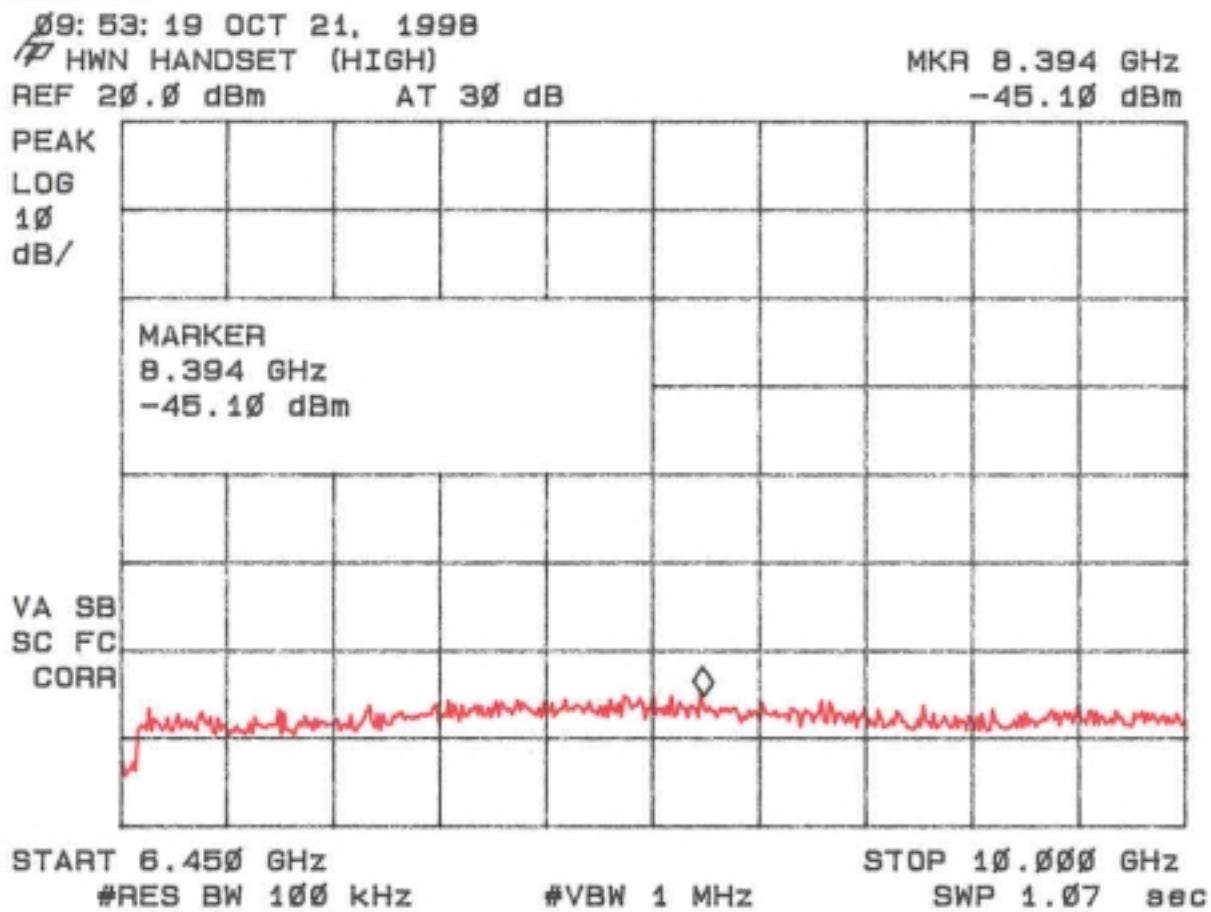

2.8 Peak Radiated Spurious Emissions in the Frequency Range 30 -10000 MHz (FCC Section 15.247(c))

A preliminary scan was performed on the EUT to determine frequencies that were caused by the transmitter portion of the product. Significant emissions that fell within restricted bands were then measured on an OAT's site. Radiated measurements below 1 GHz were tested with a RBW = 120 kHz. Radiated measurements above 1 GHz were measured using a RBW = VBW = 1 MHz. The results of peak radiated spurious emissions falling within restricted bands are given in Table 4a (low), Table 4b, (mid), Table 4c (high) and Figure 5a through 5i.

TABLE 4a PEAK RADIATED SPURIOUS EMISSIONS (Low)

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) @3m	FCC Limits (uV/m) @3m
2.7172	-61.7**	34.6	31.4	3.8	197.3	5000
3.6229	-65.6**	34.4	33.0	4.4	166.7	5000
4.5286	-65.8**	34.3	34.2	4.4	189.0	5000

TABLE 4b PEAK RADIATED SPURIOUS EMISSIONS (Mid)

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) @3m	FCC Limits (uV/m) @3m
2.7442	-65.7**	34.6	31.4	3.8	125.1	5000
3.6592	-63.1**	34.4	33.2	4.5	226.5	5000
4.5742	-64.2**	34.3	34.3	4.4	2284	5000

TABLE 4c PEAK RADIATED SPURIOUS EMISSIONS (High)

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) @3m	FCC Limits (uV/m) @3m
2.7709	-64.7**	34.6	31.5	3.8	140.9	5000
3.6946	-64.5**	34.4	33.3	4.5	196.3	5000
4.6182	-63.5**	34.3	34.4	4.3	248.8	5000

* = Data adjusted by + 1 dB for high pass filter

** = Instrumentation ground floor

SAMPLE CALCULATION:

RESULTS (uV/m @ 3m) = Antilog ((-61.7 - 34.6 + 31.4 + 3.8 + 107)/20) = 197.3

CONVERSION FROM dBm TO dBuV = 107 dB


Test Results

Reviewed By:  Name: Tim R. Johnson

FCC ID: NSK0001A

Figure 5a


Peak Radiated Spurious Emissions 15.247(c) Low

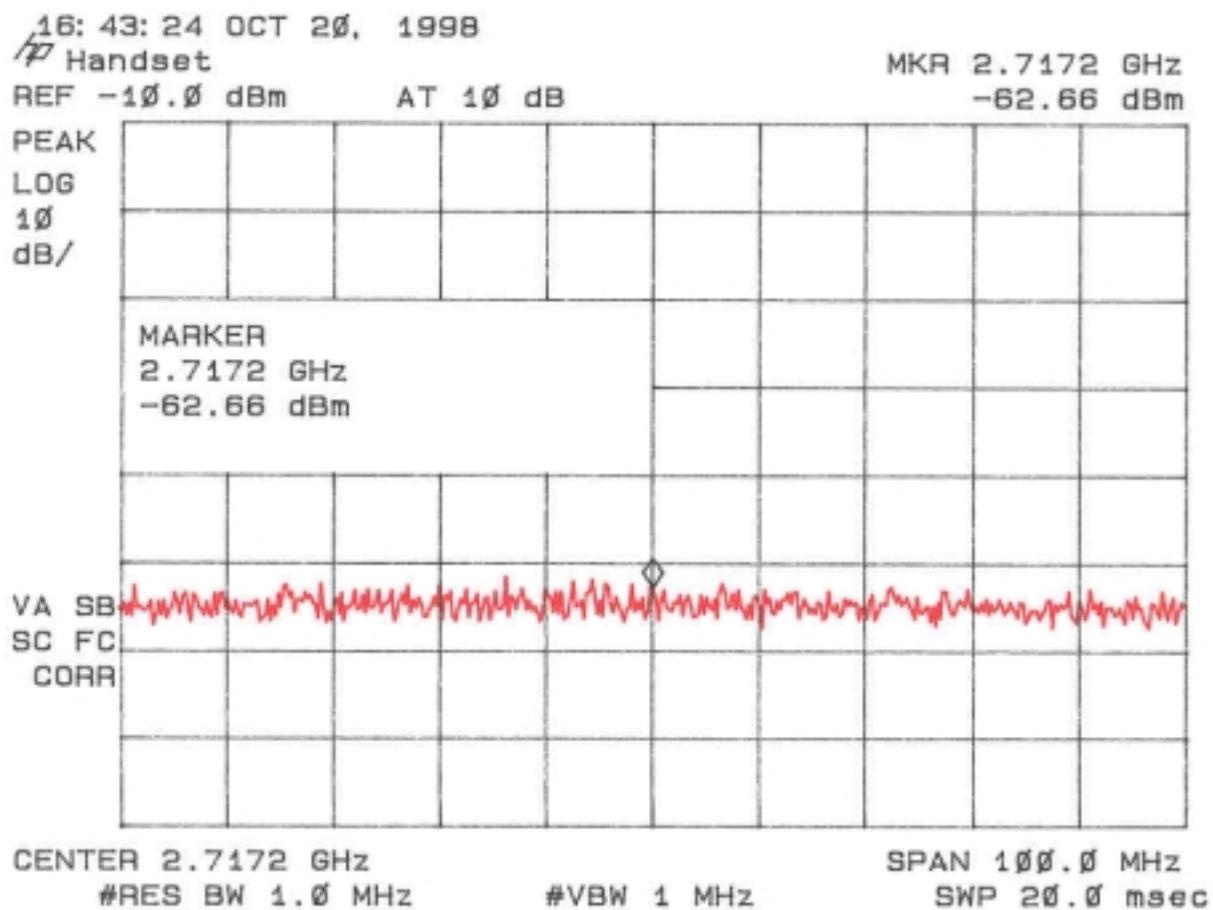

FCC ID: NSK0001A

Figure 5b

Peak Radiated Spurious Emissions 15.247(c) Low

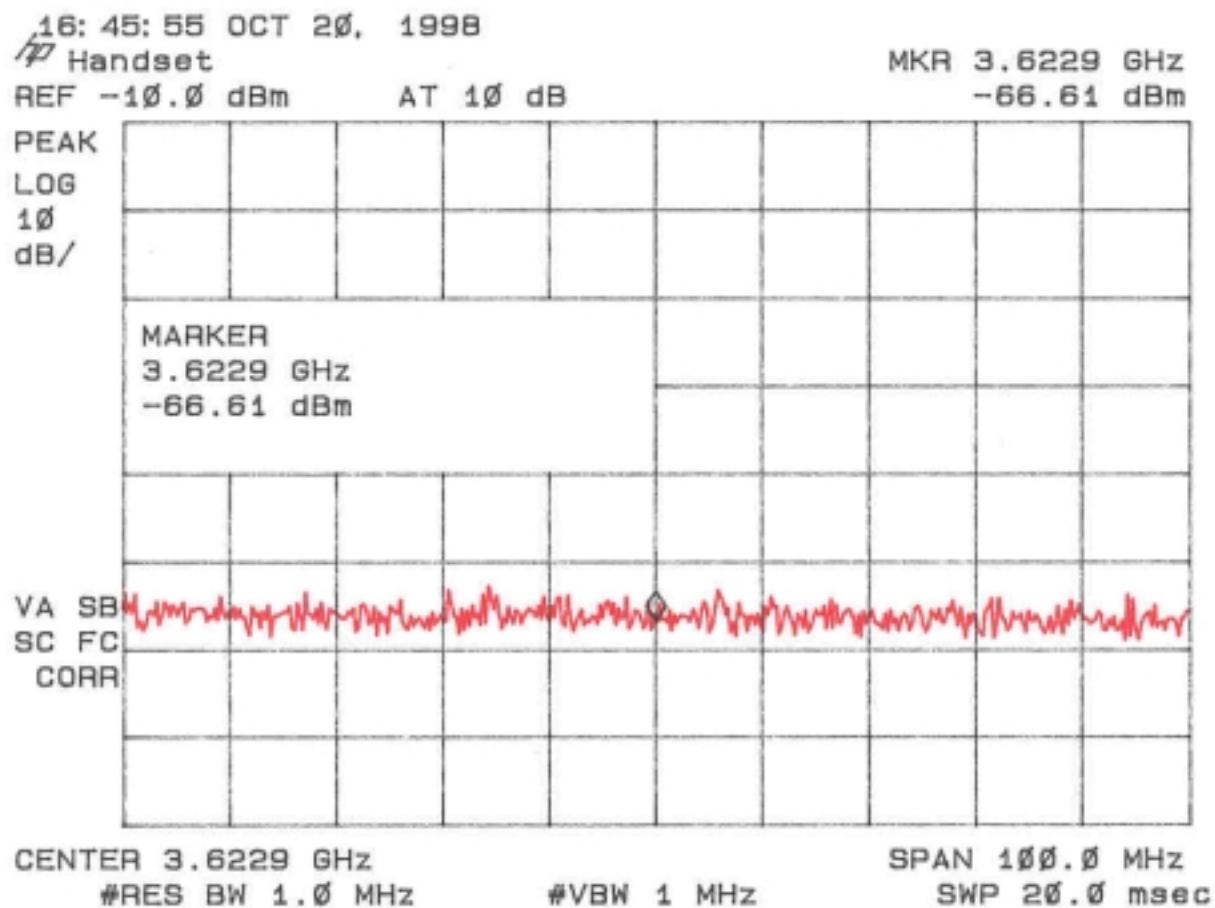

FCC ID: NSK0001A

Figure 5c

Peak Radiated Spurious Emissions 15.247(c) Low


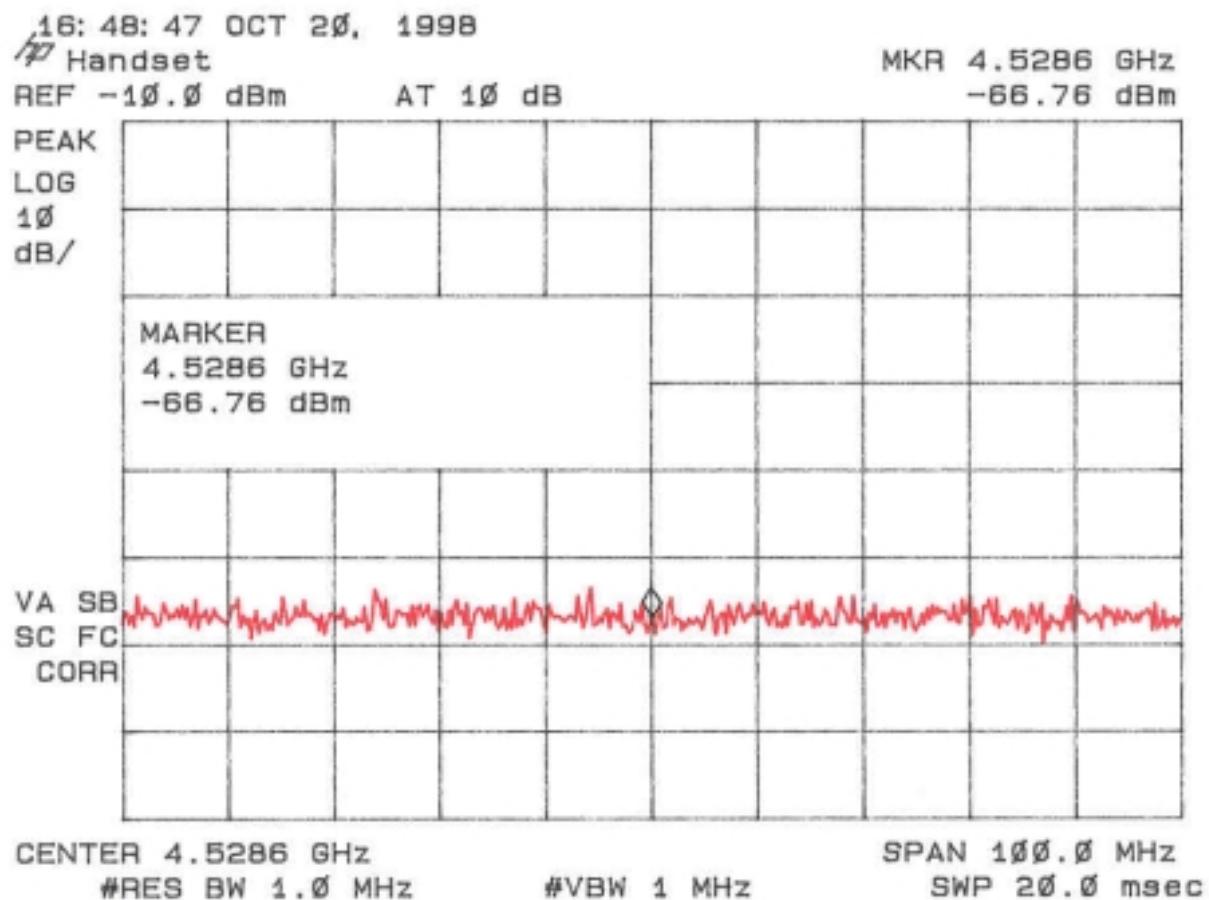



Figure 5d
Peak Radiated Spurious Emissions 15.247(c) Mid

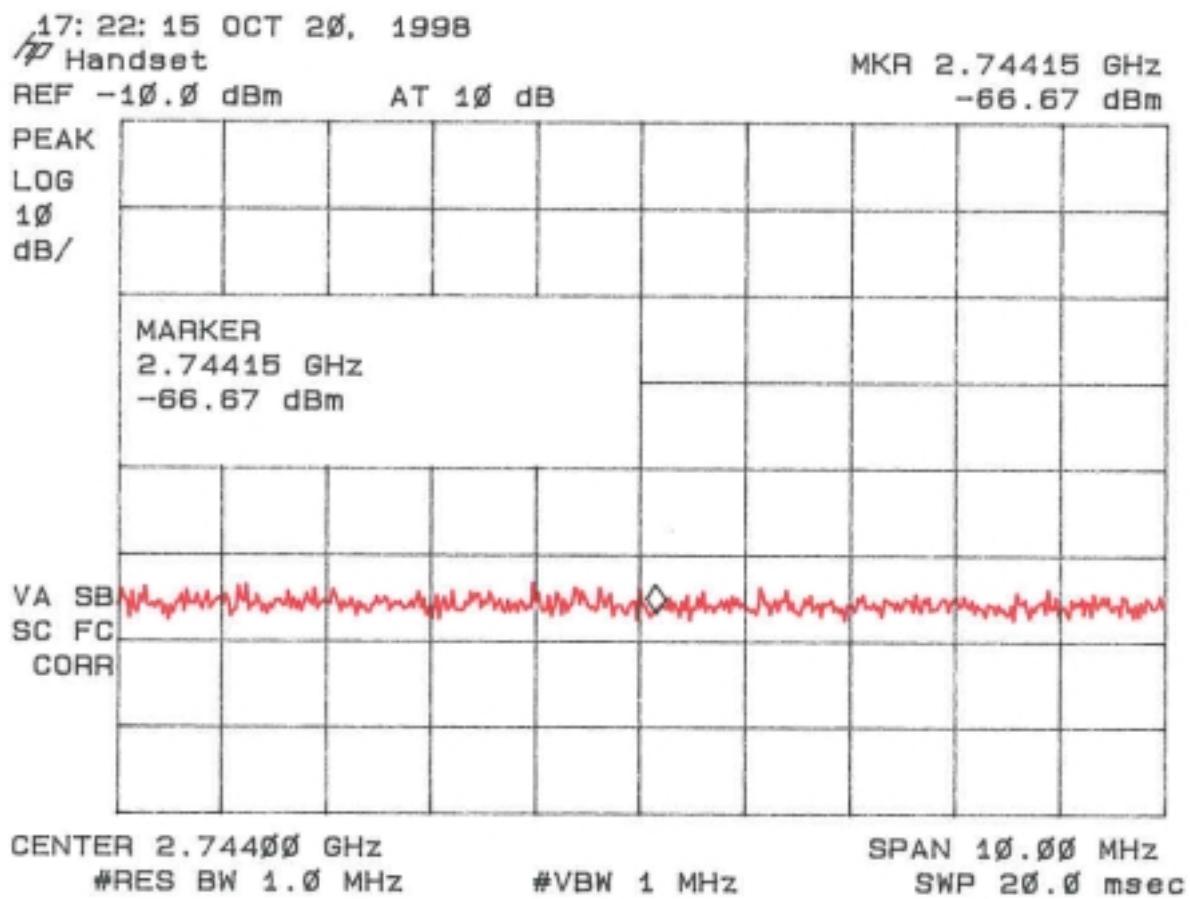

FCC ID: NSK0001A

Figure 5e

Peak Radiated Spurious Emissions 15.247(c) Mid

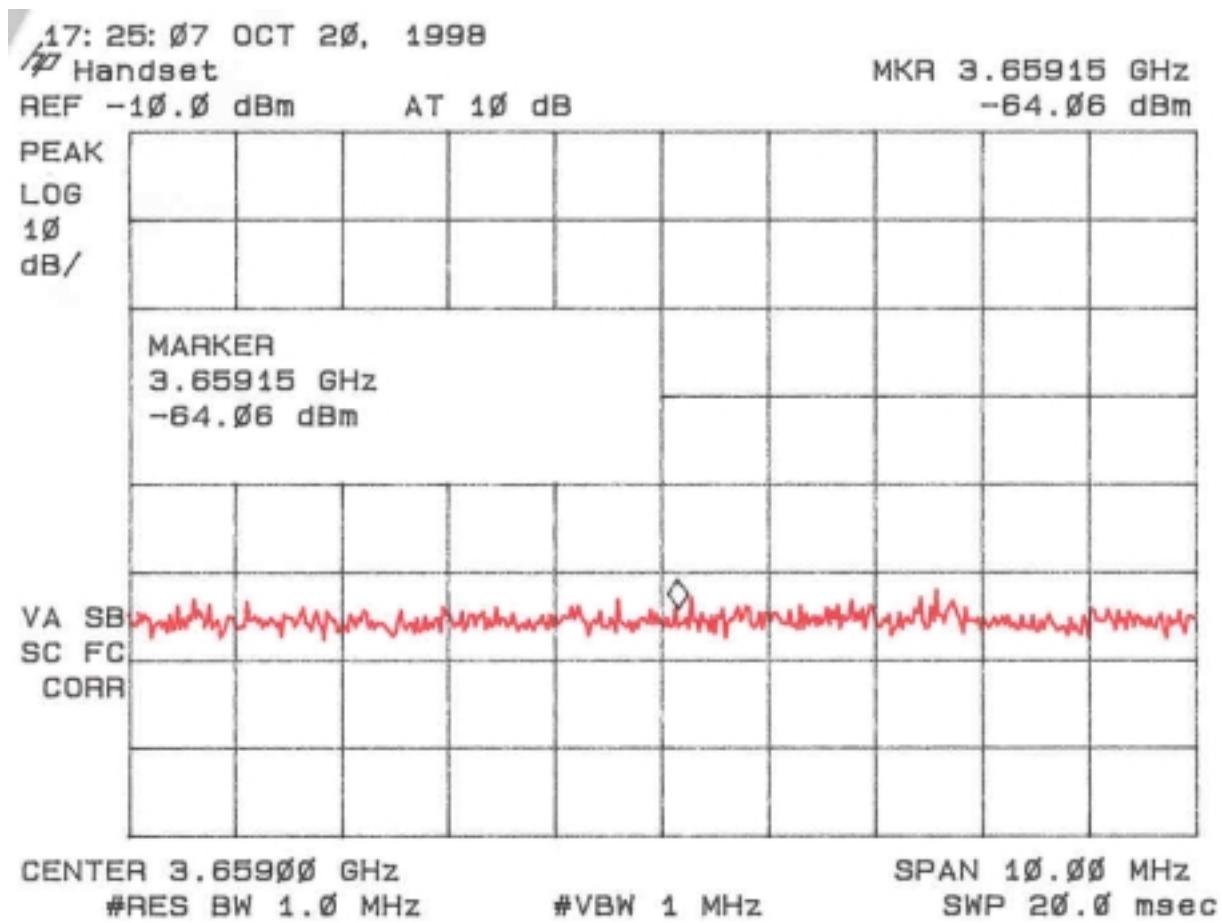

FCC ID: NSK0001A

Figure 5f

Peak Radiated Spurious Emissions 15.247(c) Mid

17:27:35 OCT 20, 1998

Handset

REF -10.0 dBm AT 10 dB


MKR 4.57415 GHz
-65.21 dBm

PEAK

LOG

10

dB/

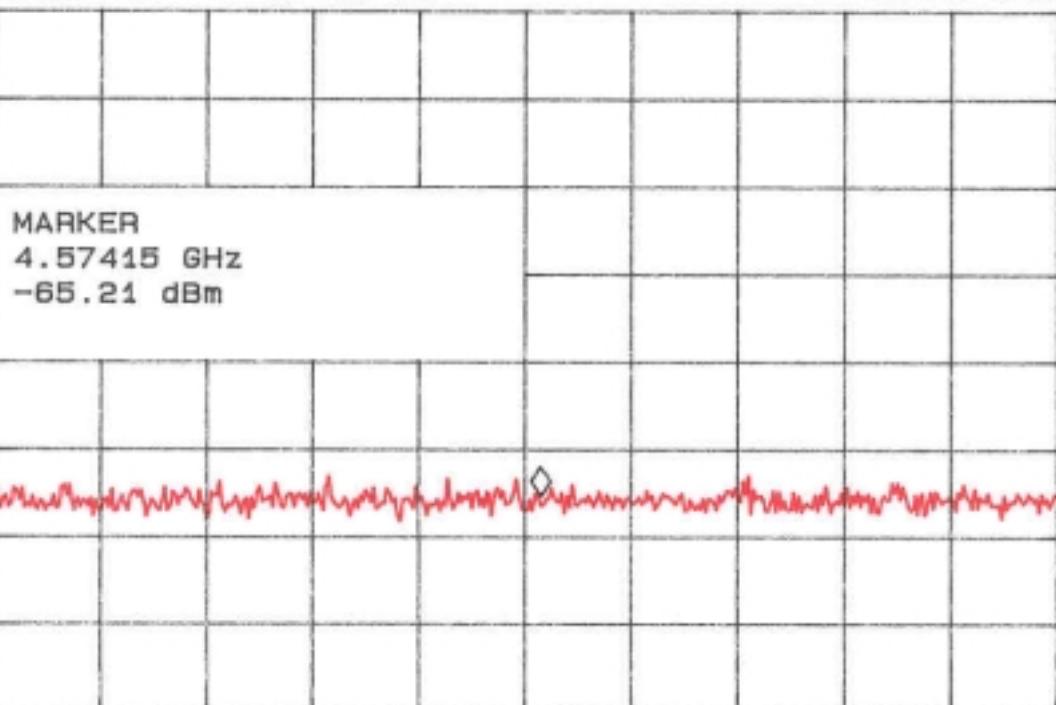

CENTER 4.57400 GHz

#RES BW 1.0 MHz

#VBW 1 MHz


SPAN 10.00 MHz

SWP 20.0 msec

FCC ID: NSK0001A

Figure 5g


Peak Radiated Spurious Emissions 15.247(c) High

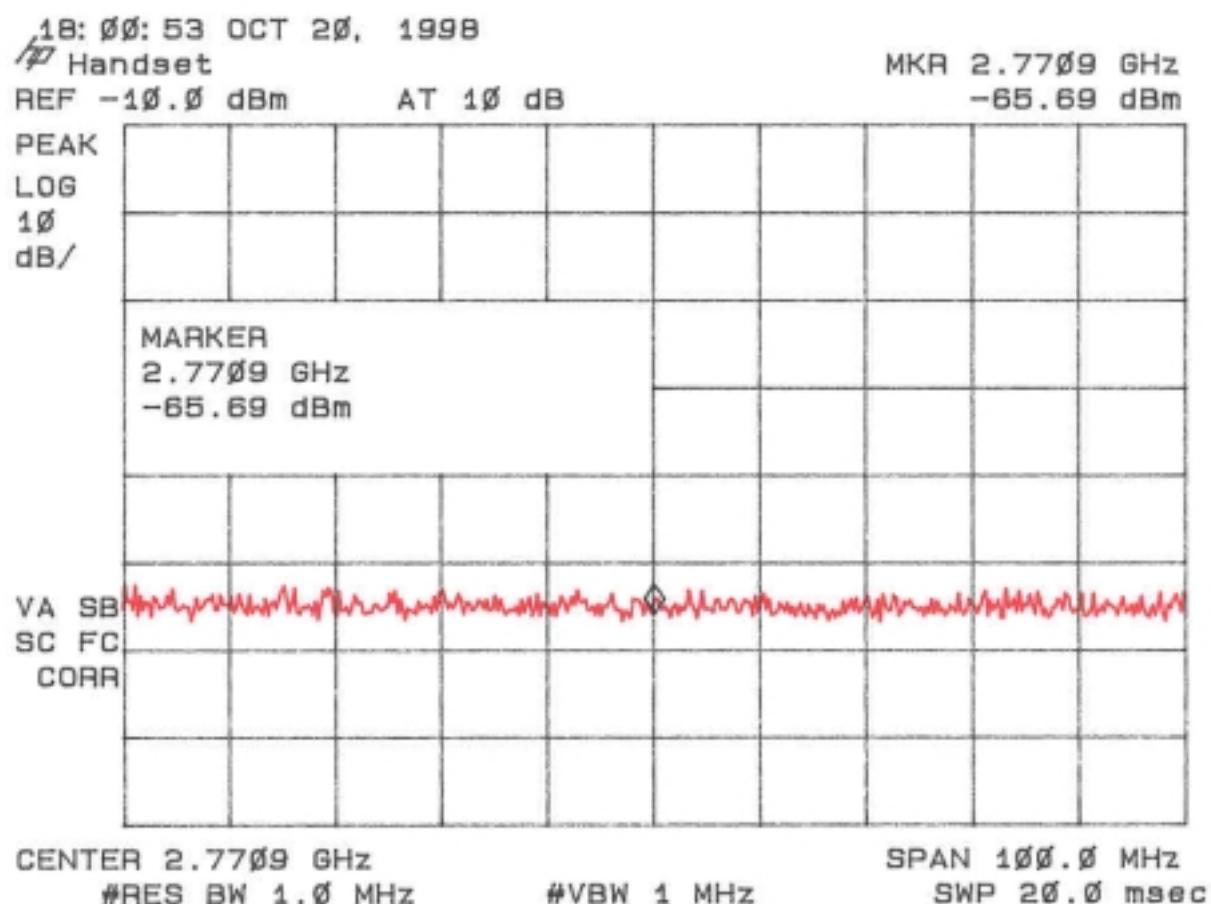

FCC ID: NSK0001A

Figure 5h

Peak Radiated Spurious Emissions 15.247(c) High

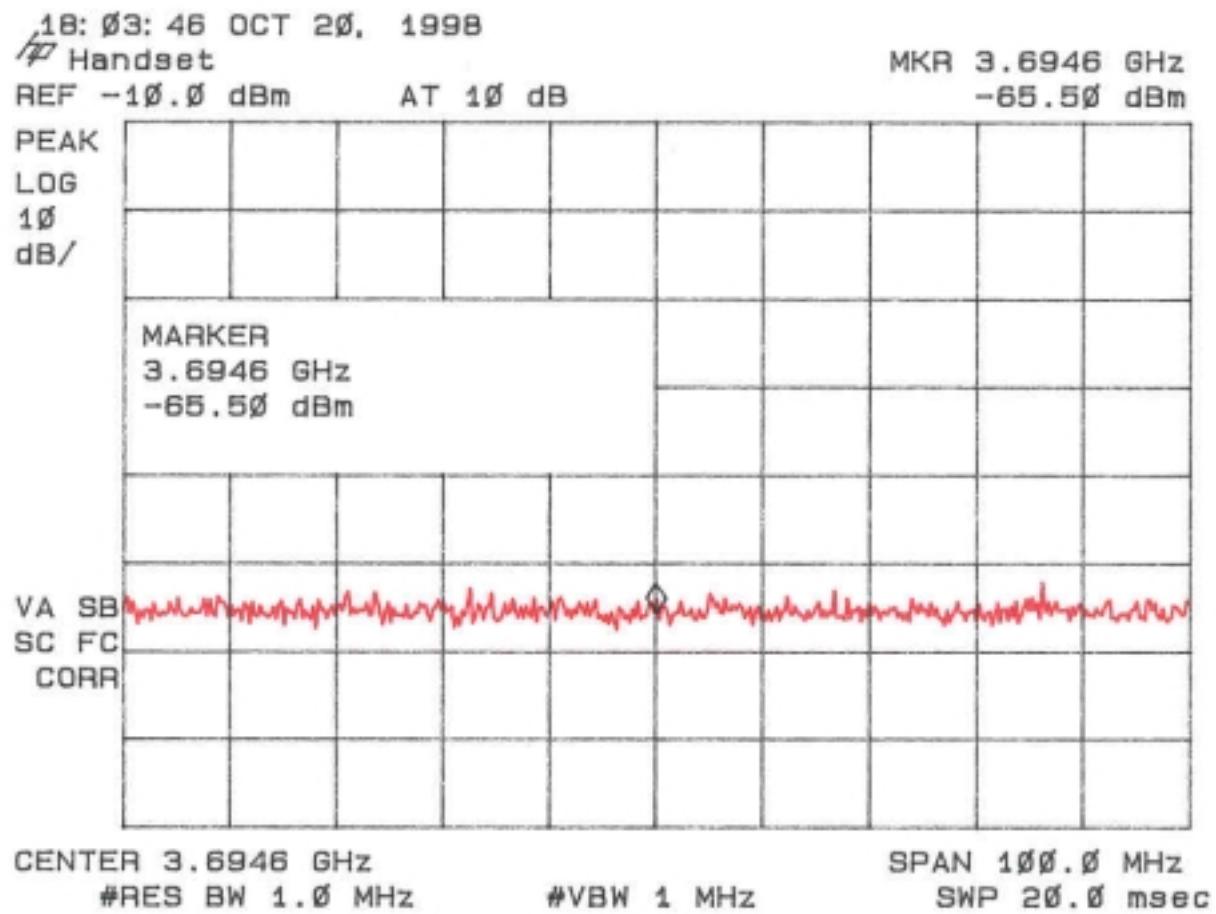


FCC ID: NSK0001A

Figure 5i

Peak Radiated Spurious Emissions 15.247(c) High

18: 07: 05 OCT 20, 1998
Handset
REF -10.0 dBm AT 10 dB

MKR 4.6182 GHz
-64.53 dBm

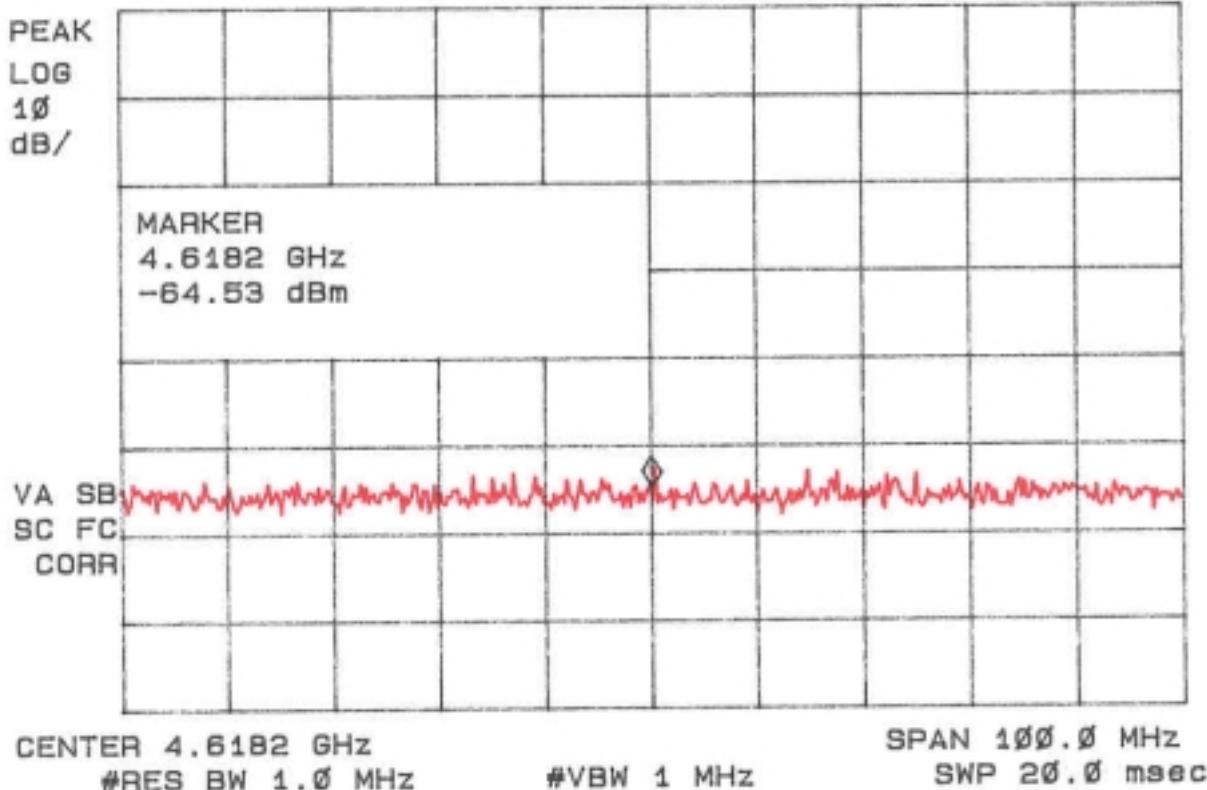

2.9 Average Radiated Spurious Emissions in the Frequency Range 30 - 10000 MHz (FCC Section 15.247(c))

The results of average radiated spurious emissions falling within restricted bands are given in Table 5a (low), Table 5b (mid), Table 5c (high).

Since all peak measurements met with the average limits, average measurements were not made. All readings in the following table are from the peak measurements made in the previous section.

TABLE 5a AVERAGE RADIATED SPURIOUS EMISSIONS (Low)

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) @3m	FCC Limits (uV/m) @3m
2.7172	-61.7**	34.6	31.4	3.8	197.3	500
3.6229	-65.6**	34.4	33.0	4.4	166.7	500
4.5286	-65.8**	34.3	34.2	4.4	189.0	500

TABLE 5b AVERAGE RADIATED SPURIOUS EMISSIONS (Mid)

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) @3m	FCC Limits (uV/m) @3m
2.7442	-65.7**	34.6	31.4	3.8	125.1	500
3.6592	-63.1**	34.4	33.2	4.5	226.5	500
4.5742	-64.2**	34.3	34.3	4.4	2284	500

TABLE 5c AVERAGE RADIATED SPURIOUS EMISSIONS (High)

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) @3m	FCC Limits (uV/m) @3m
2.7709	-64.7**	34.6	31.5	3.8	140.9	500
3.6946	-64.5**	34.4	33.3	4.5	196.3	500
4.6182	-63.5**	34.3	34.4	4.3	248.8	500

* = Data adjusted by + 1dB for high pass filter.

** = Instrumentation ground floor.

SAMPLE CALCULATION:

RESULTS (uV/m @ 3m) = Antilog ((-61.7 - 34.6 + 31.4 + 3.8 + 107)/20) = 197.3

CONVERSION FROM dBm TO dBuV = 107 dB

Test Results

Reviewed By:  Name: Tim R. Johnson


2.10 Minimum 6 dB Bandwidth per FCC Section 15.247(a)(2)

The minimum 6 dB bandwidth of the EUT was measured. The spectrum analyzer was set for a 50Ω impedance with the $RBW=100$ kHz and $VBW \geq RBW$. If the EUT incorporates different spreading codes or data rates these were each investigated, the one which produced the smallest 6 dB bandwidth was selected for test. All bandwidths measured are greater than 500 kHz minimum requirement specified by the FCC. The results of this test are given in Figure 7a through Figure 7c.

FCC ID: NSK0001A

Figure 7a.


6 dB Bandwidth per FCC Section 15.247(a)(2) (low)

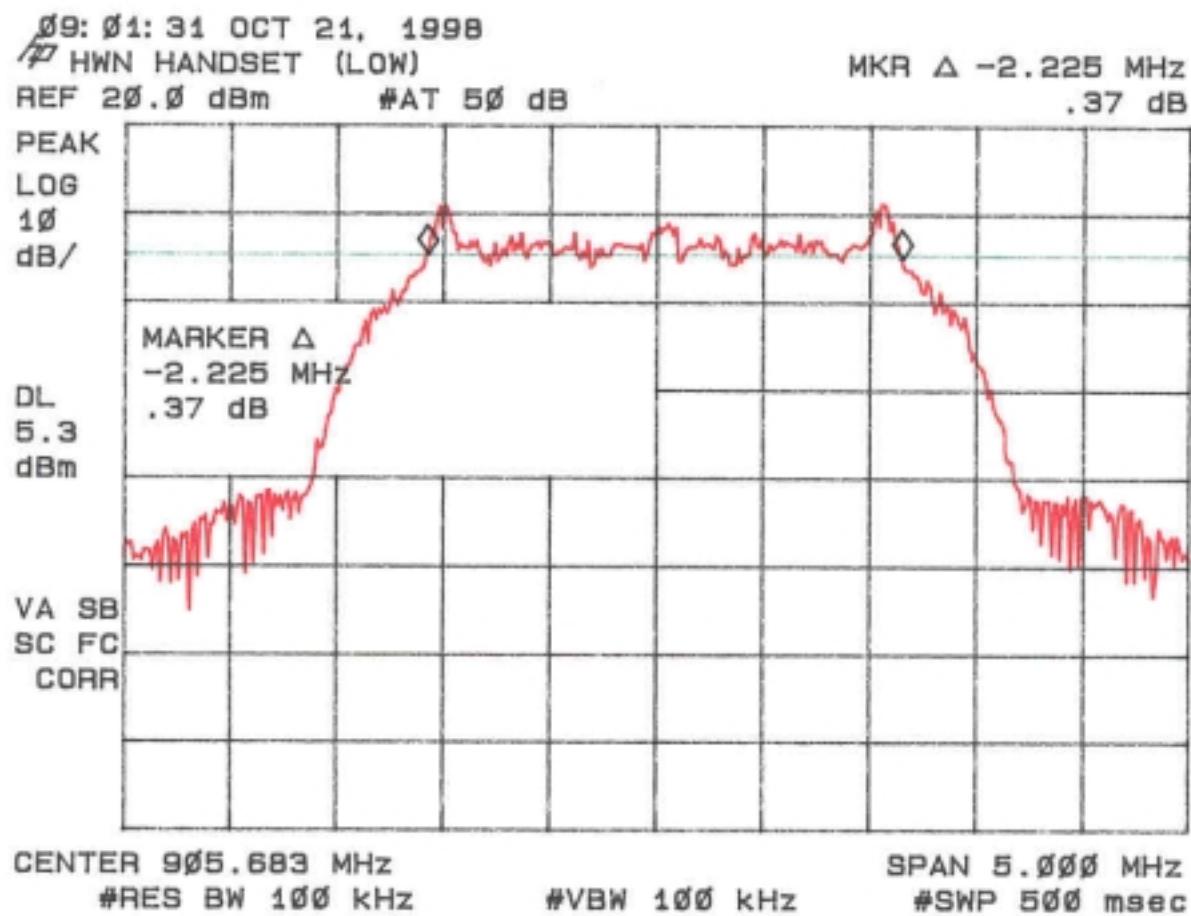

FCC ID: NSK0001A

Figure 7b.


6 dB Bandwidth per FCC Section 15.247(a)(2) (Mid)

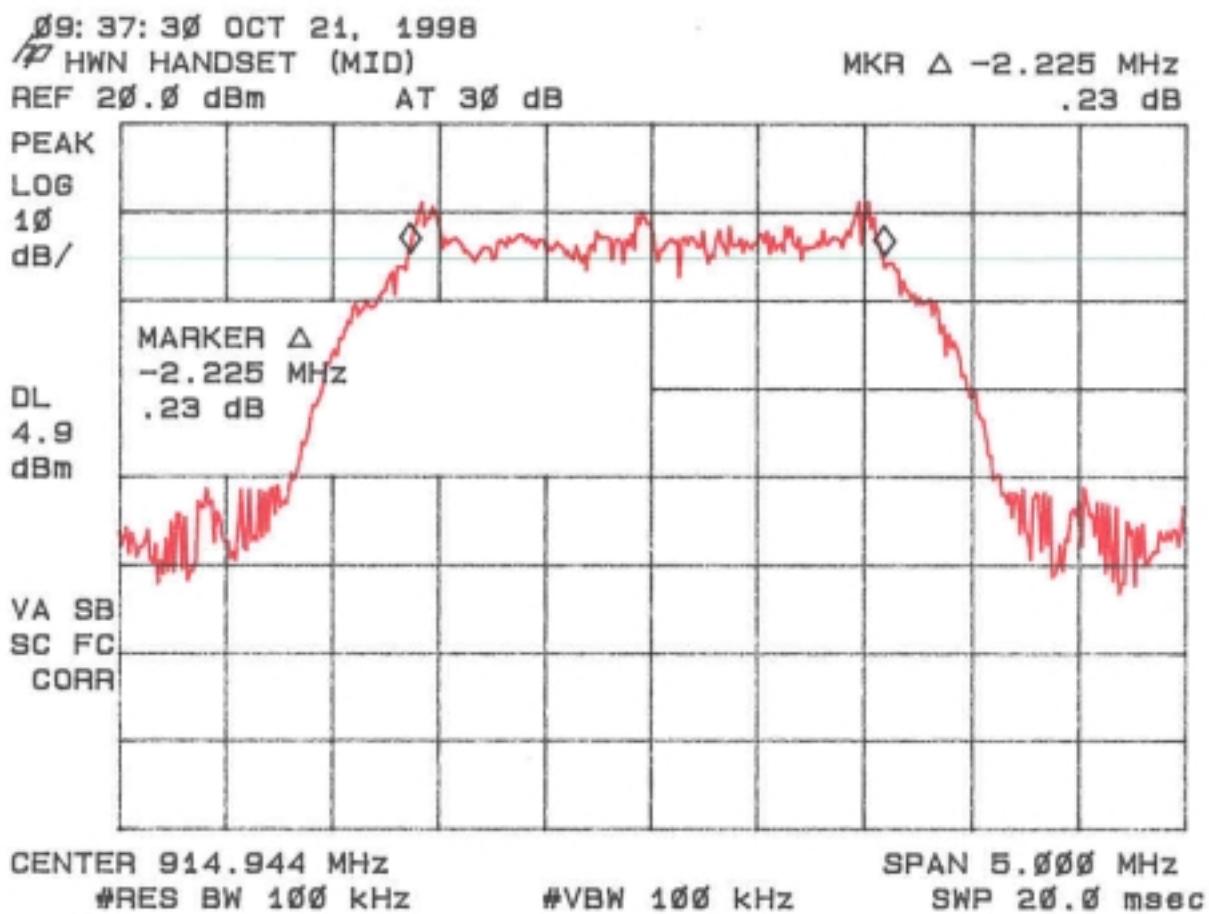

FCC ID: NSK0001A

Figure 7c.

6 dB Bandwidth per FCC Section 15.247(a)(2) (High)

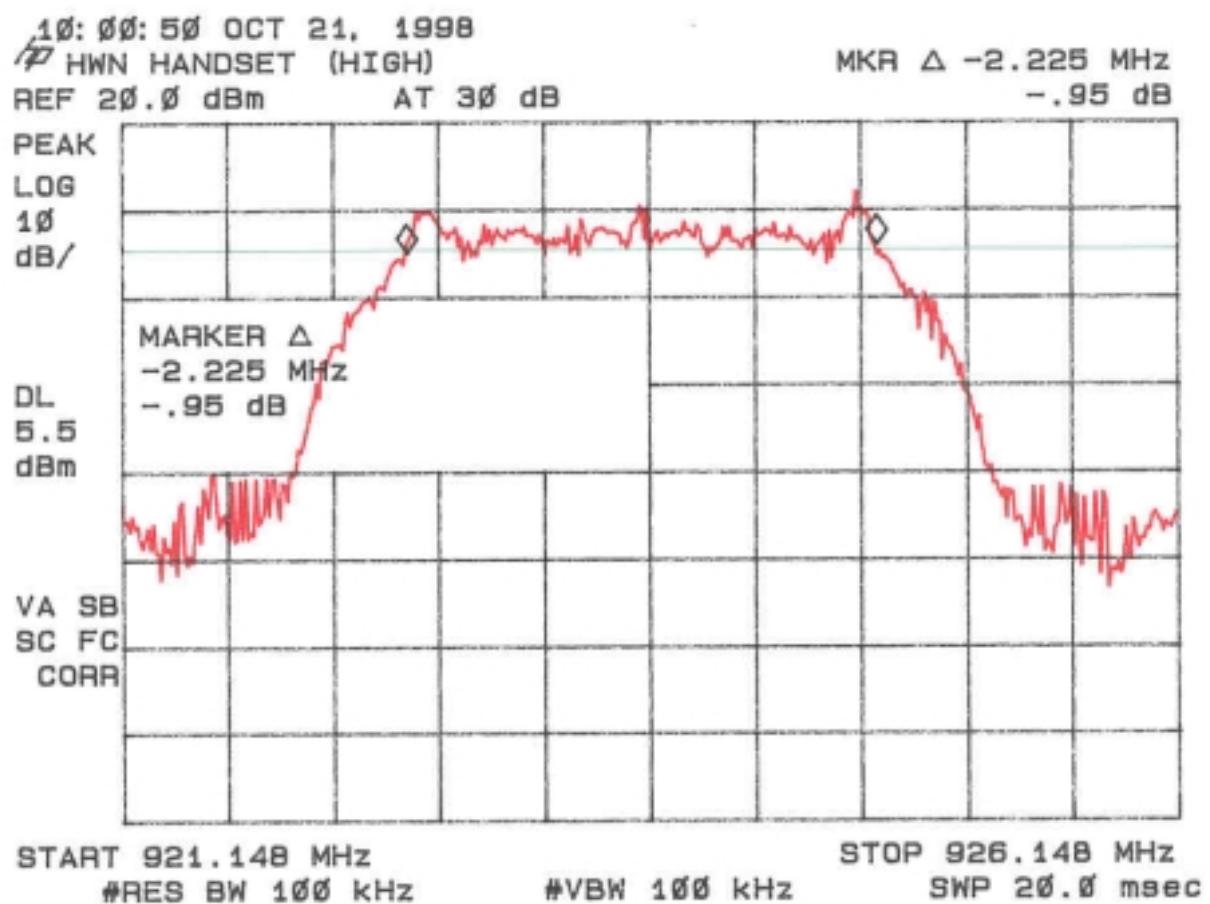

2.11 Power Spectral Density FCC Section 15.247(b) and 15.247(d)

The transmitter power spectral density averaged over any 1 second interval is given in Table 7a (low), Table 7b (mid), Table 7c (high) and Figure 8a through Figure 8c. If the EUT incorporates different spreading codes or data rates these were each investigated and the one which produced the highest spectral density was selected for test. The measurement was made using a spectrum analyzer utilizing noise marker mode. A 34.8 dBm adjustment has been added to the measurement to correct from 1 Hz to 3 kHz measurement.

FCC ID: NSK0001A
POWER SPECTRAL DENSITY

Test Date: **October 21, 1998**
UST Project: **98-569**
Customer: **Home Wireless Networks, Inc.**
Model: **95-0001-XXX**

TABLE 7a POWER SPECTRAL DENSITY (Low)

Test Data (dBm) Normalized to 1 Hz	Results (dBm)	FCC Limit 7(dBm)
-46.96	-12.16	+8.0

TABLE 7a POWER SPECTRAL DENSITY (Mid)

Test Data (dBm) Normalized to 1 Hz	Results (dBm)	FCC Limit (dBm)
-43.98	-9.18	+8.0

TABLE 7a POWER SPECTRAL DENSITY (High)

Test Data (dBm) Normalized to 1 Hz	Results (dBm)	FCC Limit (dBm)
-41.92	-7.12	+8.0

Note: 34.8 dBm has been added to correct from 1 Hz to 3 kHz


Tester

Signature:  **Name:** Tim R. Johnson

FCC ID: NSK0001A

Figure 8a


Power Spectral Density 15.247(b) and 15.247(d) Low

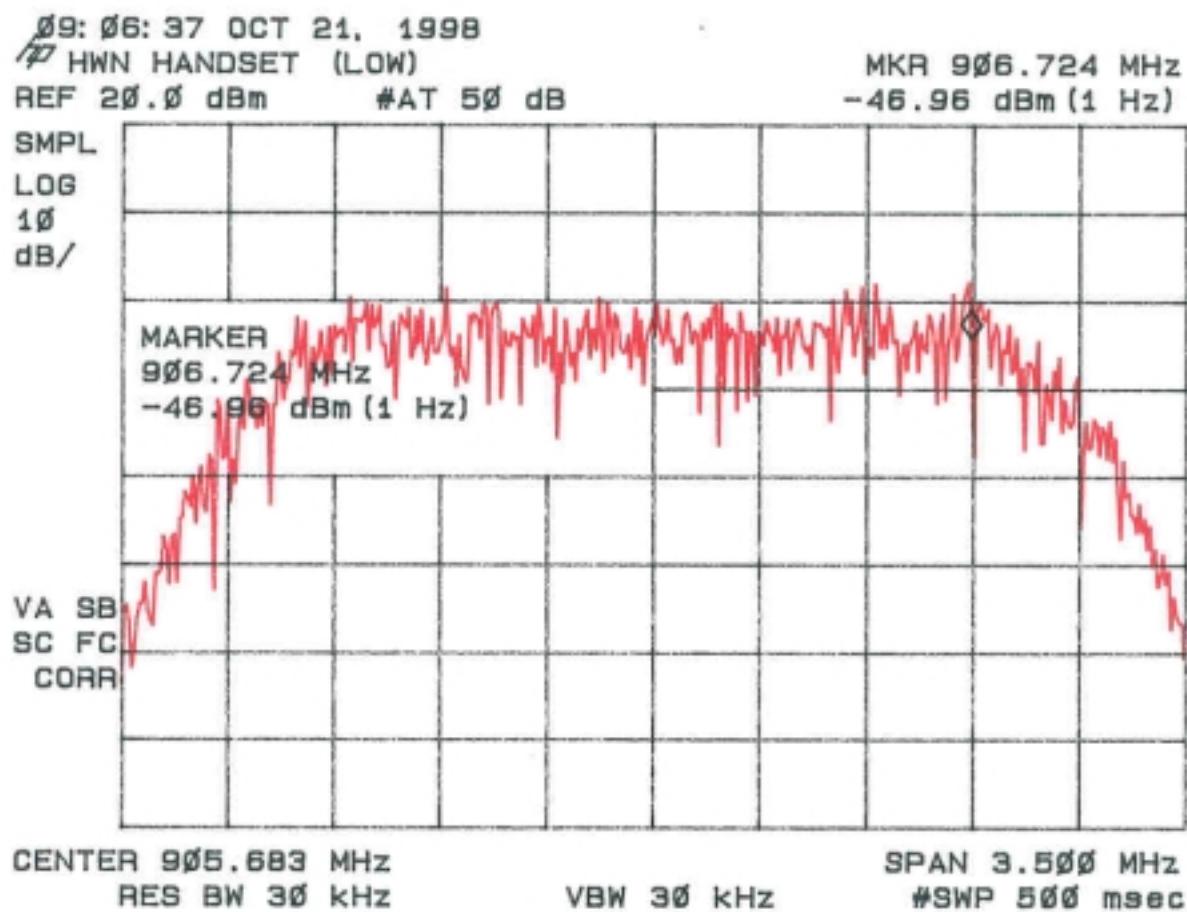

FCC ID: NSK0001A

Figure 8b


Power Spectral Density 15.247(b) and 15.247(d) Mid

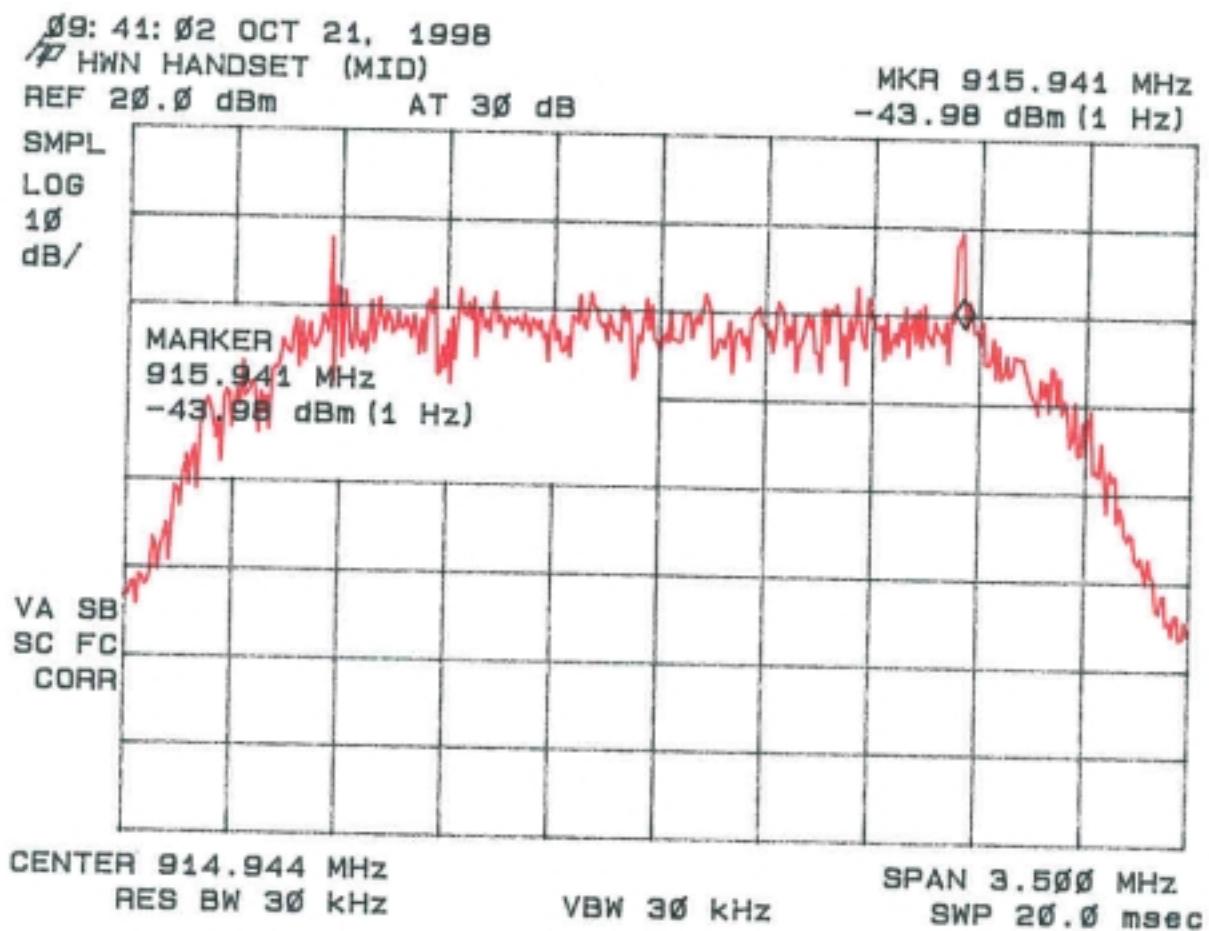

FCC ID: NSK0001A

Figure 8c

Power Spectral Density 15.247(b) and 15.247(d) High

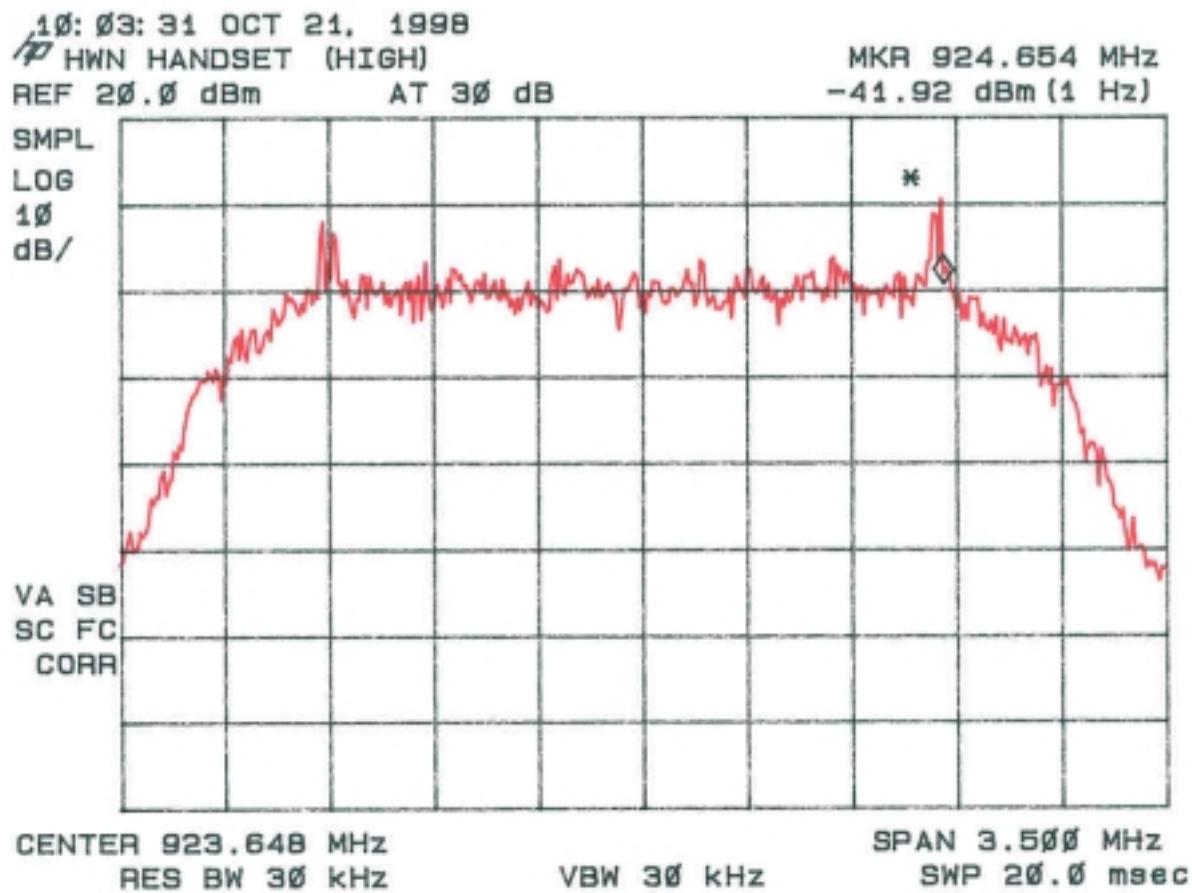

2.12 Processing Gain

Data regarding processing gain has been provided on the following page(s) from Home Wireless Networks, Inc.

This information has been provided in a separate file.

2.13 Power Line Conducted Emissions for Transmitter FCC Section 15.207

The conducted voltage measurements have been carried out in accordance with FCC Section 15.207, with a spectrum analyzer connected to a LISN and the EUT placed into a continuous mode of transmit. A preliminary scan was performed for a typical low, middle, and high channel. Final data was taken only for the worse case mode of operation determined from the preliminary scan. The results are given in Table 8.

**TABLE 8. POWER LINE CONDUCTED EMISSIONS DATA (TRANSMITTER)
CLASS B**

Test Date: **October 20, 1998**

UST Project: **98-569**

Customer: **Home Wireless Networks, Inc.**

Product: **95-0001-XXX**

FREQUENCY (MHz)	TEST DATA (dBm)		LISN LOSS (dBm)	CABLE FACTOR (dB)	RESULTS (uV)		FCC LIMITS (uV)	MARGIN BELOW LIMIT (dB)	
	PHASE	NEUTRAL	PHASE	NEUTRAL	PHASE	NEUTRAL		PHASE	NEUTRAL
Since the EUT is battery powered only, this test was deemed unnecessary									

Tester

Signature: 

Name: Tim R. Johnson

2.14 Radiated Emissions for Digital Device & Receiver (47 CFR 15.109a)

Radiated emissions were evaluated from 30 to 5000 MHz while the EUT was placed into a Receive mode of operation. Measurements were made with the analyzer's bandwidth set to 120 kHz for measurements made less than 1 GHz and 1 MHz for measurements made greater than or equal to 1 GHz. Data reported is for the worse case mode of operation on the middle channel.

**TABLE 9a. RADIATED EMISSIONS DATA
(DIGITAL DEVICE & RECEIVER)**

CLASS B

Test Date: October 20, 1998
UST Project: 98-588
Customer: Home Wireless Networks, Inc.
Product: 95-0002-XXX

Frequency (MHz)	Test Data (dBm) @3m	Ant. Factor + Cable Atten. - Amp Gain	Results (uV/m)	FCC Limits (uV/m) @3m	Margin Below FCC Limit (dB)
704.5	-76.7	6.1	16.2	200.0	-21.8

Note: All other readings were at least 20 dB below the limit

***= Quasi Peak Measurement**

SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = Antilog $((-76.7 + 6.1 + 107)/20) = 16.2$
CONVERSION FROM dBm TO dBuV = 107 dB

Test Results
Reviewed By: _____



Name: Tim R. Johnson

TABLE 9b RADIATED EMISSIONS DATA (DIGITAL DEVICE & RECEIVER)**CLASS B**

Test Date: October 20, 1998
UST Project: 98-588
Customer: Home Wireless Networks, Inc.
Model: 95-0002-XXX

Peak Measurements >1GHz

FREQ. (GHz)	TEST DATA (dBm) @ 3m	AMP GAIN (dB)	ANT. FACTOR (dB)	CABLE LOSS (dB)	RESULTS (uV/m) @ 3m	FCC LIMITS (uV/m) @ 3m
1.04	-57.0	36.0	26.9	2.2	144.4	500.0

- * Since Peak measurements met with the average limits, average measurements were deemed unnecessary.

SAMPLE CALCULATIONS:

Results uV/m @3m = Antilog $((-57.0 - 36.0 + 26.9 + 2.2 + 107)(20) = 144.4$
 Conversion from dB to dBuV = 107 dB

Tested Results

Reviewed By: Name: Tim R. Johnson

2.15 Power Line Conducted Emissions for Digital Device and Receiver
FCC Section 15.107

The conducted voltage measurements have been carried out in accordance with FCC Section 15.107, with a spectrum analyzer connected to a LISN and the EUT placed into a continuous mode of transmit.

**TABLE 10. POWER LINE CONDUCTED EMISSIONS DATA (RECIVER & DIGITAL DEVICE)
CLASS B**

Test Date: October 20, 1998
UST Project: 98-569
Customer: Home Wireless Networks, Inc.
Product: 95-0001-XXX

FREQUENCY (MHz)	TEST DATA (dBm)		LISN LOSS (dBm)		CABLE FACTOR (dB)	RESULTS (uV)		FCC LIMITS (uV)	MARGIN BELOW LIMIT (dB)	
	PHASE	NEUTRAL	PHASE	NEUTRAL		PHASE	NEUTRAL		PHASE	NEUTRAL
Since the EUT is battery powered only, this test was deemed unnecessary										

Tester
Signature: 

Name: Tim R. Johnson

SECTION 3

LABELING INFORMATION

This information has been provided in a separate file

SECTION 4

BLOCK DIAGRAM(S) / SCHEMATIC(S)

This information has been provided in a separate files

SECTION 5

PHOTOGRAPHS

PHOTOS OF THE TESTED EUT

The following photos are attached:

Photo 1. EUT, Front View

Photo 2. EUT, Rear View

Photo 3. EUT, Side View

Photo 4. Internal View Showing Antenna (Cover Opened & Battery Removed)

Photo 5. EUT, Top View of Main Board (Shields Installed)

Photo 6. EUT, Top View of Main Board (Shields Removed)

Photo 7. EUT, Bottom View of Main Board with LCD Still in Place

Photo 8. EUT, Bottom View of Main Board with LCD Removed

These have been provided in separate files

SECTION 6

USER'S MANUAL

This information has been provided in a separate file