


# ENGINEERING TEST REPORT



**PATROL SUITE PMD**  
**Model No.: PMD09**  
**FCC ID: NSNPMDO9**

*Applicant:*

**G4S Justice Services Canada, Inc.**  
#103 – 6592, 176 Street  
Surrey, BC  
Canada V3S 4G5

*In Accordance With*

**Federal Communications Commission (FCC)**  
**Part 15, Subpart C, Section 15.231(e)**  
**Periodic Operation at 433.92 MHz**

**UltraTech's File No.: G4S-006F15C231**

This Test report is Issued under the Authority of  
Tri M. Luu, Professional Engineer,  
Vice President of Engineering  
UltraTech Group of Labs

Date: May 29, 2009



Report Prepared by: JaeWook Choi

Tested by: Hung Trinh, RFI Technician

Issued Date: May 29, 2009

Test Dates: May 13 & 14, 2009

- The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.
- This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.

## UltraTech Group of Labs

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4  
Tel.: (905) 829-1570 Fax.: (905) 829-8050  
Website: [www.ultratech-labs.com](http://www.ultratech-labs.com) , Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com) , Email: [tri@ultratech-labs.com](mailto:tri@ultratech-labs.com)



0685

91038

1309

46390-2049

200093-0 SL2-IN-E-1119R

CA2049

## TABLE OF CONTENTS

<b>EXHIBIT 1</b>	<b>INTRODUCTION</b>	<b>1</b>
1.1	SCOPE.....	1
1.2	RELATED SUBMITTAL(S)/GRANT(S).....	1
1.3	NORMATIVE REFERENCES .....	1
<b>EXHIBIT 2</b>	<b>PERFORMANCE ASSESSMENT</b>	<b>2</b>
2.1	CLIENT INFORMATION .....	2
2.2	EQUIPMENT UNDER TEST (EUT) INFORMATION .....	2
2.3	EUT'S TECHNICAL SPECIFICATIONS.....	3
2.4	LIST OF EUT'S PORTS.....	3
2.5	ANCILLARY EQUIPMENT .....	3
<b>EXHIBIT 3</b>	<b>EUT OPERATION CONDITIONS AND CONFIGURATIONS DURING TESTS</b>	<b>4</b>
3.1	CLIMATE TEST CONDITIONS .....	4
3.2	OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS.....	4
<b>EXHIBIT 4</b>	<b>SUMMARY OF TEST RESULTS</b>	<b>5</b>
4.1	LOCATION OF TESTS .....	5
4.2	APPLICABILITY & SUMMARY OF EMC EMISSIONS TEST RESULTS .....	5
4.3	MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES .....	5
<b>EXHIBIT 5</b>	<b>MEASUREMENTS, EXAMINATIONS &amp; TEST DATA FOR EMC EMISSIONS</b>	<b>6</b>
5.1	TEST PROCEDURES .....	6
5.2	MEASUREMENT UNCERTAINTIES.....	6
5.3	MEASUREMENT EQUIPMENT USED .....	6
5.4	ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER .....	6
5.5	COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS .....	6
5.6	POWER LINE CONDUCTED EMISSIONS [§ 15.207(A)].....	7
5.7	EMISSION BANDWIDTH [§ 15.231(C)].....	10
5.8	TRANSMITTER RADIATED EMISSIONS @ 3 METER – FUNDAMENTAL & SPURIOUS EMISSION [§§15.231(E), 15.209 & 15.205] .....	12
<b>EXHIBIT 6</b>	<b>TEST EQUIPMENT LIST</b>	<b>16</b>
<b>EXHIBIT 7</b>	<b>MEASUREMENT UNCERTAINTY</b>	<b>17</b>
7.1	LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY .....	17
7.2	RADIATED EMISSION MEASUREMENT UNCERTAINTY .....	18

## EXHIBIT 1 INTRODUCTION

### 1.1 SCOPE

<b>Reference:</b>	FCC Part 15, Subpart C, Section 15.231
<b>Title:</b>	Code of Federal Regulations (CFR), Title 47, Telecommunication, Part 15
<b>Purpose of Test:</b>	To gain FCC Certification Authorization for Section 15.231(e) - Periodic Operation at 433.92 MHz.
<b>Test Procedures:</b>	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
<b>Environmental Classification:</b>	Residential

### 1.2 RELATED SUBMITTAL(S)/GRANT(S)

None.

### 1.3 NORMATIVE REFERENCES

Publication	Year	Title
FCC 47 CFR 15	2008	Code of Federal Regulations – Telecommunication
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 GHz
CISPR 22 EN 55022	2008-09, Edition 6.0 2006	Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement
CISPR 16-1-1 +A1 +A2	2006 2006 2007	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-1-2 +A1 +A2	2003 2004 2006	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-2: Conducted disturbances

---

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: G4S-006F15C231

May 29, 2009

## EXHIBIT 2 PERFORMANCE ASSESSMENT

### 2.1 CLIENT INFORMATION

APPLICANT	
<b>Name:</b>	G4S Justice Services Canada, Inc.
<b>Address:</b>	#103 – 6592, 176 Street Surrey, BC Canada V3S 4G5
<b>Contact Person:</b>	Mr. Harv Hundal Phone #: (604)576-8658 x238 Fax #: (604)576-0436 Email Address: <a href="mailto:hary.hundal@ca-g4s.com">hary.hundal@ca-g4s.com</a>

MANUFACTURER	
<b>Name:</b>	G4S Justice Services Canada, Inc.
<b>Address:</b>	#103 – 6592, 176 Street Surrey, BC Canada V3S 4G5
<b>Contact Person:</b>	Mr. Harv Hundal Phone #: (604)576-8658 x238 Fax #: (604)576-0436 Email Address: <a href="mailto:hary.hundal@ca-g4s.com">hary.hundal@ca-g4s.com</a>

### 2.2 EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information has been supplied by the applicant.

<b>Brand Name</b>	G4S Justice Services Canada, Inc.
<b>Product Name:</b>	PATROL SUITE PMD
<b>Model Name or Number:</b>	PMD09
<b>Serial Number:</b>	Test Sample
<b>Type of Equipment:</b>	Remote Control/Security Device Transceiver
<b>Input Power Supply Type:</b>	5 VDC ± 0.25V, 500 mA max via USB
<b>Primary User Functions of EUT:</b>	Used to remotely monitor presence and status of a PTX device worn by an offender, and to view the status information on a Bluetooth enabled PDA device. The PMD is also used to wake up a PTX device.

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: G4S-006F15C231

May 29, 2009

## 2.3 EUT'S TECHNICAL SPECIFICATIONS

433 MHz TRANSMITTER	
<b>Equipment Type:</b>	Portable
<b>Intended Operating Environment:</b>	Commercial, industrial or business environment
<b>Power Supply Requirement:</b>	5 VDC $\pm$ 0.25V, 500 mA max via USB
<b>RF Output Power Rating:</b>	84.98 Peak dB $\mu$ V/m @ 3 m
<b>Operating Frequency Range:</b>	433.92 MHz
<b>Duty Cycle:</b>	15.2 %
<b>20 dB Bandwidth:</b>	166.13 kHz
<b>Modulation Type:</b>	FSK
<b>Antenna Connector Type:</b>	Integral antenna housed inside the enclosure.
<b>Antenna Description:</b>	Manufacturer: Linx technologies Type: ANT-433-HETH helical antenna Model: n/a Gain: n/a Frequency Range: 433.92 MHz

## 2.4 LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	USB Power, changing only	1	MicroUSB B	Shielded

## 2.5 ANCILLARY EQUIPMENT

Ancillary Equipment # 1	
Description:	Switching Power Supply
Brand Name:	Phihong
Model Name or Number:	PSB05R-050Q
Serial Number:	N/A
Cable Length & Type:	< 3 m, Non-shielded
Connected to EUT's Port:	USB

## EXHIBIT 3 EUT OPERATION CONDITIONS AND CONFIGURATIONS DURING TESTS

### 3.1 CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power Input Source:	5 VDC

### 3.2 OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

<b>Operating Modes:</b>	For testing purpose only, the EUT was set to transmit continuously by setting the unit into the 1 <sup>st</sup> test state.
<b>Special Test Software:</b>	None.
<b>Special Hardware Used:</b>	None.
<b>Transmitter Test Antenna:</b>	The EUT is tested with the antenna fitted in a manner typical of normal intended use as integral antenna equipment.

<b>Transmitter Test Signals:</b>	
<b>Frequency:</b>	433.92 MHz
<b>Transmitter Wanted Output Test Signals:</b>	
▪ RF Power Output (measured maximum output power):	84.98 Peak dB $\mu$ V/m @ 3 m
▪ Normal Test Modulation:	FSK
▪ Modulating signal source:	Internal

## EXHIBIT 4 SUMMARY OF TEST RESULTS

### 4.1 LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

Power Line Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).

Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 91038) and Industry Canada office (Industry Canada File No.: 2049A-3). Expiry Date: 2011-05-01.

### 4.2 APPLICABILITY & SUMMARY OF EMC EMISSIONS TEST RESULTS

FCC Rules	Test Requirements	Compliance (Yes/No)
2.1093	Radiofrequency radiation exposure evaluation: portable devices	Yes, see attached RF exposure exhibit
15.207(a)	Power Line Conducted Emission	Yes
15.203	Antenna requirement (The transmitter shall use a transmitting antenna that is an integral part of the device).	Yes
15.231(a)	Periodic Operation Provisions	N/A
15.231(c)	20 dB Bandwidth	Yes
15.231(e)	Transmitter Radiated Emissions - Fundamental, Harmonic and Spurious	Yes*

**PATROL SUITE PMD, Model No.: PMD09, by G4S Justice Service Canada, Inc** has also been tested and found to comply with **FCC Part 15, Subpart B - Class B Digital Devices**. The engineering test report has been documented and kept on file and it is available upon request.

\* Simultaneous transmitters' radiated emissions was checked and verified to be compliant.

### 4.3 MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: G4S-006F15C231

May 29, 2009

## EXHIBIT 5 MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

### 5.1 TEST PROCEDURES

Details of test methods and procedures can be found in Ultratech Test Procedures, File # ULTR P001-2004 and ANSI C63.4.

### 5.2 MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

### 5.3 MEASUREMENT EQUIPMENT USED

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C64.3 and CISPR 16-1-1.

### 5.4 ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER

To remotely monitor presence and status of a PTX device worn by an offender, and to view the status information on a Bluetooth enabled PDA device. The PMD is also used to wake up a PTX device.

### 5.5 COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS

FCC Section	FCC Rules	
§ 15.203	<p>Described how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.</p> <p>The exception is in those cases where EUT must be professionally installed. In order to demonstrate that professional installation is required, the following 3 points must be addressed:</p> <ul style="list-style-type: none"><li>• The application (or intended use) of the EUT</li><li>• The installation requirements of the EUT</li><li>• The method by which the EUT will be marketed</li></ul>	<p>Integral coil antenna</p> <p><b>Note:</b> External antenna is optional and receive mode only</p>
§ 15.204	<p>Provided the information for every antenna proposed for use with the EUT:</p> <ul style="list-style-type: none"><li>(a) type (e.g. Yagi, patch, grid, dish, etc...),</li><li>(b) manufacturer and model number</li><li>(c) gain with reference to an isotropic radiator</li></ul>	Only furnished integral antenna will be used in the EUT.

## 5.6 POWER LINE CONDUCTED EMISSIONS [§ 15.207(a)]

### 5.6.1 Limits

The equipment shall meet the limits of the following table:


Frequency of Emissions (MHz)	Class B Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

\* Decreasing linearly with logarithm of frequency

### 5.6.2 Method of Measurements

Refer to Ultratech Test Procedures ULTR-P001-200 & ANSI C63.4 for method of measurements.


### 5.6.3 Test Arrangement

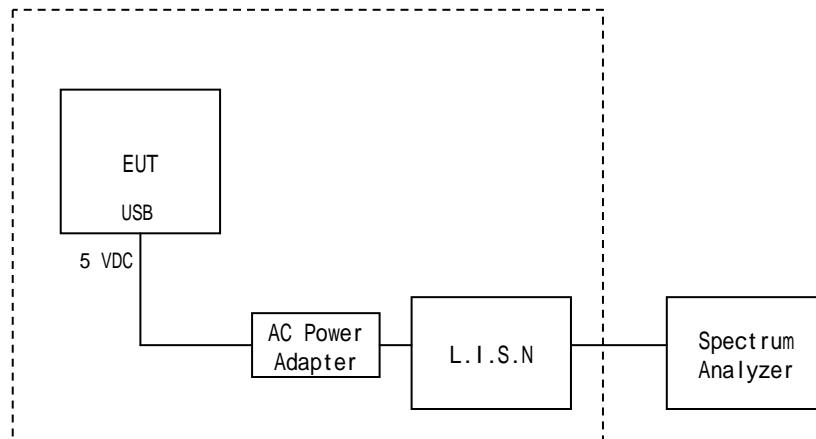

#### 5.6.4 Test Data

< 120 Vac, Line Tested: Hot >

#### Current Graph

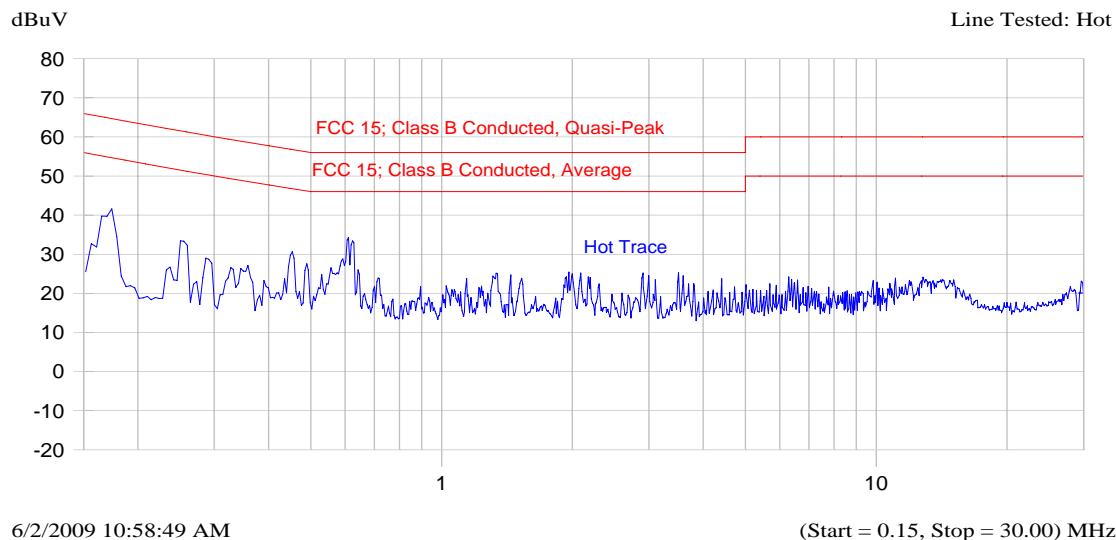


#### Current List

Frequency MHz	Peak dBuV	QP dBuV	Delta QP-QP Limit dB	Avg dBuV	Delta Avg-Avg Limit dB	Trace Name
0.168	33.5	35.1	-30.0	29.7	-25.4	Hot Trace
0.260	27.3	28.8	-32.6	10.3	-41.2	Hot Trace
0.451	21.6	26.1	-30.8	12.6	-34.2	Hot Trace
0.614	37.6	26.2	-29.8	20.7	-25.3	Hot Trace
1.349	27.1	9.7	-46.3	10.9	-35.1	Hot Trace

< 120 Vac, Line Tested: Neutral >

### Current Graph

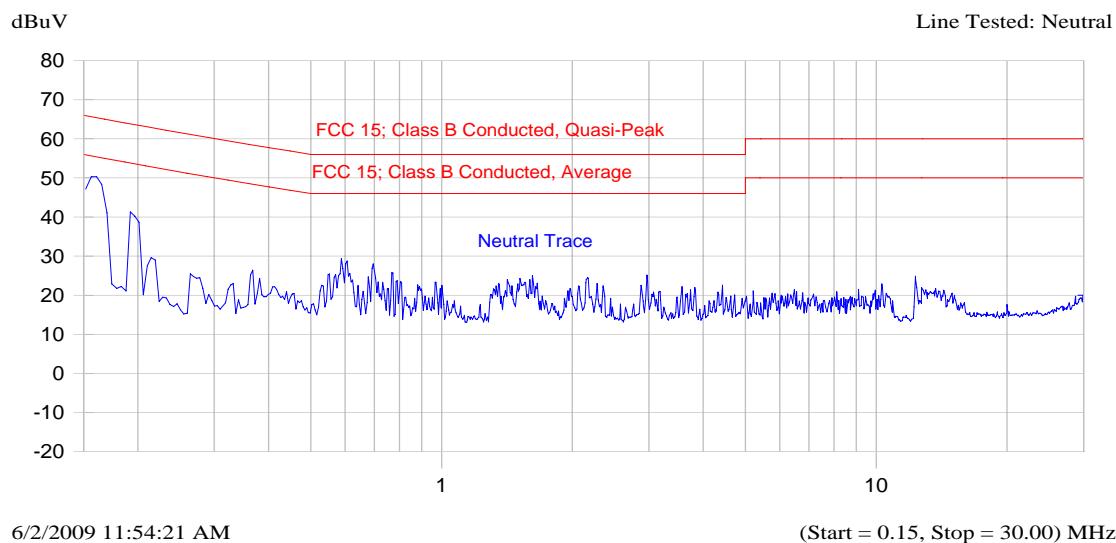

### Current List

Frequency MHz	Peak dBuV	QP dBuV	Delta QP-QP Limit dB	Avg dBuV	Delta Avg-Avg Limit dB	Trace Name
0.161	36.0	42.4	-23.0	17.3	-38.1	Neutral Trace
0.178	34.7	38.9	-25.7	17.4	-37.2	Neutral Trace
0.605	27.7	26.1	-29.9	19.9	-26.1	Neutral Trace

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: G4S-006F15C231

May 29, 2009

## 5.7 EMISSION BANDWIDTH [§ 15.231(c)]

### 5.7.1 Limits

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### 5.7.2 Method of Measurements


Refer to ULTRATECH Test Procedures, File # ULTR P001-2004, §15.231(c) & ANSI C63.4.

The transmitter output was loosely coupled to the spectrum analyzer through a receiving antenna and the bandwidth of the fundamental frequency was measured with the spectrum analyzer with the resolution bandwidth of the spectrum analyzer set per ANSI C63.4.

### 5.7.3 Test Data

Frequency (MHz)	Modulation	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/Fail
433.92	FM	166.13	1084.8	Pass

**Plot 5.5.3.1 20 dB Bandwidth**  
Test Frequency: 433.92 MHz  
Modulation: FM

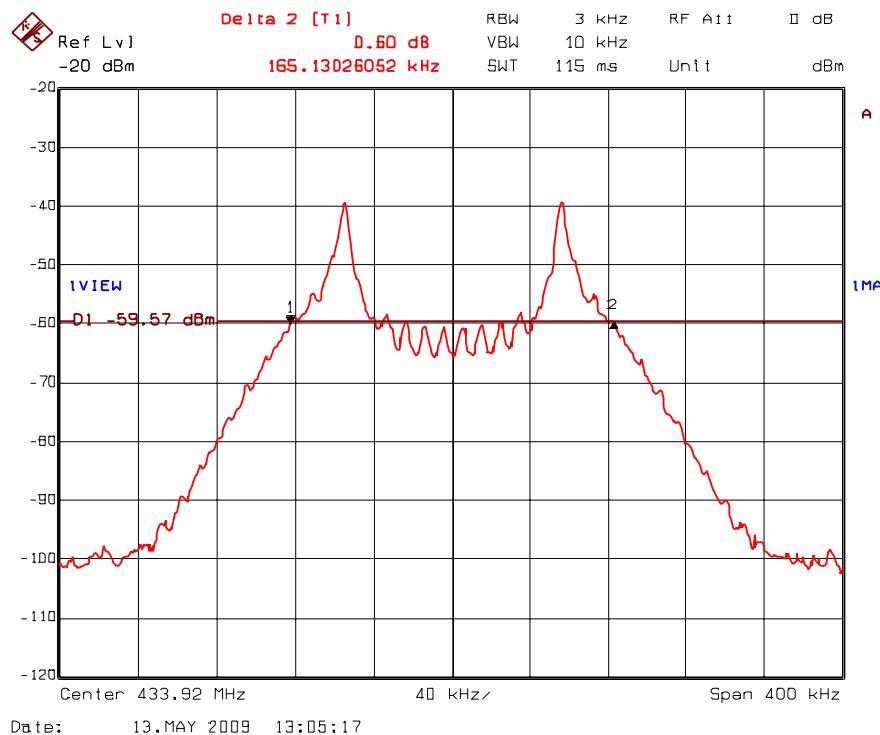

## 5.8 TRANSMITTER RADIATED EMISSIONS @ 3 METER – FUNDAMENTAL & SPURIOUS EMISSION [§§15.231(e), 15.209 & 15.205]

### 5.8.1 Limits

The RF radiated emissions measured at 3 m distance shall not exceed the field strength below:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emission (microvolts/meter)
40.66 - 40.70	1,000	100
70 - 130	500	50
130 - 174	500 to 1,500 **	50 to 150 **
174 - 260	1,500	150
260 - 470	1,500 to 5,000 **	150 to 500 **
Above 470	5,000	500

\*\* linear interpolations

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $\mu\text{V/m at 3 meters} = 22.72727(F) - 2454.545$ ; for the band 260-470 MHz,  $\mu\text{V/m at 3 meters} = 16.6667(F) - 2833.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

Emissions within the restricted bands specified in §15.205(a) shall not exceed the general radiated emission limits specified in §15.209(a).

### § 15.205(a) - Restricted Frequency Bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: G4S-006F15C231

May 29, 2009


### § 15.209(a) - Field Strength Limits within Restricted Frequency Bands

Frequency (MHz)	Field Strength Limits (microvolts/m)	Distance (Meters)
0.009 - 0.490	2,400 / F (KHz)	300
0.490 - 1.705	24,000 / F (KHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

#### 5.8.2 Method of Measurements

Refer to ULTRATECH Test Procedures, File # ULTR P001-2004 and ANSI C63.4.

#### 5.8.3 Test Arrangement

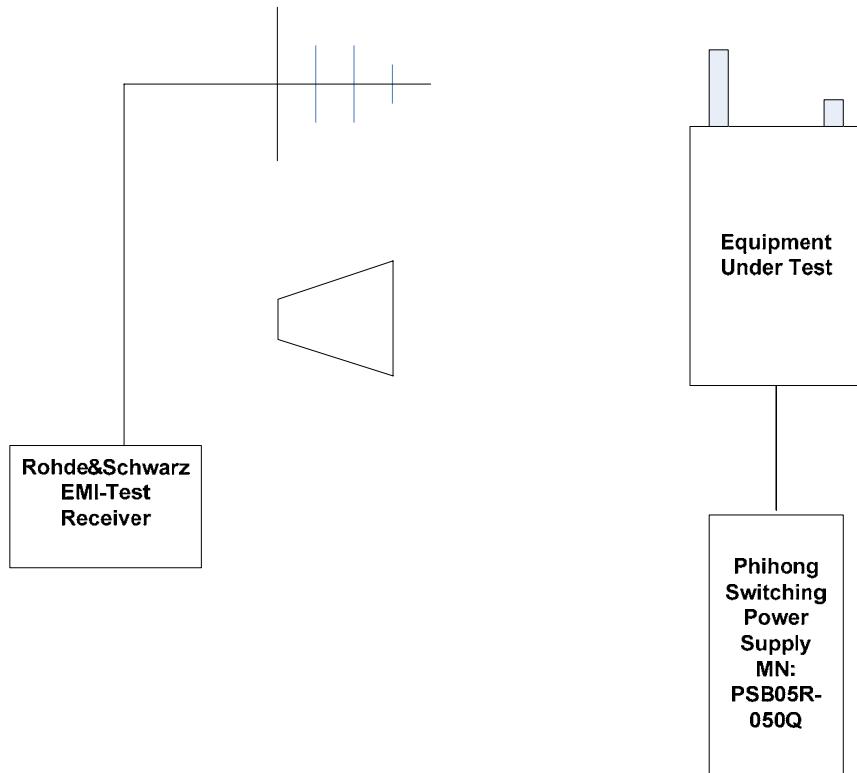

#### 5.8.4 Test Data

The PMD operates as an intentional radiator at 433.92MHz under § 15.231(e). The transmit power is fixed at 0dBm. The PMD always uses the internal 433.92MHz antenna (Linx technologies ANT-433-HETH helical antenna, which is mounted internally on the PCB) for transmitting 433.92 MHz packets.

The 433.92 MHz transmitter and receiver cannot be active simultaneously. For receiving 433.92 transmissions, the PMD can use either the internal or external 433.92 antennas. The receiving antenna used depends upon the position of the rotary MODE switch on the front plate of the PMD. When “Ext Ant” is selected, the external antenna is used; when “Int Ant” is selected, the internal antenna is used.

The PMD transmits an RF packet once every 20 second transmission cycle. (Refer to Operational description provided by manufacturer for detail)

Packet length:	15.2 ms (includes settling time, preamble, pattern, and data)
Transmit interval:	Pseudo-random in the range 20 s
Worst case duty factor:	15.2 ms / 100 ms = 15.2 %


**20.0 sec > 10 sec and 20.0 sec > 15.2 msec × 30 = 0.456 sec**

#### Remarks:


- The measuring receiver shall be tuned over the frequency range 30 MHz to 5 GHz.
- All spurious emissions that are in excess of 20 dB below the specified limit shall be recorded.
- The peak-average correction factor was obtained from the duty cycle calculation(Refer to Operational description provided by manufacturer for detail).
- Only this transmitter was transmitting during test; however it was checked and confirmed that turning on other two transmitters which made all three transmitters transmit simultaneously did not affect test results.

Worst case duty cycle correction factor =  $20 * \log (T_{on}/100 \text{ ms}) = 20 * \log (15.2 \text{ ms}/100 \text{ ms}) = -16.36 \text{ dB}$

Frequency (MHz)	Peak E-Field @3m (dB $\mu$ V/m)	Average E-Field @3m (dB $\mu$ V/m)	Antenna Plane (V/H)	§15.231(e) Limits @3m (dB $\mu$ V/m)	§15.209(a) Limits @3m (dB $\mu$ V/m)	Margin (dB)
433.92	84.98	68.62	V	72.87	--	-4.25
433.92	83.31	66.95	H	72.87	--	-5.92
867.84	37.30	20.94	V	52.87	46.0	-31.93
867.84	35.68	19.32	H	52.87	46.0	-33.55
1301.76	41.16	24.80	V	52.87	54.0	-28.07
1301.76	40.02	23.66	H	52.87	54.0	-29.21

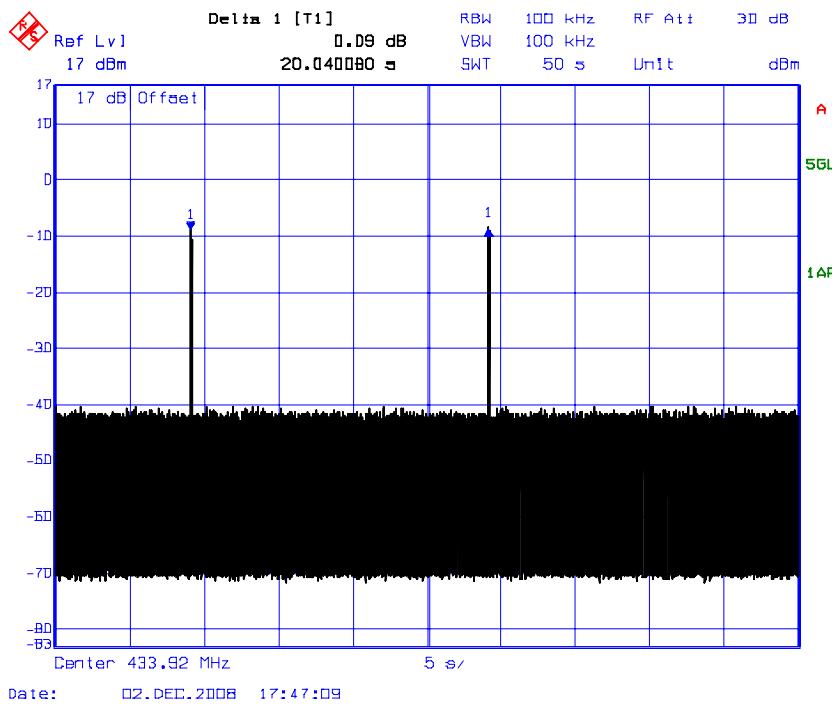

## < Silence Period between Transmissions – normal operation mode >

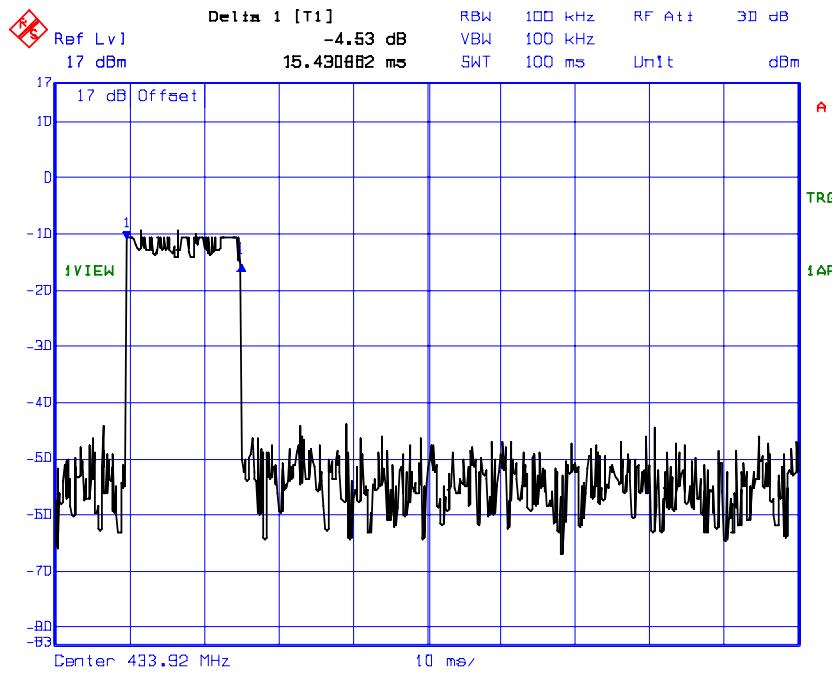

< Duty Cycle in 100 ms – normal operation mode >

## **ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic](mailto:vic)

File #: G4S-006F15C231

May 29, 2009

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**EXHIBIT 6 TEST EQUIPMENT LIST**

Test Instruments	Manufacturer	Model No.	Serial No.	Operating Range
Spectrum Analyzer/ EMI Receiver	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz - 40 GHz with external mixer
Spectrum Analyzer	Rohde & Schwarz	FSEK30	100077	20 Hz - 40 GHz
EMI Receiver System /Spectrum Analyzer with built-in Amplifier	Hewlett Packard	HP 8546A	3520A00248	9 kHz - 5.6 GHz, 50 Ohms
RF Amplifier	Com-Power	PA-103A	161243	10 MHz - 1 GHz
RF Amplifier	Hewlett Packard	8449B	3008A00769	1 GHz - 26.5 GHz
RF Amplifier	Hewlett Packard	HP 83017A	311600661	1 GHz to 26.5 GHz
Biconilog Antenna	EMCO	3143	1029	20 MHz - 2 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz - 18 GHz

## EXHIBIT 7 MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

### 7.1 LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Line Conducted)	PROBABILITY DISTRIBUTION	UNCERTAINTY (dB)	
		9-150 kHz	0.15-30 MHz
EMI Receiver specification	Rectangular	$\pm 1.5$	$\pm 1.5$
LISN coupling specification	Rectangular	$\pm 1.5$	$\pm 1.5$
Cable and Input Transient Limiter calibration	Normal (k=2)	$\pm 0.3$	$\pm 0.5$
Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8(9 \text{ kHz}) 0.2 (30 \text{ MHz})$ Uncertainty limits $20\text{Log}(1+\Gamma_1\Gamma_R)$	U-Shaped	$\pm 0.2$	$\pm 0.3$
System repeatability	Std. deviation	$\pm 0.2$	$\pm 0.05$
Repeatability of EUT	--	--	--
Combined standard uncertainty	Normal	$\pm 1.25$	$\pm 1.30$
Expanded uncertainty U	Normal (k=2)	$\pm 2.50$	$\pm 2.60$

Sample Calculation for Measurement Accuracy in 450 kHz to 30 MHz Band:

$$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{(1.5^2 + 1.5^2)/3 + (0.5/2)^2 + (0.05/2)^2 + 0.35^2} = \pm 1.30 \text{ dB}$$

$$U = 2u_c(y) = \pm 2.6 \text{ dB}$$

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: G4S-006F15C231

May 29, 2009

## 7.2 RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	UNCERTAINTY ( $\pm$ dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	$\pm 1.0$	$\pm 1.0$
Cable Loss Calibration	Normal (k=2)	$\pm 0.3$	$\pm 0.5$
EMI Receiver specification	Rectangular	$\pm 1.5$	$\pm 1.5$
Antenna Directivit	Rectangular	$\pm 0.5$	$\pm 0.5$
Antenna factor variation with height	Rectangular	$\pm 2.0$	$\pm 0.5$
Antenna phase center variation	Rectangular	0.0	$\pm 0.2$
Antenna factor frequency interpolation	Rectangular	$\pm 0.25$	$\pm 0.25$
Measurement distance variation	Rectangular	$\pm 0.6$	$\pm 0.4$
Site imperfections	Rectangular	$\pm 2.0$	$\pm 2.0$
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67$ (Bi) 0.3 (Lp) Uncertainty limits $20\log(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	+1.1 -1.25	$\pm 0.5$
System repeatability	Std. Deviation	$\pm 0.5$	$\pm 0.5$
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k=2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$