



Test Lab
Cert 2764.01

FCC LISTED, REGISTRATION
NUMBER: 2764.01

ISED LISTED REGISTRATION
NUMBER: 23595-1

Test report No:

2501BERM.007

Test report

USA FCC Part 15.247, 15.209, 15.207

CANADA RSS-247, RSS-Gen

Radio Frequency Devices. Operation within the bands 902 - 928 MHz,
2400 -2483.5 MHz, and 5725 - 5850 MHz.

Digital Transmission Systems (DTSs), Frequency Hopping Systems
(FHSs) and License-Exempt Local Area Network (LE-LAN) Devices.

Identification of item tested	Display Audio Infotainment Unit 10"TP
Trademark	Visteon
Model and /or type reference	VW MIB Regio
Other identification of the product	FCC ID: NT8-VWMIBREGIO IC: 3043A-VWMIBREGIO HW Version: H04 SW Version: 0107
Features	FM, AM, USB, Bluetooth, WLAN, GNSS
Manufacturer	VISTEON CORPORATION ONE VILLAGE CENTER DRIVE, VAN BUREN TOWNSHIP, MI, 48111 U.S.A
Test method requested, standard	USA FCC Part 15.247, 10-1-18 Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209, 10-1-18 Edition: Radiated emission limits; general requirements CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 (April 2018). 558074 D01 15.247 Meas Guidance v05r02. Guidance for Compliance Measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under section §15.247 of the FCC Rules ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Domingo Galvez EMC&RF Lab Manager
Date of issue	11-27-2019
Report template No	FDT08_21

Index

Competences and guarantees3

General conditions3

Uncertainty3

Data provided by the client.....4

Usage of samples4

Test sample description5

Identification of the client.....6

Testing period and place6

Document history6

Environmental conditions7

Remarks and comments7

Testing verdicts.....7

Summary8

List of equipment used during the test.....9

Appendix A: Test results (Bluetooth EDR)10

Appendix B: Test results (WI-FI 2.4GHz)78

Competences and guarantees

DEKRA Certification Inc. is a testing laboratory accredited by A2LA (The American Association for Laboratory Accreditation), to perform the tests indicated in the Certificate 2764.01

DEKRA Certification Inc. is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Certification Inc. has a calibration and maintenance program for its measurement equipment.

DEKRA Certification Inc. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Certification at the time of performance of the test.

DEKRA Certification Inc. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Certification Inc.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Certification Inc.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Certification Inc. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Certification internal document PODT000.

Frequency (MHz)	U(k=2)	Units
30-180	3.82	dB
180-1000	2.61	dB
1000-18000	2.92	dB
18000-40000	2.15	dB

Data provided by the client

VW MIB Regio is a Display Audio Infotainment Unit with capacitive 10"TP touch screen with following functionalities: USB 3.1/USB Video, USB Hub, Bluetooth EDR 2.4 GHz, Audio BT streaming music, control and browsing, Wi-Fi hotspot Functionality/Wireless 2.4GHz and 5 GHz band, GNSS receiver-GLONASS, GPS.

DEKRA declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: The client.

Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
2501B/08	Vehicular Radio	2GM.035.180.A	VWZ7Z2W0130069	10/31/2019
2501B/23	Harness	----	----	10/31/2019
2501B/30	Fakra USB Cable	----	----	10/31/2019

1. Sample S/01 has undergone following test(s):

All conducted tests indicated in appendix A & B.

Sample S/02 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
2501B/06	Vehicular Radio	2GM.035.180.A	VWZ7Z2W0130037	10/31/2019
2501B/20	Harness	----	----	10/31/201

1. Sample S/02 has undergone following test(s):

All radiated tests indicated in appendix A & B.

Following Accessory item was used with Sample S/02 to perform testing

Control N°	Description	Model	Serial N°	Date of reception
2501B/37	GPS & Am/FM radio antenna	6C0.035.501.G5FQ	02S AZWPL	11/11/2019
2501B/32	Fakra USB Cable	-	-	10/31/2019

Test sample description

Ports..... :	Port name and description		Cable															
			Specified length [m]	Attached during test	Shielded													
	AM/FM Antenna Connection: Fakra			☒	☐													
	GPS Antenna Connector: Fakra			☒	☐													
	USB Video Port			☒	☐													
	USB 3.0			☒	☐													
	Main Connectors			☒	☐													
Supplementary information to the ports..... :	Dual USB HUB Type C																	
Rated power supply	Voltage and Frequency		Reference poles															
			L1	L2	L3	N	PE											
	☐	AC:	☐	☐	☐	☐	☐											
	☐	AC:	☐	☐	☐	☐	☐											
	☐	DC:																
	☒	DC: 13.5 / Wireless 2.4 GHz and 5 GHz band																
Rated Power	Sleep current: 300 µA																	
Clock frequencies	48 KHZ, 26 MHZ, 25 MHZ, 36.864 MHZ, 16 MHZ																	
Other parameters..... :	Display Screensize: 10.1" (diagonal) FHD, 2.14:1, Landscape, Transmissive, Normally black, ADStype																	
Software version	0107																	
Hardware version..... :	H04																	
Dimensions in cm (L x W x D)	260.31 X 130.72 X 153.15																	
Mounting position..... :	☐	Table top equipment																
	☐	Wall/Ceiling mounted equipment																
	☐	Floor standing equipment																
	☐	Hand-held equipment																
	☒	Other: Vehicle / Automotive use																
Modules/parts	Module/parts of test item			Type		Manufacturer												
	N/A																	

Accessories (not part of the test item)	Description	Type	Manufacturer
	GPS Antenna	Antenna	-
	Harnesses to power up the Radio	Harnesses	-
	SMA Connectors	SMA	-
	USB Cables	USB	
Documents as provided by the applicant.....	Description	File name	Issue date
	PoA		
	Declaration letters		
	Application Forms FDT 30_14		
	Application forms FRF88_01 FRF91_02		
Copy of marking plate:			
			

Identification of the client

VISTEON CORPORATION
ONE VILLAGE CENTER DRIVE, VAN BUREN TOWNSHIP, MI, 48111 U.S.A

Testing period and place

Test Location	DEKRA Certification Inc.
Date (start)	11/5/2019
Date (finish)	11/26/2019

Document history

Report number	Date	Description
2501BERM.007	11-27-2019	First release

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

In the semi-anechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 60 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

Remarks and comments

The tests have been performed by the technical personnel: Divya Adusumilli, BhagyaShree Chaudhary, Poojita Bhattu and Koji Nishimoto.

Testing verdicts

Not applicable :	N/A
Pass :	P
Fail :	F
Not measured :	N/M

Summary

FCC PART 15 PARAGRAPH / RSS-247 (Bluetooth EDR)					
Section	FCC Spec Clause	RSS Spec Clause	Test Description	Verdict	Remark
A.1	§ 2.1049 & § 15.247 (a) (1)	RSS-247 5.1 (b)	20dB Emission Bandwidth, Occupied Bandwidth & Carrier Frequency Separation	P	N/A
A.2	§ 15.247 (a) (1) (iii)	RSS-247 5.1 (d)	Number of hopping channels	P	N/A
A.3	§ 15.247 (a) (1) (iii)	RSS-247 5.1 (d)	Time of Occupancy (Dwell Time)	P	N/A
A.4	§ 15.247 (b) (3)	RSS-247 5.4 (b)	Maximum peak conducted output power and antenna gain	P	N/A
A.5	§ 15.247 (d)	RSS-247 5.5	Band-edge conducted emissions compliance (Transmitter)	P	N/A
--	§ 15.247 (d)	RSS-247 5.5	Emission limitations Conducted (Transmitter)	N/A	Refer 1
A.6	§ 15.247 (d)	RSS-247 5.5	Emission limitations Radiated (Transmitter)	P	N/A
<u>Supplementary information and remarks:</u> 1: Device has internal antenna.					

FCC PART 15 PARAGRAPH (WIFI 2.4GHz)					
Section	FCC Spec Clause	RSS Spec Clause	Test Description	Verdict	Remark
B.1	§ 2.1049 & §15.247 (a) (2)	RSS-247 5.2 (a)	99% Occupied Bandwidth & 6dB Bandwidth	P	N/A
B.2	§ 15.247 (b)	RSS-247 5.4 (d)	Maximum Output Power and antenna gain	P	N/A
B.3	§ 15.247 (d)	RSS-247 5.5	Band-edge conducted emissions compliance (Transmitter)	P	N/A
B.4	§ 15.247 (e)	RSS-247 5.2 (b)	Power Spectral Density	P	N/A
--	§15.247(d)	RSS-247 5.5	Emission limitations Conducted (Transmitter)	N/A	Refer 1
B.5	§15.247 (d)	RSS-247 5.5	Emission limitations Radiated (Transmitter)	P	N/A
<u>Supplementary information and remarks:</u> 1: Device has internal antenna.					

List of equipment used during the test

Conducted Measurements

Test system Rohde & Schwarz TS 8997:

CONTROL NUMBER	DESCRIPTION	LAST CALIBRATION	NEXT CALIBRATION
1039	Signal analyzer Rohde & Schwarz FSV40	2018/10	2020/10
1009	RF generator Rohde & Schwarz SMB100A	2019/08	2021/08
1042	RF generator Rohde & Schwarz SMBV100A	2018/01	2021/01
101	Climatic chamber Espec	2019/01	2020/01

Radiated Measurements

CONTROL NUMBER	DESCRIPTION	LAST CALIBRATION	NEXT CALIBRATION
1179	Semi anechoic Absorber Lined Chamber Frankonia SAC 3 plus "L"	N/A	N/A
1064	BiconicalLog antenna ETS LINDGREN 3142E	2017/03	2020/03
1057	Double-ridge Waveguide Horn antenna 1-18 GHz	2017/03	2020/03
1056	Double-ridge Waveguide Horn antenna 18-40 GHz	2017/03	2020/03
1012	Rohde & Schwarz EMI Test Receiver ESR26	2018/09	2020/09
1014	Spectrum analyzer Rohde & Schwarz FSV40	2019/04	2021/04
0981	RF pre-amplifier 1-18 GHz Bonn Elektronik BLMA 0118-2A	2018/10	2021/05
1015, 1017, 1019, 1020	Rohde & Schwarz EMC32 software	N/A	N/A

Appendix A: Test results (Bluetooth EDR)

Appendix A Content

PRODUCT INFORMATION12

DESCRIPTION OF TEST CONDITIONS13

TEST A.1: 20DB EMISSION BANDWIDTH, OCCUPIED BANDWIDTH AND CARRIER
FREQUENCY SEPARATION14

TEST A.2: NUMBER OF HOPPING CHANNELS.....30

TEST A.3: TIME OF OCCUPANCY (DWELL TIME)34

TEST A.4: MAXIMUM PEAK CONDUCTED OUTPUT POWER AND ANTENNA GAIN.....38

TEST A.5: BAND-EDGE EMISSIONS COMPLIANCE (TRANSMITTER).....44

TEST A.6: EMISSION LIMITATIONS RADIATED (TRANSMITTER).....57

PRODUCT INFORMATION

The following information is provided by the client

Information	Description
Modulation	FHSS
Adaptive	Adaptive equipment
Operating Frequency Range	2400 – 2483.5 MHz
Nominal Channel Bandwidth	20 MHz
RF Output Power	16 dBm
Extreme operating conditions	
- Temperature range	-40 °C to +70 °C
Antenna type	BT/WLAN Automotive Chip Antenna
Antenna gain	-4 dBi
Nominal Voltage	
- Supply Voltage	13.5 Vdc
- Type of power source	DC voltage
Equipment type	Bluetooth EDR
Geo-location capability	No

DESCRIPTION OF TEST CONDITIONS

TEST CONDITIONS	DESCRIPTION
TC#01	<u>Power supply (V):</u> $V_{\text{nominal}} = 13.5 \text{ Vdc}$ <u>Modulation:</u> GFSK <u>Test Frequencies for conducted/Radiated tests:</u> Lowest range: 2402 MHz Middle channel: 2441 MHz Highest range: 2480 MHz
TC#02	<u>Power supply (V):</u> $V_{\text{nominal}} = 13.5 \text{ Vdc}$ <u>Modulation:</u> PI/4-DQPSK <u>Test Frequencies for Conducted/Radiated tests:</u> Lowest range: 2402 MHz Middle channel: 2441 MHz Highest range: 2480 MHz
TC#03	<u>Power supply (V):</u> $V_{\text{nominal}} = 13.5 \text{ Vdc}$ <u>Modulation:</u> 8-DPSK <u>Test Frequencies for Conducted/Radiated tests:</u> Lowest range: 2402 MHz Middle channel: 2441 MHz Highest range: 2480 MHz


TEST A.1: 20DB EMISSION BANDWIDTH, OCCUPIED BANDWIDTH AND CARRIER FREQUENCY SEPARATION

LIMITS:	Product standard:	§ 2.1049, Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(a) (1) and RSS-247 5.1 (b)

LIMITS

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST SETUP:

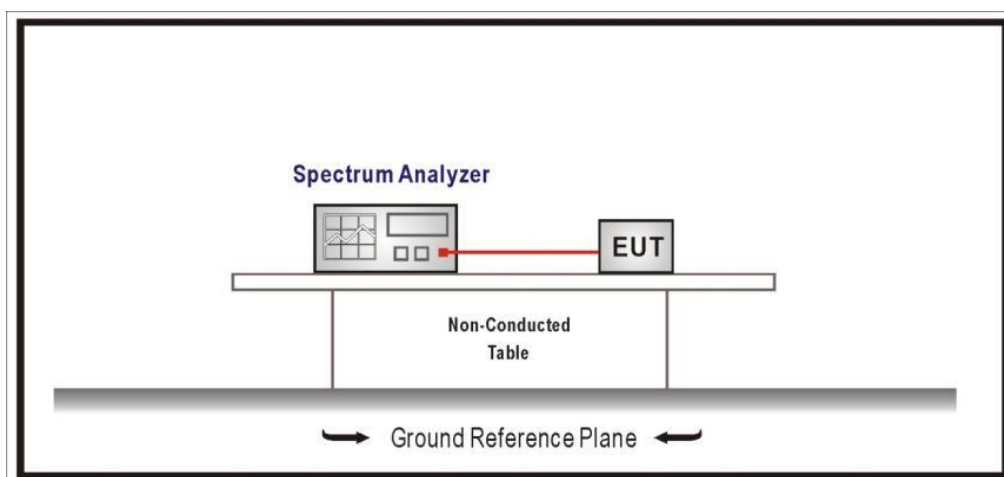

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
20dB Bandwidth (kHz)	930	930	930
Occupied bandwidth (kHz)	885	885	885
Measurement uncertainty (kHz)	<± 1.80		


Measurement Set up

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100 GHz	2.43900 GHz	2.47900 GHz
Stop Frequency	2.40300 GHz	2.44100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz	2.000 MHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	400	400	400
Sweep time	189.648 µs	189.648 µs	189.648 µs
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	13 / max. 150	17 / max. 150	11 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.07 dB	0.04 dB	0.03 dB


TEST RESULTS (Cont.):

20 dB BANDWIDTH


Lowest Channel

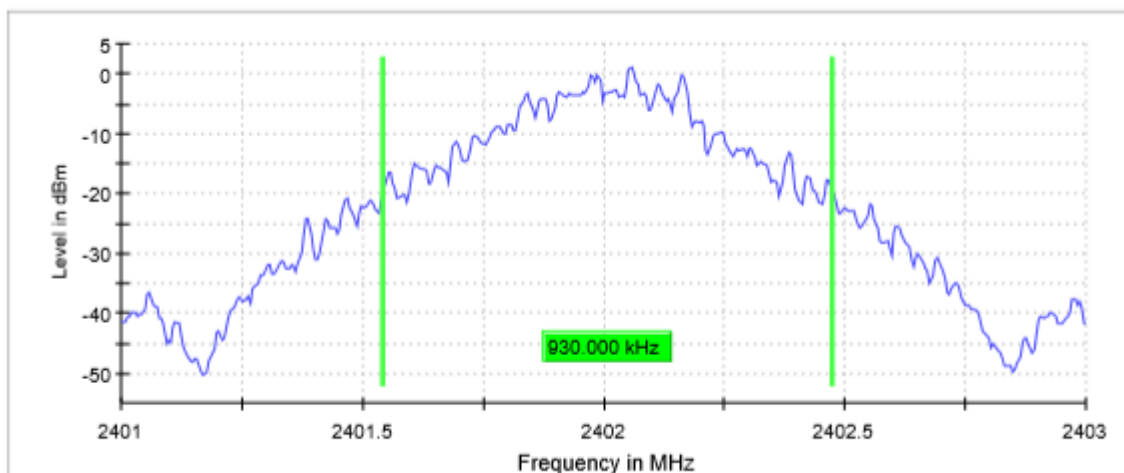

Middle Channel

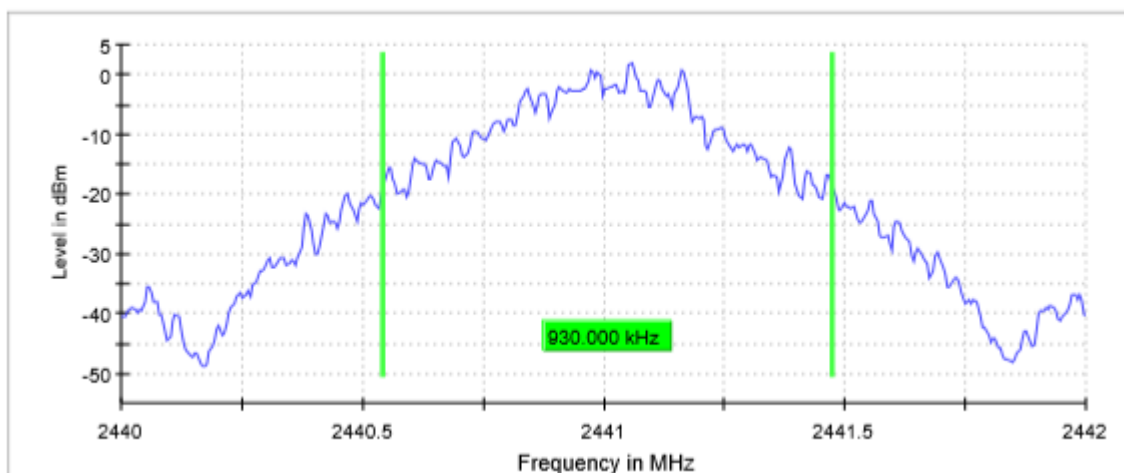


Highest Channel

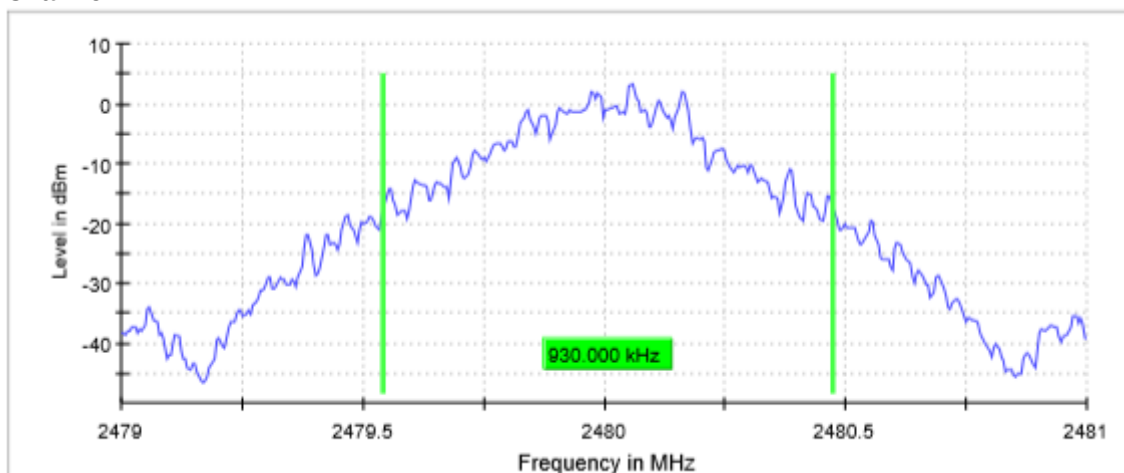


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH


Lowest Channel

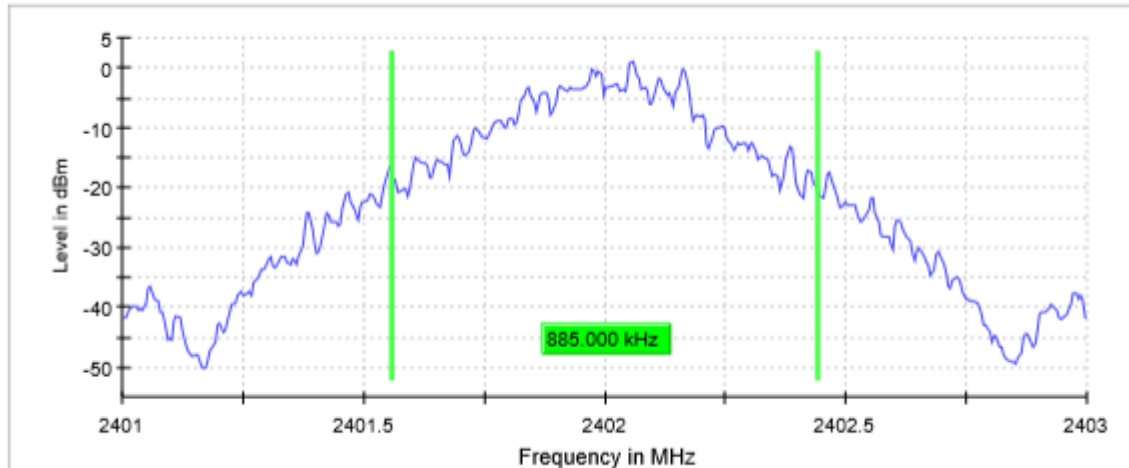

Middle Channel

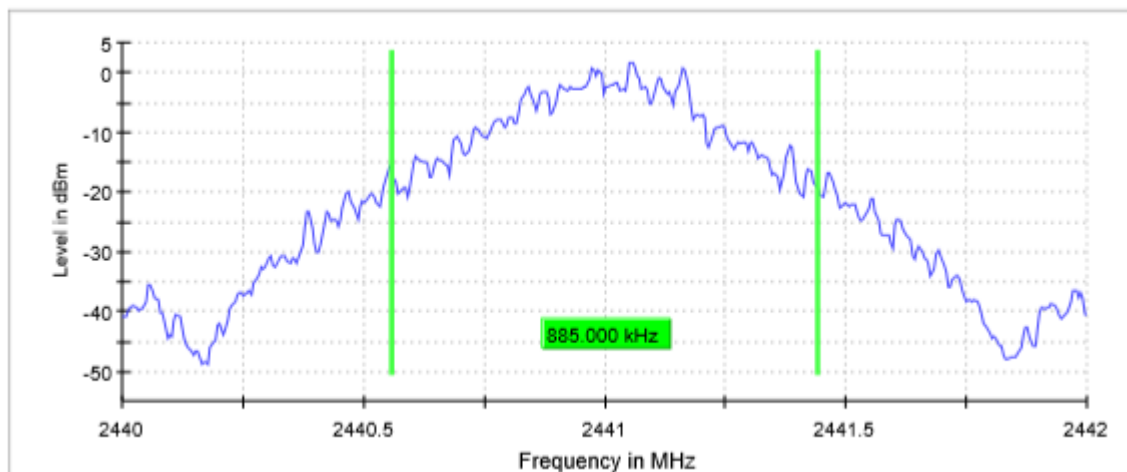

Highest Channel

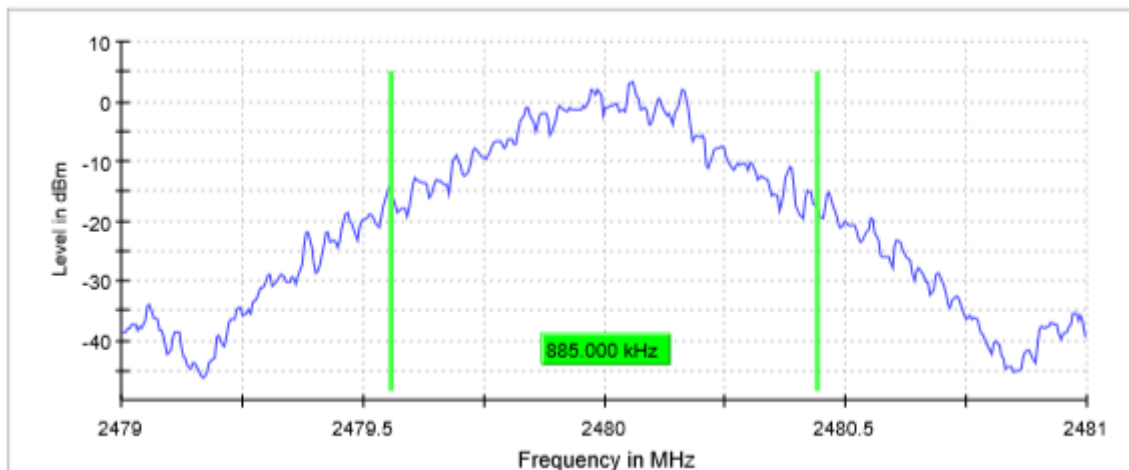

TEST RESULTS (Cont.):


OCCUPIED BANDWIDTH

Measurement Set- up

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100 GHz	2.43900 GHz	2.47900 GHz
Stop Frequency	2.40300 GHz	2.44100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz	2.000 MHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	400	400	400
Sweep time	189.648 μ s	189.648 μ s	189.648 μ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	500	500	500
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamplifier	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	6 / max. 150	6 / max. 150	7 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.05 dB	0.11 dB	0.06 dB

TEST RESULTS (Cont.)

CARRIER FREQUENCY SEPARATION

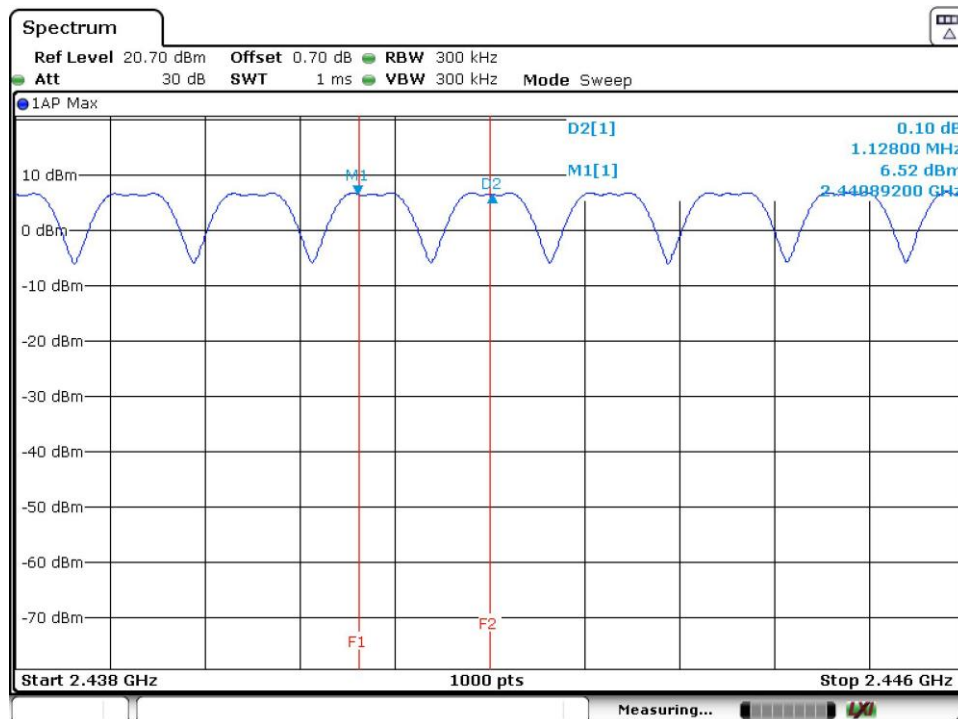

The hopping channel carrier frequencies are separated by a minimum of the two-thirds of the 20dB bandwidth of the hopping channel.

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02
TEST RESULTS:	PASS

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
20dB bandwidth (MHz)	1.230	1.230	1.260
Occupied bandwidth (MHz)	1.160	1.160	1.160
Measurement uncertainty (kHz)	<± 1.80		


Measurement Setup

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100 GHz	2.43900 GHz	2.47900 GHz
Stop Frequency	2.40300 GHz	2.44100 GHz	2.48100 GHz
Span	2.00 MHz	2.00 MHz	2.00 MHz
RBW	10.000 KHz	10.000 KHz	10.000 KHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	400	400	400
Sweep time	189.648 µs	189.648 µs	189.648 µs
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	8 / max. 150	8 / max. 150	10 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.15 dB	0.07 dB	0.12 dB


TEST RESULTS (Cont.):

20 dB BANDWIDTH


Lowest Channel

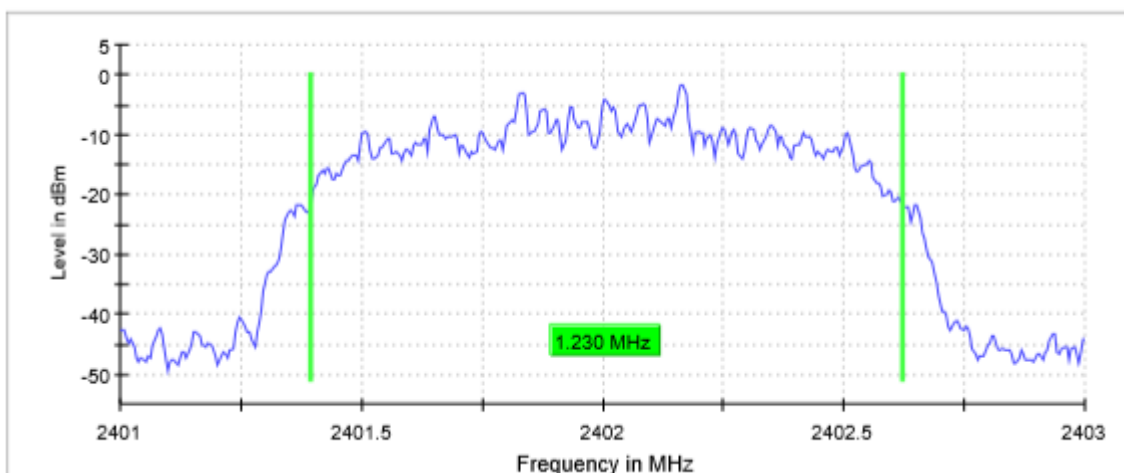

Middle Channel

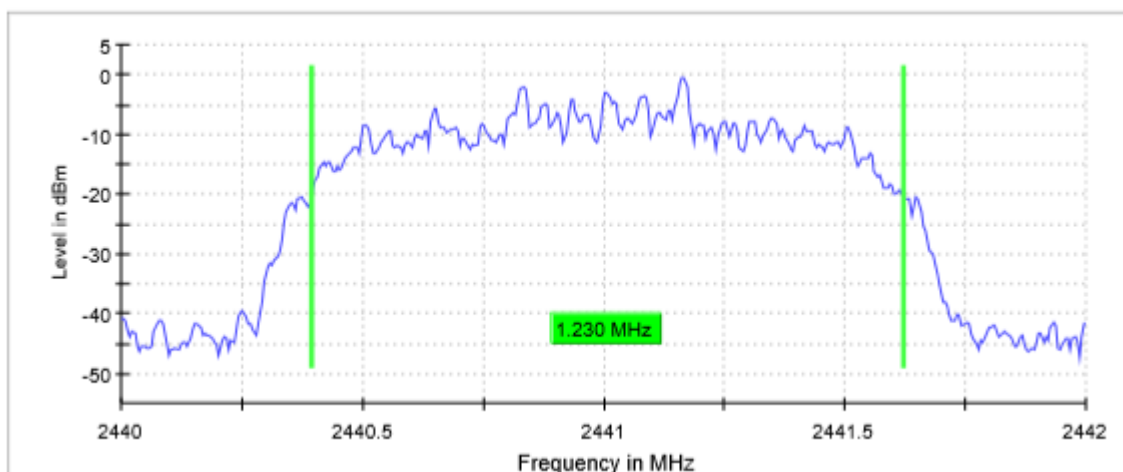


Highest Channel

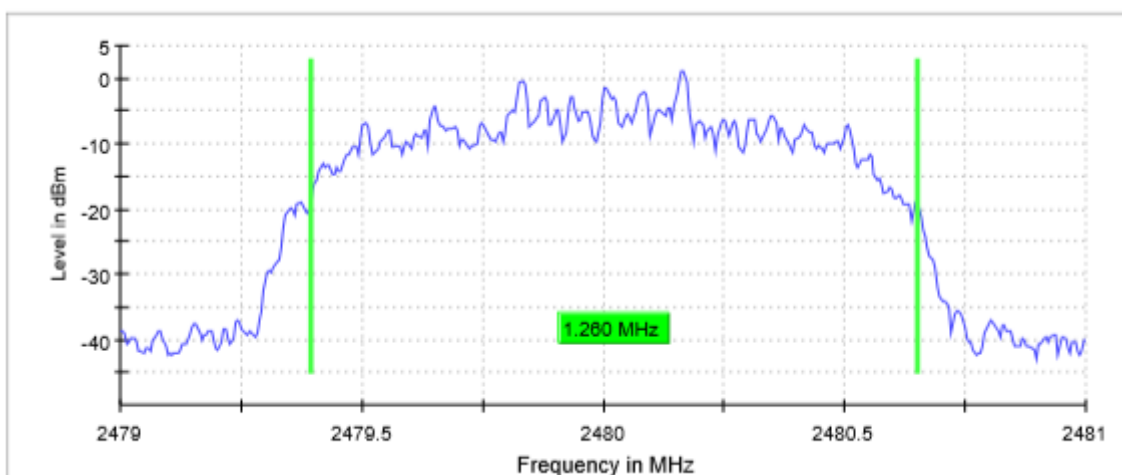


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH


Lowest Channel

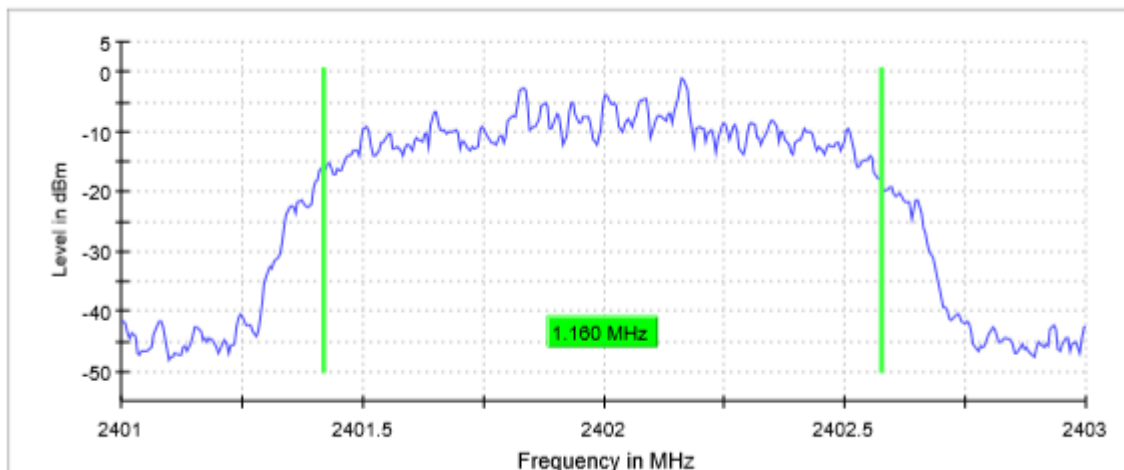

Middle Channel

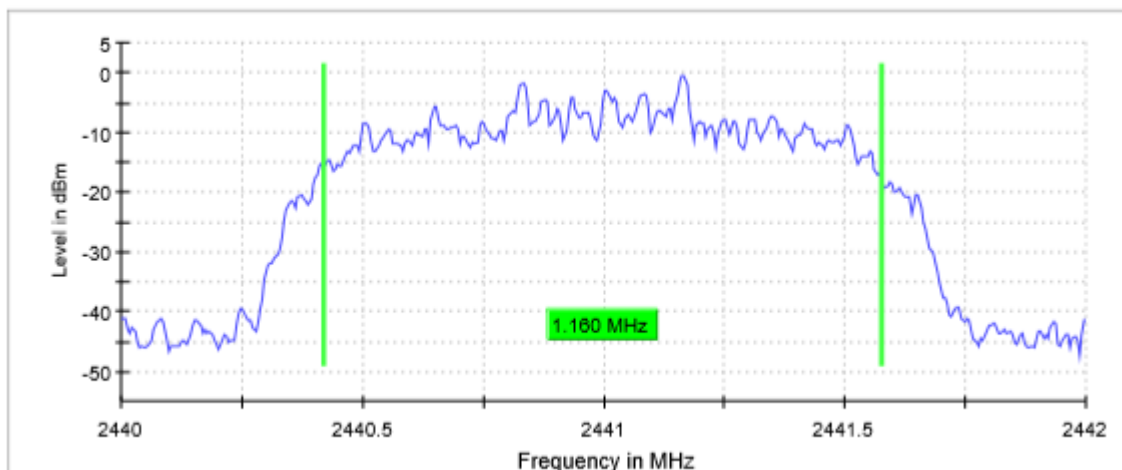

Highest Channel

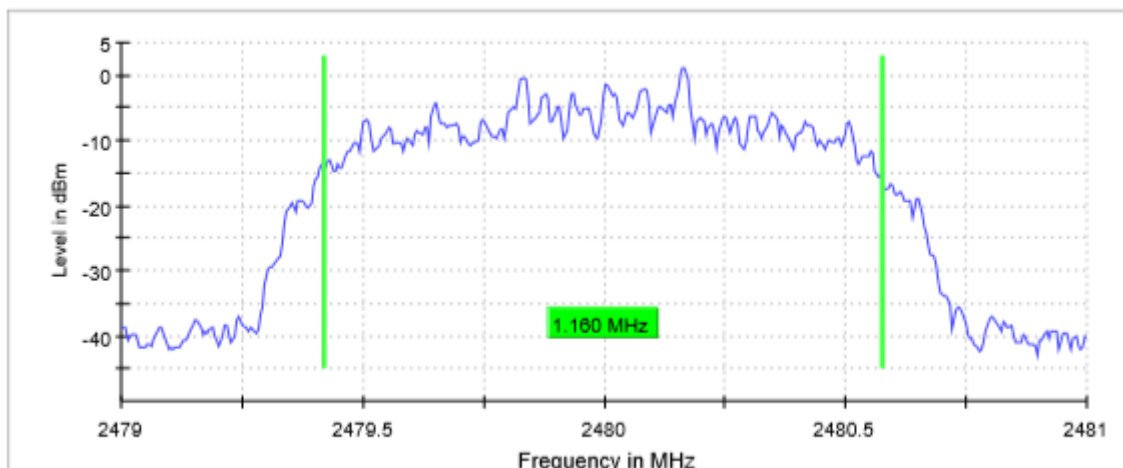

TEST RESULTS (Cont.):


OCCUPIED BANDWIDTH

Measurement Set- up

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100 GHz	2.43900 GHz	2.47900 GHz
Stop Frequency	2.40300 GHz	2.44100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz	2.000 MHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	400	400	400
Sweep time	189.648 μ s	189.648 μ s	189.648 μ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	500	500	500
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	12 / max. 150	6 / max. 150	6 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.09 dB	0.04 dB	0.05 dB

TEST RESULTS (Cont.)

CARRIER FREQUENCY SEPARATION

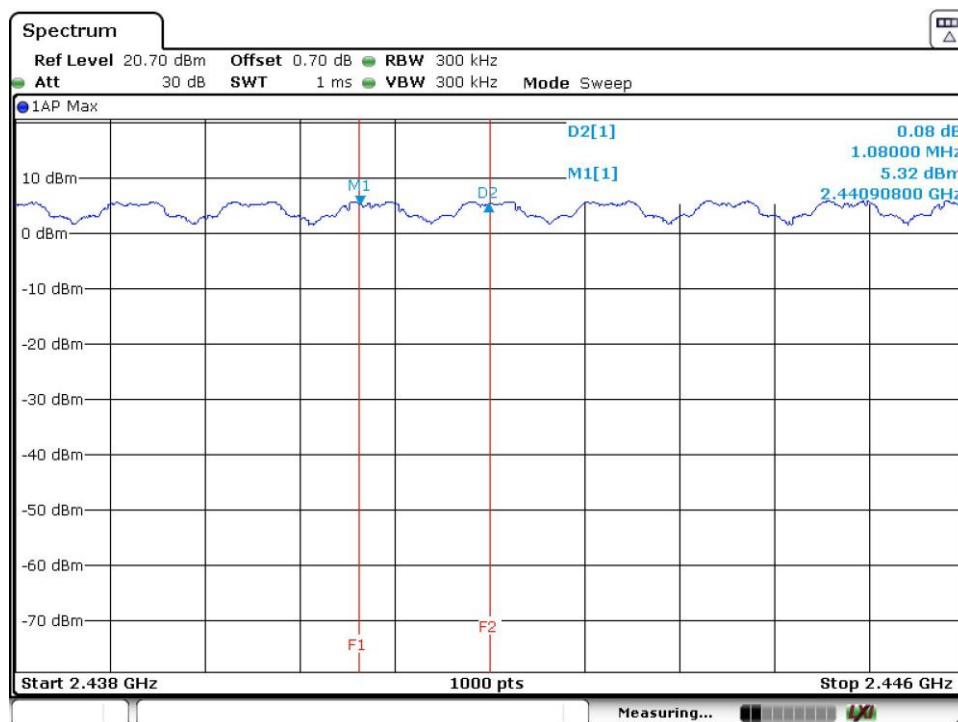

The hopping channel carrier frequencies are separated by a minimum of the two-thirds of the 20 dB bandwidth of the hopping channel.

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03
TEST RESULTS:	PASS

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
20dB bandwidth (MHz)	1.265	1.265	1.265
Occupied bandwidth (MHz)	1.175	1.175	1.175
Measurement uncertainty (kHz)	<± 1.80		


Measurement Setup

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100 GHz	2.43900 GHz	2.47900 GHz
Stop Frequency	2.40300 GHz	2.44100 GHz	2.48100 GHz
Span	2.00 MHz	2.00 MHz	2.00 MHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	400	400	400
Sweep time	189.648 µs	189.648 µs	189.648 µs
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamplifier	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	11 / max. 150	11 / max. 150	13 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.05 dB	0.02 dB	0.07 dB


TEST RESULTS (Cont.):

20 dB BANDWIDTH


Lowest Channel

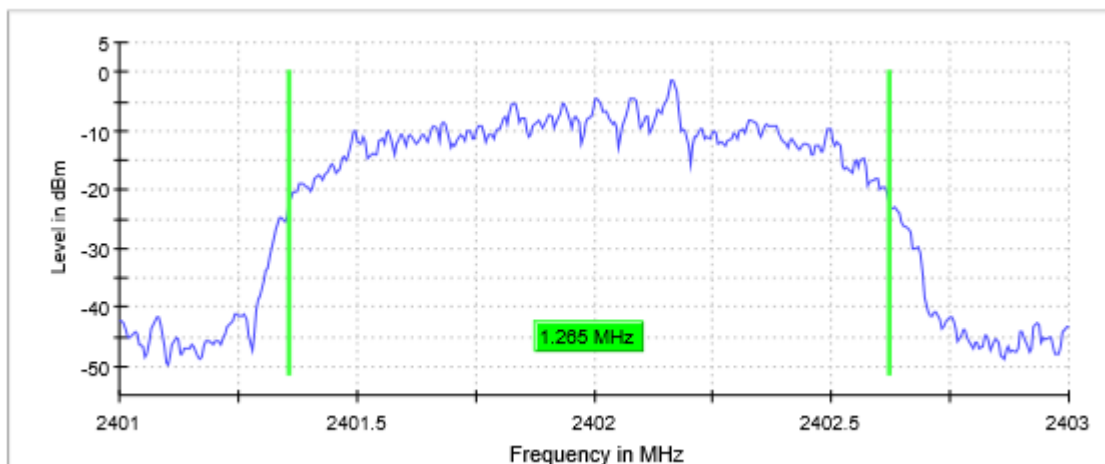

Middle Channel

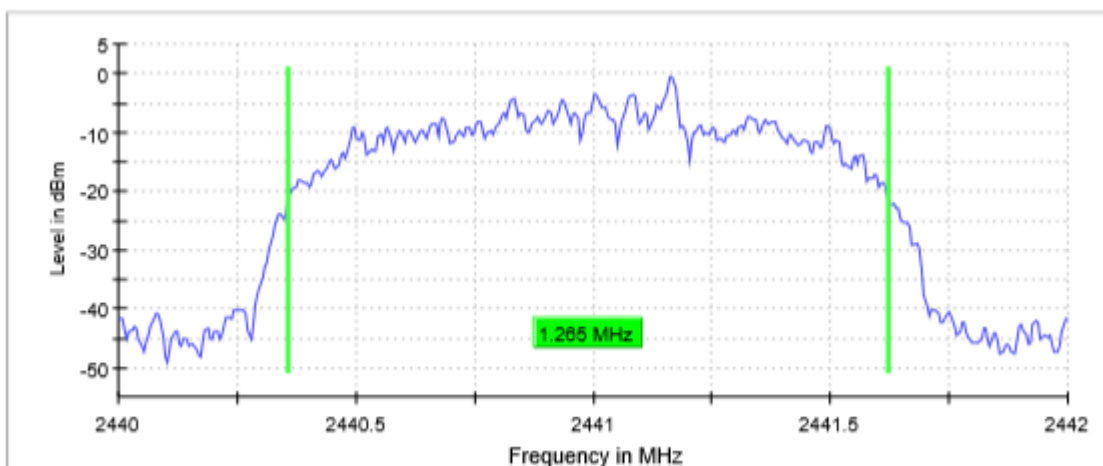


Highest Channel

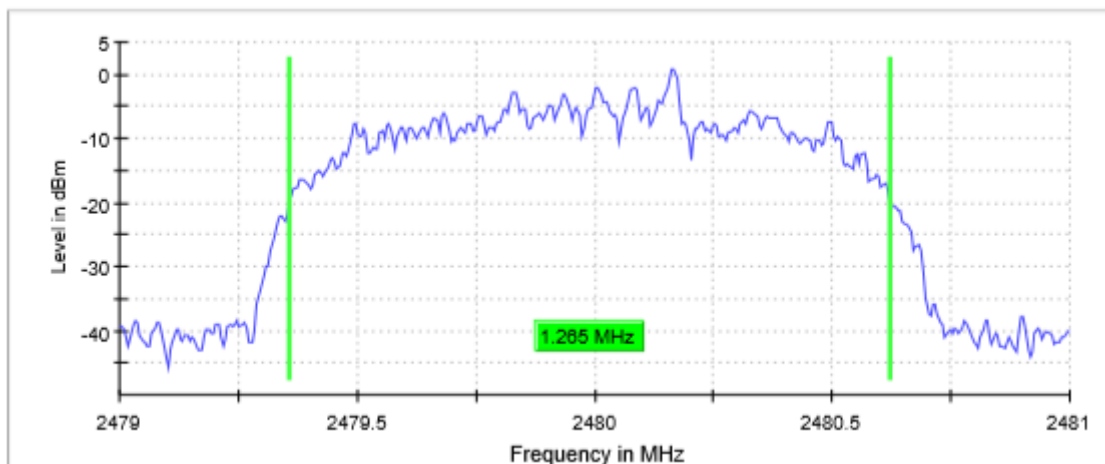


TEST RESULTS (Cont.)

OCCUPIED BANDWIDTH


Lowest Channel

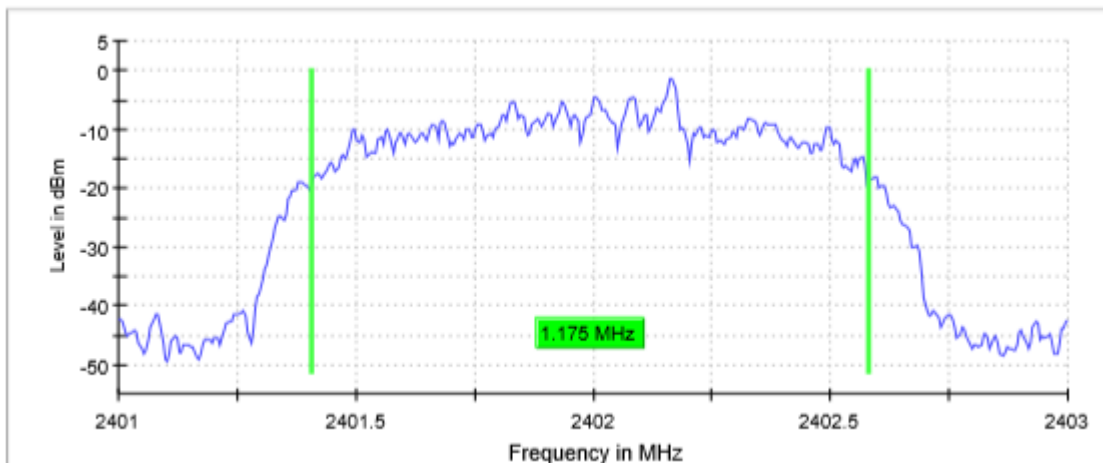

Middle Channel

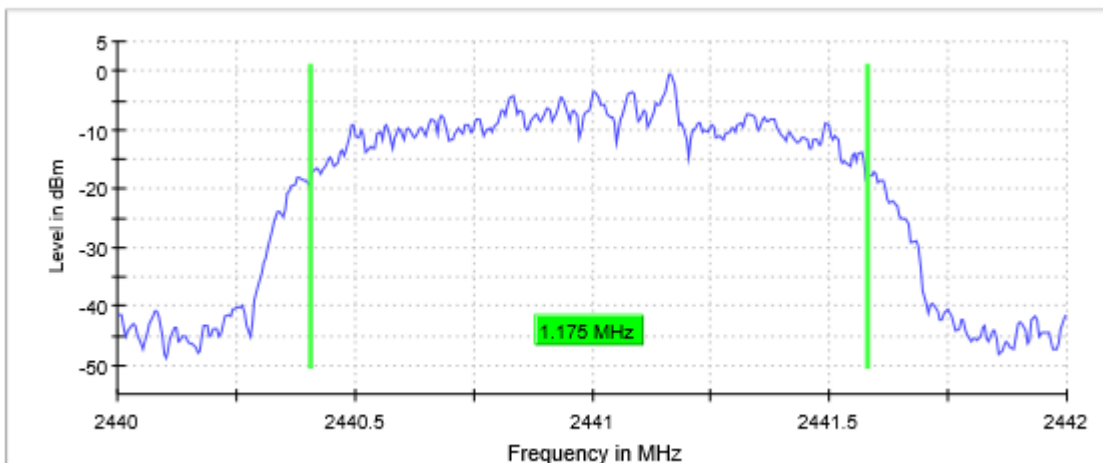

Highest Channel

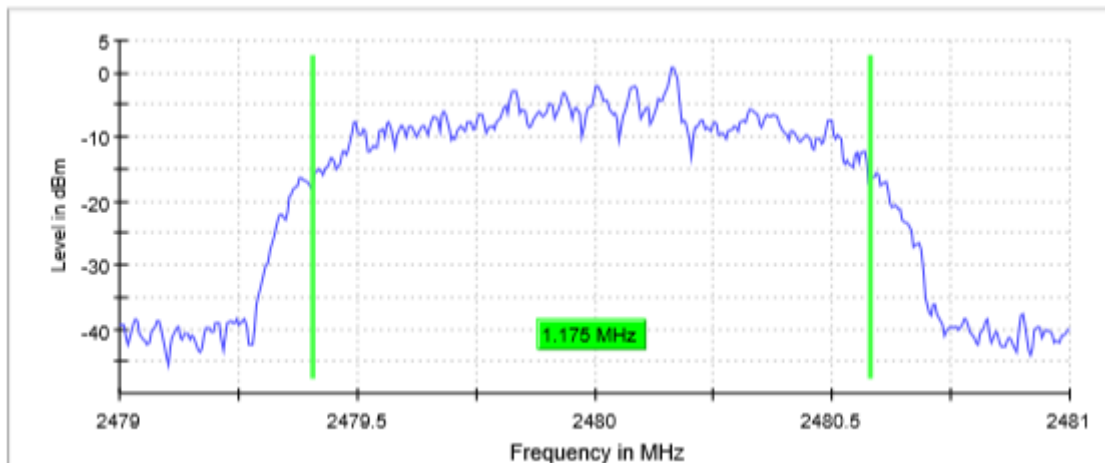

TEST RESULTS (Cont.):


OCCUPIED BANDWIDTH

Measurement Set- up

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100 GHz	2.43900 GHz	2.47900 GHz
Stop Frequency	2.40300 GHz	2.44100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz	2.000 MHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	400	400	400
Sweep time	189.648 μ s	189.648 μ s	189.648 μ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	500	500	500
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamplifier	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	6 / max. 150	6 / max. 150	5 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.24 dB	0.06 dB	0.20 dB

TEST RESULTS (Cont.)

CARRIER FREQUENCY SEPARATION

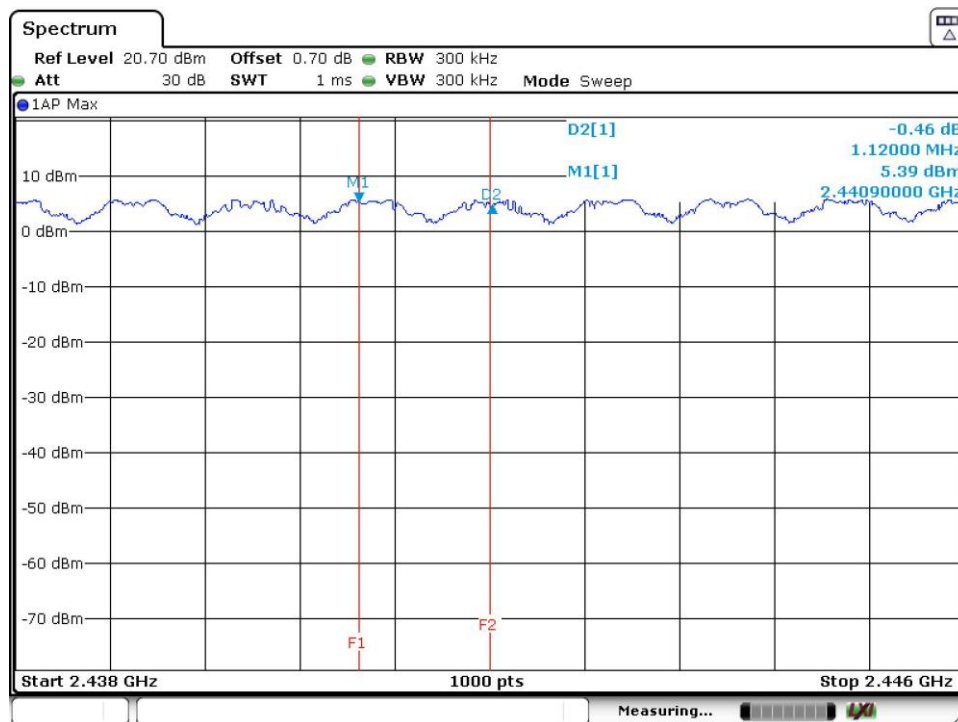

The hopping channel carrier frequencies are separated by a minimum of the two-thirds of the 20 dB bandwidth of the hopping channel.


TEST A.2: NUMBER OF HOPPING CHANNELS

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(a) (1) (iii) and RSS-247 5.1 (d)



LIMITS

Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 channels.

TEST SETUP:


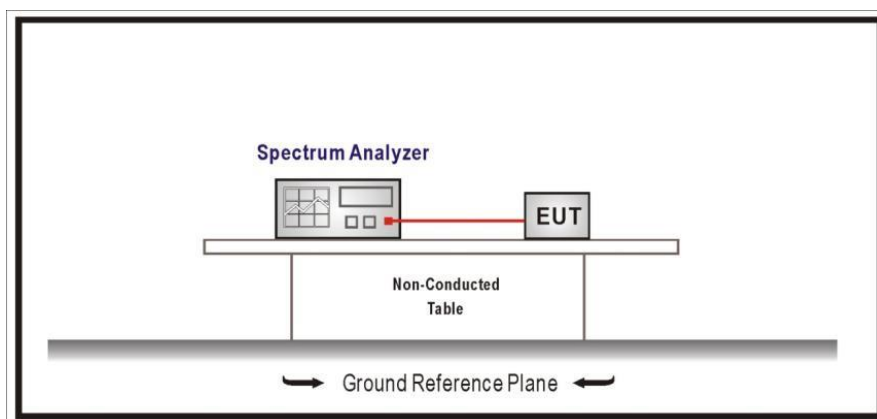


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

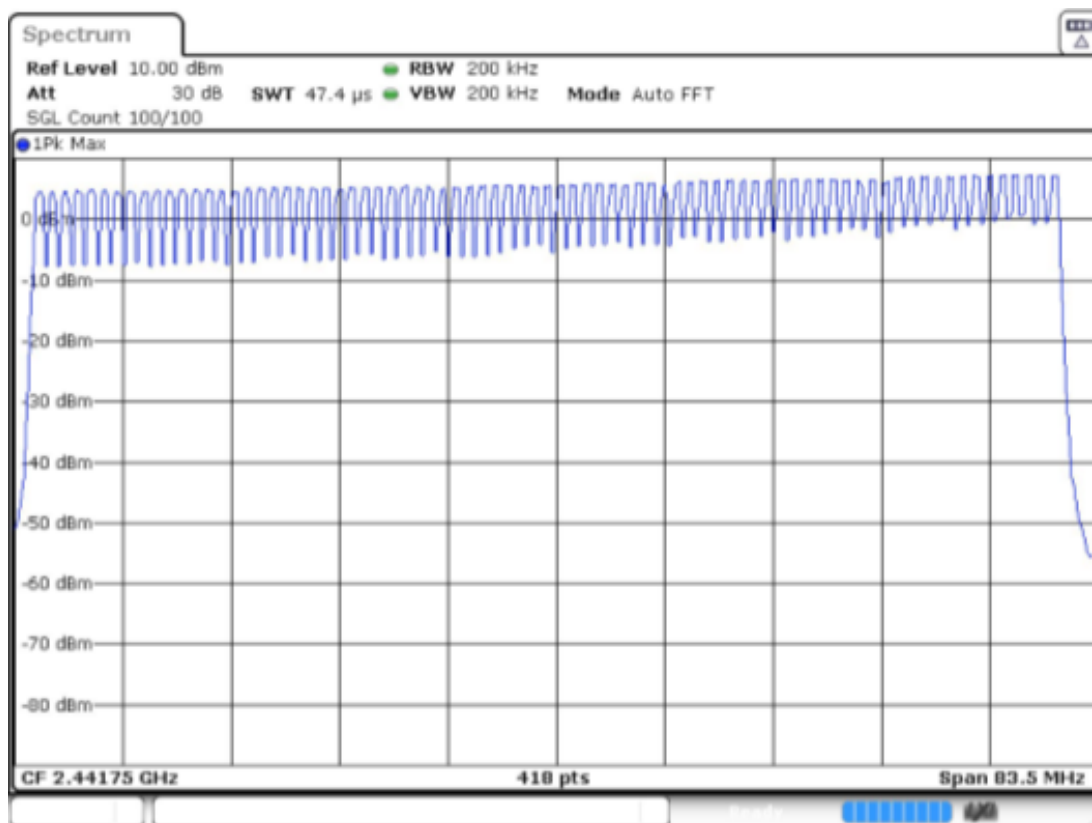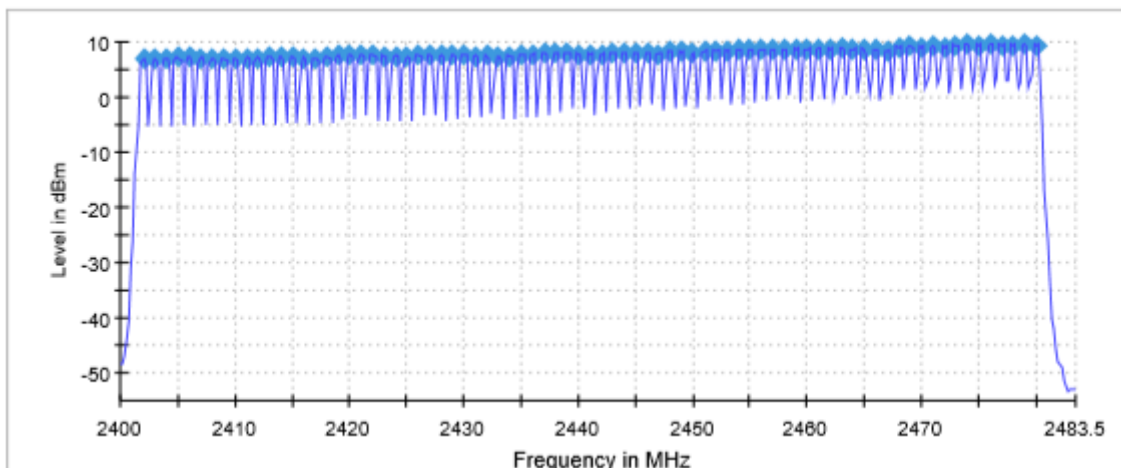



Number of Hopping Frequencies: 79

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02
TEST RESULTS:	PASS

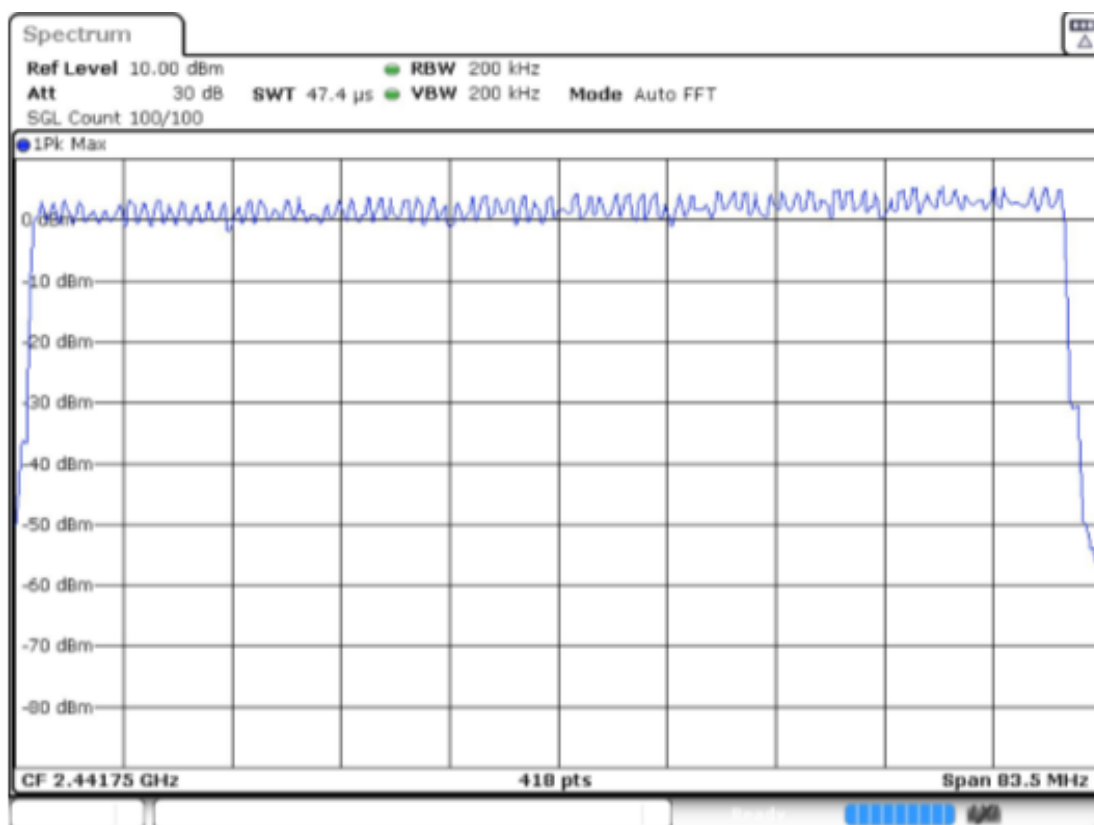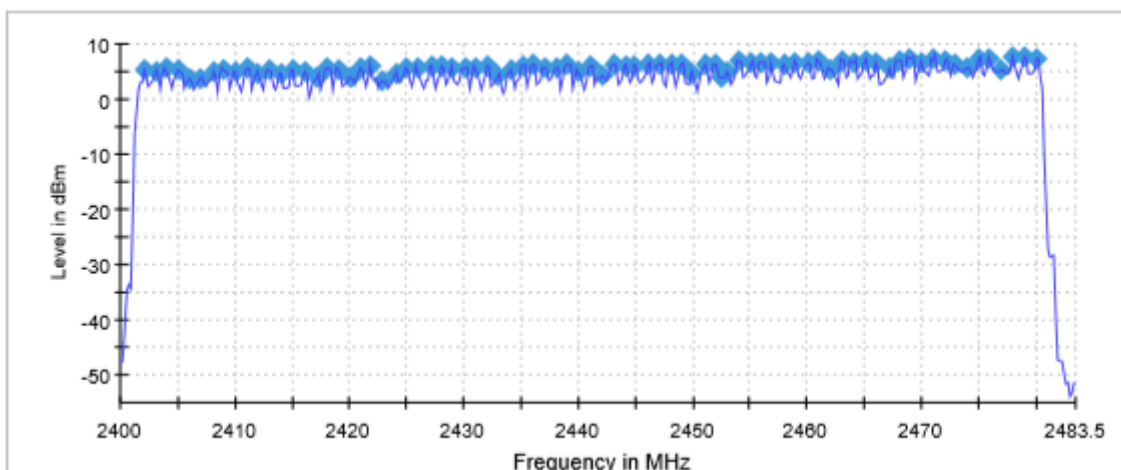

Number of Hopping Frequencies: 79

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03
TEST RESULTS:	PASS

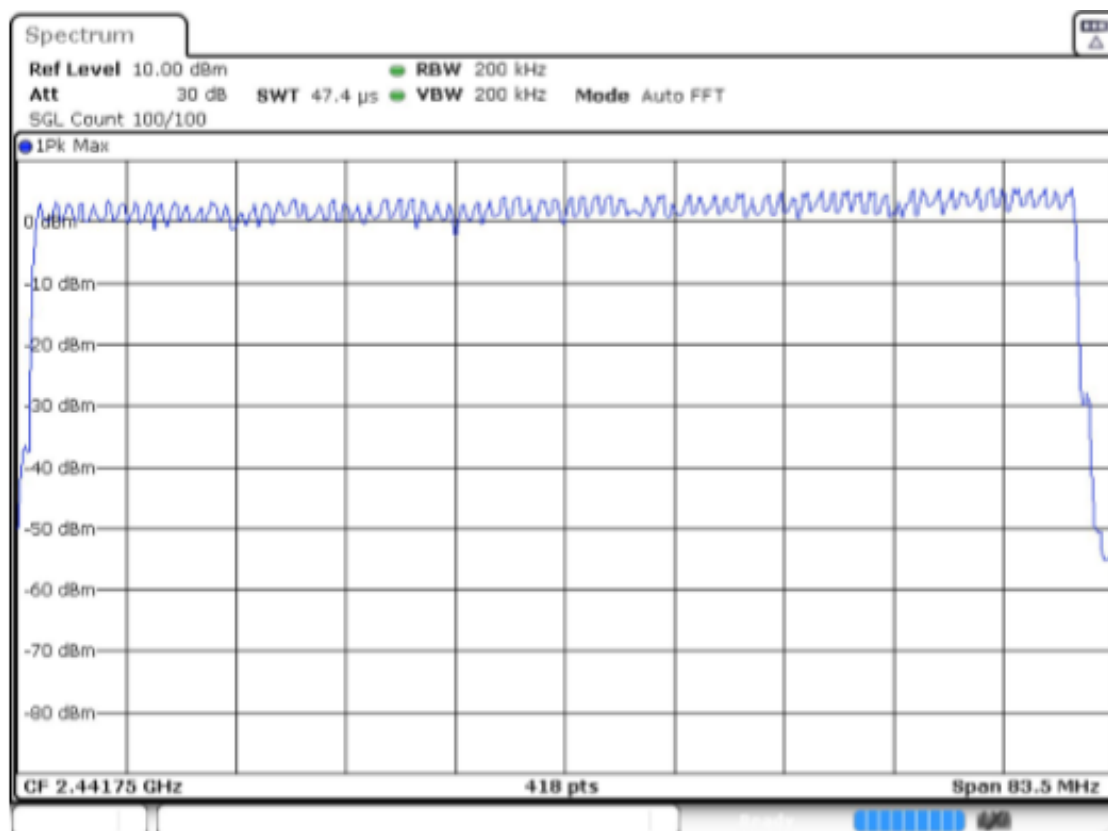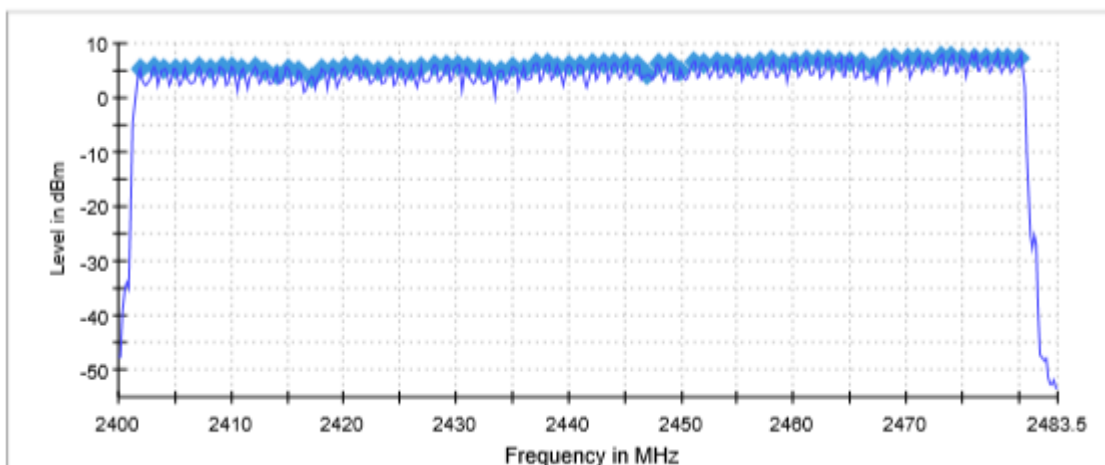

Number of Hopping Frequencies: 79


TEST A.3: TIME OF OCCUPANCY (DWELL TIME)

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(a)(1)(iii) and RSS-247 5.1(d)

LIMITS



The average time of occupancy on any channel shall not be greater than 0.4 seconds (400 ms) within a period of 0.4 seconds multiplied by the number of hopping channels employed = $0.4 \times 79 = 31.6$ seconds.

TEST SETUP:

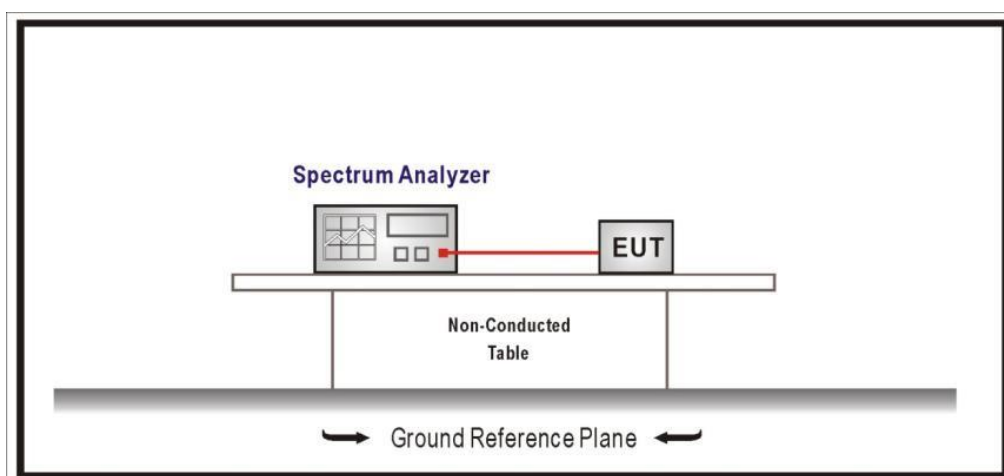

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (GFSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	PACKET TYPE DH5

Transmit Time per Hop: 2.868 ms

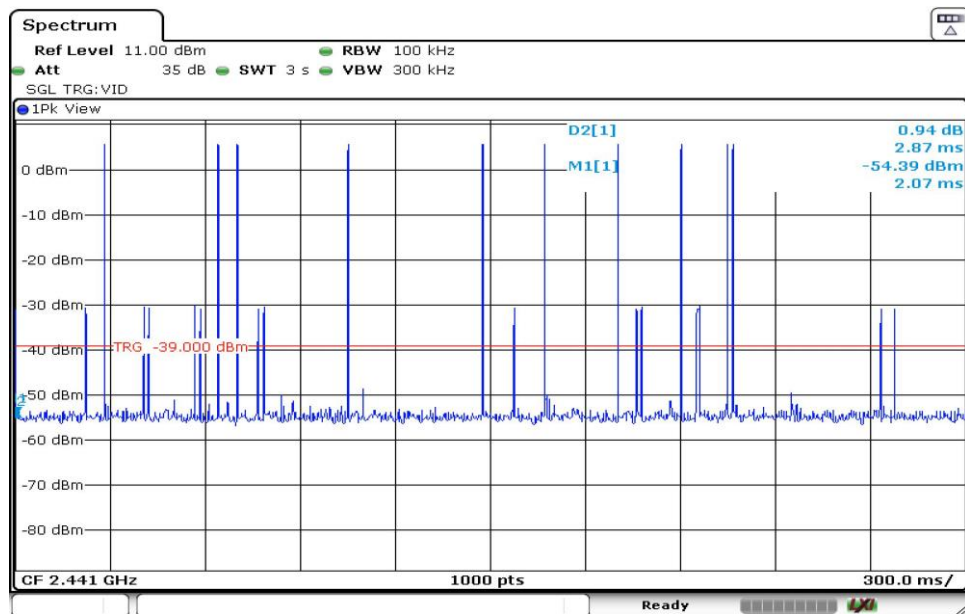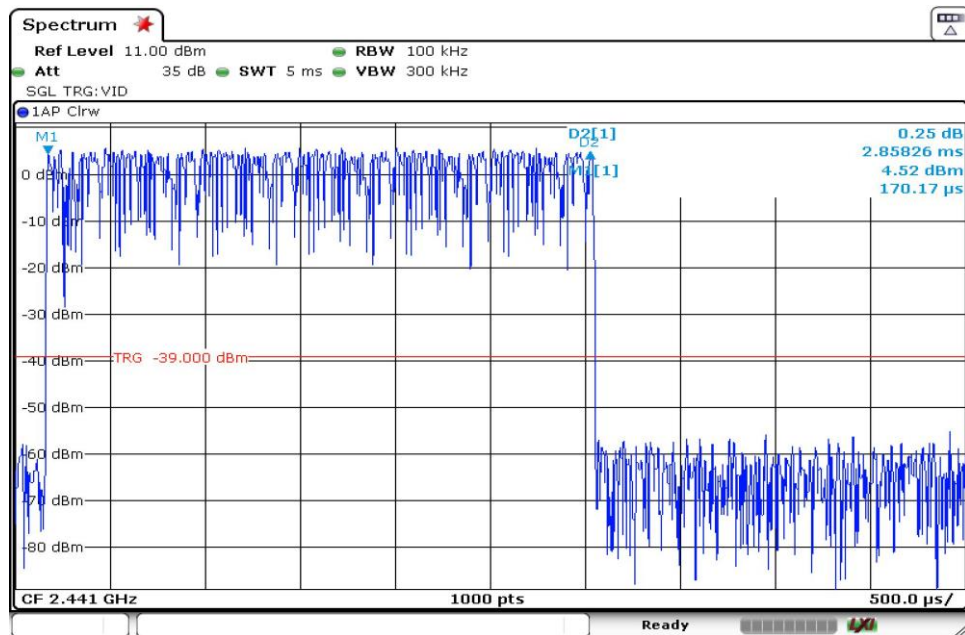



Number of hops over a period of 3 seconds: 10 hops.

Number of hops in the period specified in the requirements = (10 hops) x (31.6 s / 3 s) = 105.33 hops.
Averaging time of occupancy = 2.868 ms x 105.33 hops = 302.08 ms per 31.6 seconds.

Measurement uncertainty (%)	<±0.12
-----------------------------	--------

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (PI4DQPSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	PACKET TYPE 2DH5

Transmit Time per Hop: 2.849 ms

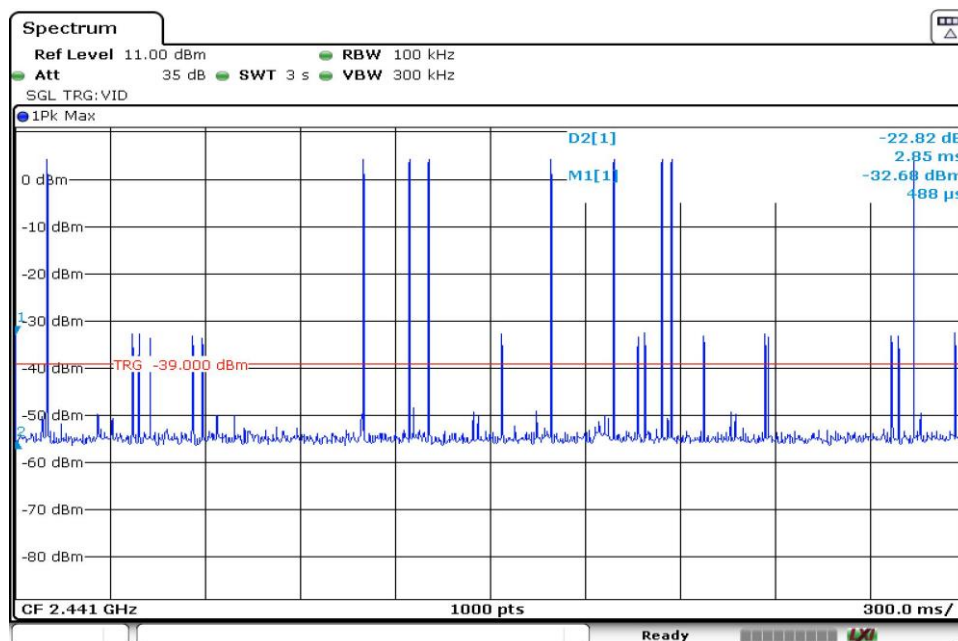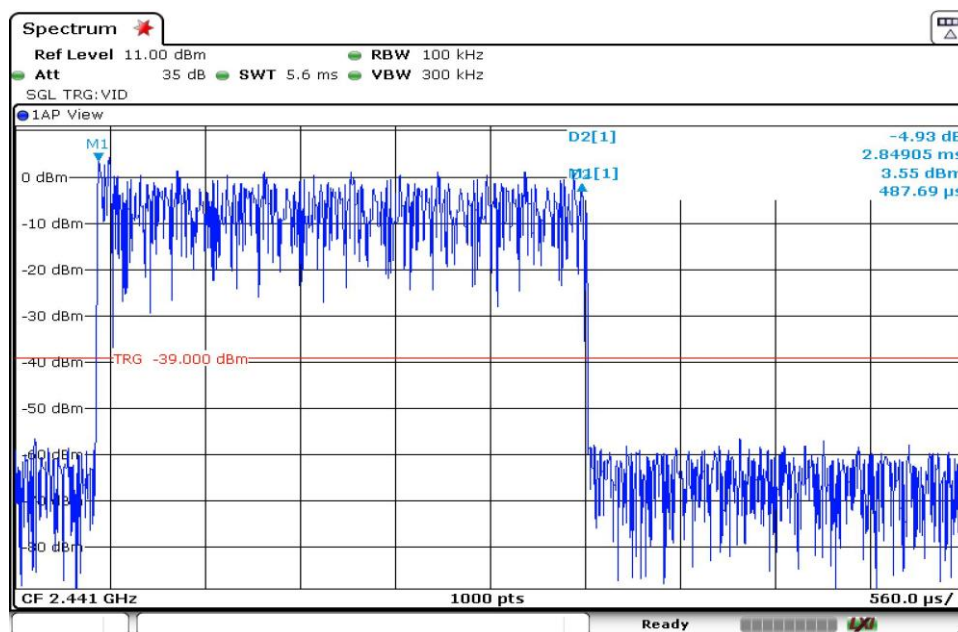

Number of hops over a period of 3 seconds: 9 hops.



Number of hops in the period specified in the requirements = (9 hops) x (31.6 s / 3 s) = 94.8 hops.

Averaging time of occupancy = 2.849 ms x 94.8 hops = 270.08 ms per 31.6 seconds.

Measurement uncertainty (%)	<±0.12
-----------------------------	--------

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (8DPSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	PACKET TYPE 3DH5

Transmit Time per Hop: 2.872

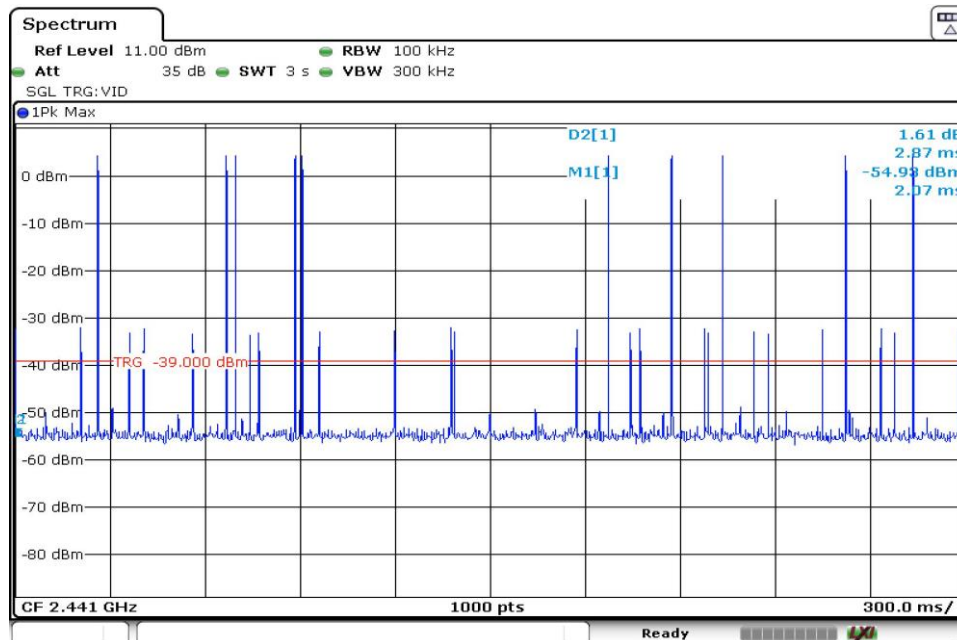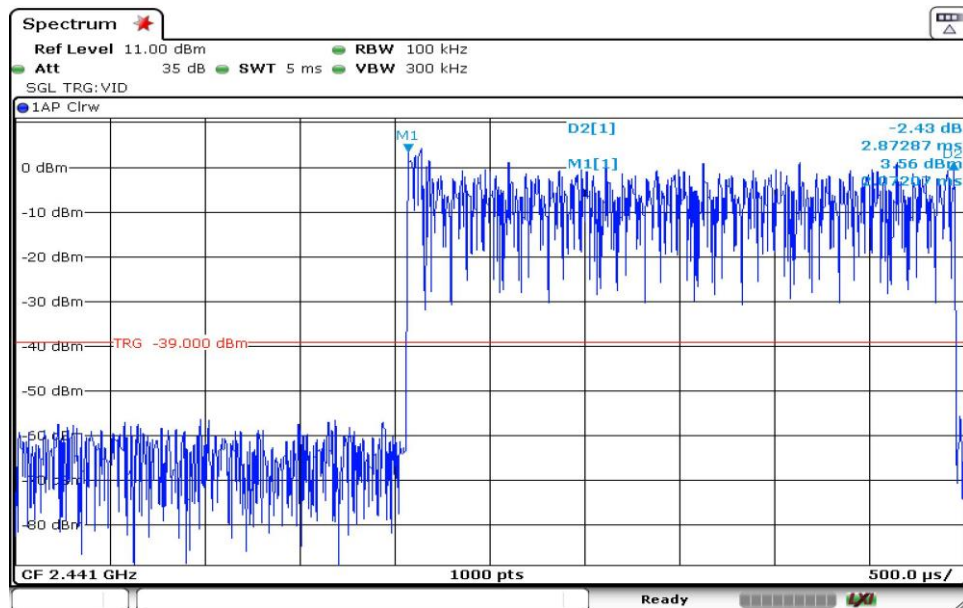

Number of hops over a period of 3 seconds: 10 hops.

Number of hops in the period specified in the requirements = (10 hops) x (31.6 s / 3 s) = 105.33 hops.
Averaging time of occupancy = 2.872 ms x 105.33 hops = 302.50 ms per 31.6 seconds.

Measurement uncertainty (%)

<±0.12

TEST A.4: MAXIMUM PEAK CONDUCTED OUTPUT POWER AND ANTENNA GAIN

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(b) (3) and RSS-247 5.4(b)


LIMITS

For Frequency Hopping systems operating in the 2400 – 2483.5 MHz band employing at least 75 hopping channels: 1 watt (30 dBm). (Part 15 Subpart C §15.247).

The e.i.r.p. shall not exceed 4 W (RSS-247).

TEST SETUP

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power

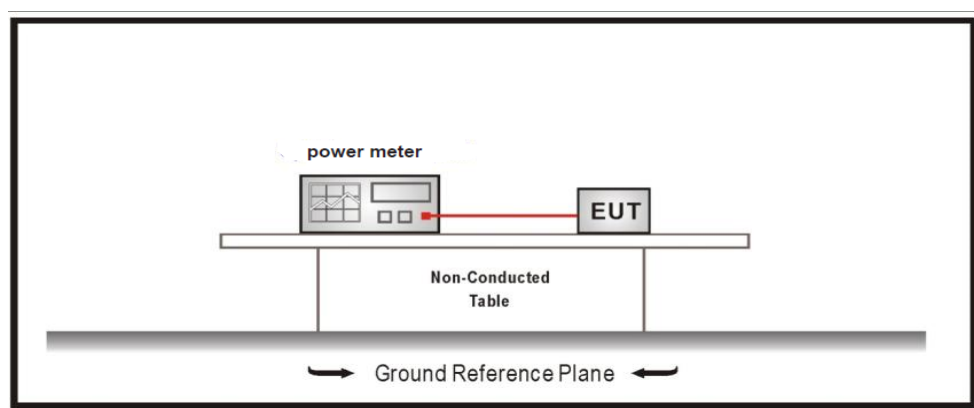

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

Maximum declared antenna gain: -4 dBi


	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Maximum conducted power (dBm)	6.7	7.5	8.9
Maximum EIRP power (dBm)	2.7	3.5	4.9
Measurement uncertainty (dB)	<±0.78		

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.


TEST RESULTS (Cont.):

CONDUCTED OUTPUT POWER


Lowest Channel

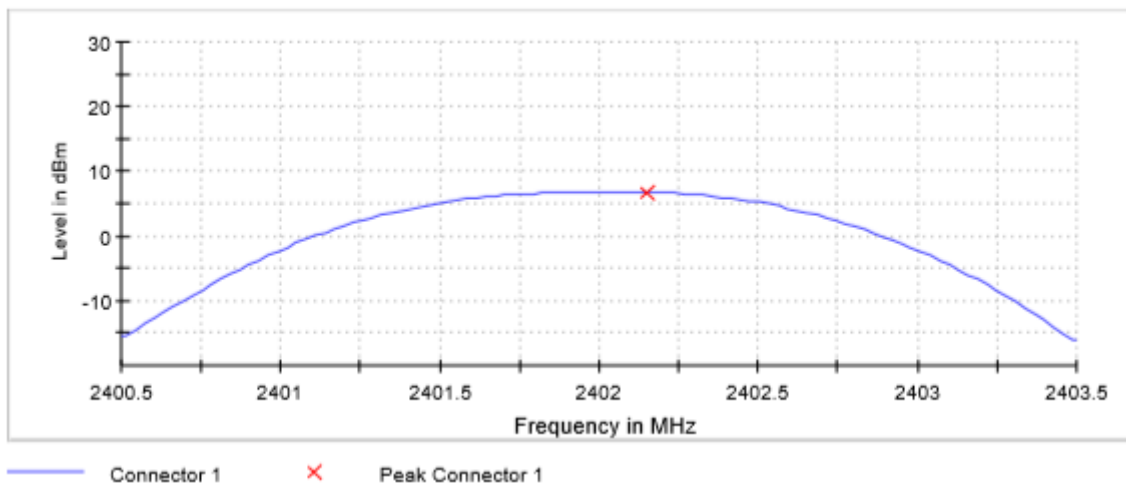

Middle Channel

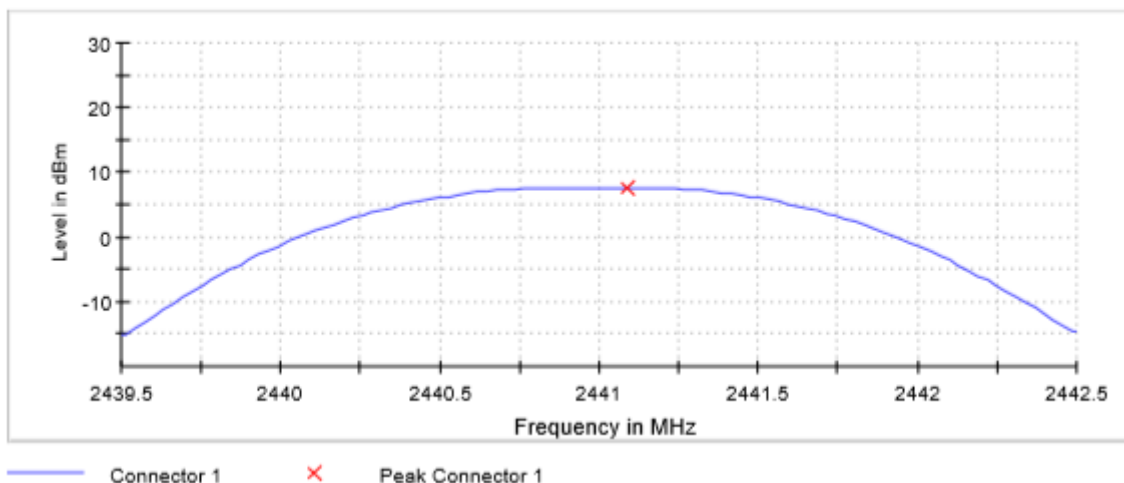

Highest Channel

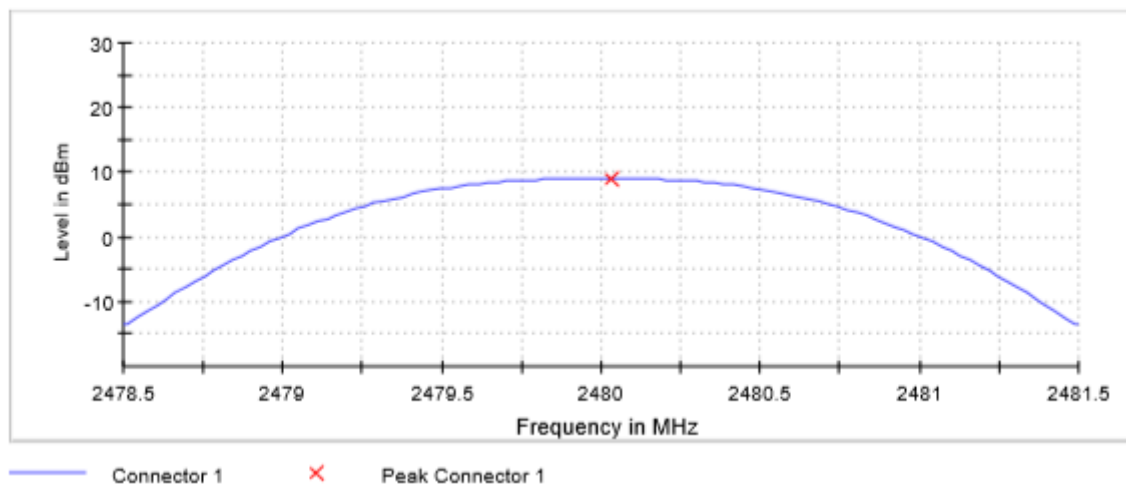


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02
TEST RESULTS:	PASS

Maximum declared antenna gain: -4 dBi

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Maximum conducted power (dBm)	6.0	6.9	8.4
Maximum EIRP power (dBm)	2	2.9	4.4
Measurement uncertainty (dB)	<±0.78		

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.


Lowest Channel

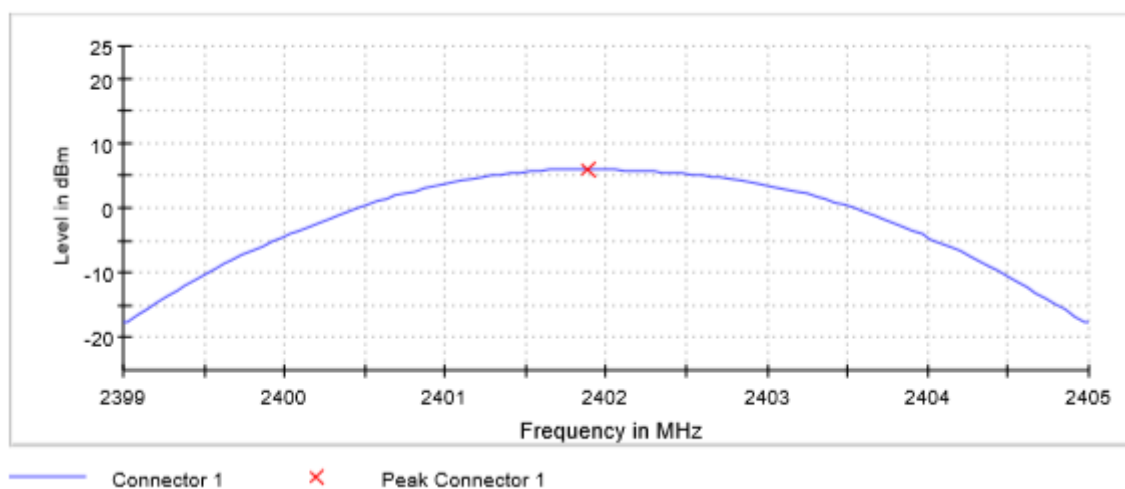


TEST RESULTS (Cont.)

CONDUCTED OUTPUT POWER

Middle Channel

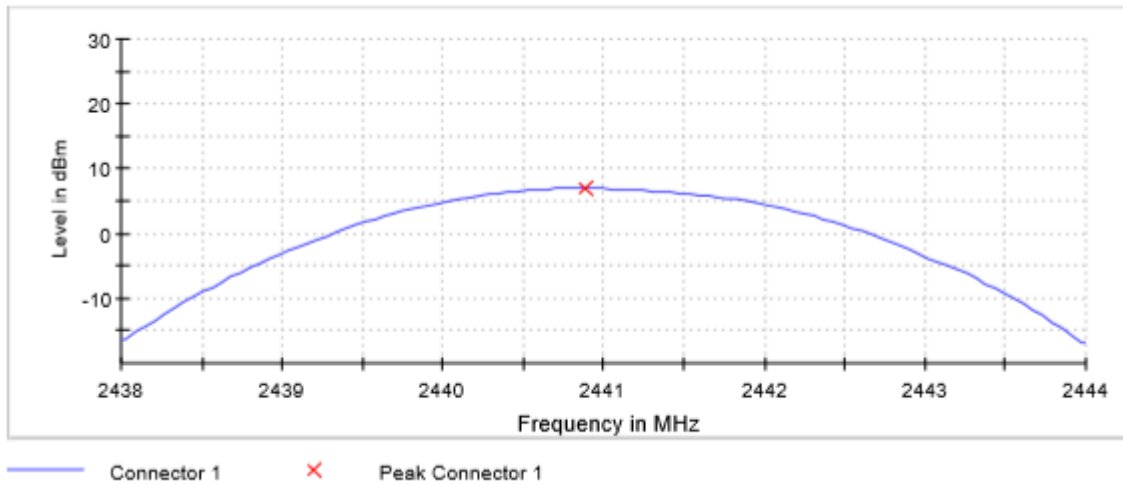

Highest Channel

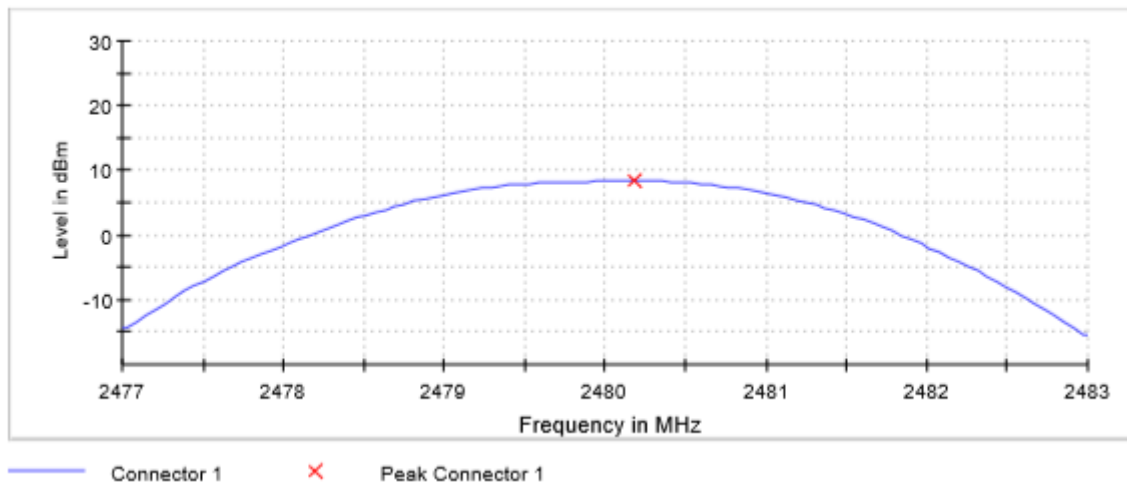


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03
TEST RESULTS:	PASS

Maximum declared antenna gain: -4 dBi

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Maximum conducted power (dBm)	6.2	7.2	8.9
Maximum EIRP power (dBm)	2.2	3.2	4.9
Measurement uncertainty (dB)	<±0.78		


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

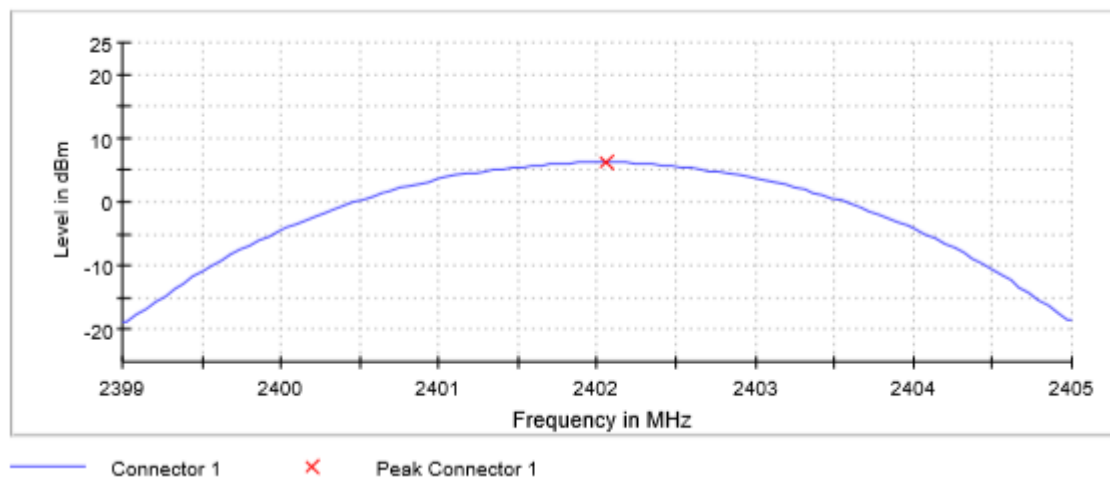


TEST RESULTS (Cont.)

Middle Channel

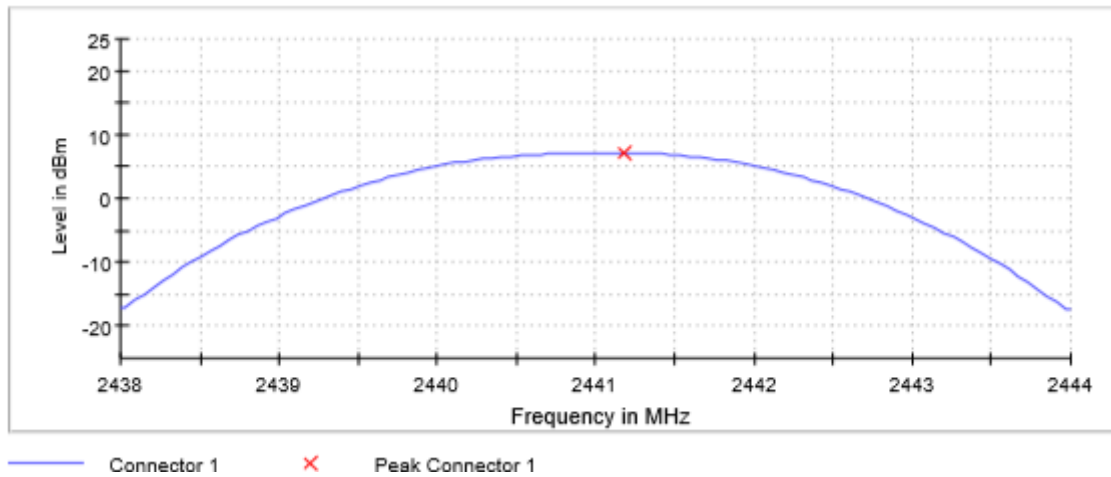

Highest Channel

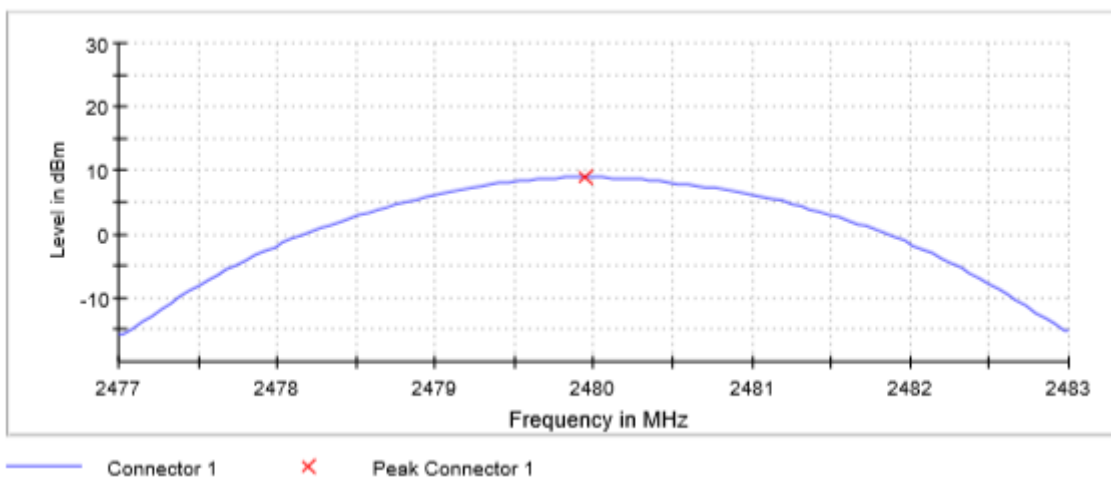


TEST A.5: BAND-EDGE EMISSIONS COMPLIANCE (TRANSMITTER)

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(d) and RSS-247 5.5


LIMITS

Emissions outside the frequency band in which the intentional radiator is operating shall be at least 20dB below the highest level of the desired power.

TEST SETUP

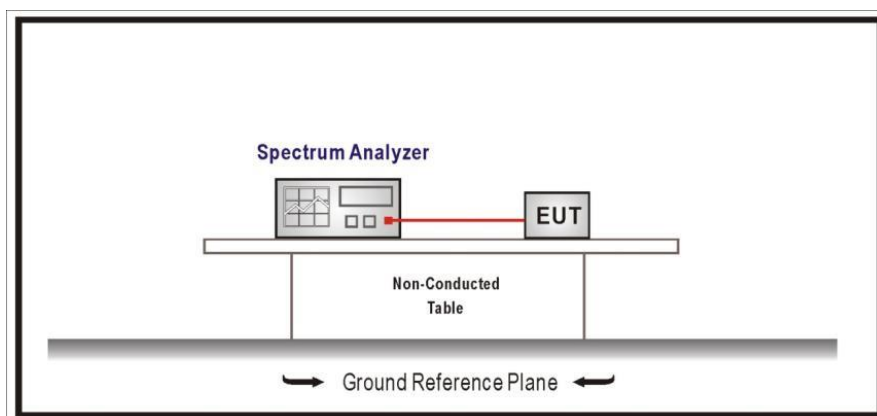

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	HOPPING OFF (Lowest channel)

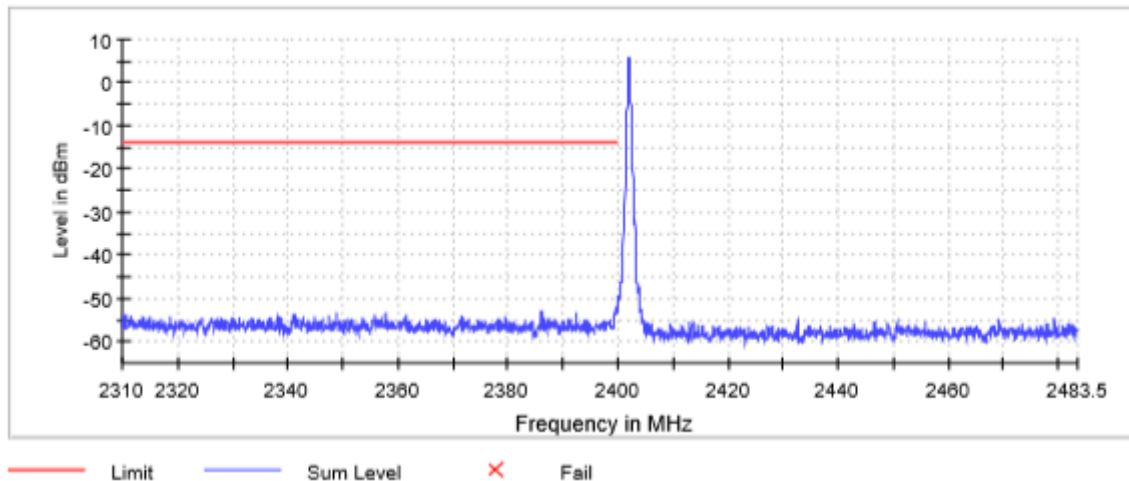


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.31000 GHz	2.40000 GHz
Stop Frequency	2.40000 GHz	2.48350 GHz
Span	90.000 MHz	83.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1800	1670
Sweep time	113.672 μ s	94.727 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	4 / max. 150	5 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.00 dB	0.20 dB

TEST RESULTS (Cont.):

HOPPING OFF (Highest channel)

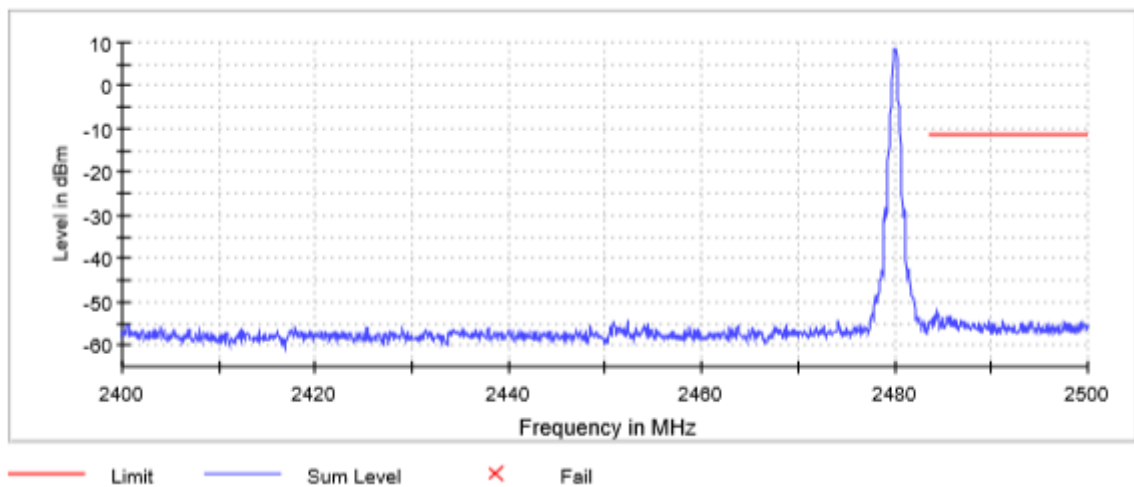


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.40000 GHz	2.48350 GHz
Stop Frequency	2.48350 GHz	2.50000 GHz
Span	83.500 MHz	16.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1670	330
Sweep time	94.727 μ s	18.945 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamplifier	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	9 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.00 dB	0.00 dB

TEST RESULTS (Cont.):

HOPPING ON (Lowest channel)

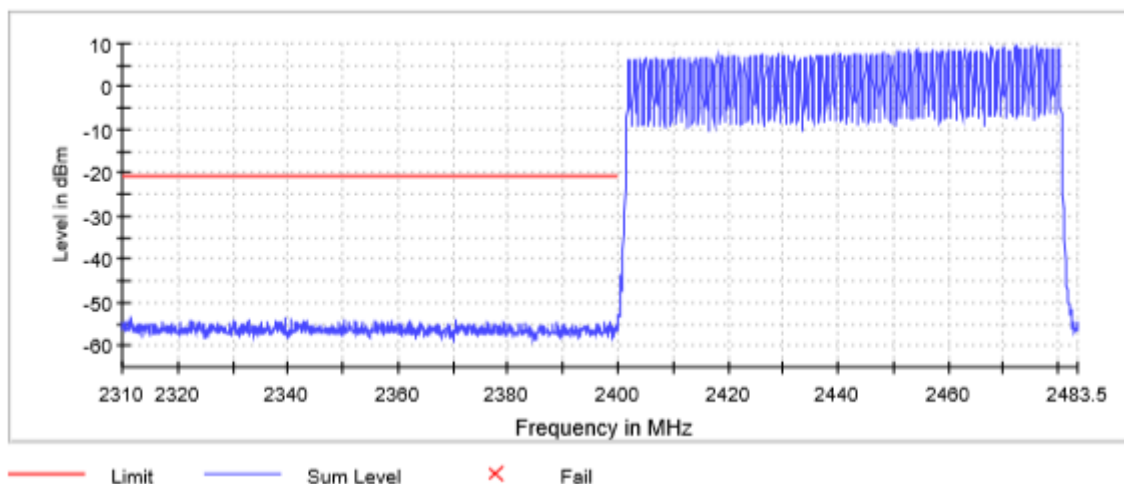


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.31000 GHz	2.40000 GHz
Stop Frequency	2.40000 GHz	2.48350 GHz
Span	90.000 MHz	83.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1800	1670
Sweep time	113.672 μ s	94.727 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	4 / max. 150	100 / max. 150
Stable	3 / 3	3/ 3
Max Stable Difference	0.00 dB	0.23 dB

TEST RESULTS (Cont.):


HOPPING ON (Highest channel)

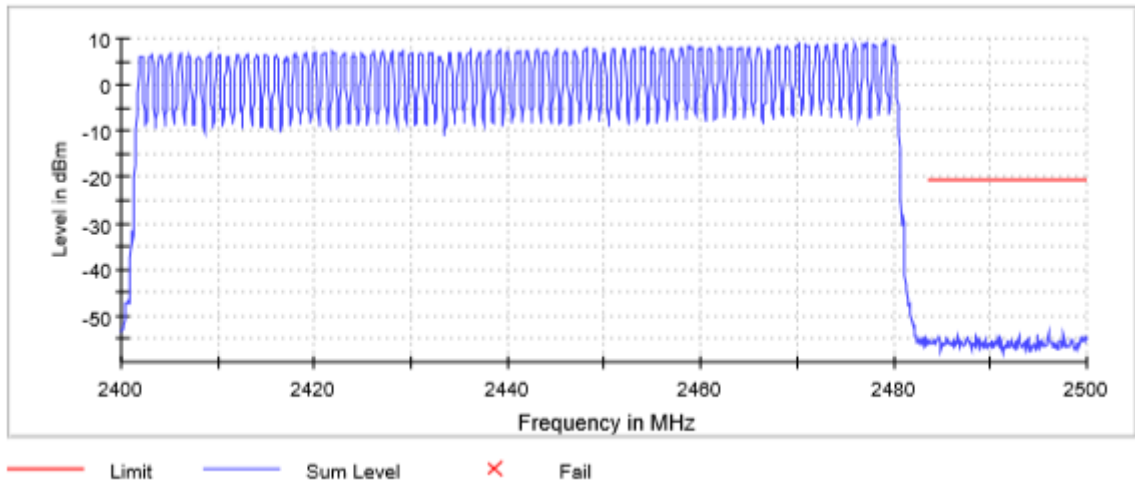

Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.40000 GHz	2.48350 GHz
Stop Frequency	2.48350 GHz	2.50000 GHz
Span	83.500 MHz	16.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1670	330
Sweep time	94.727 μ s	18.945 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamplifier	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	117 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.09 dB	0.00 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (PI4DQPSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	HOPPING OFF (Lowest channel)

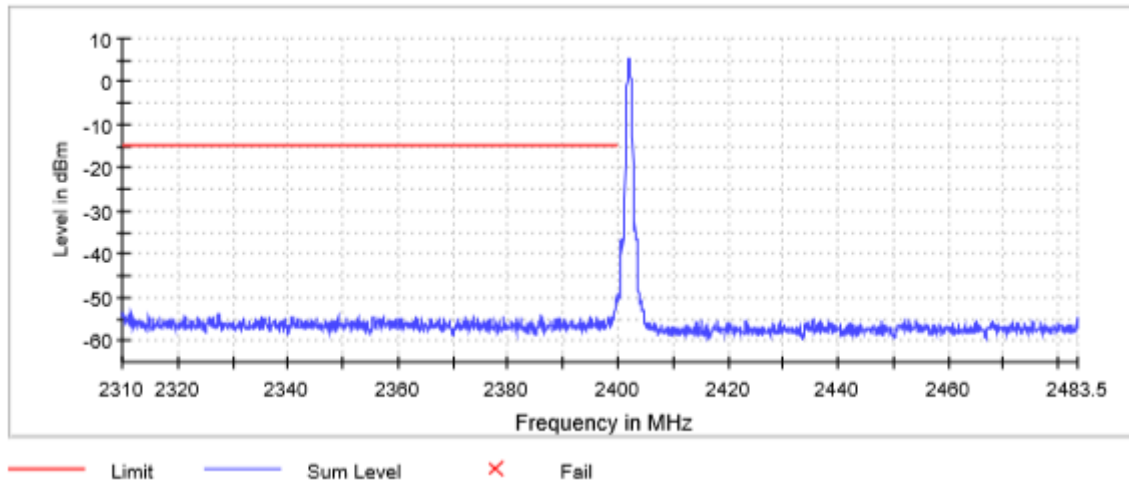


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.31000 GHz	2.40000 GHz
Stop Frequency	2.40000 GHz	2.48350 GHz
Span	90.000 MHz	83.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1800	1670
Sweep time	113.672 μ s	94.727 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	4 / max. 150	17 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.00 dB	0.00 dB

TEST RESULTS (Cont.):

HOPPING OFF (Highest channel)

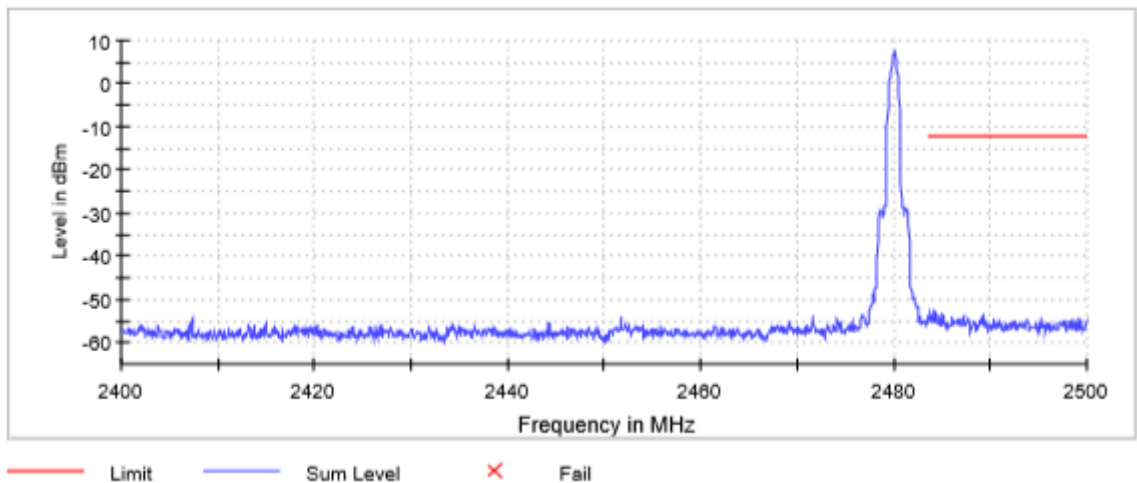


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.40000 GHz	2.48350 GHz
Stop Frequency	2.48350 GHz	2.50000 GHz
Span	83.500 MHz	16.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1670	330
Sweep time	94.727 μ s	18.945 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamplifier	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	10 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.27 dB	0.00 dB

TEST RESULTS (Cont.):

HOPPING ON (Lowest channel)

Lowest Channel

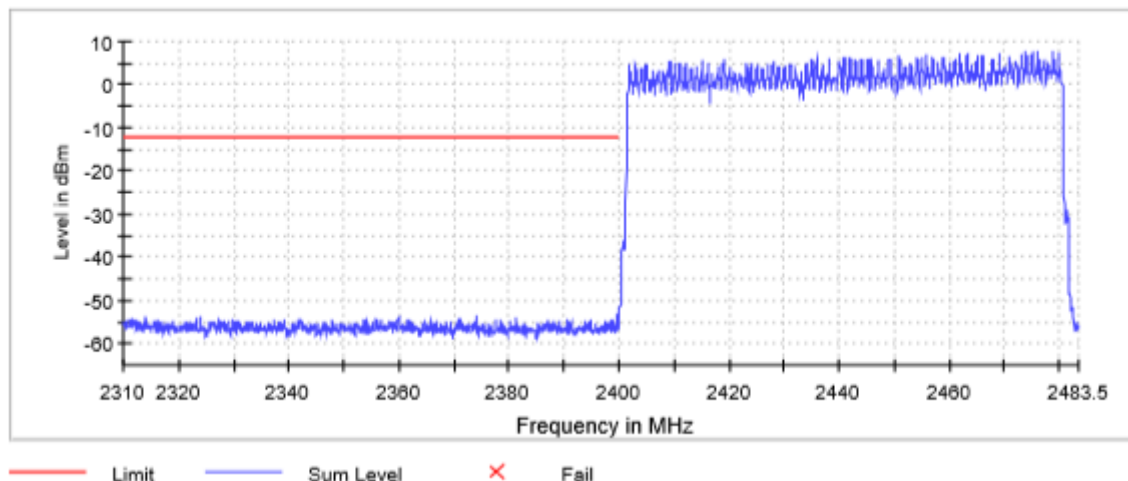


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.31000 GHz	2.40000 GHz
Stop Frequency	2.40000 GHz	2.48350 GHz
Span	90.000 MHz	83.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1800	1670
Sweep time	113.672 μ s	94.727 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamplifier	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	4 / max. 150	125 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.00 dB	0.00 dB

TEST RESULTS (Cont.):


HOPPING ON (Highest channel)

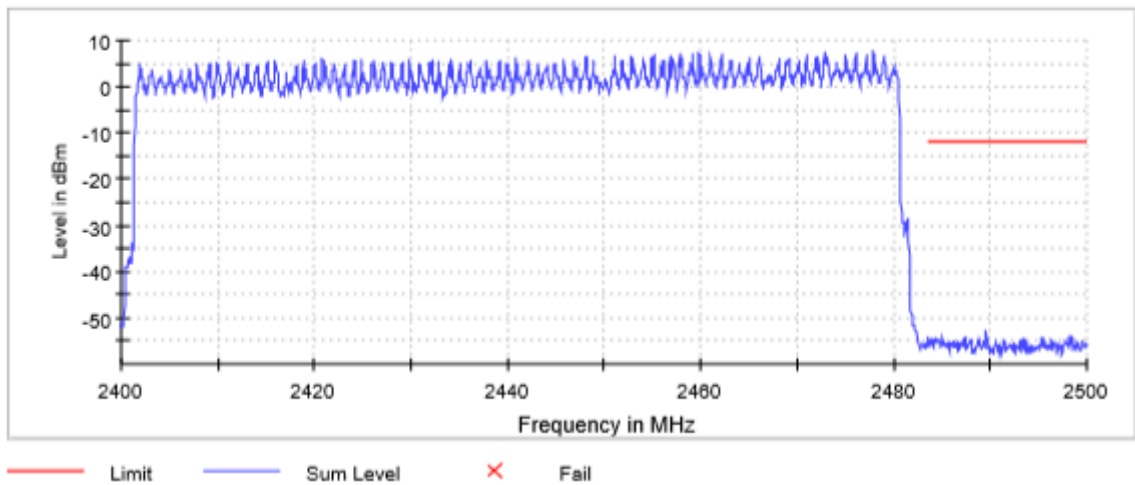

Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.40000 GHz	2.48350 GHz
Stop Frequency	2.48350 GHz	2.50000 GHz
Span	83.500 MHz	16.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1670	330
Sweep time	94.727 μ s	18.945 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamplifier	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	128 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.00 dB	0.00 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (8DPSK)
TEST RESULTS:	PASS
TEST RESULTS (Cont.)	HOPPING OFF (Lowest channel)

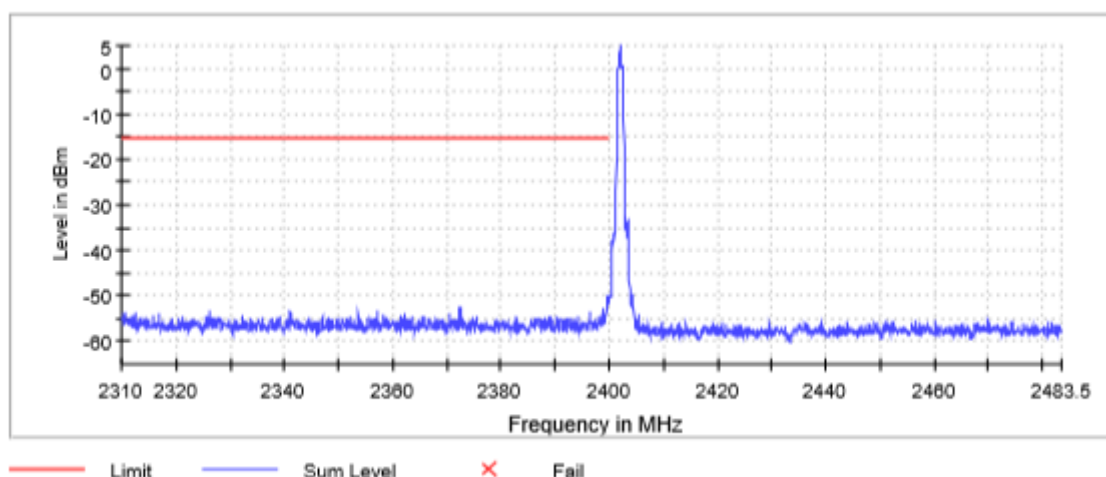


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.31000 GHz	2.40000 GHz
Stop Frequency	2.40000 GHz	2.48350 GHz
Span	90.000 MHz	83.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1800	1670
Sweep time	113.672 μ s	94.727 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamplifier	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	4 / max. 150	11 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.00 dB	0.06 dB

TEST RESULTS (Cont.):

HOPPING OFF (Highest channel)

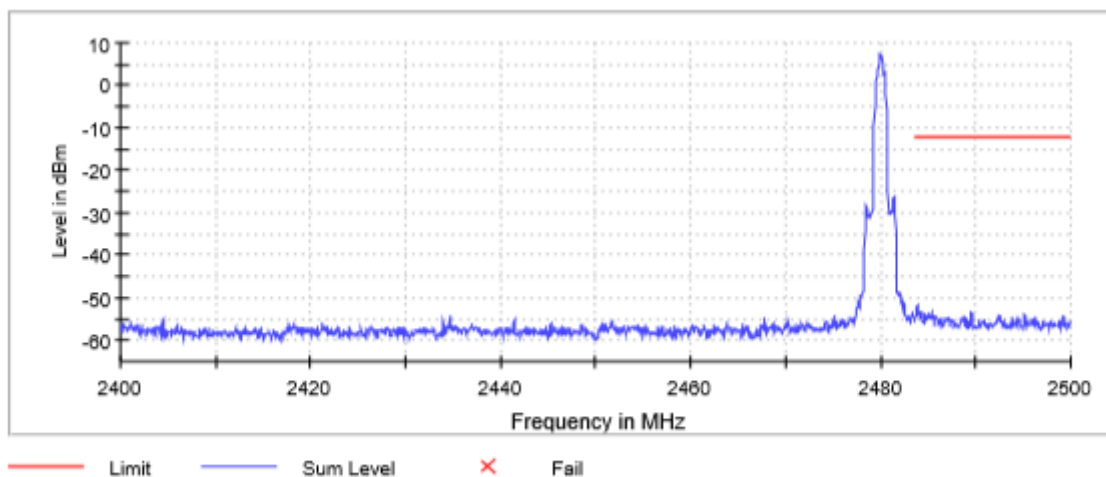


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.40000 GHz	2.48350 GHz
Stop Frequency	2.48350 GHz	2.50000 GHz
Span	83.500 MHz	16.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1670	330
Sweep time	94.727 μ s	18.945 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamplifier	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	8 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.03 dB	0.00 dB

TEST RESULTS (Cont.):

HOPPING ON (Lowest channel)

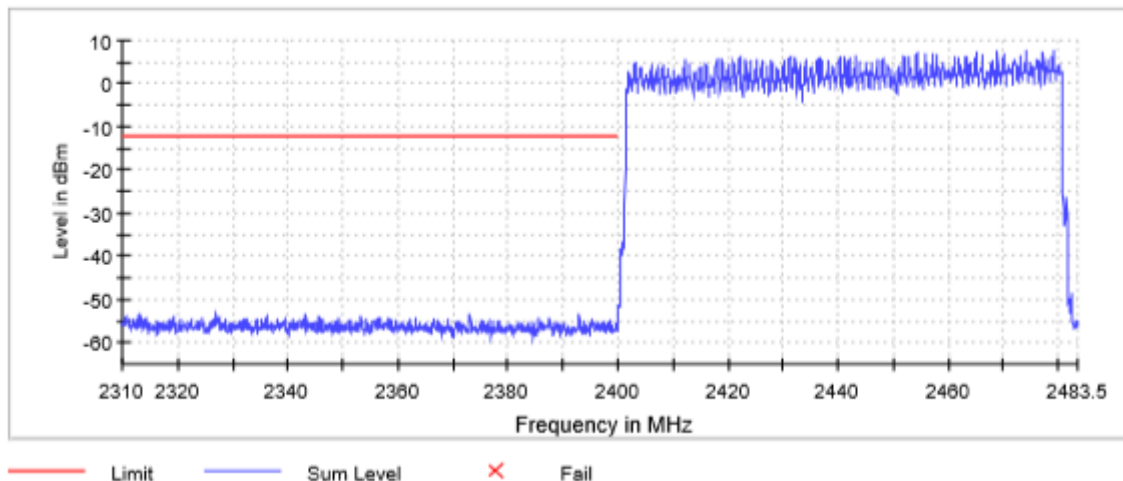


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.31000 GHz	2.40000 GHz
Stop Frequency	2.40000 GHz	2.48350 GHz
Span	90.000 MHz	83.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1800	1670
Sweep time	113.672 μ s	94.727 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamplifier	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	4 / max. 150	126 / max. 150
Stable	3 / 3	0 / 3
Max Stable Difference	0.00 dB	0.03 dB

TEST RESULTS (Cont.):

HOPPING ON (Highest channel)

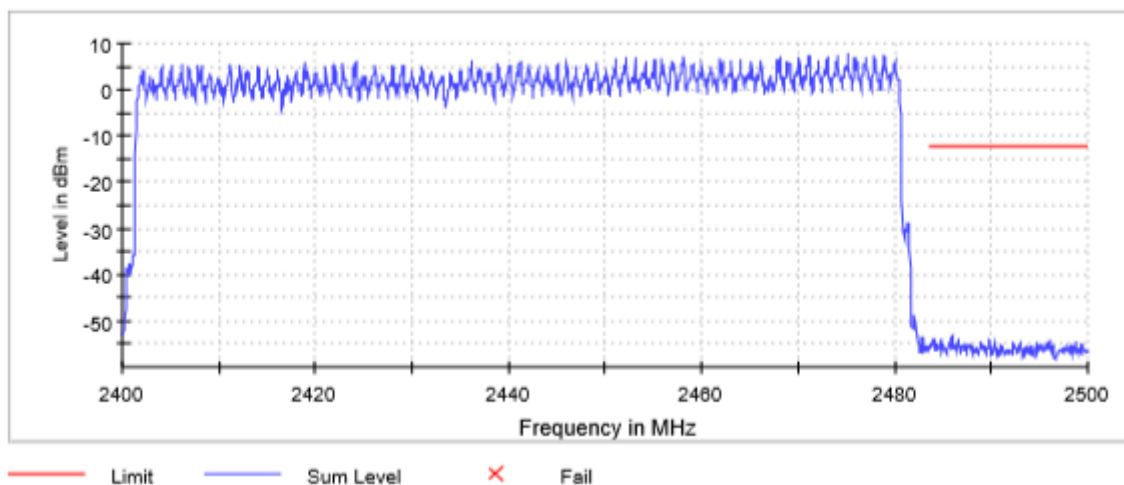

Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.40000 GHz	2.48350 GHz
Stop Frequency	2.48350 GHz	2.50000 GHz
Span	83.500 MHz	16.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1670	330
Sweep time	94.727 μ s	18.945 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	127 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.00 dB	0.00 dB

TEST A.6: EMISSION LIMITATIONS RADIATED (TRANSMITTER)

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(d) and RSS-247 5.5

LIMITS

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required

TEST SETUP

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at 3 m for the frequency range 30-1000 MHz (Bilog antenna) and at 1m for the frequency range 1-40 GHz (1 GHz-18 GHz and 18 GHz-40 GHz Double ridge horn antennas).

For radiated emissions in the range 1-40 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.


The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

TEST SETUP (CONT.)

Radiated measurements Setup $f < 1$ GHz

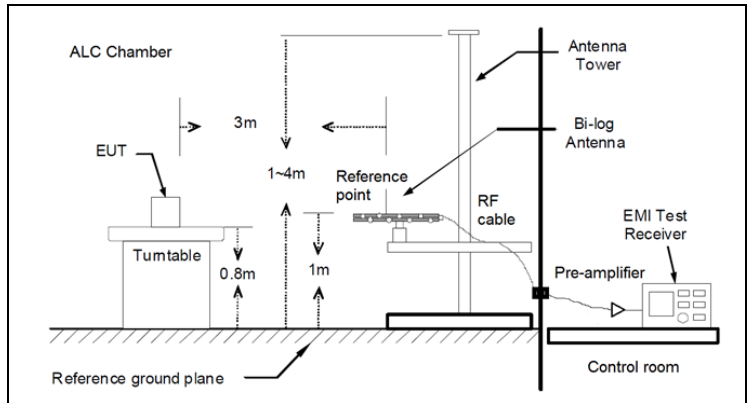

Radiated measurements setup $f > 1$ GHz

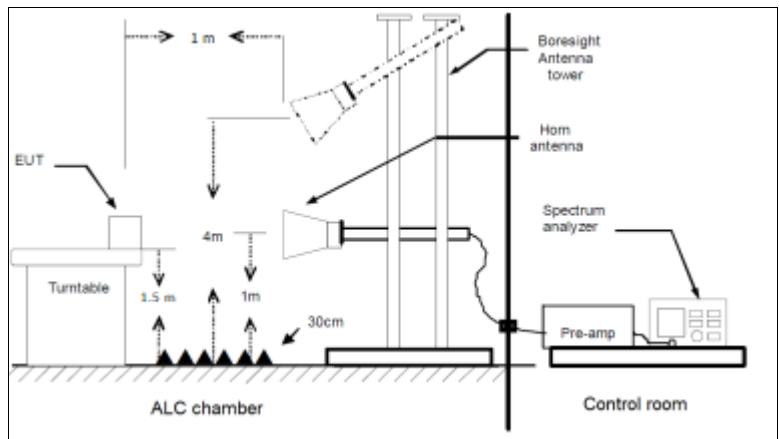

TESTED SAMPLES:

S/02

TESTED CONDITIONS MODES:

TC#01 (GFSK)

TEST RESULTS:

PASS

Frequency range 30 MHz – 1000 MHz

The spurious emissions below 1 GHz do not depend on the operating channel selected in the EUT.

The results in the following plots and tables show the maximum measured levels in the 30-1000 MHz range.

Frequency range 1 GHz – 26 GHz


The results in the following plots and tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.5 GHz.

TEST RESULTS (Cont.):

30 MHz – 1000 MHz (GFSK)

Middle Channel

RF_FCC_15.247_E Field_30MHz_1GHz

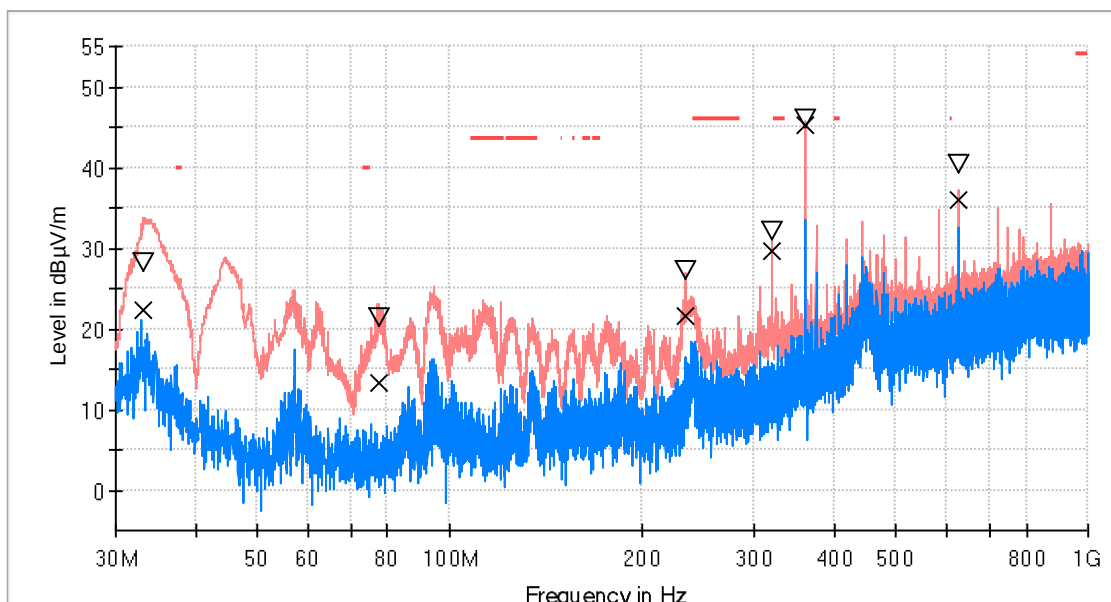

- PK+ _MAXH
- PK+ _CLRWR
- TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Limit
- ▽ MaxPeak-PK+ (Single)
- × QuasiPeak-QPK (Single)


Maximizations

Frequency (MHz)	MaxPeak (dBμV/m)	QuasiPeak (dBμV/m)	Pol	Azimuth (deg)
33.152500	28.3	22.3	V	-14.0
77.384500	21.3	13.2	V	180.0
233.457500	27.2	21.7	V	-180.0
319.496500	32.2	29.6	H	-85.0
361.255000	46.0	45.2	H	119.0
624.998000	40.3	36.0	H	-20.0

TEST RESULTS (Cont.)

1 GHz – 18 GHz (GFSK)

CHANNEL: Lowest (2402 MHz).

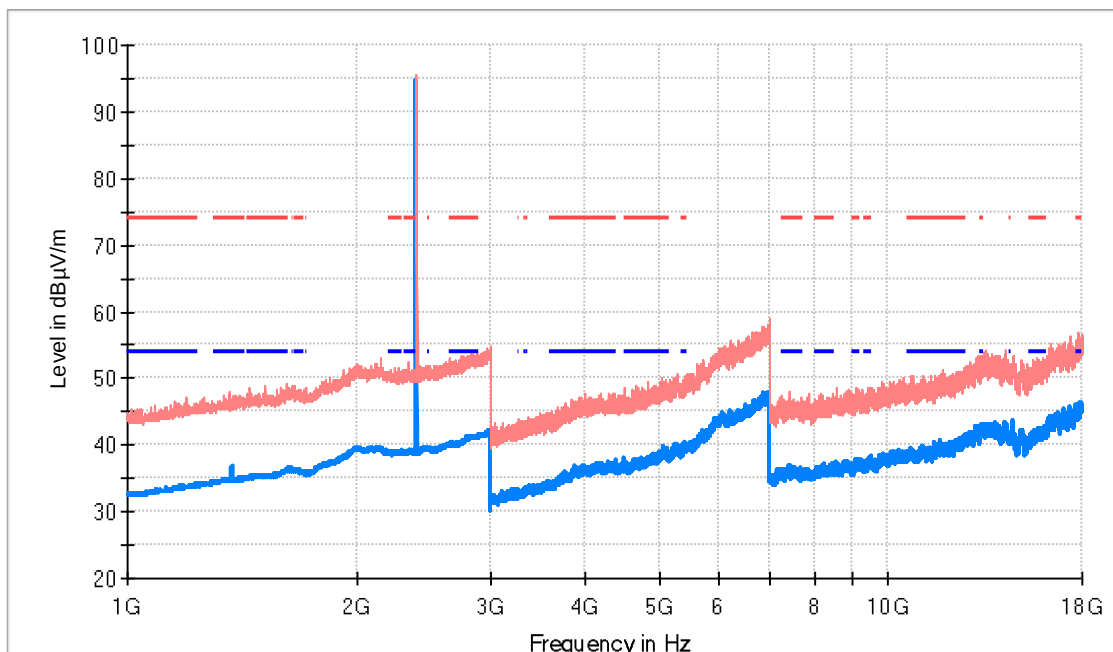


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

Maximizations

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Comment
1375.000000	47.5	36.8	H	
2402.000000	95.6	94.8	H	Fundamental

TEST RESULTS (Cont.)

CHANNEL: Middle (2440 MHz).

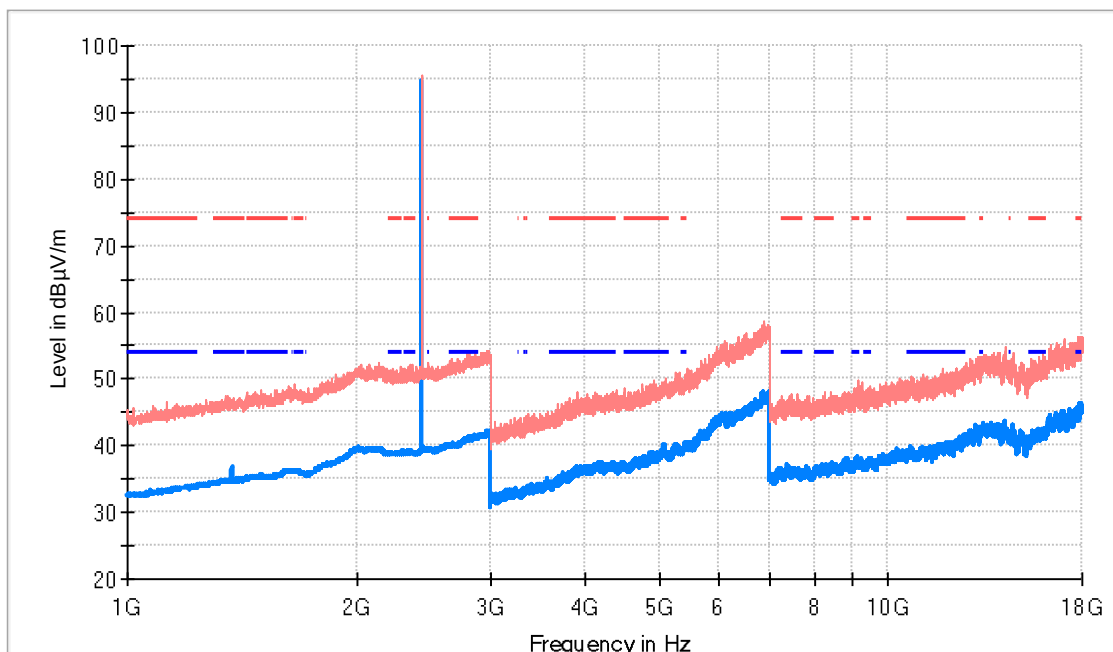


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

Maximizations

Frequency (MHz)	PK+_MAXH (dBμV/m)	AVG_MAXH (dBμV/m)	Pol	Comment
1375.000000	46.9	36.8	H	
2441.000000	95.5	94.7	H	Fundamental

TEST RESULTS (Cont.)

CHANNEL: Highest (2480 MHz).

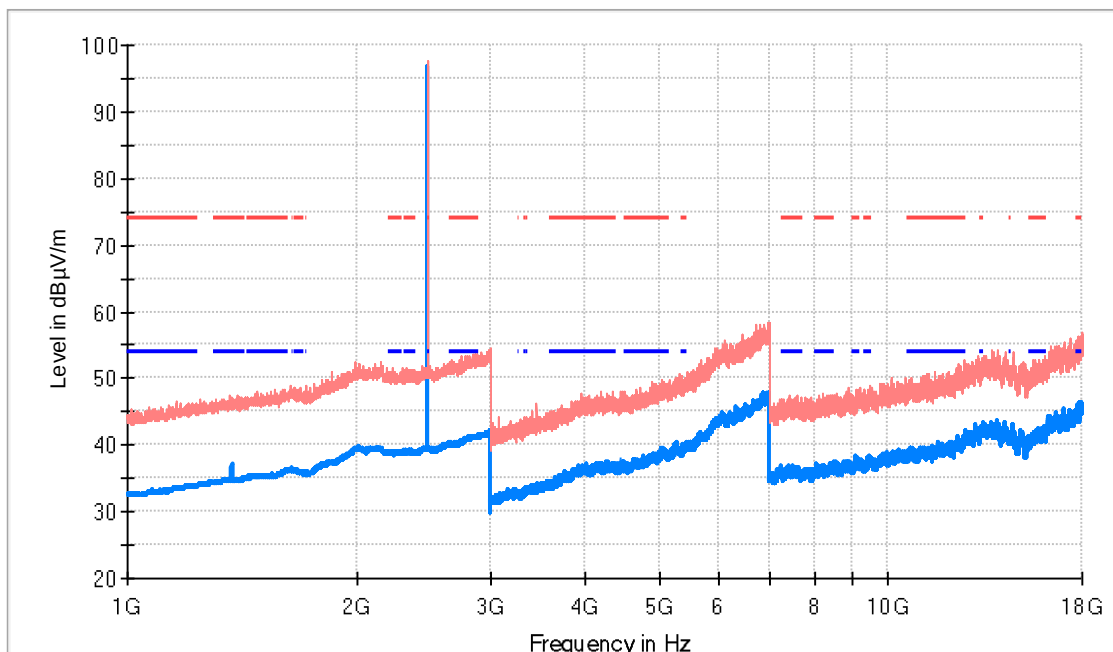

- AVG_ _MAXH
- PK+ _MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


Maximizations

Frequency (MHz)	PK+ _MAXH (dBμV/m)	AVG_ _MAXH (dBμV/m)	Pol	Comment
1375.000000	46.7	37.2	H	
2480.000000	97.7	96.7	H	Fundamental

TEST RESULTS (Cont.)


18 GHz – 26 GHz (GFSK)

CHANNEL: Lowest (2402 MHz).

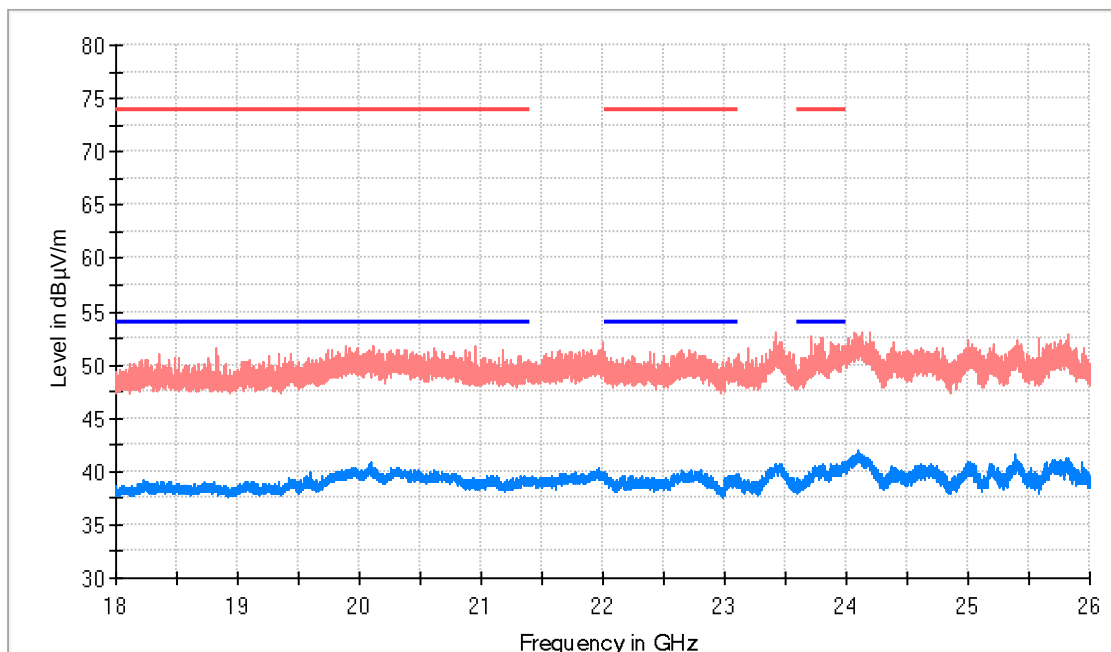

- AVG_MAXH
- PK+MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


CHANNEL: Middle (2440 MHz).

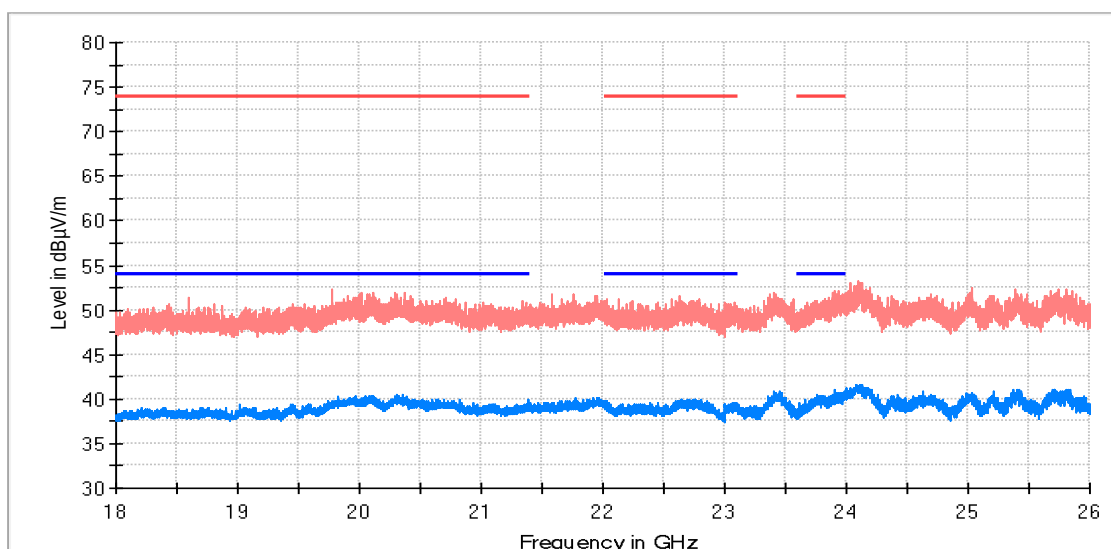

- AVG_MAXH
- PK+MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

TEST RESULTS (Cont.)

CHANNEL: Highest (2480 MHz).

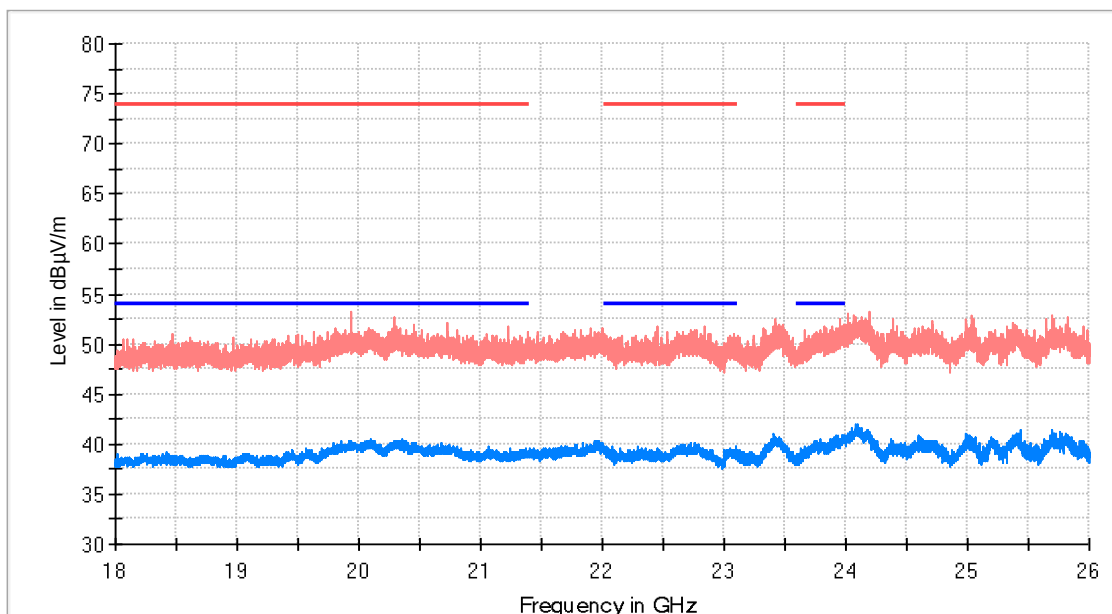


- AVG_MAXH
- PK+ _MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

RESTRICTED BANDS

2.31 GHz – 2.5 GHz (GFSK)


CHANNEL: Lowest (2402 MHz)

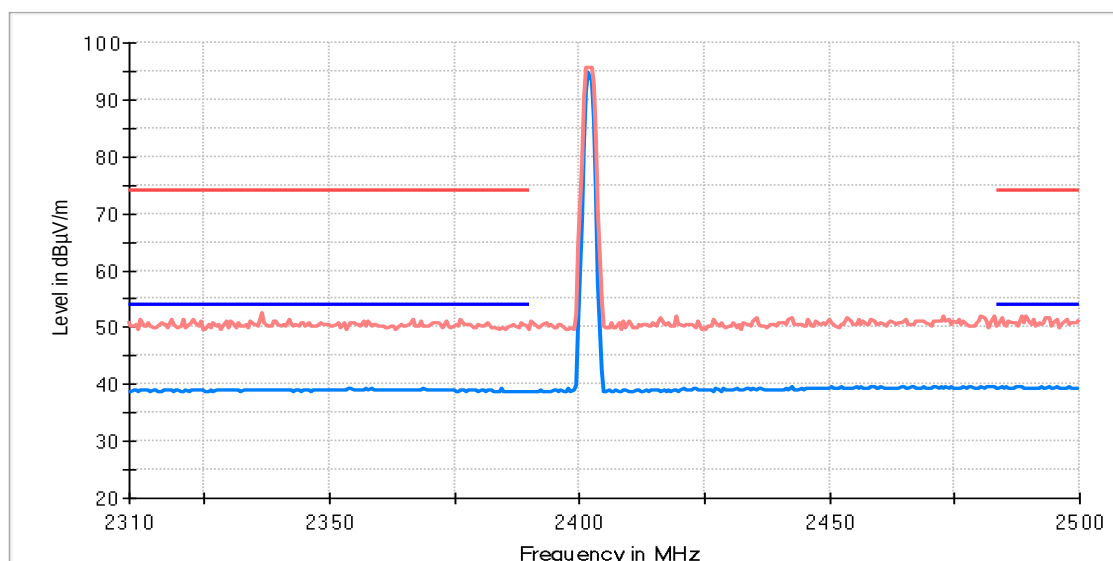

- AVG_MAXH
- PK+ _MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


TEST RESULTS (Cont.)

CHANNEL: Middle (2440 MHz)

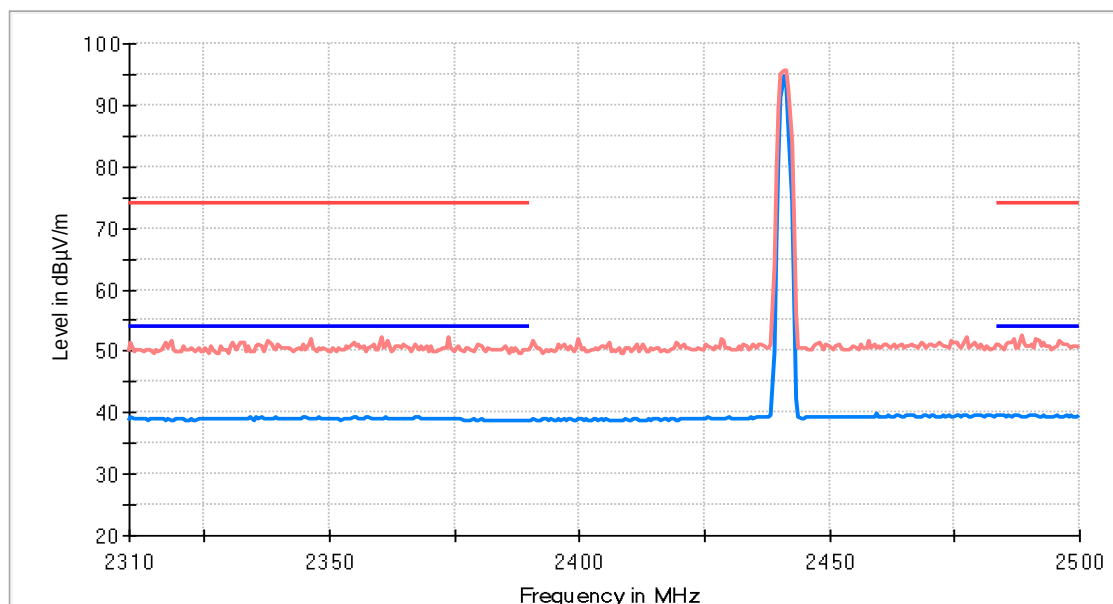

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

CHANNEL: Highest (2480 MHz)

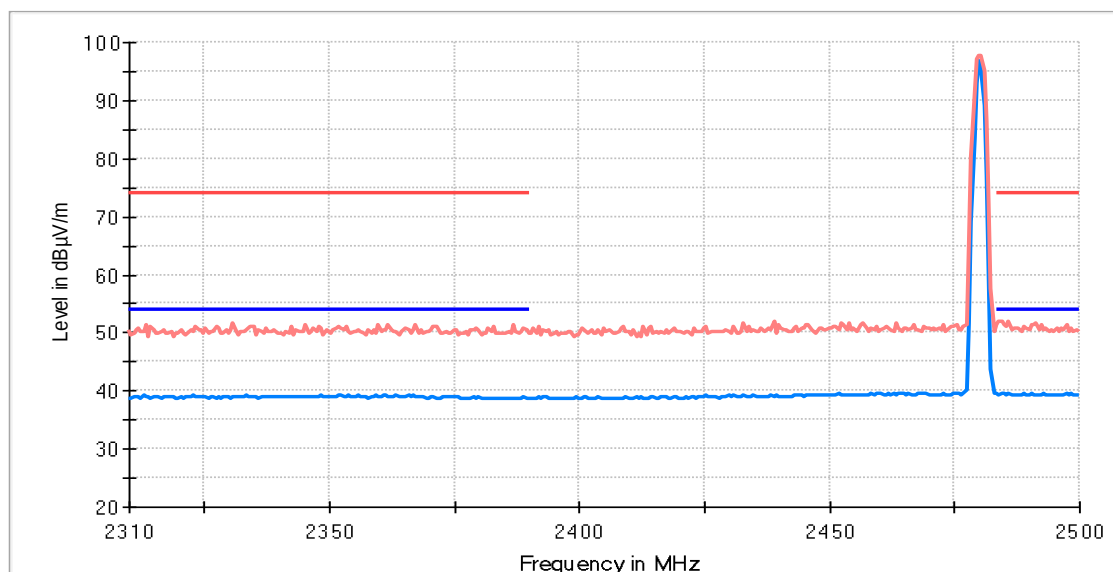

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

TESTED SAMPLES:	S/02
TESTED CONDITIONS MODES:	TC#02 (PI4DQPSK)
TEST RESULTS:	PASS

Frequency range 30 MHz – 1000 MHz

The spurious emissions below 1 GHz do not depend on the operating channel selected in the EUT. GFSK Modulation was identified as a worst case.


The results in the following plots and tables show the maximum measured levels in the 30-1000 MHz range.

Frequency range 1 GHz – 26 GHz

The results in the following plots and tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.5 GHz.

TEST RESULTS (Cont.)	1 GHz – 18 GHz (PI4DQPSK)
----------------------	---------------------------

CHANNEL: Lowest (2402 MHz).

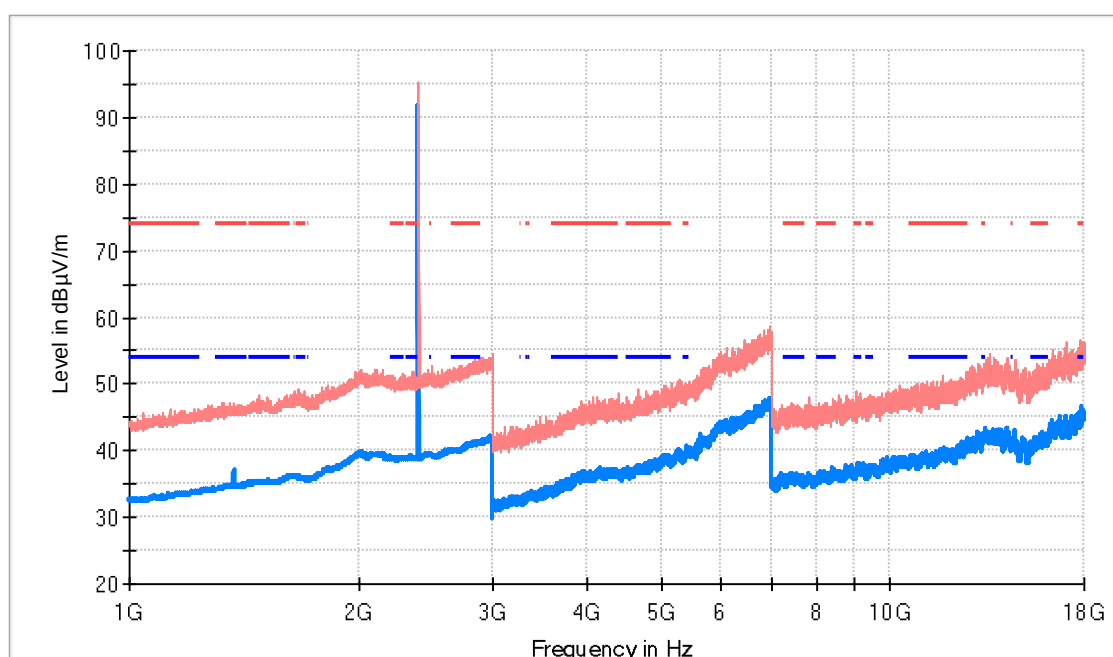


- AVG_MAXH
- PK+MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

Maximizations

Frequency (MHz)	PK+MAXH (dBμV/m)	AVG_MAXH (dBμV/m)	Pol	Comment
1375.000000	46.2	37.0	H	
2402.000000	95.3	91.8	H	Fundamental

TEST RESULTS (Cont.)

CHANNEL: Middle (2440 MHz).

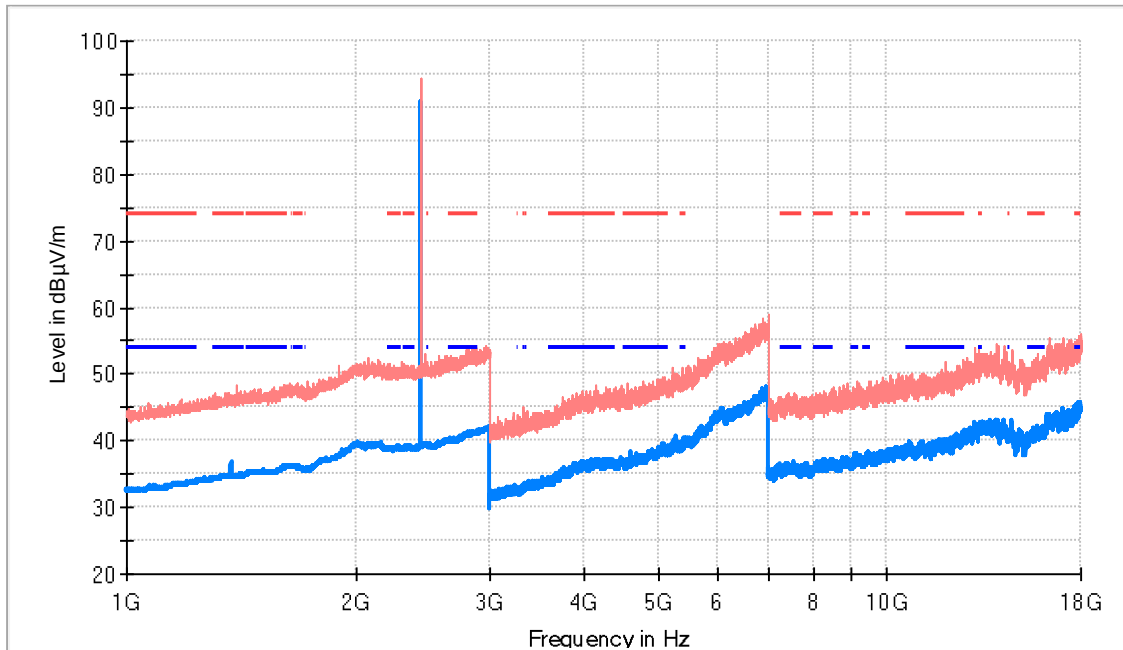


- AVG_MAXH
- PK+ MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

Maximizations

Frequency (MHz)	PK+ MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Comment
1375.000000	46.7	36.9	H	
2441.000000	94.4	91.0	H	Fundamental

TEST RESULTS (Cont.)

CHANNEL: Highest (2480 MHz)

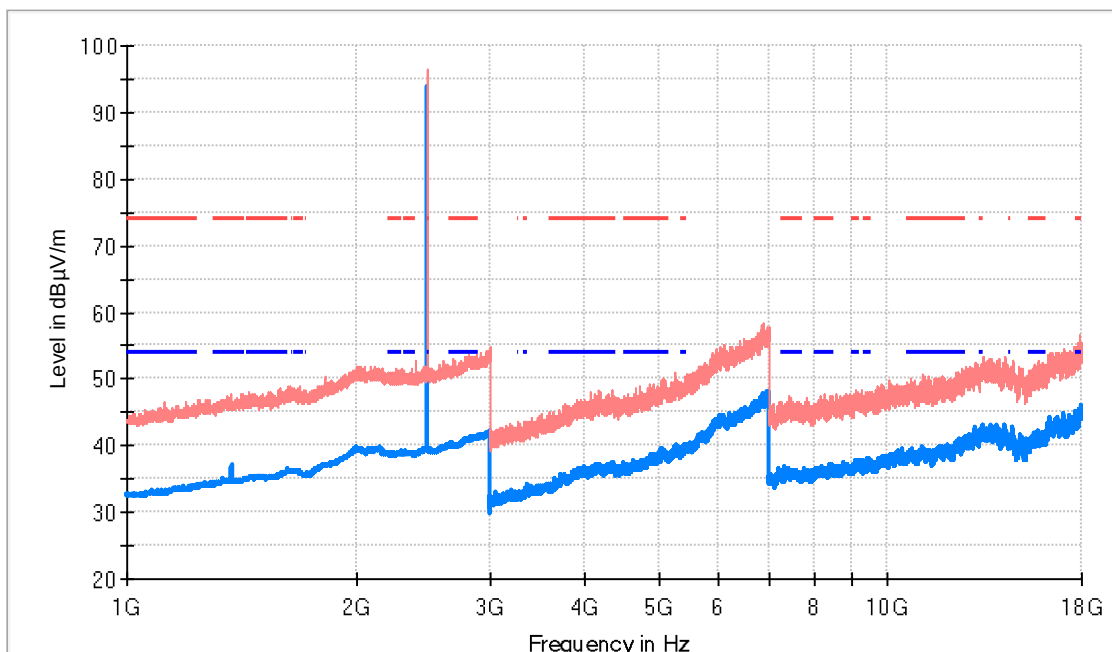

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


Maximizations

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Comment
1375.000000	46.4	37.0	H	
2480.000000	96.4	93.8	H	Fundamental

TEST RESULTS (Cont.)


18 GHz – 26 GHz (PI4DQPSK)

CHANNEL: Lowest (2402 MHz)

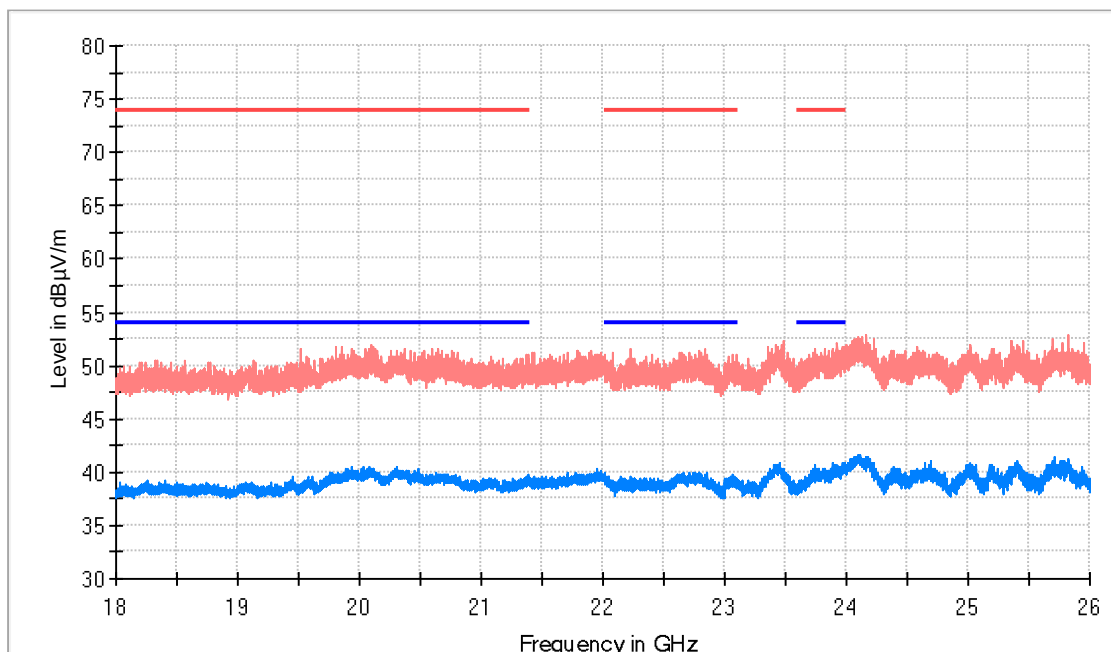

- AVG_MAXH
- PK+ _MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


CHANNEL: Middle (2440 MHz)

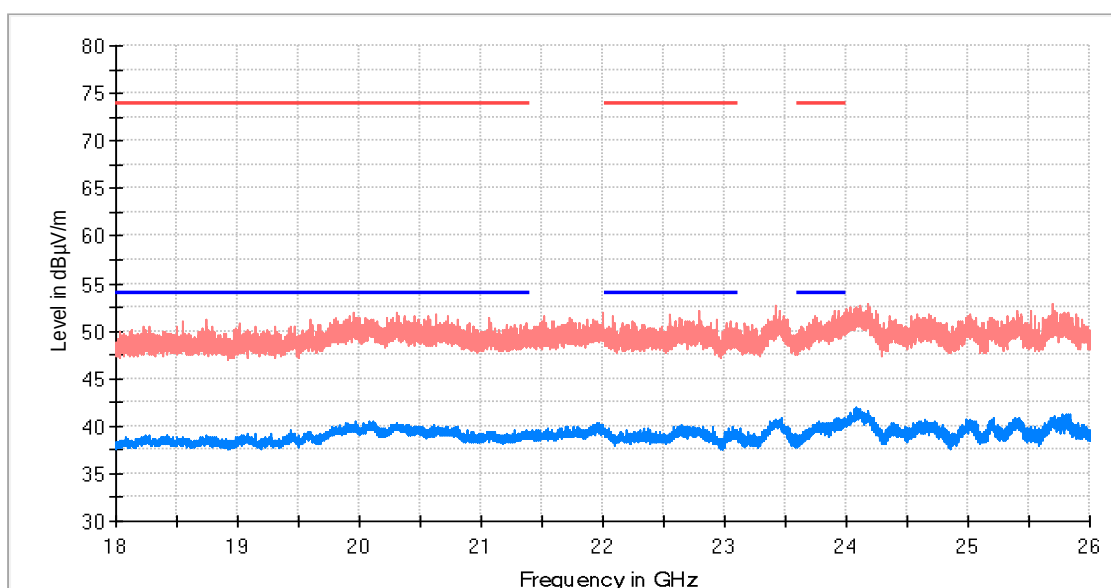

- AVG_MAXH
- PK+ _MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

TEST RESULTS (Cont.)

CHANNEL: Highest (2480 MHz)

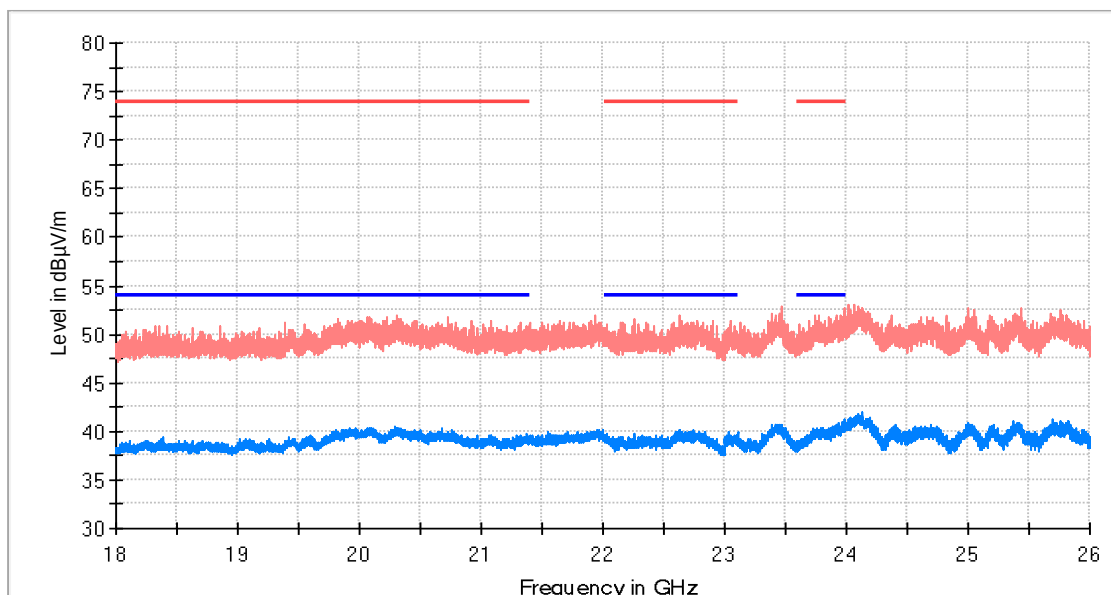


- AVG_MAXH
- PK+MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

TEST RESULTS (Cont.):

RESTRICTED BAND 2.31 GHz – 2.5 GHz (PI4DQPSK)


CHANNEL: Lowest (2402 MHz)

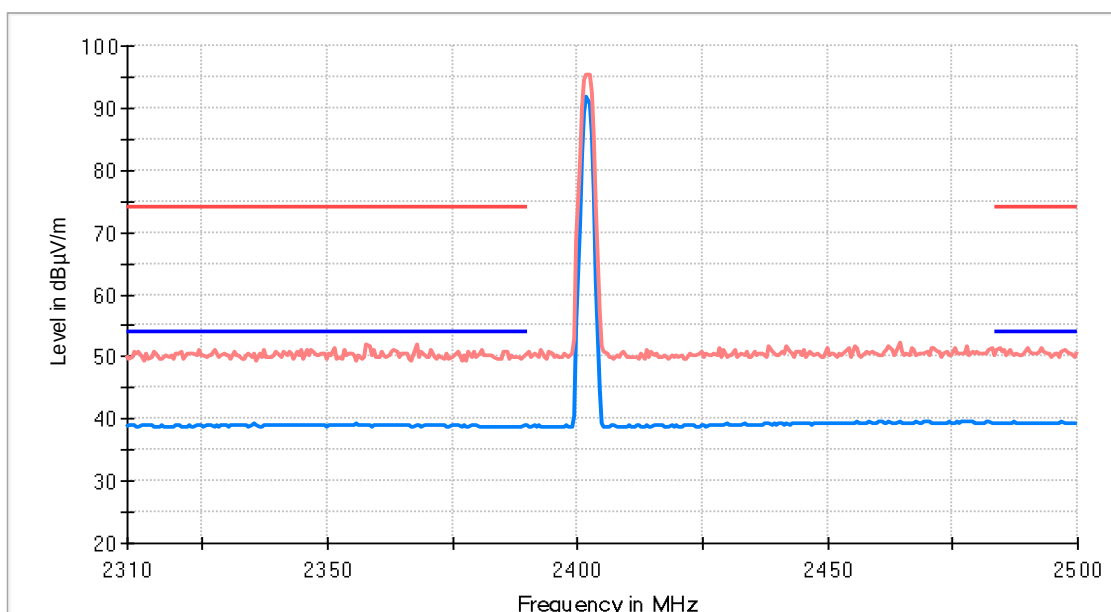

- AVG_MAXH
- PK+MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


TEST RESULTS (Cont.)

CHANNEL: Middle (2440 MHz)

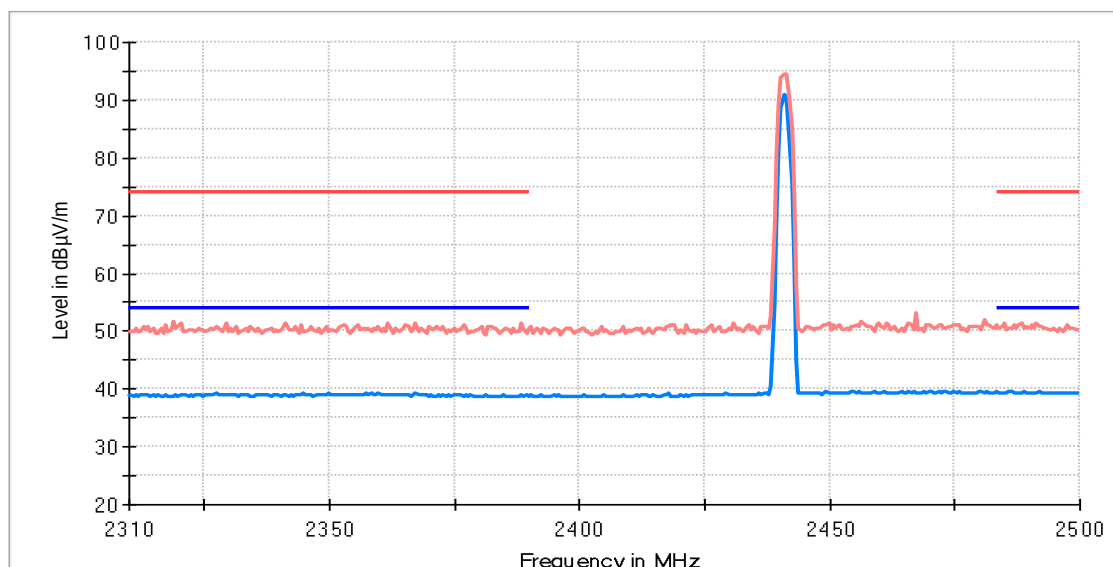

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

CHANNEL: Highest (2480 MHz)

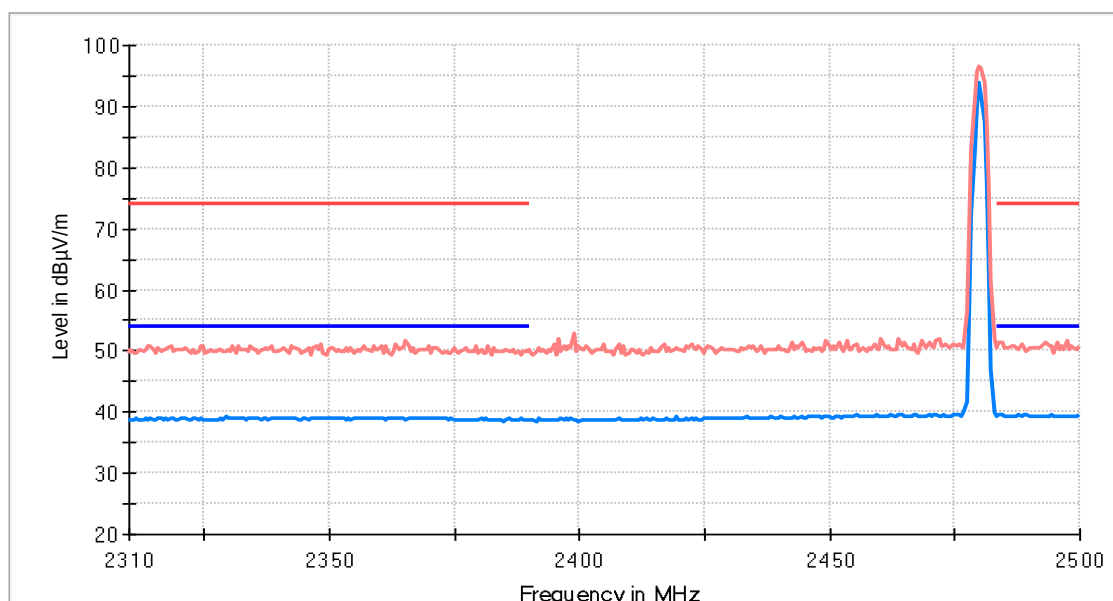

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

TESTED SAMPLES:	S/02
TESTED CONDITIONS MODES:	TC#03 (8DPSK)
TEST RESULTS:	PASS

Frequency range 30 MHz – 1000 MHz

The spurious emissions below 1 GHz do not depend on the operating channel selected in the EUT. GFSK modulation was selected as a worst case.


The results in the following plots and tables show the maximum measured levels in the 30-1000 MHz range.

Frequency range 1 GHz – 26 GHz

The results in the following plots and tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.5 GHz.

TEST RESULTS (Cont.)	1 GHz – 18 GHz (8DPSK)
----------------------	------------------------

CHANNEL: Lowest (2402 MHz)

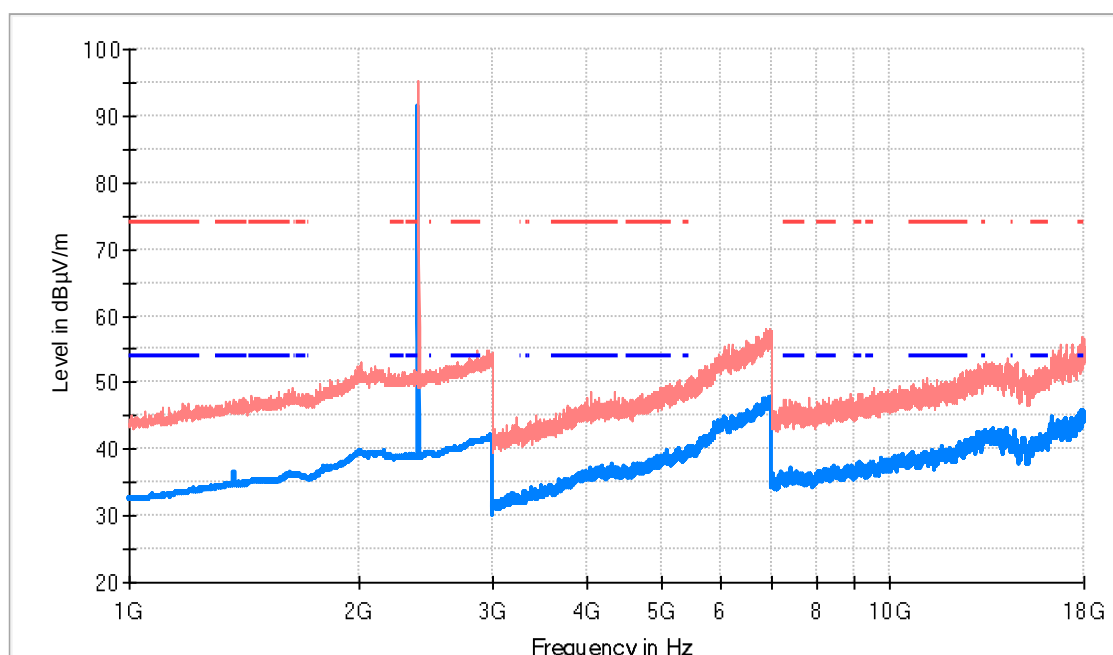


- AVG _MAXH
- PK+ _MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

Maximizations

Frequency (MHz)	PK+ _MAXH (dBμV/m)	AVG _MAXH (dBμV/m)	Pol	Comment
1374.500000	47.3	36.6	H	
2402.000000	95.2	91.4	H	Fundamental

TEST RESULTS (Cont.)

CHANNEL: Middle (2440 MHz)

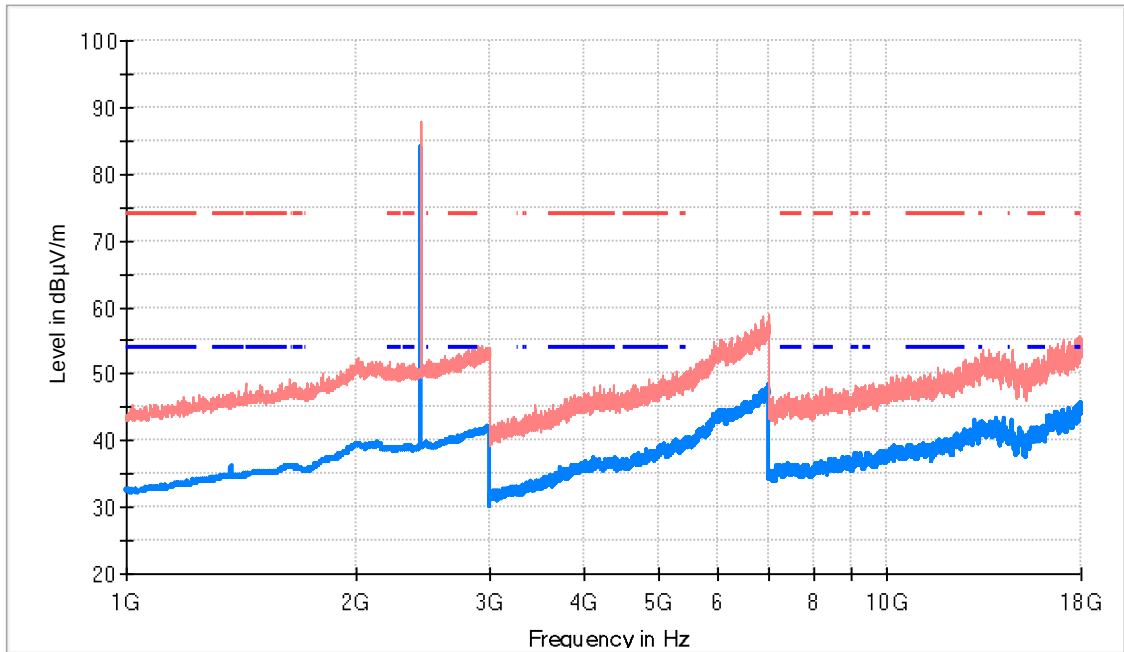


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

Maximizations

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Comment
2441.500000	87.5	84.0	V	Fundamental

TEST RESULTS (Cont.)

CHANNEL: Highest (2480 MHz)

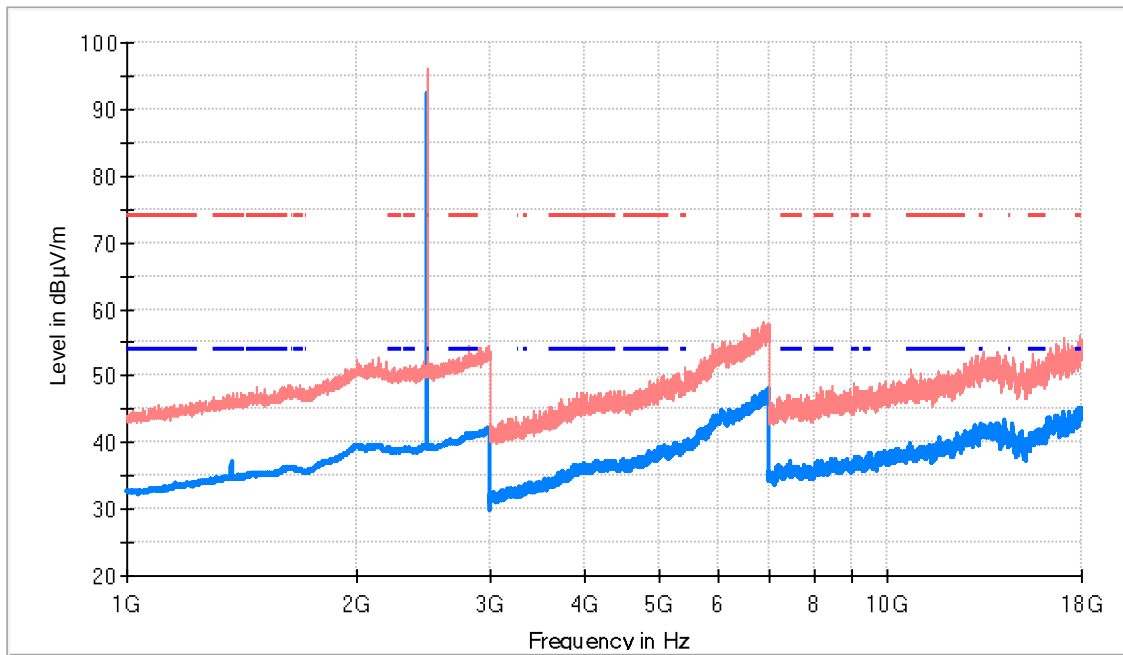

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


Maximizations

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Comment
2480.000000	96.1	92.3	H	Fundamental

TEST RESULTS (Cont.)


18 GHz – 26 GHz (8DPSK)

CHANNEL: Lowest (2402 MHz)

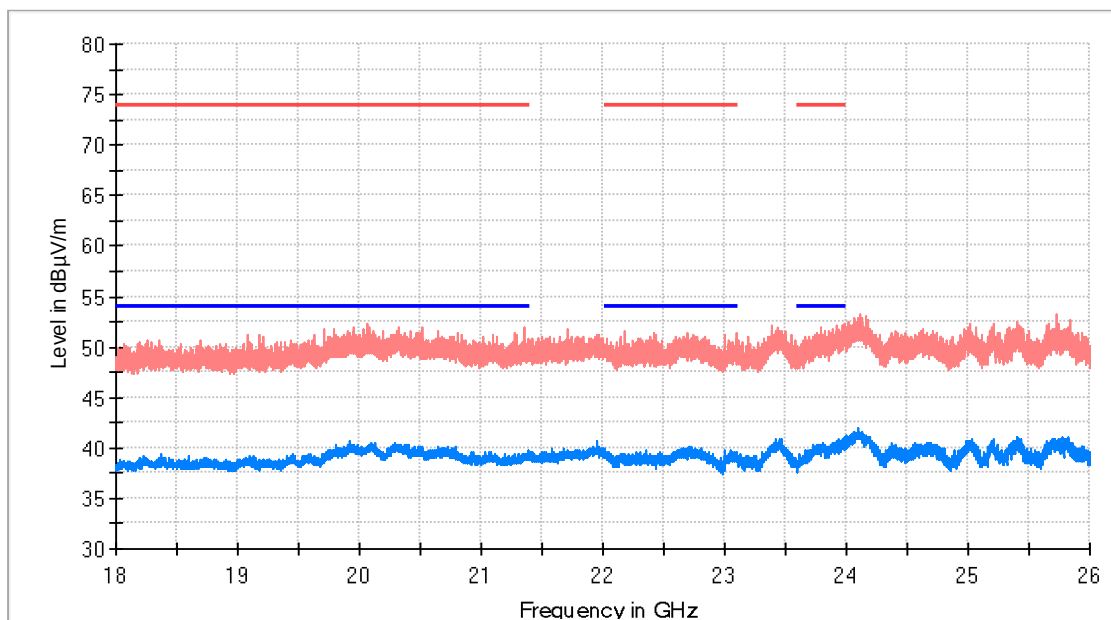

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


CHANNEL: Middle (2440 MHz)

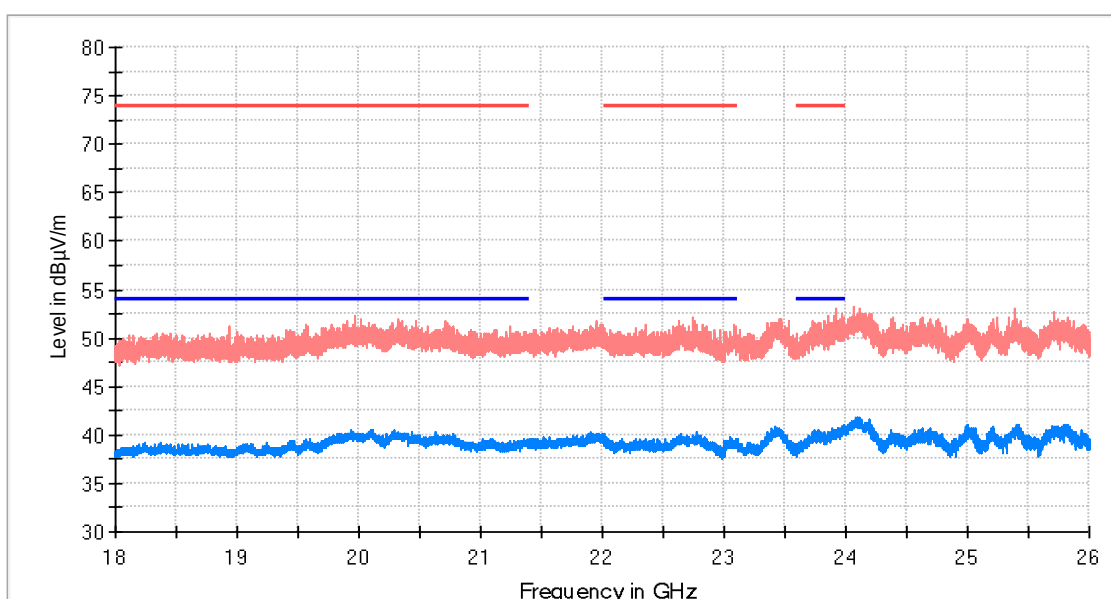

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

TEST RESULTS (Cont.)

CHANNEL: Highest (2480 MHz)

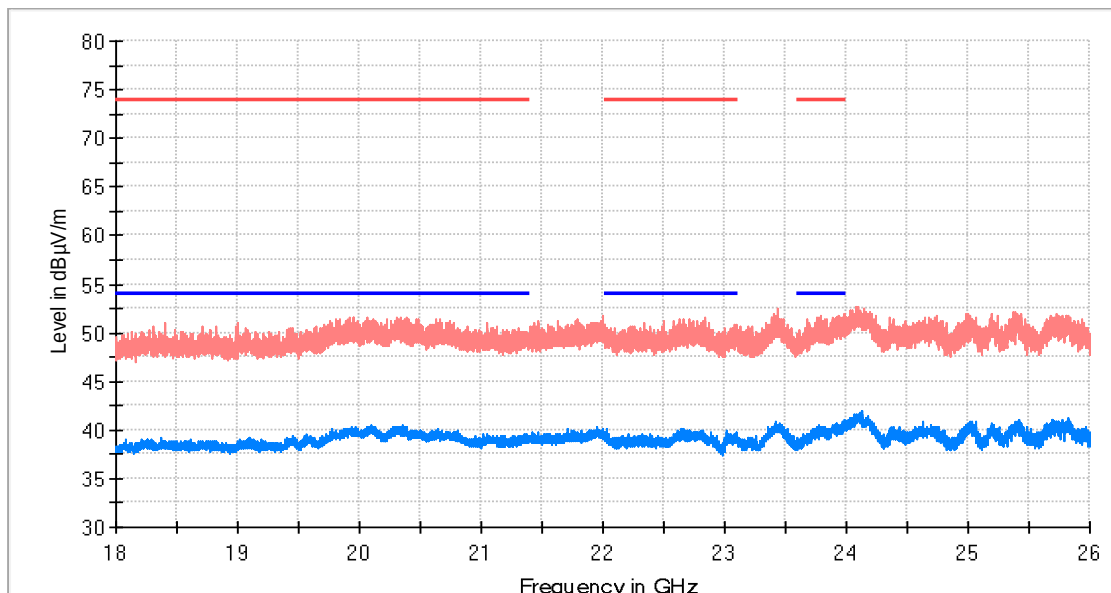


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

RESTRICTED BANDS

2.31 GHz – 2.5 GHz (8DPSK)


CHANNEL: Lowest (2402 MHz)

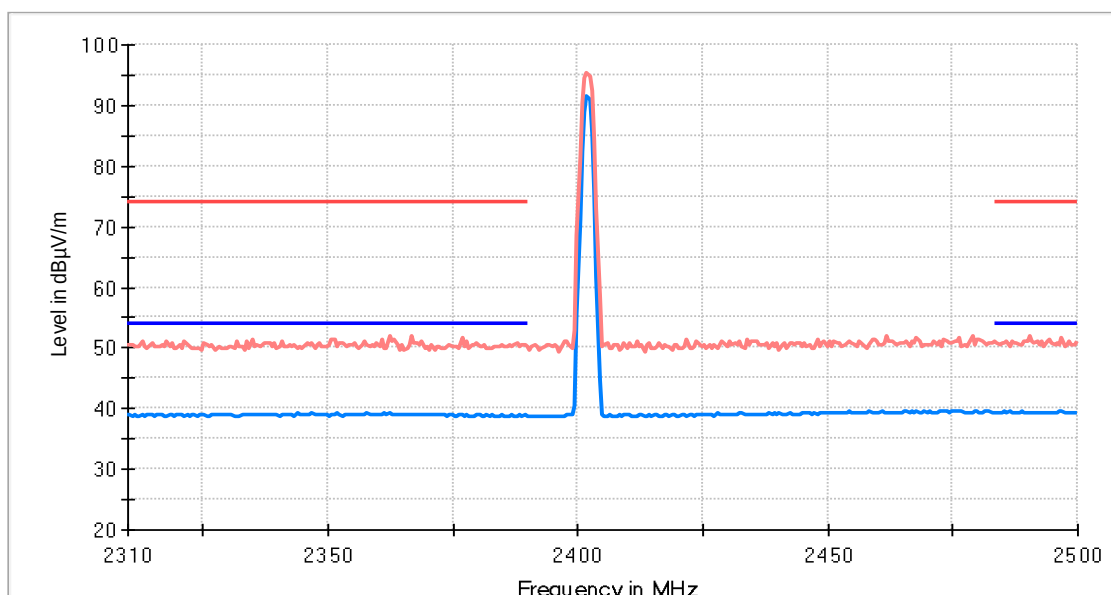

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit


TEST RESULTS (Cont.)

CHANNEL: Middle (2440 MHz)

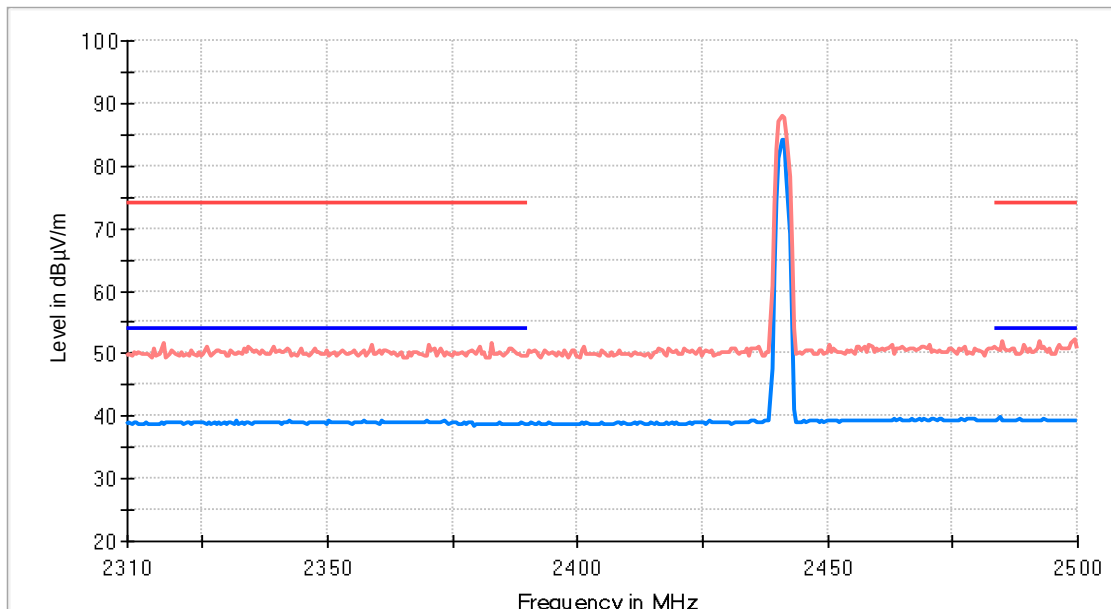

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

CHANNEL: Highest (2480 MHz)

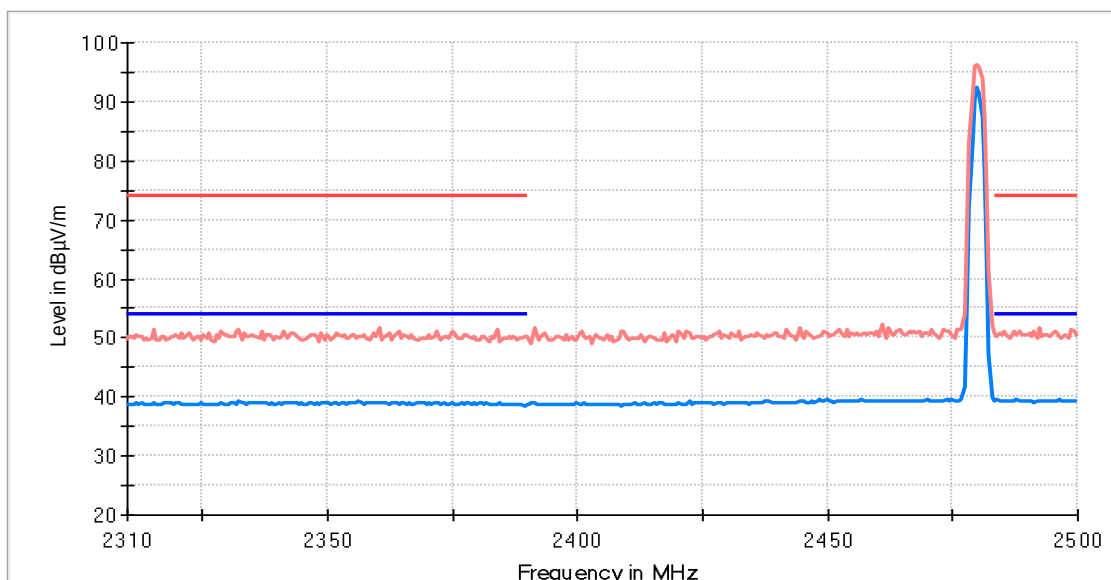

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1GHz to 26 GHz) Restricted Bands AVG Limit

Appendix B: Test results (WI-FI 2.4GHz)

Appendix B Content

PRODUCT INFORMATION80

DESCRIPTION OF TEST CONDITIONS81

TEST B.1: 99% OCCUPIED BANDWIDTH AND 6DB BANDWIDTH.....82

TEST B.2: MAXIMUM CONDUCTED OUTPUT POWER AND ANTENNA GAIN99

TEST B.3: BAND-EDGE EMISSIONS COMPLIANCE (TRANSMITTER).....108

TEST B.4: POWER SPECTRAL DENSITY125

TEST B.5: EMISSION LIMITATIONS RADIATED (TRANSMITTER).....134

PRODUCT INFORMATION

The following information is provided by the supplier, in accordance with clause 5.4.1:

Information	Description
Modulation	DSSS/OFDM
Maximum RF Output Power	b/g mode: 14 dBm n20 mode: 8 dBm n40 mode: 6 dBm
Operating Frequency Range	2412 – 2462 MHz
Nominal Channel Bandwidth	20 MHz 40 MHz
Extreme operating conditions	
- Temperature range	-20 °C to +55 °C
Antenna type	BT/WLAN Automotive Chip Antenna
Antenna gain	-4 dBi
Nominal Voltage	
- Supply Voltage	13.5 Vdc
- Type of power source	DC voltage
Equipment type	WIFI 2.4GHz b/g/n20/n40
Geo-location capability	No

DESCRIPTION OF TEST CONDITIONS

During transmitter test the EUT was being controlled by the SW tool to operate in a continuous transmit mode on the test channel as required and in each of the different modulation modes.

TEST CONDITIONS	DESCRIPTION
TC#01 ⁽¹⁾ (b mode)	<u>Power supply (V):</u> $V_{\text{nominal}} = 13.5 \text{ Vdc}$ <u>Channel Bandwidth:</u> 20 MHz <u>Test Frequencies for Conducted/Radiated tests</u> Lowest channel: 2412 MHz Middle channel: 2437 MHz Highest channel: 2462 MHz
TC#02 ⁽¹⁾ (g mode)	<u>Power supply (V):</u> $V_{\text{nominal}} = 13.5 \text{ Vdc}$ <u>Channel Bandwidth:</u> 20 MHz <u>Test Frequencies for Conducted/Radiated tests</u> Lowest channel: 2412 MHz Middle channel: 2437 MHz Highest channel: 2462 MHz
TC#03 ⁽¹⁾ (n mode)	<u>Power supply (V):</u> $V_{\text{nominal}} = 13.5 \text{ Vdc}$ <u>Channel Bandwidth:</u> 20 MHz <u>Test Frequencies for Conducted/Radiated tests</u> Lowest channel: 2412 MHz Middle channel: 2437 MHz Highest channel: 2462 MHz <u>Channel Bandwidth:</u> 40 MHz <u>Test Frequencies for Conducted/Radiated tests</u> Lowest channel: 2422 MHz Middle channel: 2437 MHz Highest channel: 2452 MHz

Note (1): For spurious emissions for OFDM modes 802.11g and 802.11n20,802.11n40 a preliminary scan was performed to determine the worst case. The following tables and plots show the results for DSSS modulation (802.11b) and the worst case in OFDM modulation (802.11n).

The data rates of 1Mb/s for 802.11b, 6Mb/s for 802.11g, MCS0 for 802.11n20 and 802.11n40 were selected based on the preliminary testing that identified those rates corresponding to the worst cases.


TEST B.1: 99% OCCUPIED BANDWIDTH AND 6DB BANDWIDTH

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	§2.1049, Part 15 Subpart C §15.247(a)(2) and RSS-247 5.2(a)

LIMITS

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 KHz.

TEST SETUP

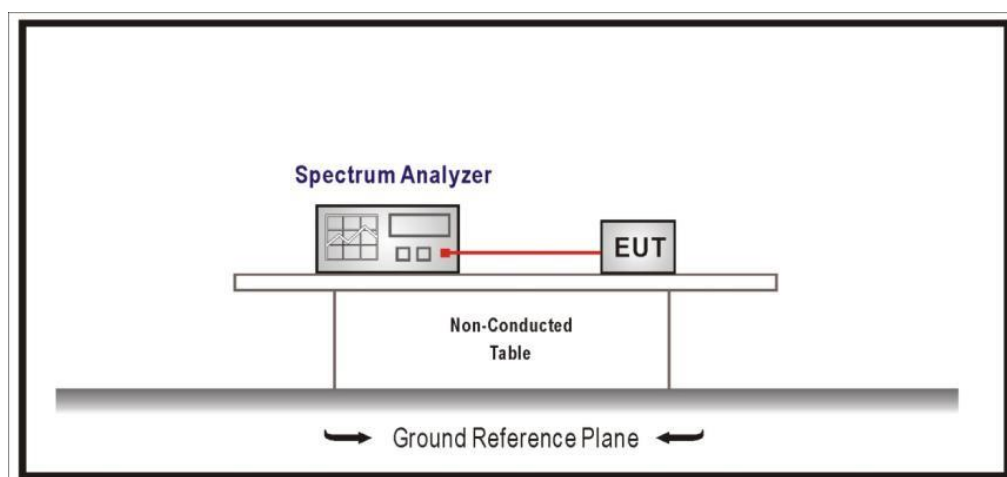

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (b mode)
TEST RESULTS:	PASS

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
6dB Bandwidth (MHz)	10.150	9.150	9.150
Occupied bandwidth (kHz)	14.500	14.200	14.000
Measurement uncertainty (kHz)	<± 1.80		


6dB Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	800	800	800
Sweep time	56.836 µs	56.836 µs	56.836 µs
Reference Level	20.000 dBm	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	40.000 dB	40.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamplifier	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	14 / max. 150	7 / max. 150	7 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.05 dB	0.21 dB	0.27 dB


TEST RESULTS (Cont.):

6 dB BANDWIDTH


Lowest Channel

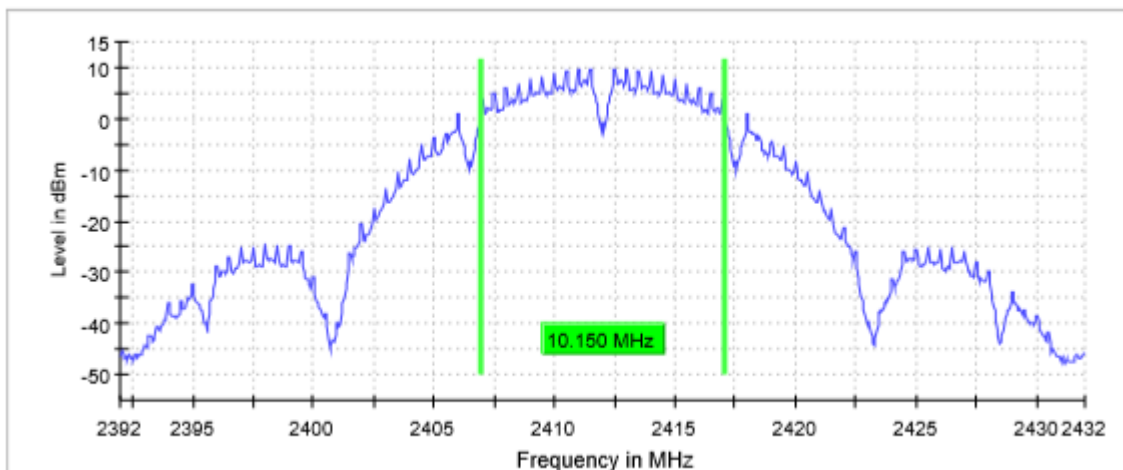

Middle Channel

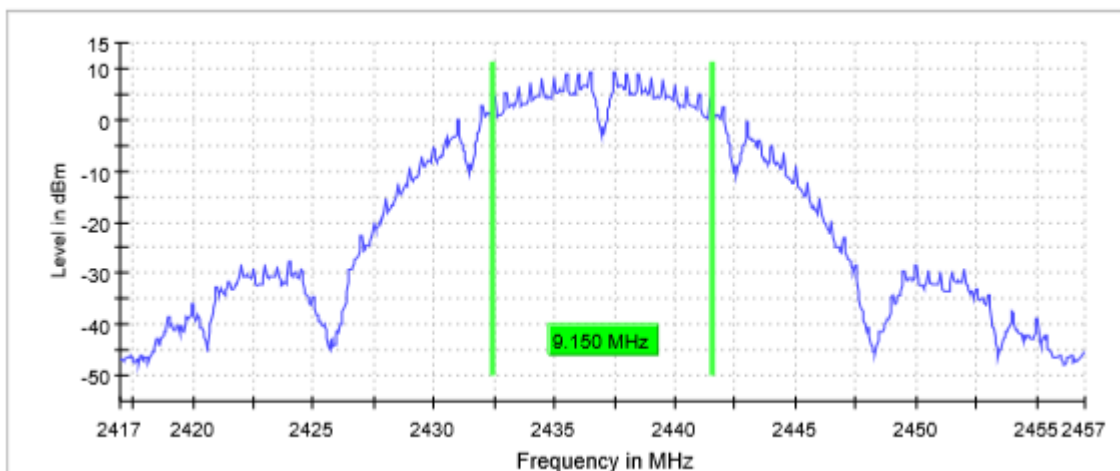

Highest Channel

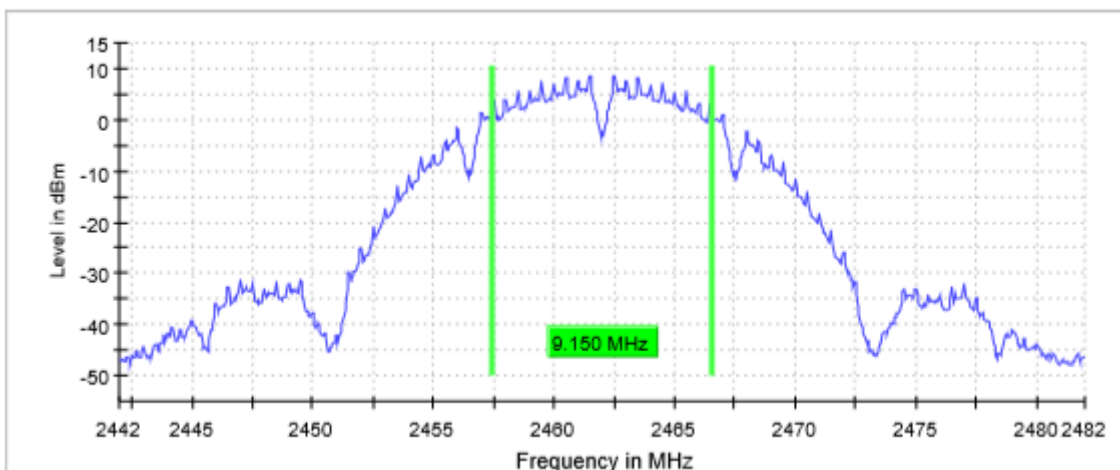

TEST RESULTS (Cont.):


OBW Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamplifier	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	6 / max. 150	7 / max. 150	6 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.04 dB	0.24 dB	0.05 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH


Lowest Channel

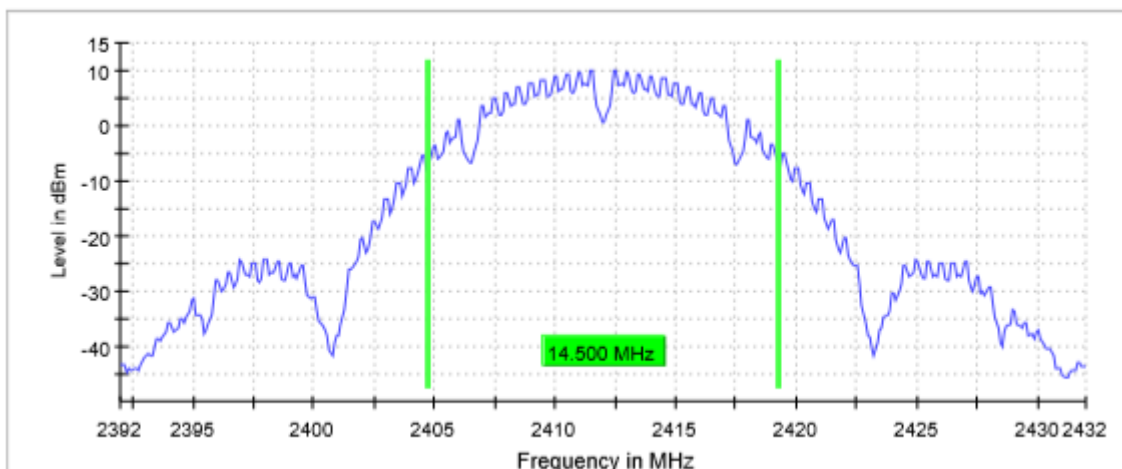

Middle Channel

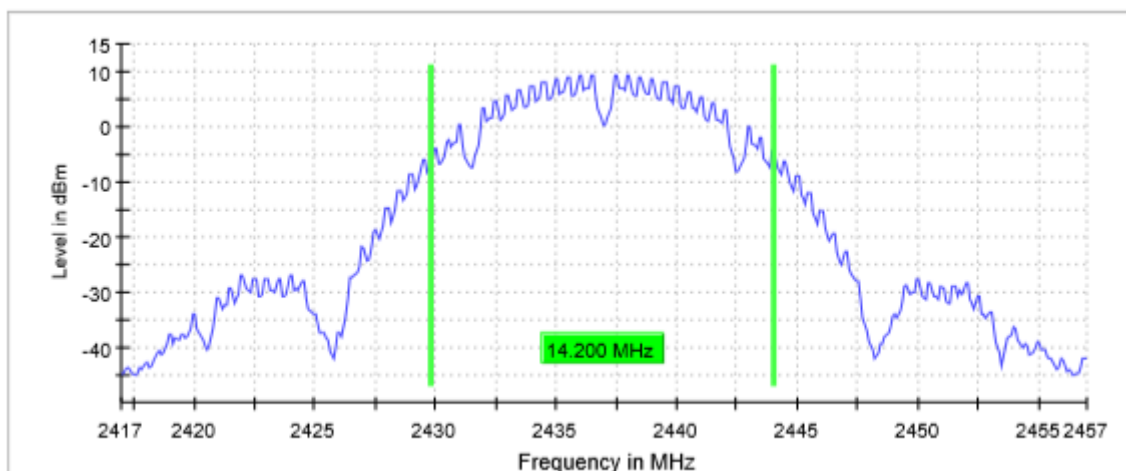

Highest Channel

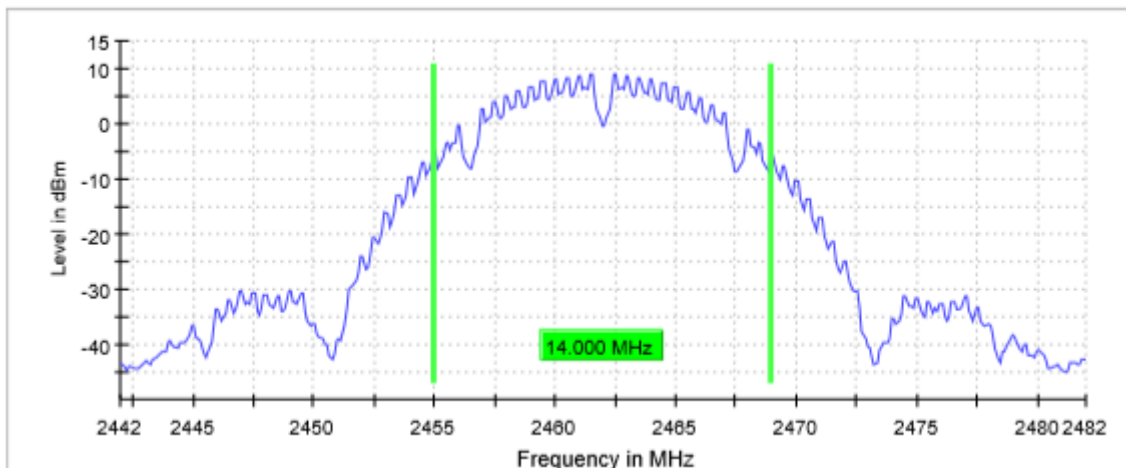

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (g mode)
TEST RESULTS:	PASS

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
6dB bandwidth (MHz)	8.800	9.050	8.900
Occupied bandwidth (MHz)	13.500	13.400	13.300
Measurement uncertainty (kHz)	<± 1.80		


6dB Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	800	800	800
Sweep time	56.836 µs	56.836 µs	56.836 µs
Reference Level	20.000 dBm	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	40.000 dB	40.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamplifier	off	off	Off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	101 / max. 150	75 / max. 150	78 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.05 dB	0.06 dB	0.25 dB


TEST RESULTS (Cont.):

6 dB BANDWIDTH


Lowest Channel

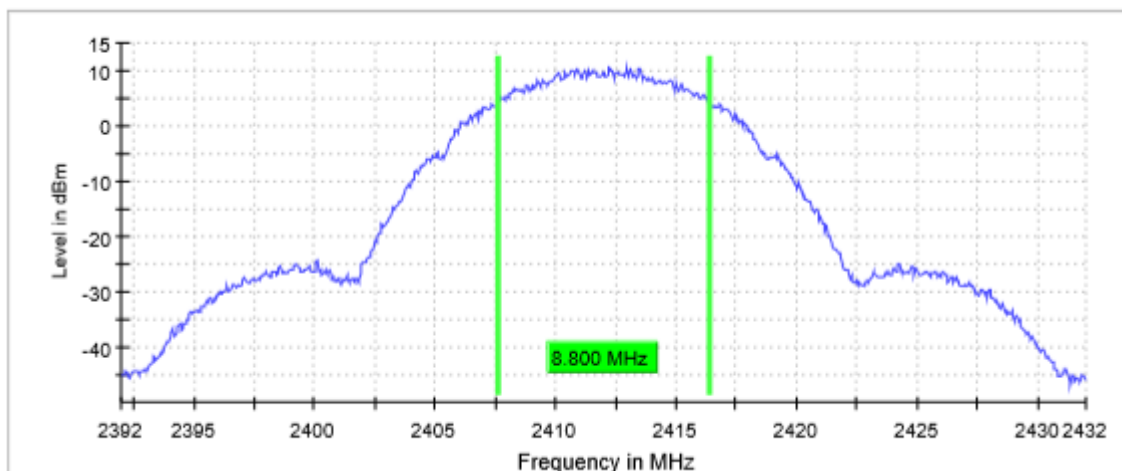

Middle Channel

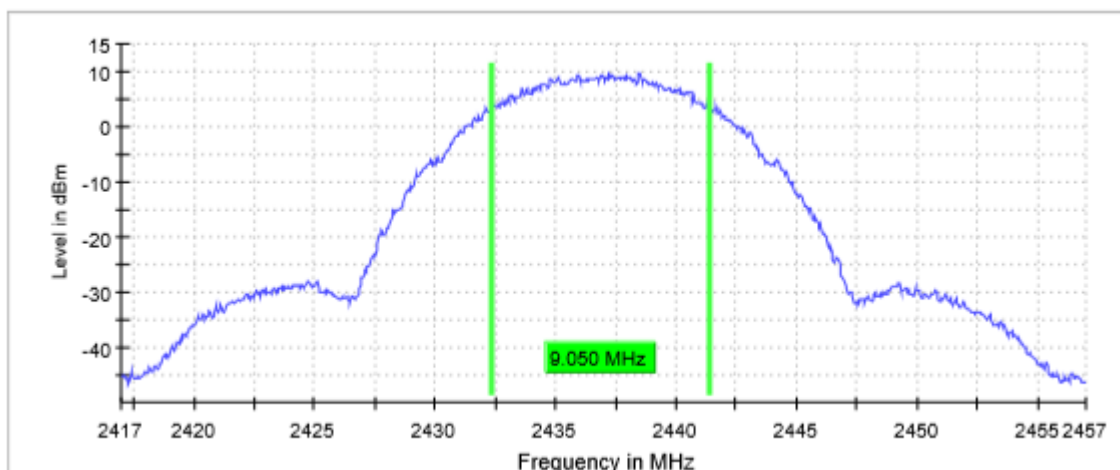

Highest Channel

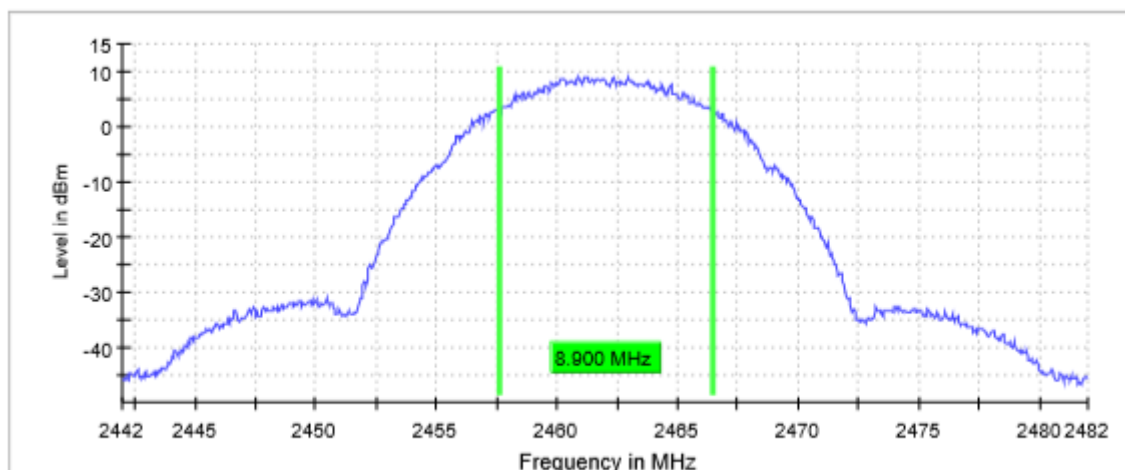

TEST RESULTS (Cont.):


OBW Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamplifier	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	46 / max. 150	25 / max. 150	41 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.03 dB	0.18 dB	0.00 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

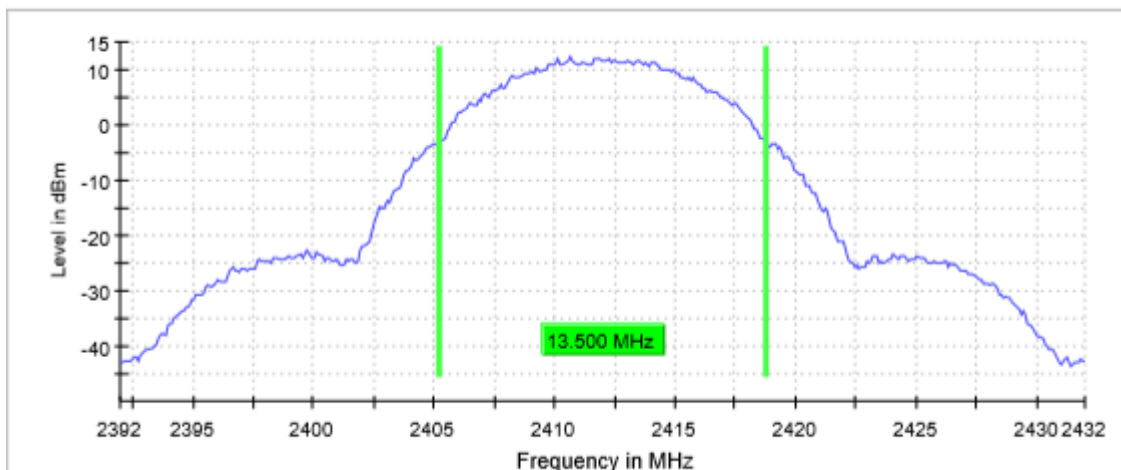

Middle Channel

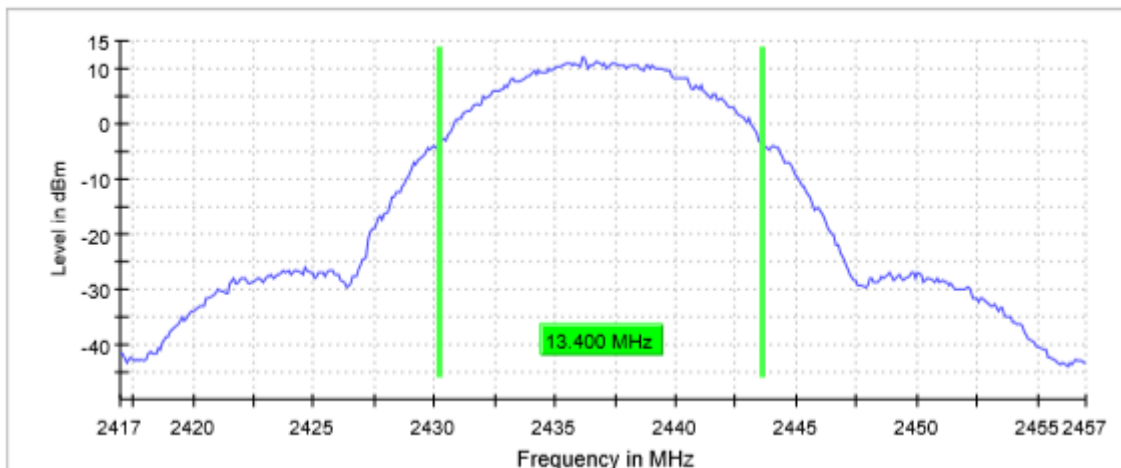

Highest Channel

