



HERMON LABORATORIES

Test specification: Section 15.247(e), RSS-247 section 5.2(b), Peak power density	
Test procedure:	ANSI C63.10, section 11.10.5
Test mode:	Compliance
Date(s):	19-Jan-25
Temperature: 22 °C	Relative Humidity: 41 %
	Air Pressure: 1016 hPa
	Power: 3.6 VDC
Remarks:	

Table 7.12.2 Maximum power spectral density test results

ASSIGNED FREQUENCY: 902-928 MHz
 MODULATION: 2GFSK
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Average
 EUT 20 dB BANDWIDTH: 61.54 kHz
 RESOLUTION BANDWIDTH: 3 kHz
 VIDEO BANDWIDTH: 30 kHz
 FREQUENCY HOPPING: Disabled

BIT RATE: **50 kbps**

Carrier frequency, MHz	Spectrum analyzer reading, dBm	External attenuation, dB	DC factor, dB	Peak power density, dBm / 3 kHz**	Limit, dBm	Margin*, dB	Verdict
902.3	-1.76	Included	5.34	3.58	8.00	-4.42	Pass
915.0	-1.95	Included	5.34	3.39	8.00	-4.61	Pass
927.7	-1.98	Included	5.34	3.36	8.00	-4.64	Pass


* - Margin = Peak output power – specification limit.

** - Peak power density = SA reading + DC factor, where
 DC Factor = $10^{\ast}\log(1/(Txon / Txon+Txoff))$

Reference numbers of test equipment used

HL 3440	HL 4135	HL 4355	HL 5642	HL 5933	HL 7523		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.

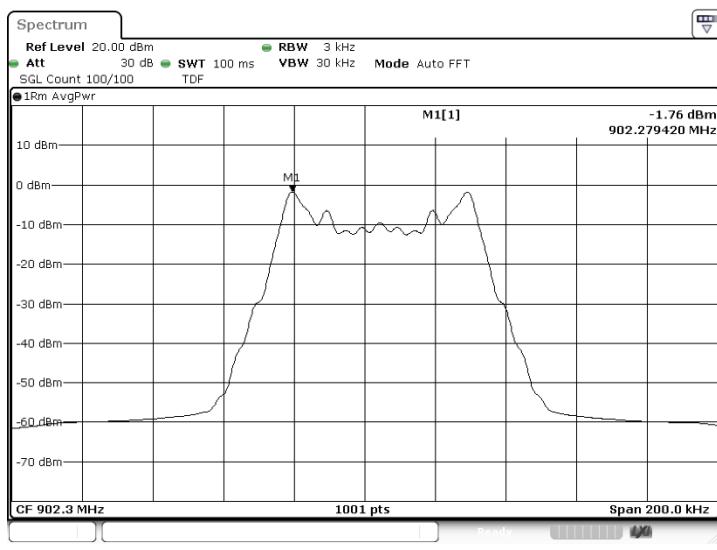
Plot 7.12.1 Average power spectral density at low frequency




HERMON LABORATORIES

Test specification: Section 15.247(e), RSS-247 section 5.2(b), Peak power density			
Test procedure: ANSI C63.10, section 11.10.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-Jan-25			
Temperature: 22 °C	Relative Humidity: 41 %	Air Pressure: 1016 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.12.2 Average power spectral density at mid frequency

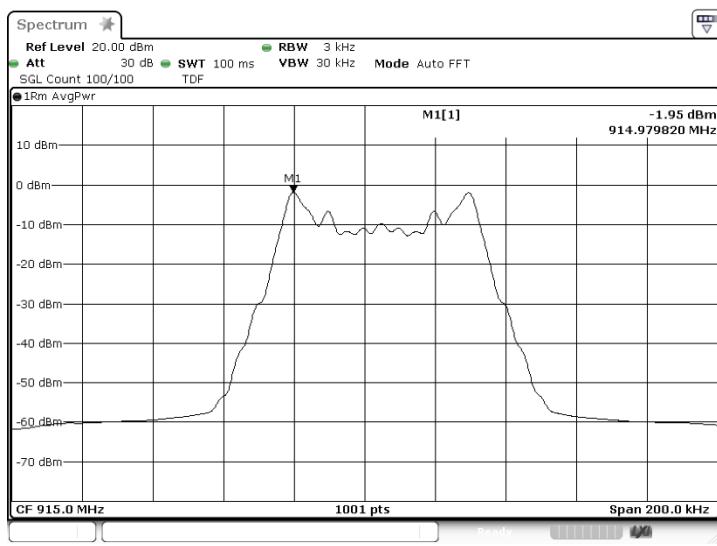

Plot 7.12.3 Average power spectral density at high frequency

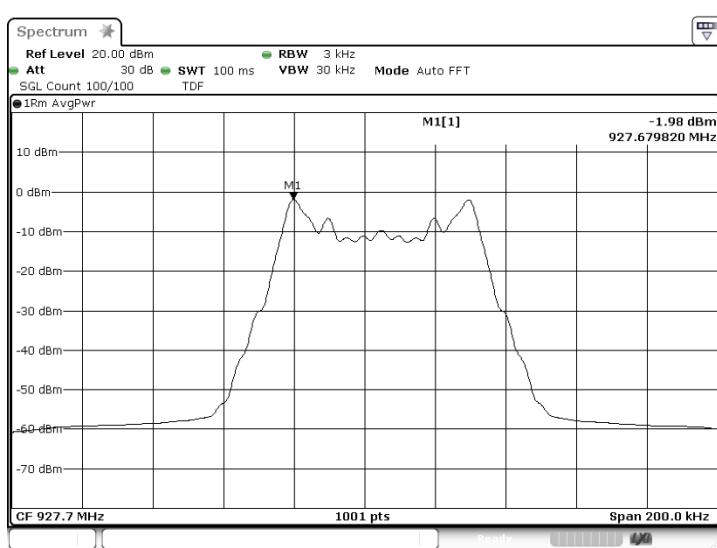




HERMON LABORATORIES

Test specification: Section 15.247(e), RSS-247 section 5.2(b), Peak power density			
Test procedure: ANSI C63.10, section 11.10.5			
Test mode: Compliance			Verdict: PASS
Date(s): 19-Jan-25			
Temperature: 22 °C	Relative Humidity: 41 %	Air Pressure: 1016 hPa	Power: 3.6 VDC
Remarks:			

Plot 1.1.4 Transmission pulse duration and period

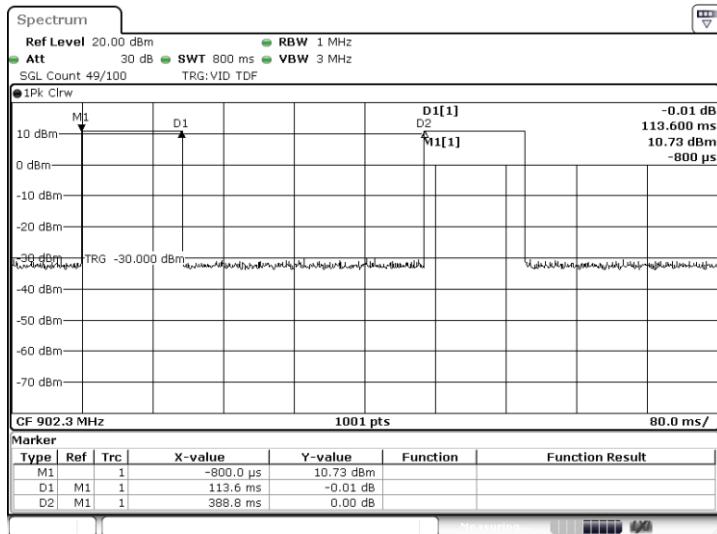



HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.13.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 07-Apr-25		Air Pressure: 1012 hPa	Power: 3.6 VDC
Temperature: 23 °C Relative Humidity: 48 %			
Remarks:			

7.13 Band edge emissions at RF antenna connector at LoRa modulation

7.13.1 General

This test was performed to measure band edge emissions at RF antenna connector. Specification test limits are given in Table 7.13.1.

Table 7.13.1 Band edge emission limits

Output power	Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(µV/m)	
			Peak	Average
Peak	902.0 – 928.0	20.0	74.0	54.0
Averaged over a time interval	902.0 – 928.0	30.0	74.0	54.0

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.13.2 Test procedure

7.13.2.1 The EUT was set up as shown in Figure 7.13.1, energized normally modulated at the maximum data rate with its hopping function disabled and its proper operation was checked.

7.13.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.

7.13.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.


7.13.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.

7.13.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.13.2 and associated plots and referenced to the highest emission level measured within the authorized band.

7.13.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.

7.13.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.13.1 Band edge emission test setup

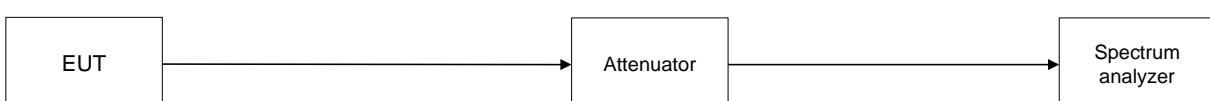



HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions						
Test procedure:		ANSI C63.10 section 11.13.2				
Test mode:		Compliance				Verdict: PASS
Date(s):		07-Apr-25				
Temperature: 23 °C		Relative Humidity: 48 %		Air Pressure: 1012 hPa	Power: 3.6 VDC	
Remarks:						

Table 7.13.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 902.0 – 928.0 MHz
 DETECTOR USED: AVG with max hold
 MODULATION: LoRa 125 kHz
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz

BIT RATE: 1.2 kbps

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Frequency hopping disabled						
902.3	-28.03	19.12	47.15	30.0	-17.15	Pass
927.7	-19.91	18.86	38.77		-8.77	
Frequency hopping enabled						
902.3	-29.10	19.24	48.34	30.0	-18.34	Pass
927.7	-23.71	19.53	43.24		-13.24	

BIT RATE: 6.8 kbps

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Frequency hopping disabled						
902.3	-29.25	19.09	48.34	30.0	-18.34	Pass
927.7	-20.23	18.86	39.09		-9.09	
Frequency hopping enabled						
902.3	-30.32	19.25	49.57	30.0	-19.57	Pass
927.7	-22.47	19.54	42.01		-12.01	

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 3230	HL 3440	HL 4136	HL 5376	HL 5638	HL 5933		
---------	---------	---------	---------	---------	---------	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure:	ANSI C63.10 section 11.13.2		
Test mode:	Compliance		
Date(s):	07-Apr-25		
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.13.1 The highest band edge emission at low carrier frequency with hopping function disabled

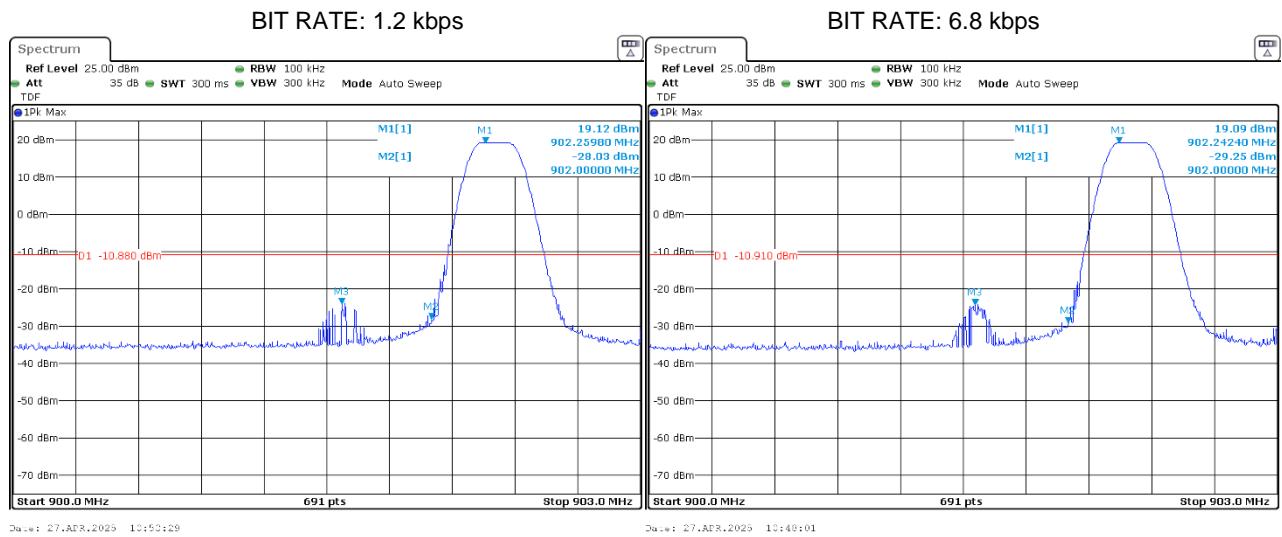

Plot 7.13.2 The highest band edge emission at high carrier frequency with hopping function disabled

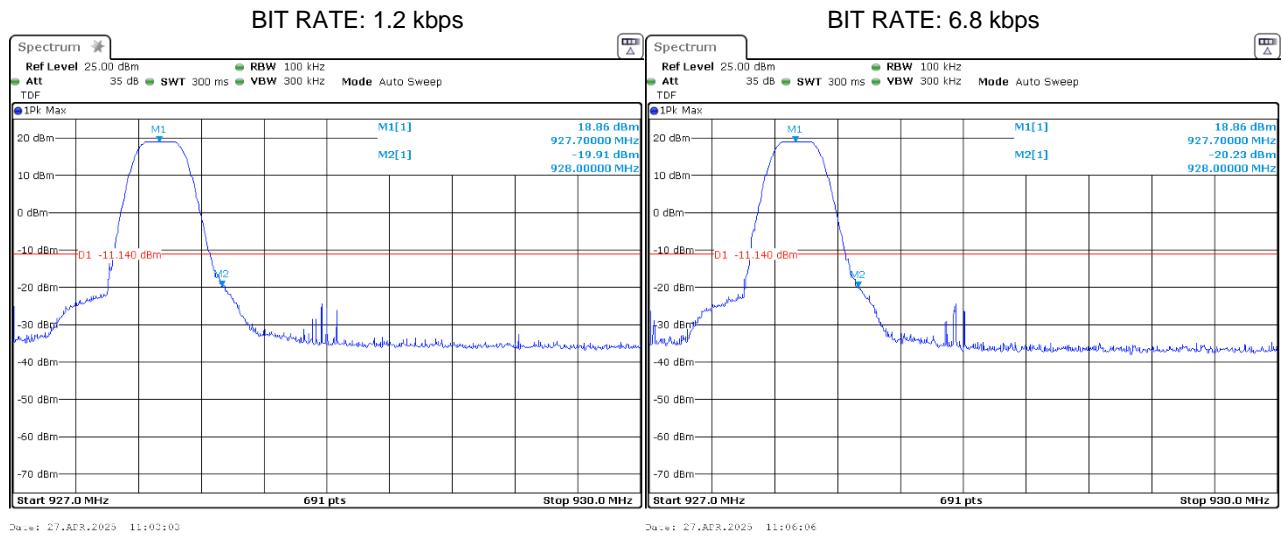





HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure:	ANSI C63.10 section 11.13.2		
Test mode:	Compliance		
Date(s):	07-Apr-25		
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.13.3 The highest band edge emission at low carrier frequency with hopping function enabled

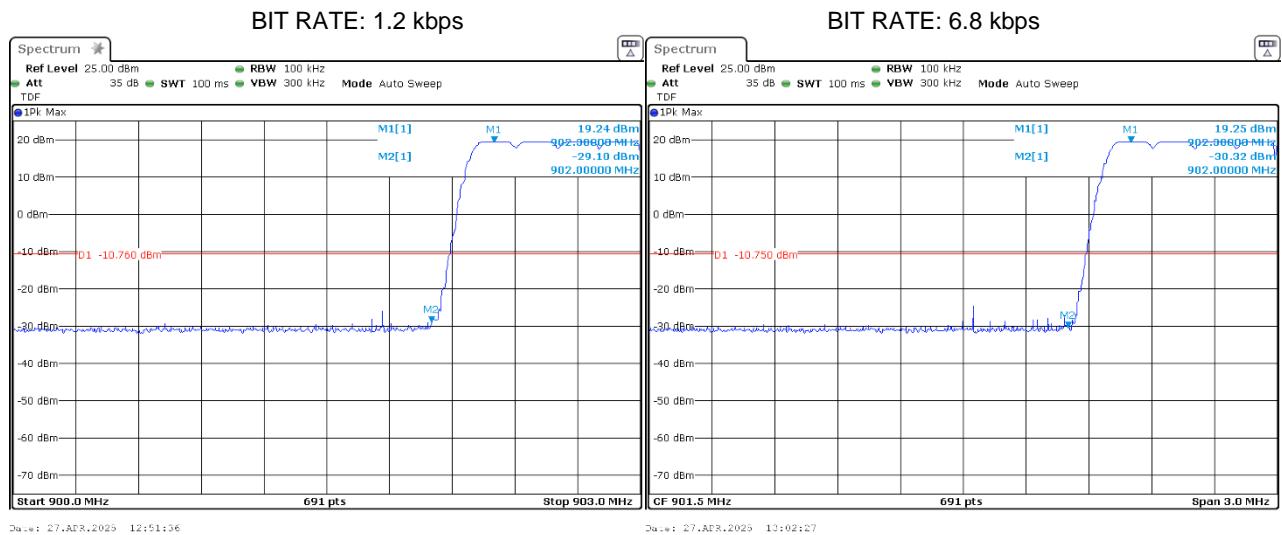

Plot 7.13.4 The highest band edge emission at high carrier frequency with hopping function enabled

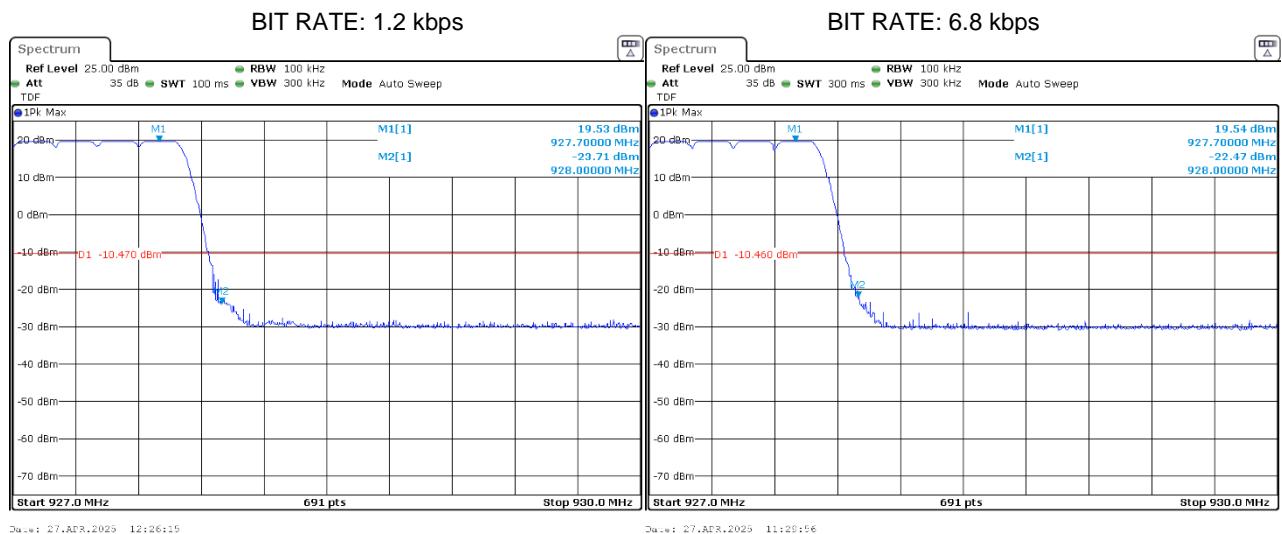



HERMON LABORATORIES

Report ID: TELRAD_FCC.55429_Hybrid_LoRa_2GFSK.docx

Date of Issue: 8-May-25

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.13.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 07-Apr-25		Air Pressure: 1012 hPa	Power: 3.6 VDC
Temperature: 23 °C Relative Humidity: 48 %			
Remarks:			

7.14 Band edge emissions at RF antenna connector at 2GFSK modulation

7.14.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.14.1.

Table 7.14.1 Band edge emission limits

Output power	Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(µV/m)	
			Peak	Average
Peak	902.0 – 928.0	20.0	74.0	54.0
Averaged over a time interval	902.0 – 928.0	30.0	74.0	54.0

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.14.2 Test procedure

7.14.2.1 The EUT was set up as shown in Figure 7.14.1, energized normally modulated at the maximum data rate and its proper operation was checked.

7.14.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.

7.14.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.

7.14.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.

7.14.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.14.2 and associated plots and referenced to the highest emission level measured within the authorized band.

7.14.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.

7.14.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.14.1 Band edge emission test setup





HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions						
Test procedure:	ANSI C63.10 section 11.13.2					
Test mode:	Compliance				Verdict:	PASS
Date(s):	07-Apr-25					
Temperature: 23 °C	Relative Humidity:	48 %		Air Pressure: 1012 hPa	Power: 3.6 VDC	
Remarks:						

Table 7.14.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 902.0 -928.0MHz
 DETECTOR USED: Average
 MODULATION: GFSK
 BIT RATE: 50 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: \geq RBW

HOPPING Disabled

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Low carrier - Peak power						
902.0	-40.53	10.17	50.70	30.0	20.70	Pass
High carrier - Peak power						
928.0	-33.52	9.69	43.21	30.0	13.21	Pass

HOPPING Enabled

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Low carrier - Peak power						
902.00	-40.83	10.16	50.99	30.0	20.99	Pass
High carrier - Peak power						
928.00	-37.64	9.67	47.31	30.0	17.31	Pass

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 3440	HL 3818	HL 3901	HL 4135	HL 5933	HL 7523		
---------	---------	---------	---------	---------	---------	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.13.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 07-Apr-25			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.14.1 The highest emission level within the assigned band at low carrier frequency with hopping disabled

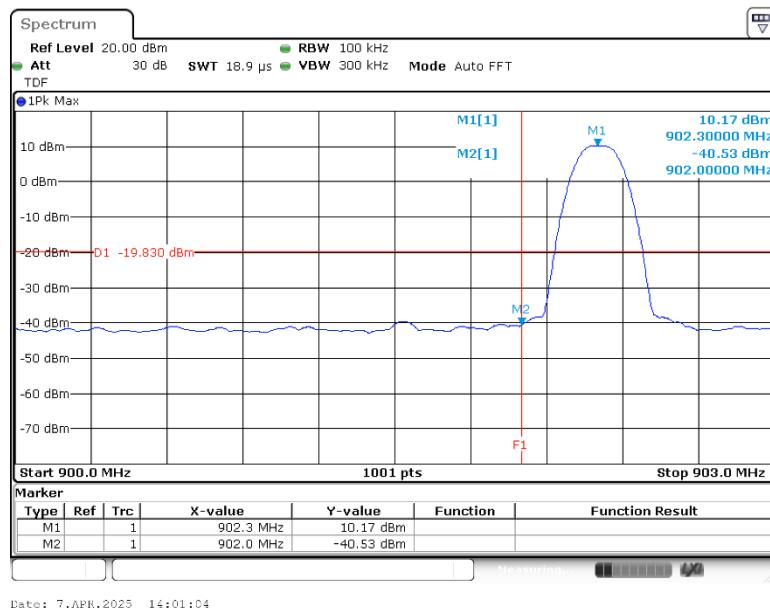

Plot 7.14.2 The highest emission level within the assigned band at low carrier frequency with hopping enabled

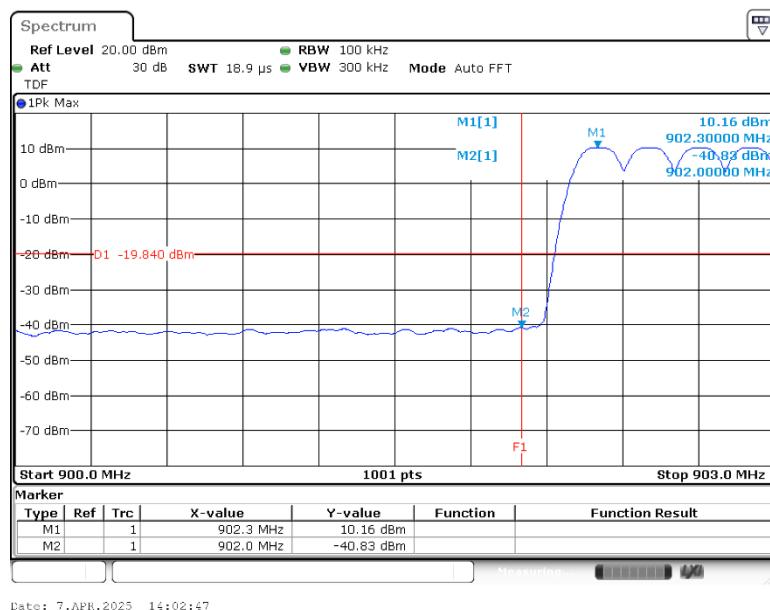





HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.13.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 07-Apr-25			
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.14.3 The highest emission level within the assigned band at high carrier frequency with hopping disabled

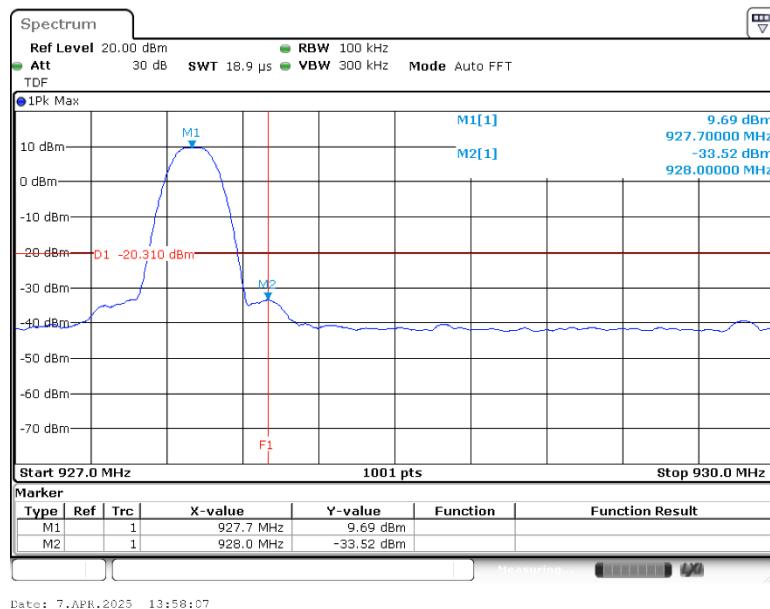

Plot 7.14.4 The highest emission level within the assigned band at high carrier frequency with hopping enabled

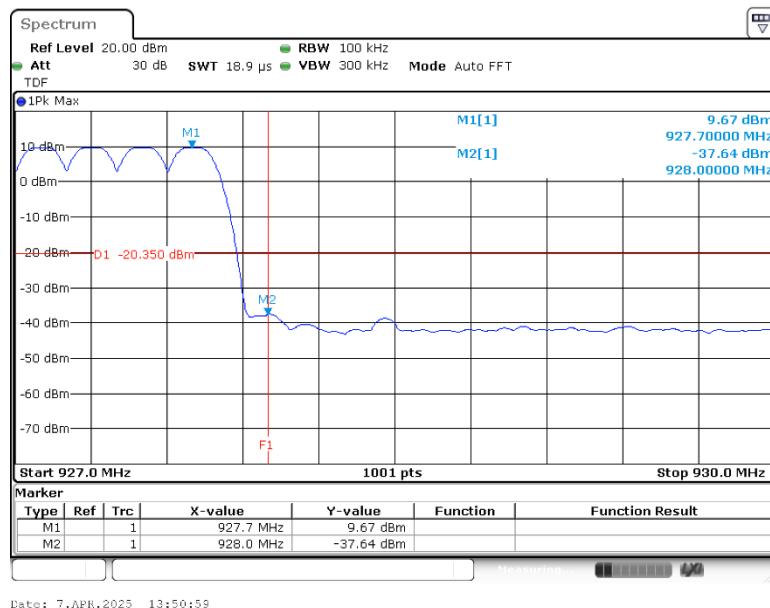



HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

7.15 Field strength of spurious emissions at LoRa modulation

7.15.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.15.1.

Table 7.15.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	30.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705		73.8 – 63.0**		
1.705 – 30.0*		69.5		
30 – 88	NA	40.0	NA	
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$L_{mS2} = L_{mS1} + 40 \log \left(\frac{S_1}{S_2} \right)$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.15.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.15.2.1 The EUT was set up as shown in Figure 7.15.1, energized and the performance check was conducted.

7.15.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.15.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.15.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.15.3.1 The EUT was set up as shown in Figure 7.15.2, Figure 1.1.3, energized and the performance check was conducted.

7.15.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.


7.15.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 25-Dec-24			
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Figure 7.15.1 Setup for spurious emission field strength measurements below 30 MHz

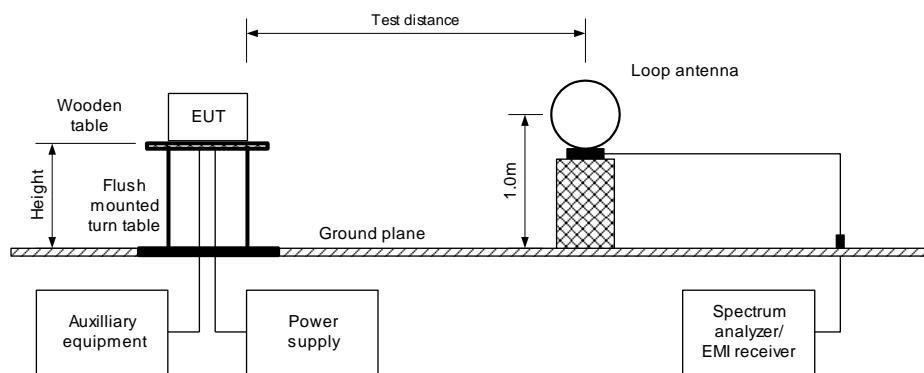



HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Figure 7.15.2 Setup for spurious emission field strength measurements in 30 -1000 MHz


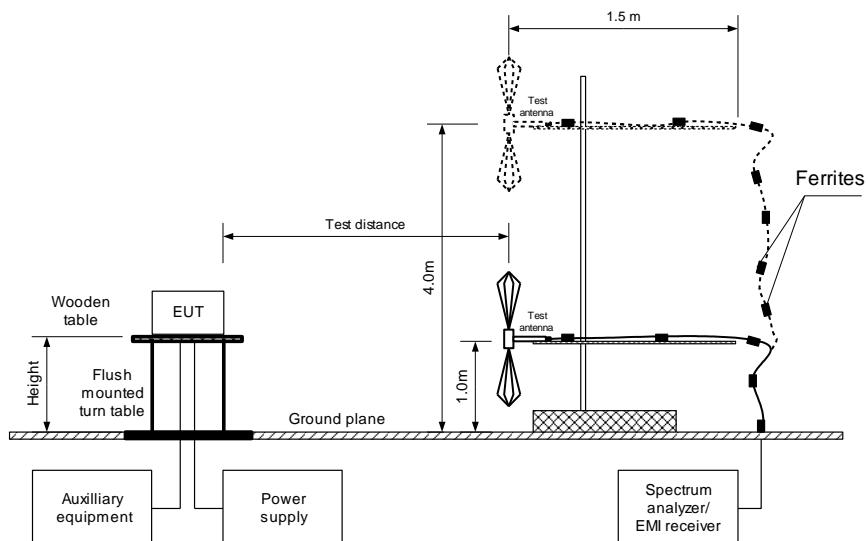


Figure 7.15.3 Setup for spurious emission field strength measurements above 1000 MHz



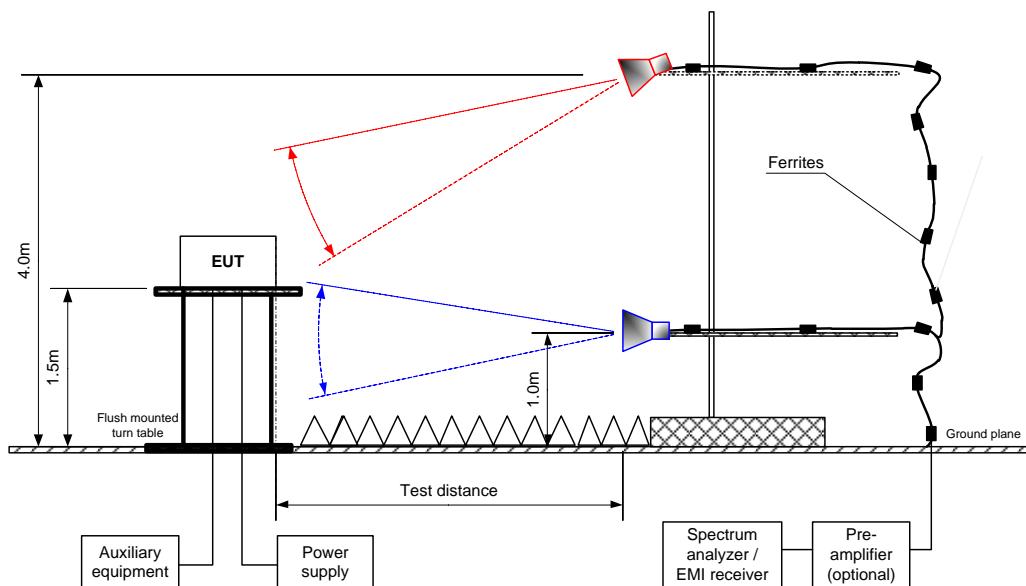

HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions											
Test procedure:	ANSI C63.10 section 11.12.1										
Test mode:	Compliance					Verdict:		PASS			
Date(s):	25-Dec-24										
Temperature: 23 °C	Relative Humidity: 47 %			Air Pressure: 1019 hPa			Power: 3.6 VDC				
Remarks:											

Table 7.15.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY: 902 – 928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 9500 MHz
 TEST DISTANCE: 3 m
 MODULATION: LoRa 125 kHz
 BIT RATE: 1.2 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency 902.3 MHz									
870.350	46.40	Vertical	1.0	35	114.41	68.01	30.0	38.01	Pass
934.539	42.58	Vertical	1.0	35		71.83		41.83	
1804.724	65.50	Vertical	1.3	-137		48.91		18.91	
6316.574	59.66	Vertical	1.7	37		54.75		24.75	
Mid carrier frequency 915.0 MHz									
843.020	45.10	Vertical	1.0	33	115.14	70.04	30.0	40.04	Pass
883.263	45.61	Vertical	1.0	33		69.53		39.53	
947.088	42.86	Vertical	1.0	33		72.28		42.28	
1830.132	47.81	Vertical	1.51	148		67.33		37.33	
5490.118	52.07	Vertical	1.55	144		63.07		33.07	
6405.160	58.68	Vertical	1.55	149		56.46		26.46	
High carrier frequency 927.7 MHz									
862.322	45.41	Vertical	1.0	-78	115.43	70.02	30.0	40.02	Pass
869.403	42.50	Horizontal	1.0	-35		72.93		42.93	
895.687	44.25	Vertical	1.0	-78		71.18		41.18	
959.701	46.90	Vertical	1.0	-78		68.53		38.53	
1855.525	54.02	Vertical	1.65	143		61.41		31.41	
5565.944	54.68	Vertical	1.63	159		60.75		30.75	
6493.952	54.16	Vertical	1.58	163		61.27		31.27	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.



HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Table 7.15.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 902 – 928 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 – 9500 MHz
 TEST DISTANCE: 3 m
 MODULATION: LoRa 125 kHz
 BIT RATE: 1.2 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)			Verdict
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured***, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	
Low carrier frequency										
2706.960	Vertical	1.25	-132	64.07	74.00	-9.93	44.30	N/A	54.00	-9.70
3609.135	Vertical	1.73	6	60.07	74.00	-13.93	42.72	N/A	54.00	-11.28
4511.595	Vertical	1.37	12	48.40	74.00	-25.60	48.40	N/A	54.00	-3.34
5413.923	Vertical	2.44	37	53.57	74.00	-20.43	49.52	N/A	54.00	-4.48
Mid carrier frequency										
2744.945	Vertical	1.55	-86	43.41	74.00	-30.59	43.41	N/A	54.00	-10.59
3660.899	Vertical	1.76	111	52.78	74.00	-21.22	52.78	N/A	54.00	-1.22
4575.105	Vertical	1.33	165	46.88	74.00	-27.12	46.88	N/A	54.00	-7.12
High carrier frequency										
2783.065	Vertical	1.64	63	54.38	74.00	-19.62	49.82	N/A	54.00	-4.18
3710.890	Vertical	1.50	125	53.51	74.00	-20.49	53.51	N/A	54.00	-0.49
4638.485	Vertical	1.39	149	47.43	74.00	-26.57	47.43	N/A	54.00	-6.57

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Average field strength = SA reading + DC factor, where

$$\text{DC Factor} = 10^{\log_{10}(\text{1}/(\text{Txon} / \text{Txon+Txoff}))}$$

Table 7.15.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
NA	NA	NA	NA	NA	NA

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Table 7.15.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY:	902 – 928 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
TEST DISTANCE:	3 m
MODULATION:	LoRa
BIT RATE:	1.2 kbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	> Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict			
Low carrier frequency											
No emissions were found											
Mid carrier frequency											
No emissions were found											
High carrier frequency											
No emissions were found											

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.



HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions					
Test procedure:	ANSI C63.10 section 11.12.1				
Test mode:	Compliance			Verdict:	PASS
Date(s):	25-Dec-24				
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa		Power: 3.6 VDC	
Remarks:					

Table 7.15.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

Table 7.15.7 Restricted bands according to RSS-Gen

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6

Reference numbers of test equipment used

HL 0446	HL 3903	HL 4339	HL 4933	HL 5209	HL 5288	HL 7585	
---------	---------	---------	---------	---------	---------	---------	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.15.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

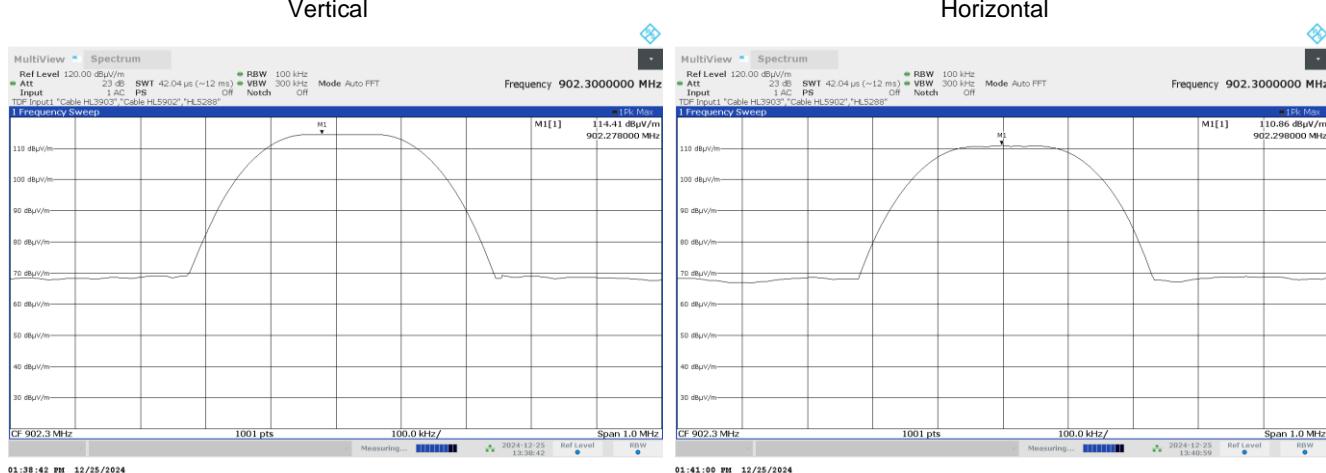

Plot 7.15.2 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

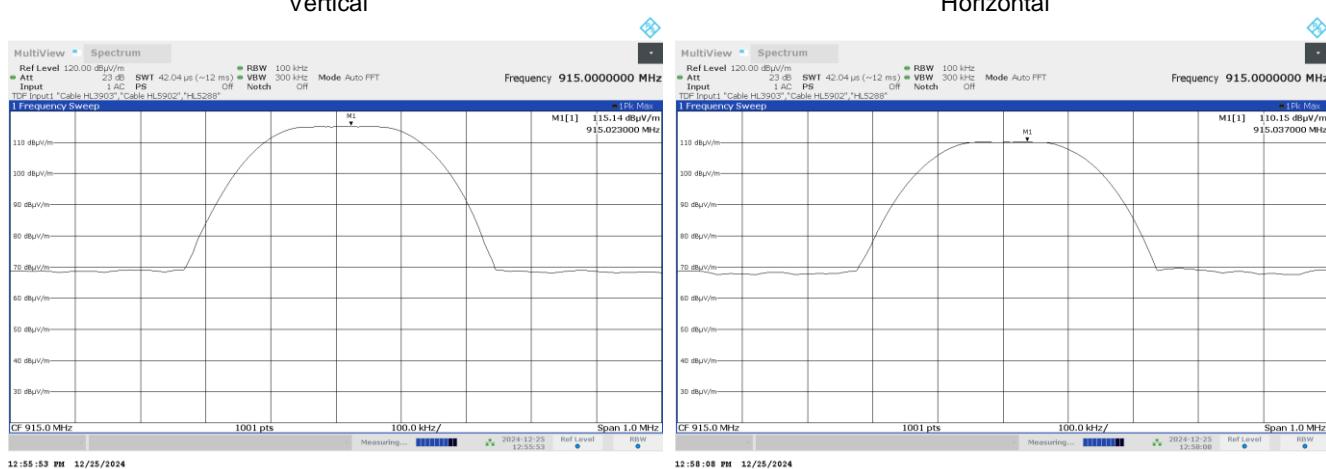




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.15.3 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

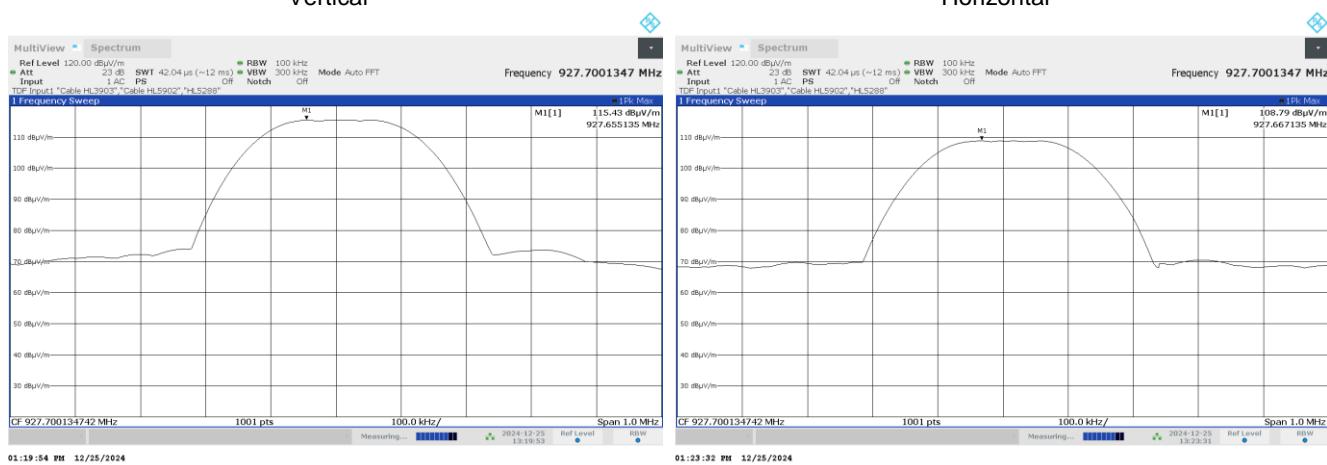




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.15.4 Radiated emission measurements from 9 to 30000 kHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

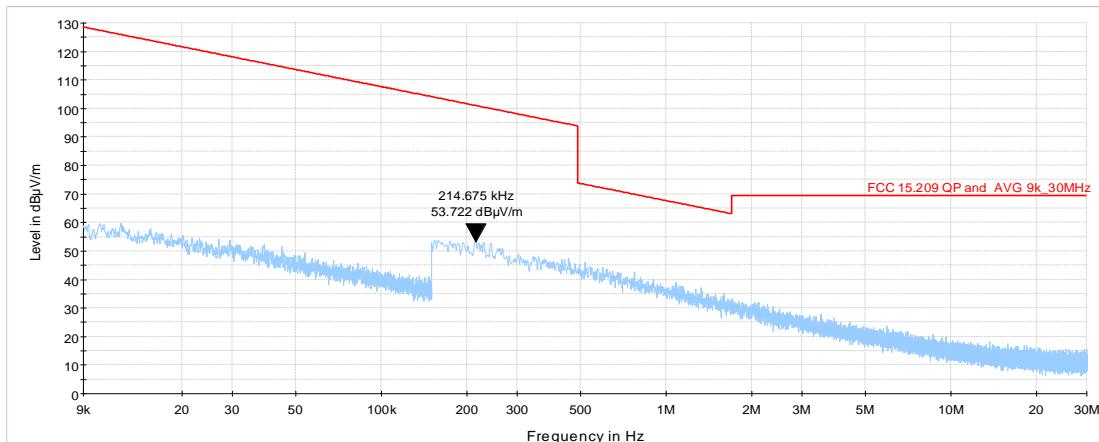

Plot 7.15.5 Radiated emission measurements from 9 to 30000 kHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

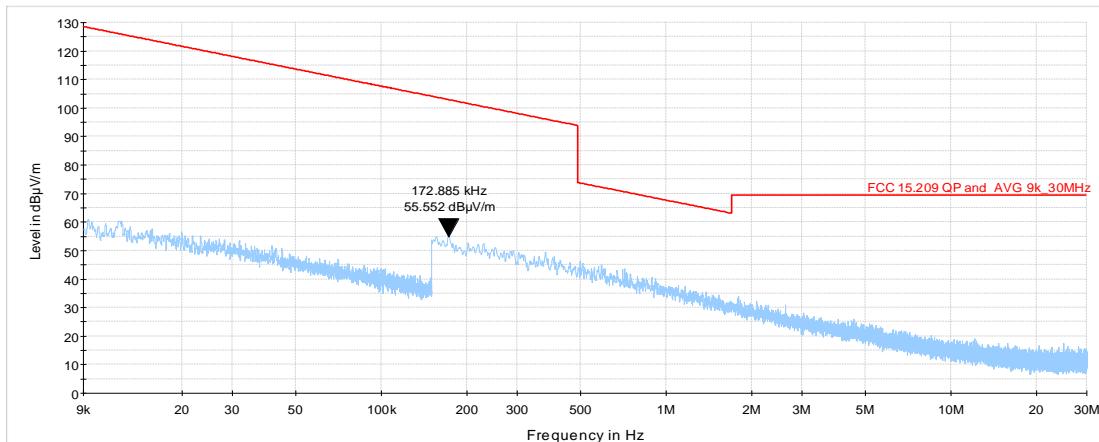




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.15.6 Radiated emission measurements from 9 to 30000 kHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

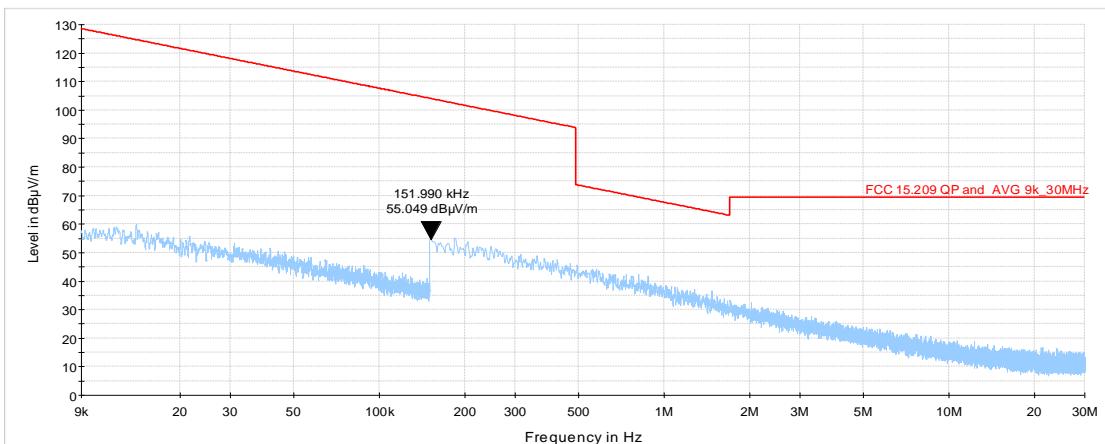



HERMON LABORATORIES


Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.15.7 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

Vertical

Horizontal

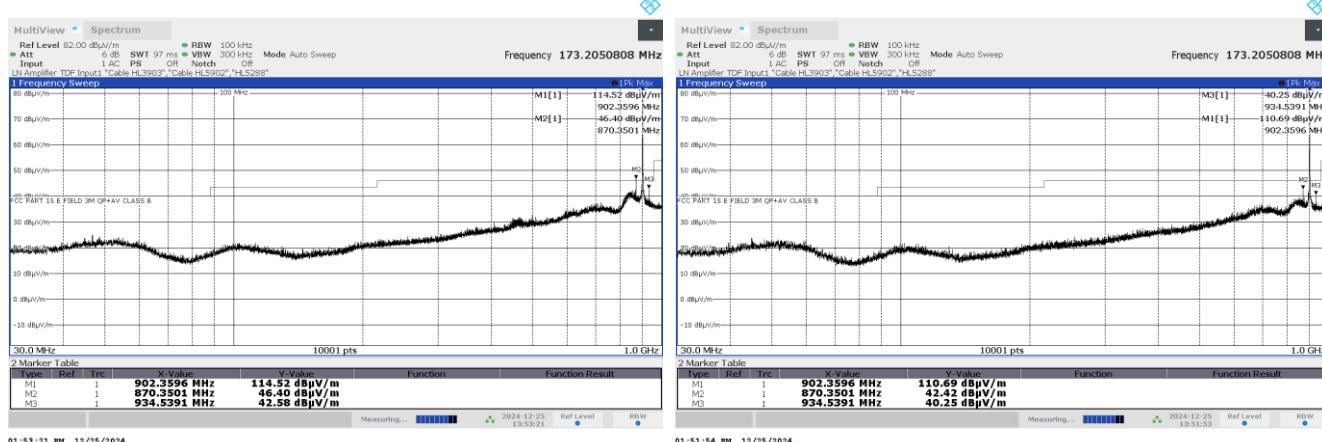


Plot 7.15.8 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

Vertical

Horizontal

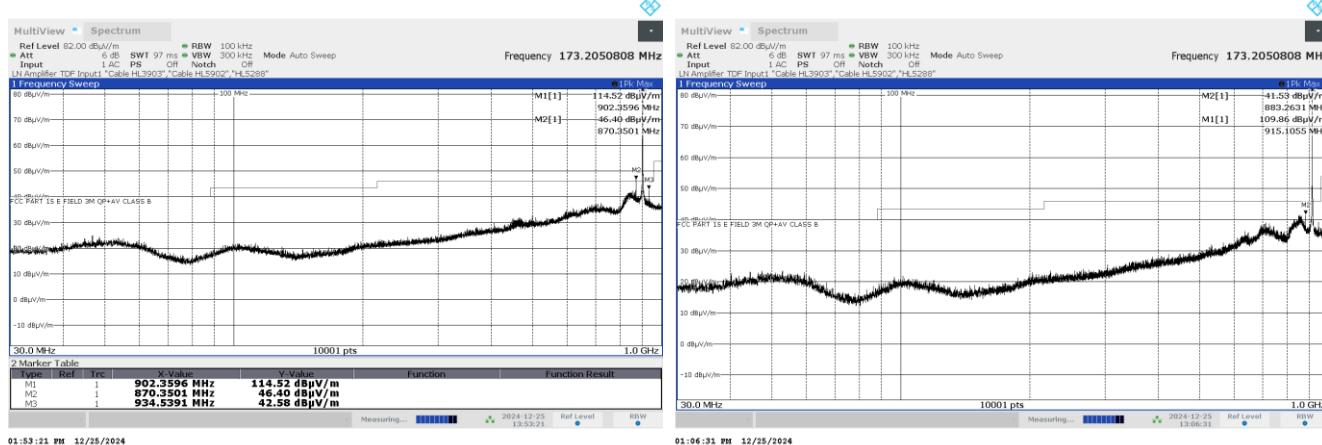




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.15.9 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

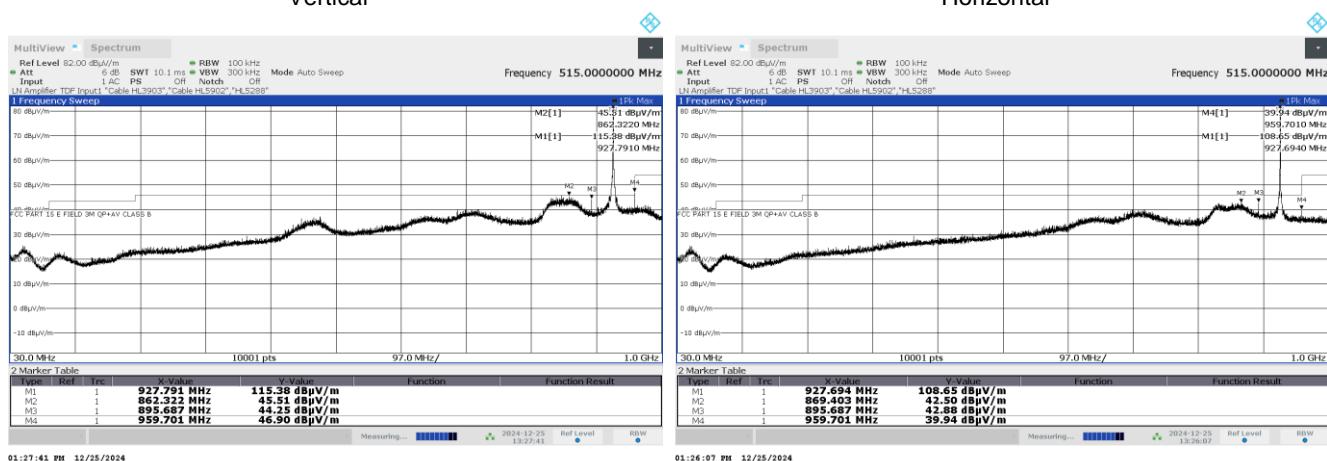




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance			Verdict: PASS
Date(s): 25-Dec-24			
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.15.10 Radiated emission measurements from 1000 to 9500 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

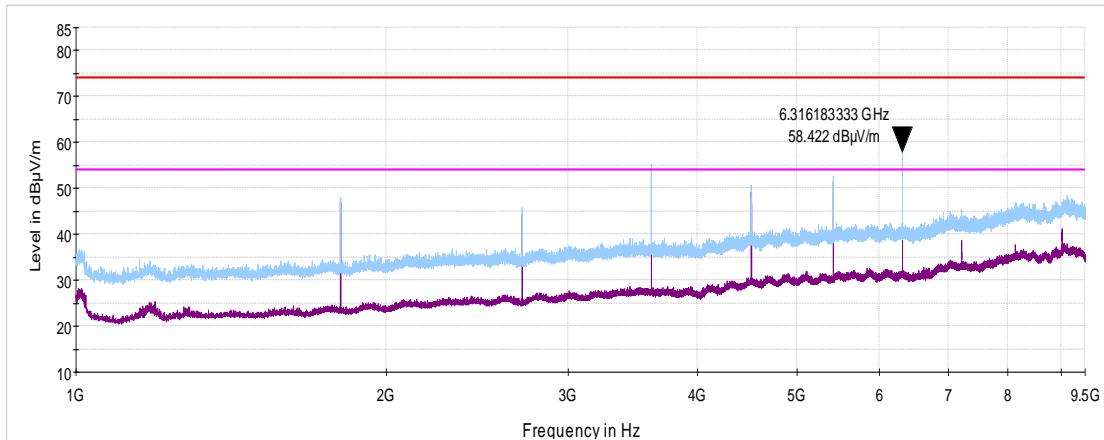

Plot 7.15.11 Radiated emission measurements from 1000 to 9500 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

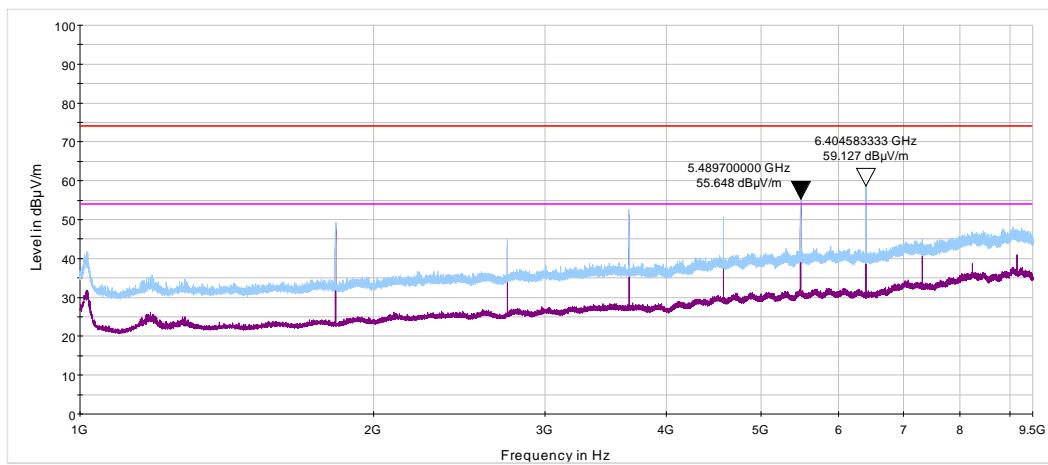




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.15.12 Radiated emission measurements from 1000 to 9500 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

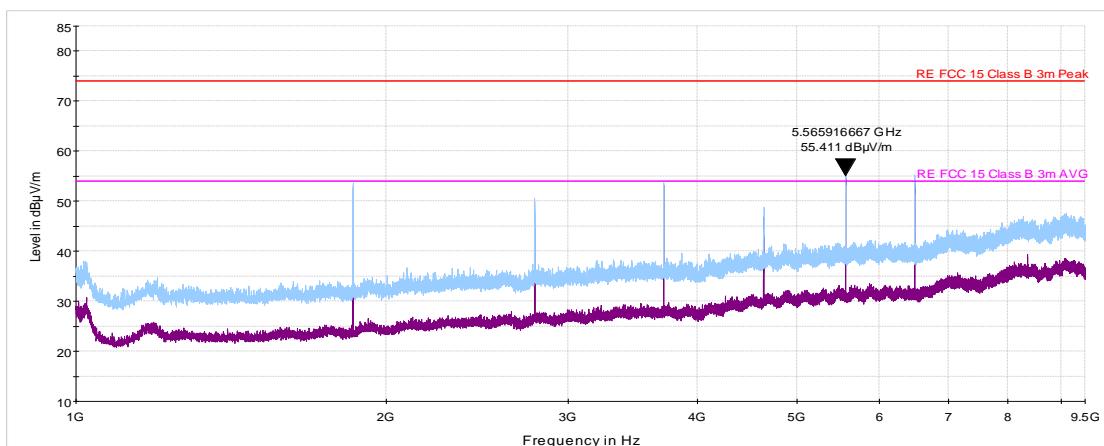




HERMON LABORATORIES


Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions				
Test procedure: ANSI C63.10 section 11.12.1				
Test mode: Compliance			Verdict: PASS	
Date(s): 25-Dec-24				
Temperature: 23 °C		Relative Humidity: 47 %	Air Pressure: 1019 hPa	
Remarks:				

Plot 7.15.13 Radiated emission measurements at the second harmonic of low carrier frequencyTEST SITE:
TEST DISTANCE:
VerticalSemi anechoic chamber
3 m

Horizontal

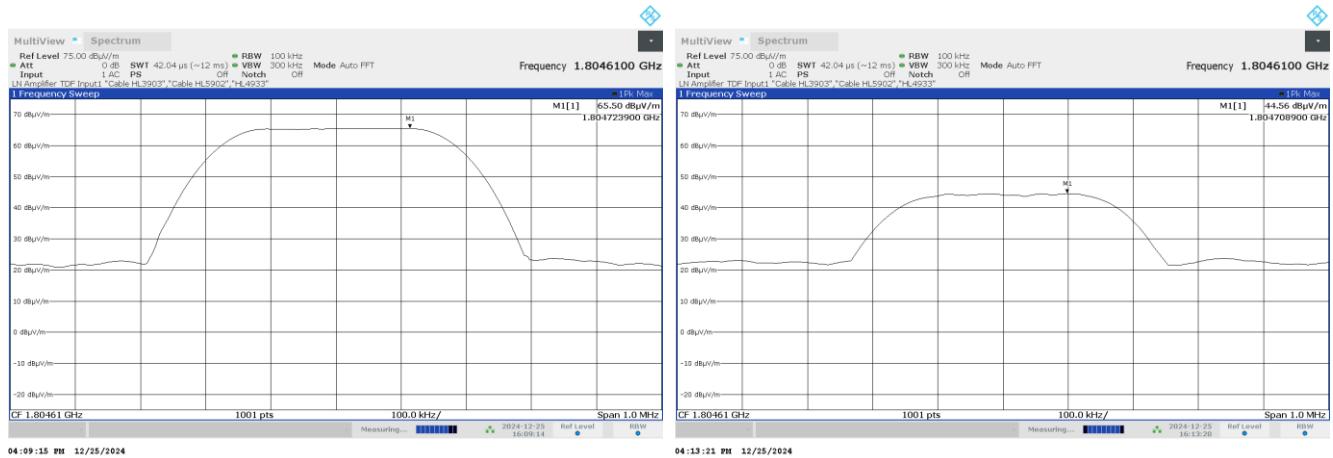**Plot 7.15.14 Radiated emission measurements at the second harmonic of mid carrier frequency**TEST SITE:
TEST DISTANCE:
VerticalSemi anechoic chamber
3 m

Horizontal

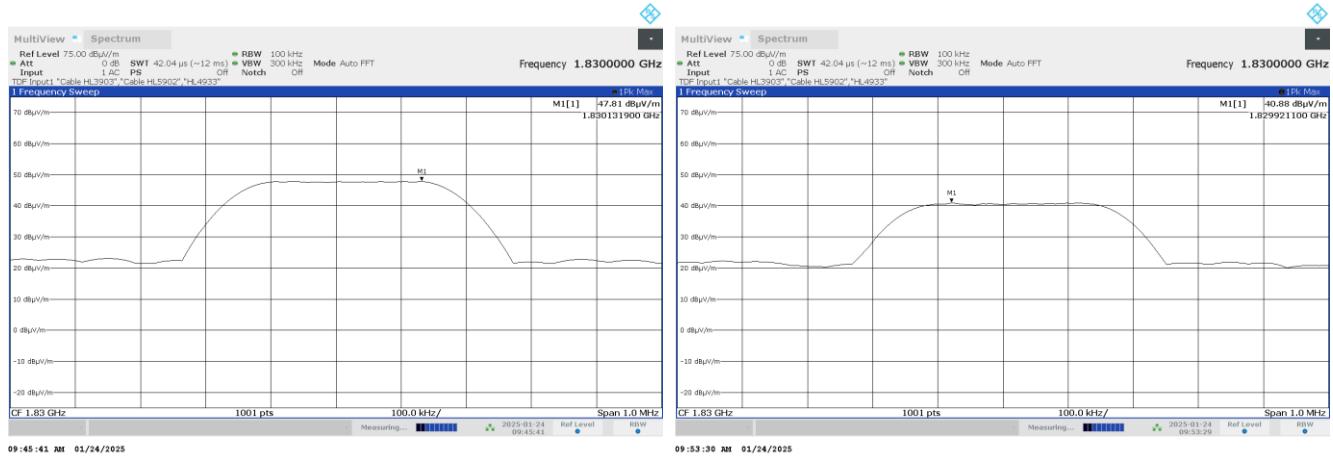



HERMON LABORATORIES


Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.15.15 Radiated emission measurements at the second harmonic of high carrier frequency

TEST SITE:
TEST DISTANCE:
Vertical

Semi anechoic chamber
3 m

Horizontal

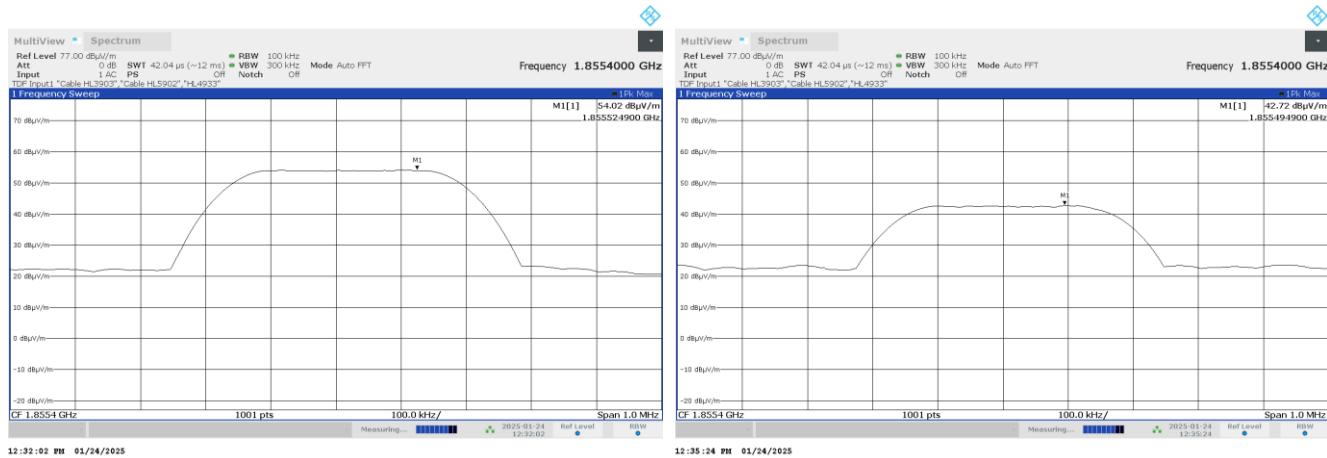





HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.15.16 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE:
TEST DISTANCE:
VerticalSemi anechoic chamber
3 m

Horizontal

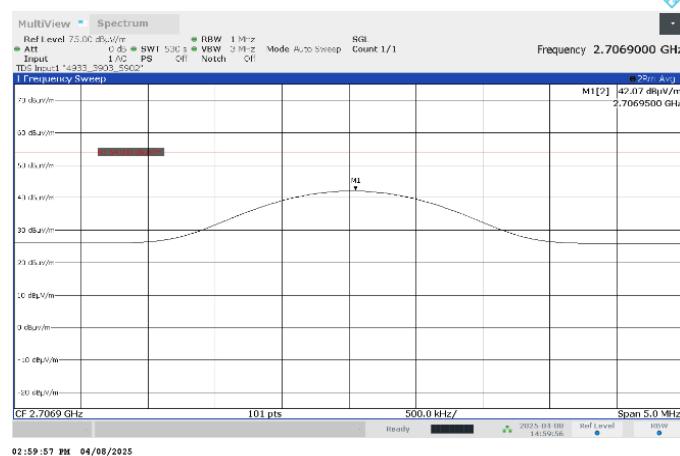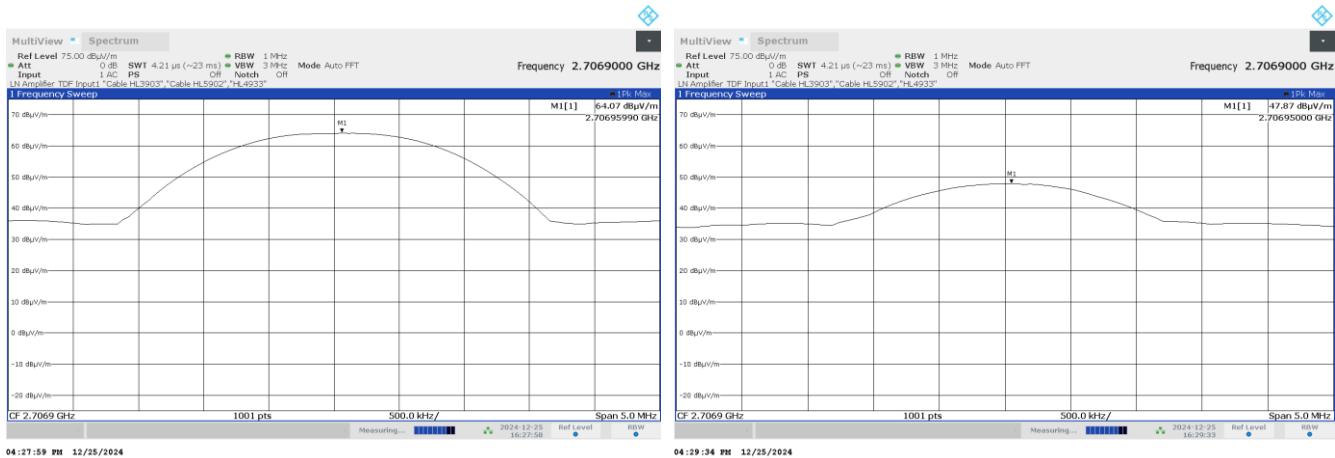



HERMON LABORATORIES


Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.15.17 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE:
TEST DISTANCE:
Vertical

Semi anechoic chamber
3 m

Horizontal

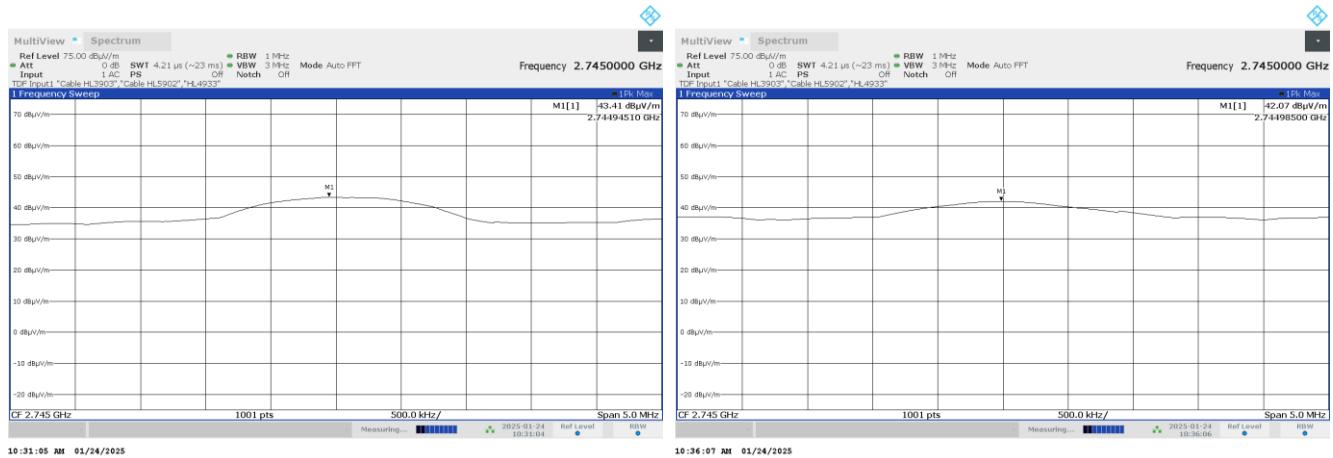



HERMON LABORATORIES



Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.15.18 Radiated emission measurements at the third harmonic of high carrier frequency

TEST SITE:
TEST DISTANCE:
Vertical

Semi anechoic chamber
3 m

Horizontal

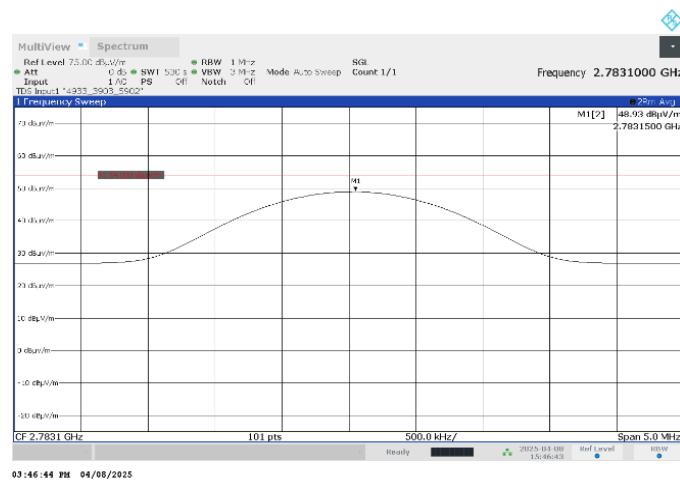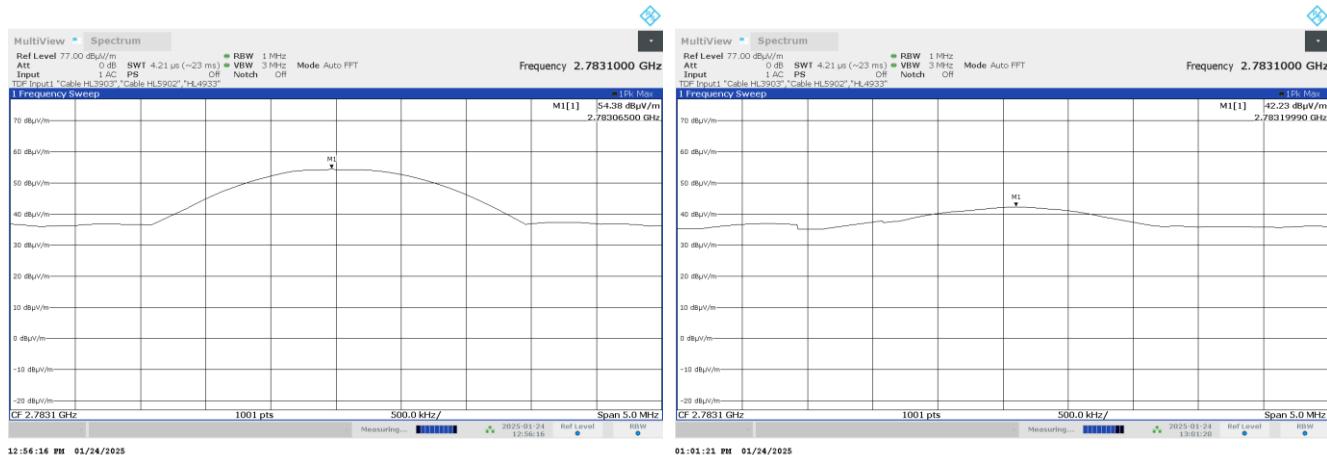





HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.15.19 Radiated emission measurements at the fourth harmonic of low carrier frequency

TEST SITE:
TEST DISTANCE:
VerticalSemi anechoic chamber
3 m

Horizontal

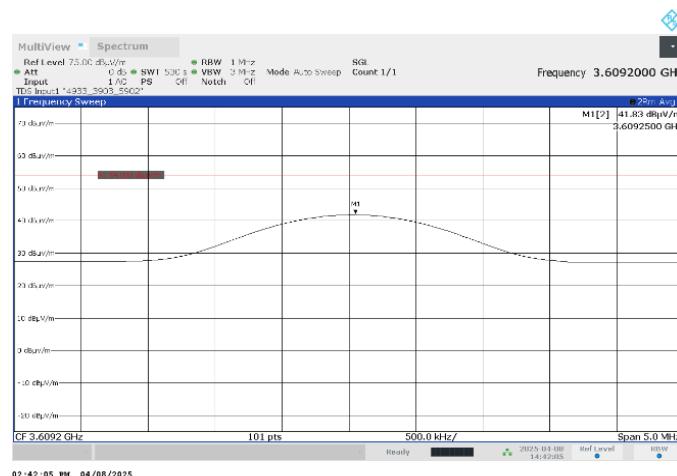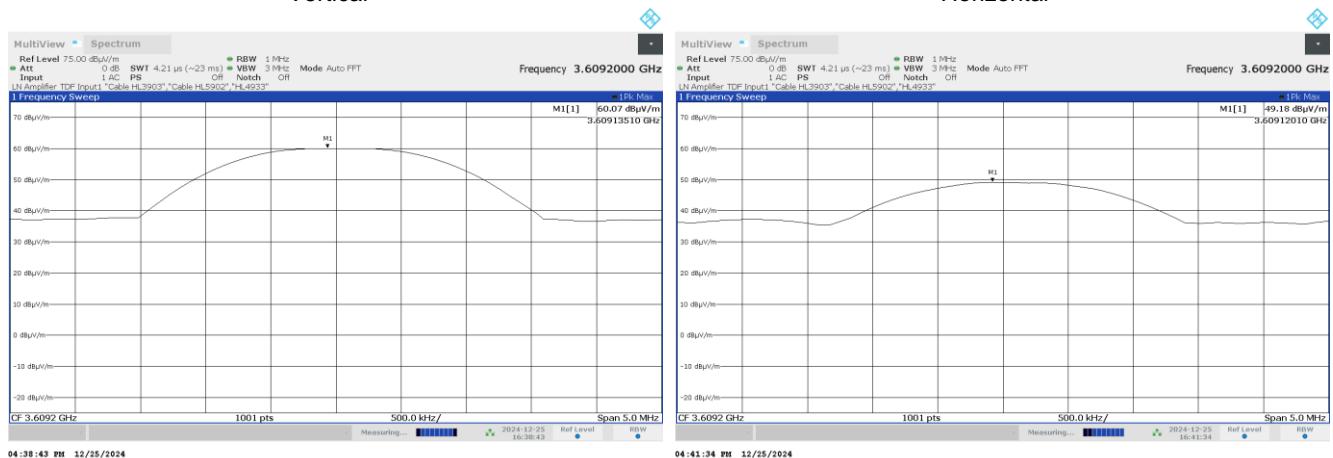




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.15.20 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE:
TEST DISTANCE:
VerticalSemi anechoic chamber
3 m


Horizontal

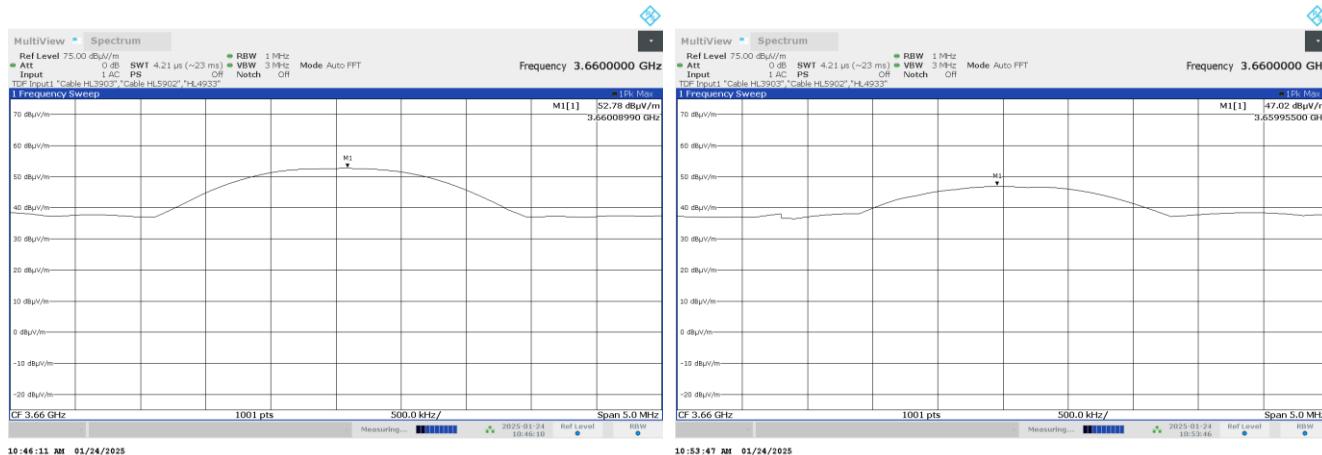

Plot 7.15.21 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE:
TEST DISTANCE:
VerticalSemi anechoic chamber
3 m

Horizontal

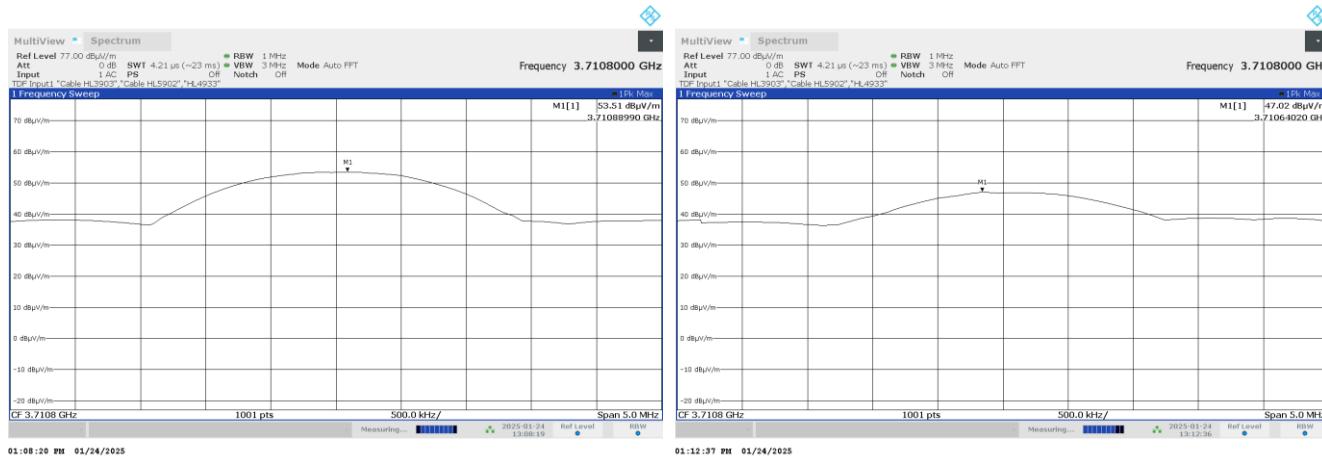




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	25-Dec-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1019 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.15.22 Radiated emission measurements at the fifth harmonic of low carrier frequency

TEST SITE:
TEST DISTANCE:
VerticalSemi anechoic chamber
3 m

Horizontal

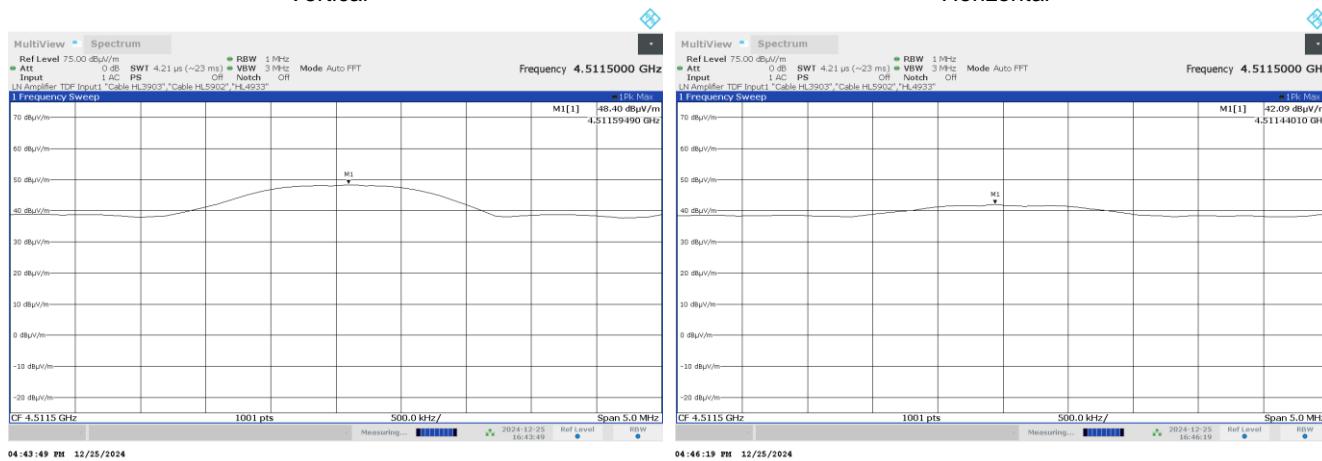

Plot 7.15.23 Radiated emission measurements at the fifth harmonic of mid carrier frequency

TEST SITE:
TEST DISTANCE:
VerticalSemi anechoic chamber
3 m

Horizontal

