
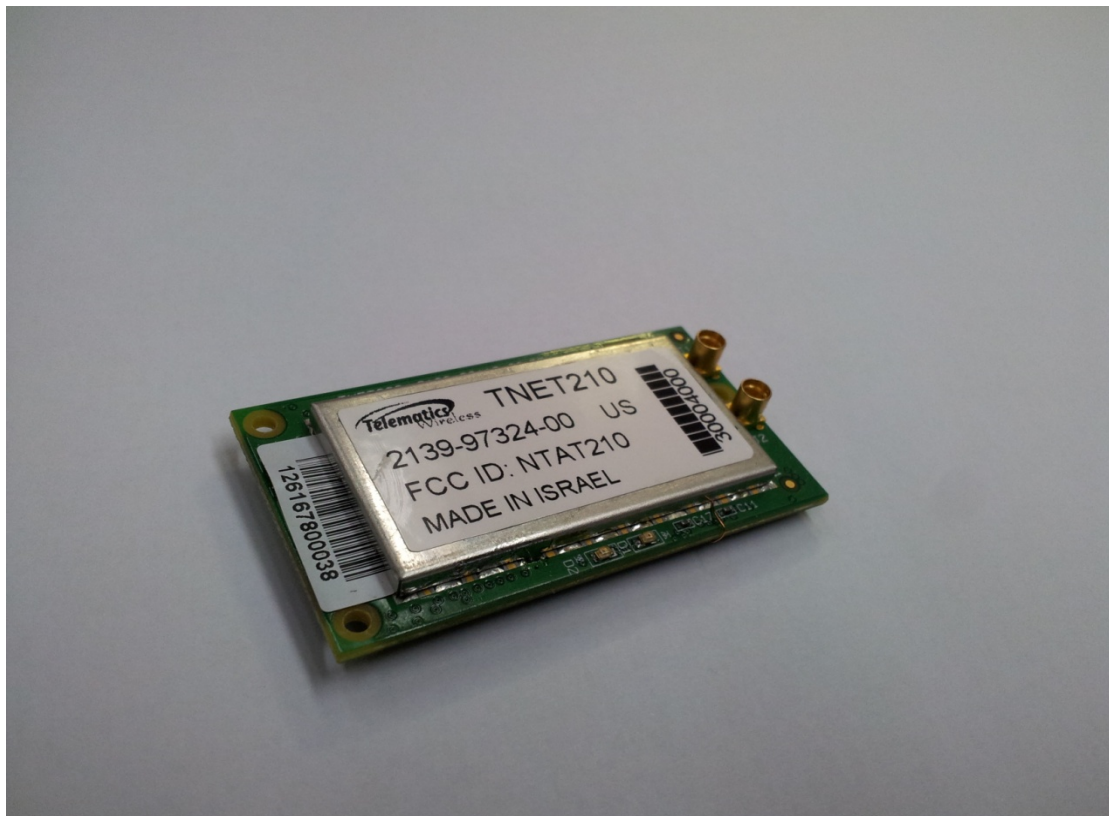


500436982
Tnet 210 Module


FCC-ID Label and Location

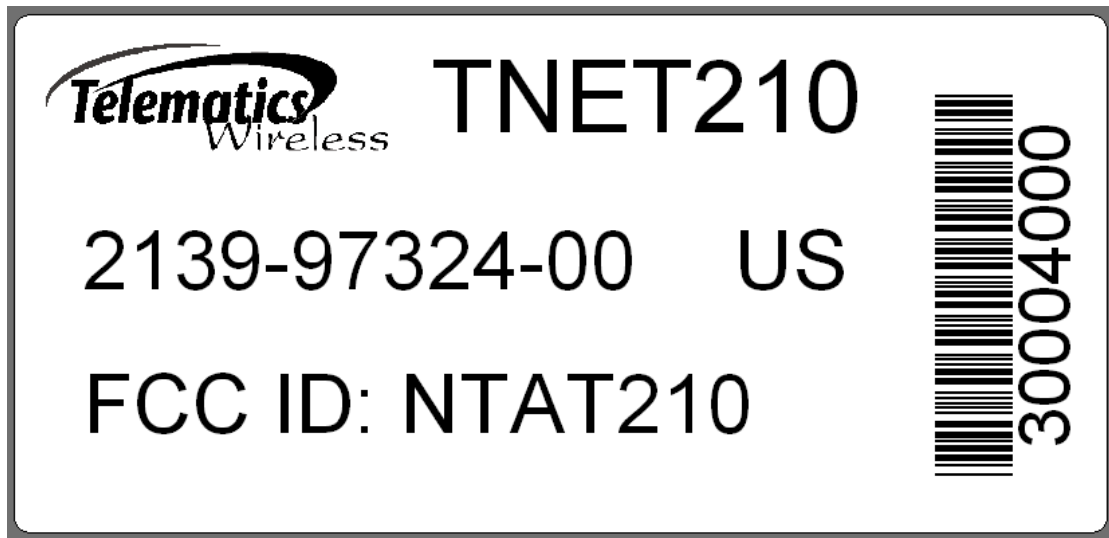

PROPRIETARY INFORMATION

ALL RIGHTS RESERVED. NO PARTS OF THIS DOCUMENT
 MAY BE REPRODUCED OR TRANSMITTED IN ANY
 FORM OR BY ANY MEANS, ELECTRONIC OR
 MECHANICAL, INCLUDING PHOTOCOPYING,
 RECORDING OR OTHERWISE, WITHOUT THE PRIOR
 WRITTEN PERMISSION OF TELEMATICS WIRELESS LTD.
 FOR ANY CUSTOMER, EXCEPT TELEMATICS WIRELESS.

REV	DESCRIPTION	CHNGD SHEET	E.C.N	DATE	DRAWN	CHECKED
A			1243	14/03/13		

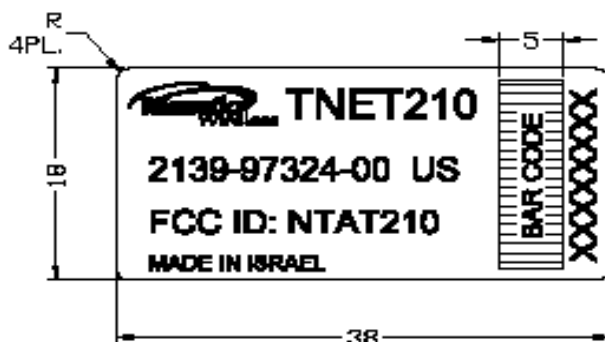

NOTES:

1. MATERIAL: WHITE POLYESTER SELF ADHESIVE FILM.
 (SUCH AS 'WP' MADE BY EPC).
2. MARKING: HIGH DURABILITY AND SOLVENT RESISTANCE RED MARKING
 (USING THERMAL TRANSFER BLACK RIBBON SUCH AS 'RHD' MADE BY EPC).
3. THE LABEL MATERIAL SHALL BE CAPABLE OF WITHSTANDING A TEMPERATURE
 RANGE OF -20° TO +70°, AND THE DELETERIOUS EFFECTS CAUSED BY:
 -CONFORMAL COATING (ALL TYPES)
 -SALT SPRAY.
4. THE ADHESIVE SHALL BE APPROPRIATE FOR AFFIXING THE LABEL TO
 SURFACES SUCH AS GLASS EPOXY, ALUMINIUM, PLASTIC AND ALLOW THE LABEL
 TO BE REMOVED QUICKLY WITHOUT LEAVING ADHESIVE TRACES
 ON THE SURFACE.
5. BAR CODING SHALL BE ACCORDING TO CODE 128 SUBSET C.
6. BARCODE NUMBERS.
- 6.1 XXXXXXXX = CONSECUTIVE NUMERICAL NUMBERS.
- 6.2 STARTING NUMBER (FIRST XXXXXXXX) WILL BE PROVIDED
 TO THE MANUFACTURER IN EACH PURCHASING ORDER.

NO.	PART NO.	NAME	DESCRIPTION	U/M	QTY	NOTES
UNLESS OTHERWISE SPECIFIED:			PROCESSING LEVEL			
ALL DIMENSIONS ARE IN MM.			OPERATION		CATALOG NO.	
TOLERANCES: LINEAR ± 0.17 ANGLES ± 0.17			—		—	
			—		—	
			—		—	
			—		—	
			—		—	
ROUGHNESS: 0.8/0.4/0.8/0.4/0.8/0.4			DESIGNED		M.K.	14/03/13
			CHECKED		Y.L.	14/03/13
			APPROVED		A.S.	14/03/13
			G.A.		Z.A.	14/03/13
			213973471000		A	
SCALE: 2 : 1			SHEET/OF			
213973471000			1/1			