



ELECTRICAL TESTING
0839.01

Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

**ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 (FHSS) and subpart B
RSS-247 issue 1, RSS-Gen issue 4, ICES-003 Issue 6:2016**

FOR:

**Telematics Wireless Ltd.
RF module for wireless mesh network
Model:TNET210
FCC ID:NTAT210A
IC:4732A-T210A**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Changes made in EUT	5
6.3	Test configuration.....	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements.....	7
7.1	20 dB bandwidth	7
7.2	Carrier frequency separation.....	11
7.3	Number of hopping frequencies	14
7.4	Average time of occupancy.....	17
7.5	Peak output power	20
7.6	Band edge emissions at RF antenna connector.....	24
7.7	Field strength of spurious emissions	28
7.8	Antenna requirements	54
7.9	Conducted emissions	55
8	Unintentional emissions	58
8.1	Conducted emissions	58
8.2	Radiated emission measurements	62
9	APPENDIX A Test equipment and ancillaries used for tests.....	67
10	APPENDIX B Measurement uncertainties.....	68
11	APPENDIX C Test laboratory description	69
12	APPENDIX D Specification references	69
13	APPENDIX E Test equipment correction factors.....	70
14	APPENDIX F Abbreviations and acronyms	79



1 Applicant information

Client name: Telematics Wireless Ltd.
Address: 26 Hamelaha street, POB 1911, Holon, 58117, Israel
Telephone: +972 3557 5767
Fax: +972 3557 5753
E-mail: itsikk@telematics-wireless.com
Contact name: Mr. Itsik Kanner

2 Equipment under test attributes

Product name: RF module for RF mesh network
Product type: Transceiver
Model(s): TNET210
Serial number: 00001820
Hardware version: REV C
Software release: 200.200.10.100
Receipt date 15-May-16

3 Manufacturer information

Manufacturer name: Telematics Wireless Ltd.
Address: 26 Hamelaha street, POB 1911, Holon, 58117, Israel
Telephone: +972 3557 5767
Fax: +972 3557 5753
E-Mail: itsikk@telematics-wireless.com
Contact name: Mr. Itsik Kanner

4 Test details

Project ID: 28384
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 15-May-16
Test completed: 28-Jun-16
Test specification(s): FCC 47CFR part 15 subpart C § 15.247 (FHSS) and subpart B;
RSS-247 issue 1, RSS-Gen issue 4, ICES-003 issue 6:2016



5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.247(a)1/ RSS-247 section 5.1(3), 20 dB bandwidth	Pass
Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions	Pass
Section 15.247(a)1/ RSS-247 section 5.1(2), Frequency separation	Pass
Section 15.247(a)1/ RSS-247 section 5.1(3), Number of hopping frequencies	Pass
Section 15.247(a)1/ RSS-247 section 5.1(3), Average time of occupancy	Pass
Section 15.247(b) / RSS-247 section 5.4(1), Peak output power	Pass
Section 15.247(i)5/ RSS-102 section 2.5, RF exposure	Pass, the exhibit to the application of certification is provided
Section 15.247(d) / RSS-247 section 5.5, Emissions at band edges	Pass
Section 15.203/ RSS-Gen section 8.3, Antenna requirements	Pass
Section 15.207(a) / RSS-Gen section 8.8, Conducted emission	Pass
Unintentional emissions	
Section 15.107/ICES-003, Section 6.1, Class B, Conducted emission at AC power port	Pass
Section 15.109/ RSS-Gen section 7.1.2 /ICES-003, Section 6.2, Class B, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. K. Zushchyk, test engineer Mr. S. Samokha, test engineer	June 28, 2016	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	July 5, 2016	
Approved by:	Mr. M. Nikishin, EMC and radio group leader	September 19, 2016	



6 EUT description


6.1 General information

The EUT is a RF module for RF Mesh network, operating in 902-928 MHz with FHSS modulation.

6.2 Changes made in EUT

No changes were implemented in the EUT during testing.

6.3 Test configuration

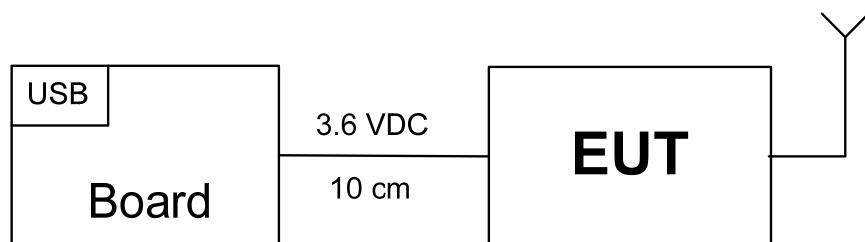



6.4 Transmitter characteristics

Type of equipment			
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)		
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)		
	Plug-in card (Equipment intended for a variety of host systems)		
Intended use		Condition of use	
	fixed	Always at a distance more than 2 m from all people	
<input checked="" type="checkbox"/>	mobile	Always at a distance more than 20 cm from all people	
	portable	May operate at a distance closer than 20 cm to human body	
Assigned frequency ranges		902 – 928 MHz	
Operating frequencies		904.8 – 924.8 MHz	
Maximum rated output power		At transmitter 50 Ω RF output connector	dBm
		Peak output power	26.49 dBm
Is transmitter output power variable?		X No	
			continuous variable
			stepped variable with stepsize
		minimum RF power	dBm
		maximum RF power	dBm
Antenna connection			
X unique coupling	standard connector	integral	with temporary RF connector
			<input checked="" type="checkbox"/> without temporary RF connector
Antenna/s technical characteristics			
Type	Manufacturer	Model number	Gain
External	V.Torch	VTGSMA-70	2 dBi
Transmitter aggregate data rate/s		110 kbps	
Type of modulation		2GFSK	
Modulating test signal (baseband)		PRBS	
Transmitter power source			
Battery	Nominal rated voltage		Battery type
DC	Nominal rated voltage	3.6 V to module	
X AC mains	Nominal rated voltage	120 VAC	Frequency 60 Hz
Common power source for transmitter and receiver		X yes	no
Spread spectrum technique used		X Frequency hopping (FHSS)	
		Digital transmission system (DTS)	
		Hybrid	
Spread spectrum parameters for transmitters tested per FCC 15.247 only			
FHSS	Total number of hops	51	
	Bandwidth per hop	229.6 kHz	
	Max. separation of hops	398.2 kHz	



HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), 20 dB bandwidth		
Test procedure: ANSI C63.10, section 7.8.7		
Test mode: Compliance		Verdict: PASS
Date(s): 23-May-16		
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1008 hPa
Power: 120 VAC		
Remarks:		

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements

7.1 20 dB bandwidth

7.1.1 General

This test was performed to measure 20 dB bandwidth of the transmitter hopping channel. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 20 dB bandwidth limits


Assigned frequency, MHz	Maximum bandwidth, kHz	Modulation envelope reference points*, dBc
902.0 – 928.0	250	20
2400.0 – 2483.5	NA	
5725.0 – 5850.0	1000	

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.
- 7.1.2.2 The EUT was set to transmit modulated carrier at maximum data rate.
- 7.1.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.
- 7.1.2.4 The test was repeated for each data rate and each modulation format.

Figure 7.1.1 The 20 dB bandwidth test setup





HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), 20 dB bandwidth								
Test procedure:		ANSI C63.10, section 7.8.7						
Test mode:	Compliance		Verdict:		PASS			
Date(s):	23-May-16							
Temperature: 25 °C	Relative Humidity: 47 %		Air Pressure: 1008 hPa	Power: 120 VAC				
Remarks:								

Table 7.1.2 The 20 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902 – 928 MHz
 DETECTOR USED: Peak
 SWEEP TIME: Auto
 VIDEO BANDWIDTH: \geq RBW
 MODULATION ENVELOPE REFERENCE POINTS: 20.0 dBc
 MODULATING SIGNAL: PRBS
 FREQUENCY HOPPING: Disabled

Carrier frequency, MHz	Type of modulation	Data rate, kbps	20 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency						
904.80	2GFSK	110.00	229.46	250.00	-20.54	Pass
Mid frequency						
914.40	2GFSK	110.00	229.60	250.00	-20.40	Pass
High frequency						
924.80	2GFSK	110.00	229.19	250.00	-20.81	Pass

Carrier frequency, MHz	Type of modulation	Data rate, kbps	99% bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency						
904.80	2GFSK	110.00	206.60	250.00	-43.40	Pass
Mid frequency						
914.40	2GFSK	110.00	206.84	250.00	-43.16	Pass
High frequency						
924.80	2GFSK	110.00	205.76	250.00	-44.26	Pass

Reference numbers of test equipment used

HL 3818	HL 3901	HL 4068				
---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), 20 dB bandwidth			
Test procedure: ANSI C63.10, section 7.8.7			
Test mode: Compliance		Verdict: PASS	
Date(s):	23-May-16		
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.1 The 20 dB bandwidth test result at low frequency

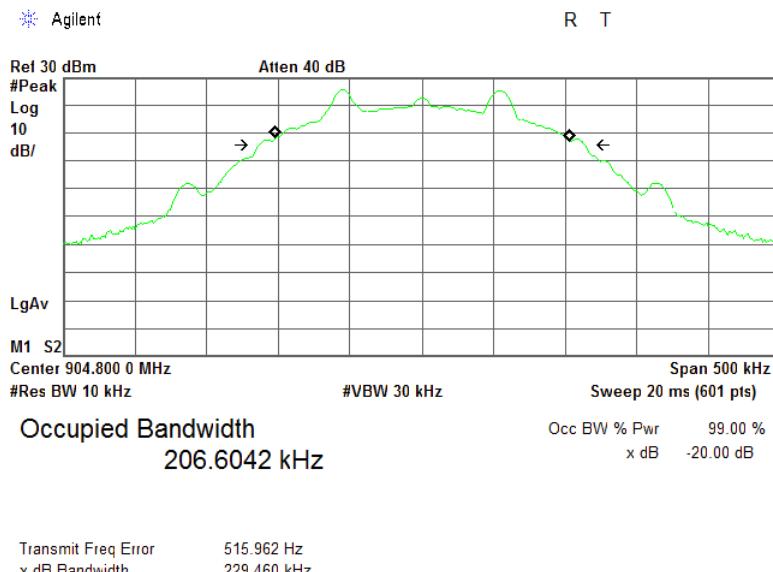

Plot 7.1.2 The 20 dB bandwidth test result at mid frequency

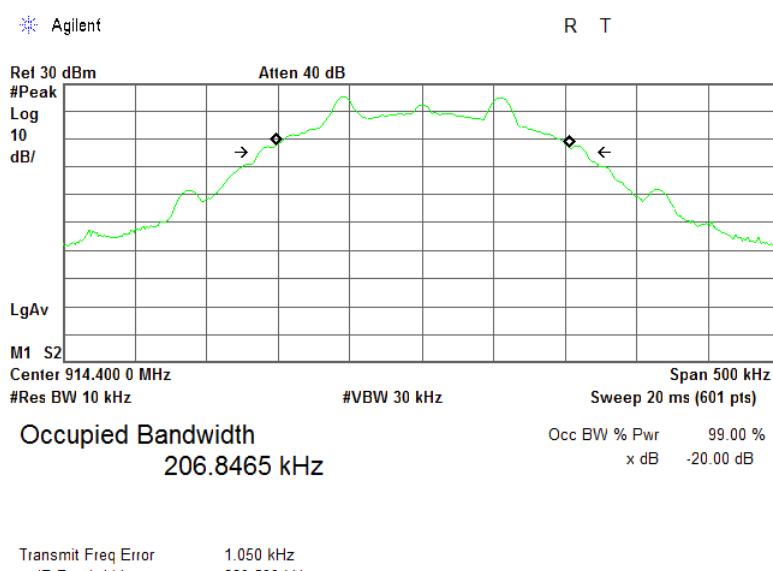




HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), 20 dB bandwidth			
Test procedure: ANSI C63.10, section 7.8.7			
Test mode: Compliance		Verdict: PASS	
Date(s):	23-May-16		
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.3 The 20 dB bandwidth test result at high frequency

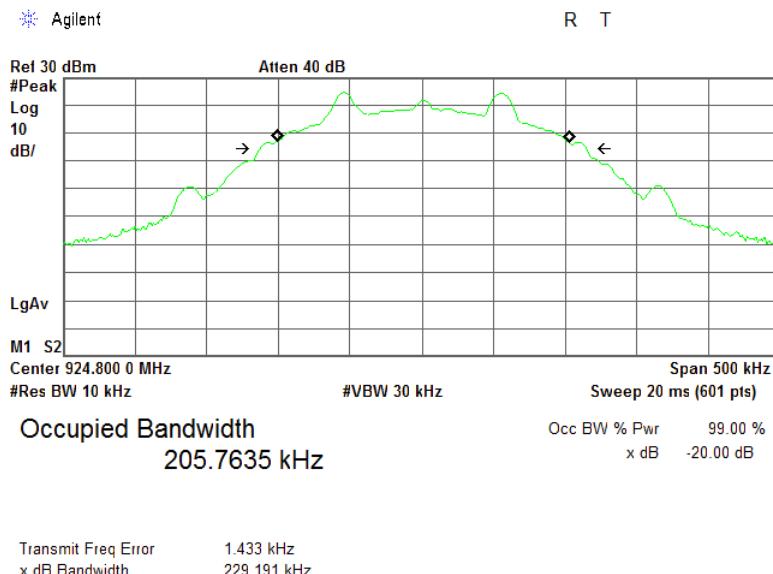



HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(2), Frequency separation		
Test procedure: ANSI C63.10, section 7.8.2		
Test mode: Compliance		Verdict: PASS
Date(s): 23-May-16		
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1008 hPa
Remarks:		

7.2 Carrier frequency separation

7.2.1 General

This test was performed to measure frequency separation between the peaks of adjacent channels. Specification test limits are given in Table 7.2.1.


Table 7.2.1 Carrier frequency separation limits

Assigned frequency range, MHz	Carrier frequency separation	
	Output power 30 dBm	Output power 21 dBm
902.0 – 928.0	25 kHz or 20 dB bandwidth of the hopping channel,	25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel,
2400.0 – 2483.5		whichever is greater
5725.0 – 5850.0		whichever is greater

7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.2.2.2 The spectrum analyzer span was set to capture the carrier frequency and both of adjacent channels, the lower and the higher. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.2.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.2.2.4 The frequency separation between the peaks of adjacent channels was measured as provided in Table 7.2.2 and the associated plots.

Figure 7.2.1 Carrier frequency separation test setup





HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(2), Frequency separation			
Test procedure: ANSI C63.10, section 7.8.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-May-16			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

Table 7.2.2 Carrier frequency separation test results

ASSIGNED FREQUENCY BAND: 902 – 928 MHz
MODULATION: 2GFSK
MODULATING SIGNAL: PRBS
BIT RATE: 110 kbps
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
VIDEO BANDWIDTH: \geq RBW
FREQUENCY HOPPING: Enabled
20 dB BANDWIDTH: 229.60 kHz

Carrier frequency separation, kHz	Limit, kHz	Margin*	Verdict
398.20	229.60	168.60	Pass

* - Margin = Carrier frequency separation – specification limit.

Reference numbers of test equipment used

HL 3818	HL 3901	HL 4068					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(2), Frequency separation			
Test procedure: ANSI C63.10, section 7.8.2			
Test mode: Compliance		Verdict: PASS	
Date(s):	23-May-16		
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

Plot 7.2.1 Carrier frequency separation

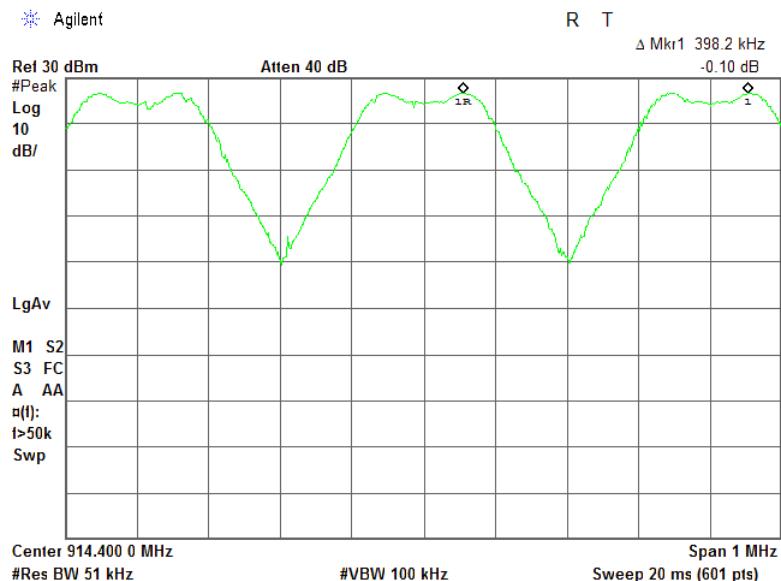



HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), Number of hopping frequencies			
Test procedure: ANSI C63.10, section 7.8.3			
Test mode: Compliance			Verdict: PASS
Date(s): 23-May-16 - 26-May-16			
Temperature: 23.2 °C	Relative Humidity: 47 %	Air Pressure: 1004 hPa	Power: 120 VAC
Remarks:			

7.3 Number of hopping frequencies

7.3.1 General

This test was performed to calculate the number of hopping frequencies used by the EUT. Specification test limits are given in Table 7.3.1.


Table 7.3.1 Minimum number of hopping frequencies

Assigned frequency range, MHz	Number of hopping frequencies
902.0 – 928.0	50 (if the 20 dB bandwidth is less than 250 kHz) 25 (if the 20 dB bandwidth is 250 kHz or greater)
2400.0 – 2483.5	15
5725.0 – 5850.0	75

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.3.2.2 Initially the spectrum analyzer span was set equal to frequency band of operation and the resolution bandwidth was set wider than 1 % of the frequency span. If the separate hopping channels were not clearly resolved the frequency band of operation was broken to sections and the resolution bandwidth was set wider than 1 % of the frequency span of each section.
- 7.3.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.3.2.4 The number of frequency hopping channels was calculated as provided in Table 7.3.2 and the associated plots.

Figure 7.3.1 Hopping frequencies test setup





HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), Number of hopping frequencies			
Test procedure: ANSI C63.10, section 7.8.3			
Test mode: Compliance		Verdict: PASS	
Date(s):	23-May-16 - 26-May-16		
Temperature: 23.2 °C	Relative Humidity: 47 %	Air Pressure: 1004 hPa	Power: 120 VAC
Remarks:			

Table 7.3.2 Hopping frequencies test results

ASSIGNED FREQUENCY BAND: 902 – 928 MHz
MODULATION: 2GFSK
MODULATING SIGNAL: PRBS
BIT RATE: 110 kbps
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: \geq RBW
FREQUENCY HOPPING: Enabled

Number of hopping frequencies	Minimum number of hopping frequencies	Margin*	Verdict
51	50	1	Pass

* - Margin = Number of hopping frequencies – Minimum number of hopping frequencies.

Reference numbers of test equipment used

HL 3787	HL 3788	HL 3818	HL 3903	HL 4068			
---------	---------	---------	---------	---------	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), Number of hopping frequencies			
Test procedure: ANSI C63.10, section 7.8.3			
Test mode: Compliance		Verdict: PASS	
Date(s):	23-May-16 - 26-May-16	Air Pressure:	1004 hPa
Temperature: 23.2 °C	Relative Humidity: 47 %	Power:	120 VAC
Remarks:			

Plot 7.3.1 Number of hopping frequencies

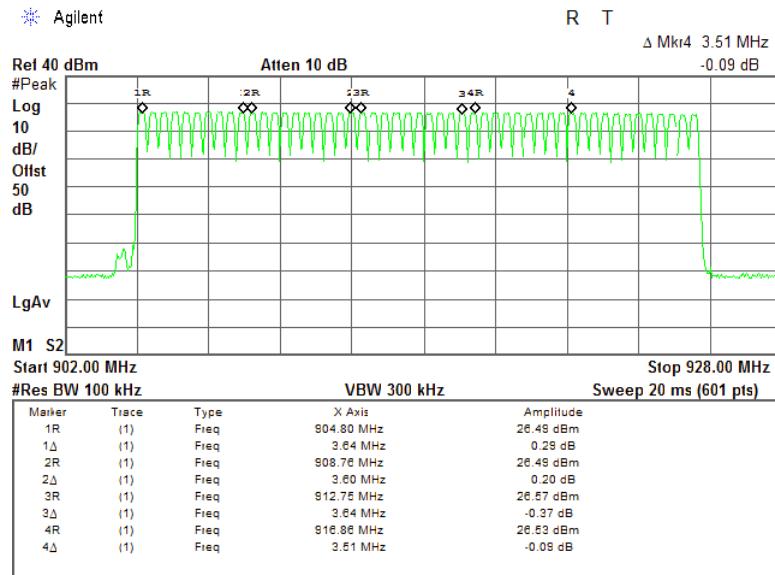

Plot 7.3.2 Number of hopping frequencies

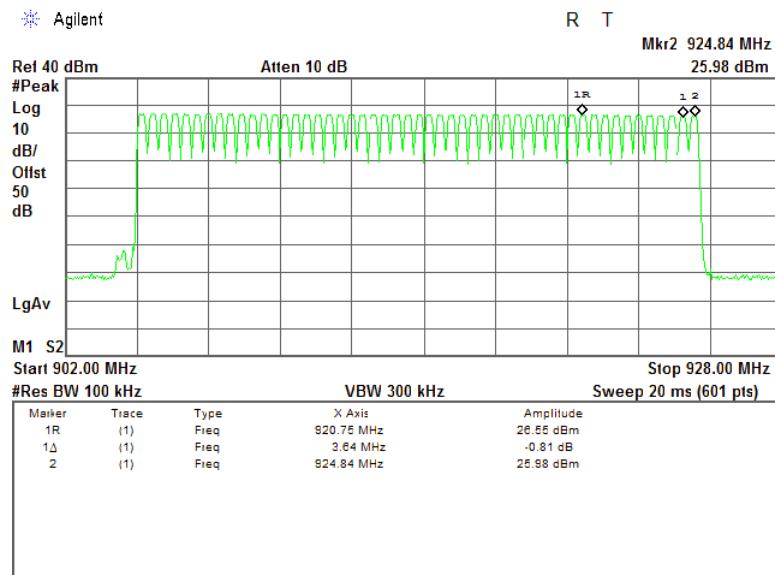



HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), Average time of occupancy			
Test procedure: ANSI C63.10, section 7.8.4			
Test mode: Compliance		Verdict: PASS	
Date(s):	23-May-16 - 26-May-16	Air Pressure: 1004 hPa	Power: 120 VAC
Temperature: 23.2 °C Relative Humidity: 47 %			
Remarks:			

7.4 Average time of occupancy

7.4.1 General

This test was performed to calculate the average time of occupancy (dwell time) on any frequency channel of the EUT. Specification test limits are given in Table 7.4.1.


Table 7.4.1 Average time of occupancy limits

Assigned frequency range, MHz	Maximum average time of occupancy, s	Investigated period, s	Number of hopping frequencies
902.0 – 928.0	0.4	20.0	≥ 50
902.0 – 928.0	0.4	10.0	< 50
2400.0 – 2483.5	0.4	0.4 × N	N (≥ 15)
5725.0 – 5850.0	0.4	30.0	≥ 75

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.4.2.2 The spectrum analyzer span was set to zero centered on a hopping channel.
- 7.4.2.3 The single transmission duration and period were measured with oscilloscope.
- 7.4.2.4 The average time of occupancy was calculated as the single transmission time multiplied by the investigated period and divided by the single transmission period.
- 7.4.2.5 The test was repeated at each data rate and modulation type as provided in Table 7.4.2 and the associated plots.

Figure 7.4.1 Average time of occupancy test setup





HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), Average time of occupancy			
Test procedure: ANSI C63.10, section 7.8.4			
Test mode: Compliance			Verdict: PASS
Date(s):	23-May-16 - 26-May-16		
Temperature: 23.2 °C	Relative Humidity: 47 %	Air Pressure: 1004 hPa	Power: 120 VAC
Remarks:			

Table 7.4.2 Average time of occupancy test results

ASSIGNED FREQUENCY BAND:	902 – 928 MHz
MODULATION:	2GFSK
MODULATING SIGNAL:	PRBS
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	RBW
NUMBER OF HOPPING FREQUENCIES:	51
INVESTIGATED PERIOD:	20 s
FREQUENCY HOPPING:	Enabled

Carrier frequency, MHz	Single transmission duration, ms	Single transmission period, s	Average time of occupancy*, ms	Limit, s	Margin, s**	Verdict
914.4	17.5	20.4	17.5	0.4	0.382	Pass

* - Average time of occupancy = (Single transmission duration × Investigated period) / Single transmission period.

** - Margin = Average time of occupancy – specification limit.

Reference numbers of test equipment used

HL 3787	HL 3788	HL 3818	HL 3903	HL 4068			
---------	---------	---------	---------	---------	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(a)1, RSS-247 section 5.1(3), Average time of occupancy			
Test procedure: ANSI C63.10, section 7.8.4			
Test mode: Compliance		Verdict: PASS	
Date(s):	23-May-16 - 26-May-16		
Temperature: 23.2 °C	Relative Humidity: 47 %	Air Pressure: 1004 hPa	Power: 120 VAC
Remarks:			

Plot 7.4.1 Single transmission duration

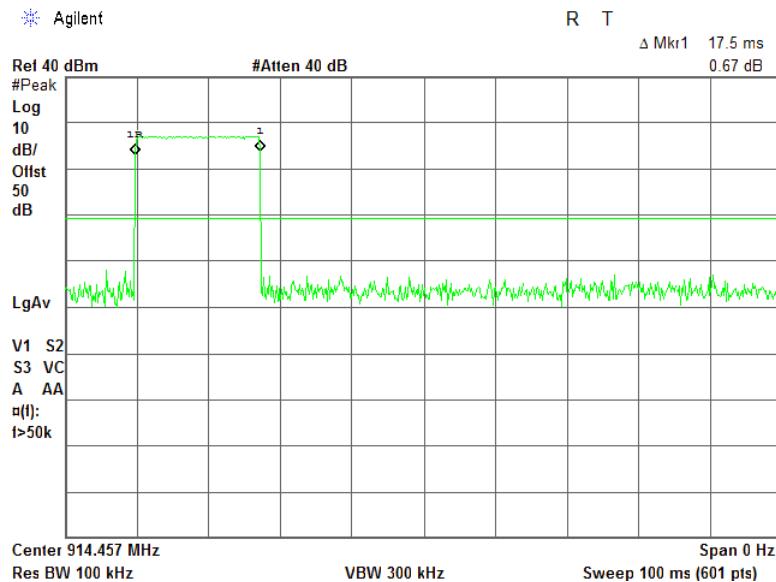

Plot 7.4.2 Single transmission period

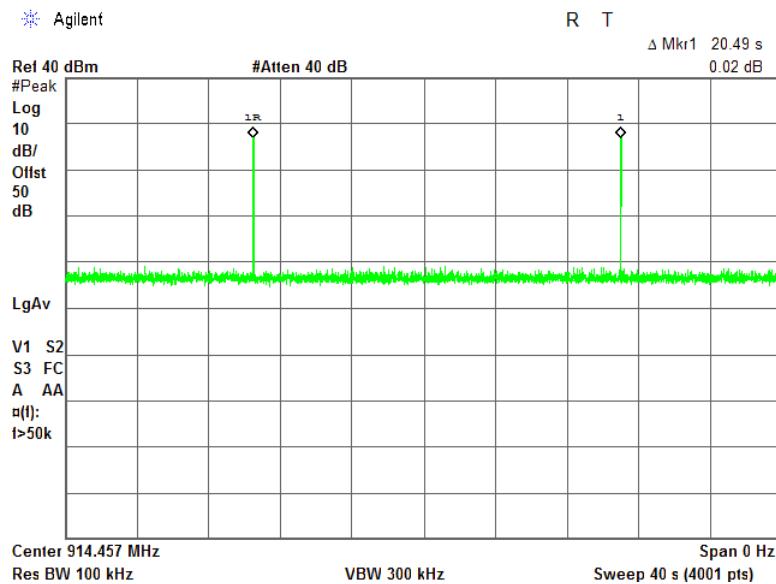



HERMON LABORATORIES

Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s):	23-May-16		
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

7.5 Peak output power

7.5.1 General

This test was performed to measure the maximum peak output power at the transmitter RF antenna connector. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak output power limits

Assigned frequency range, MHz	Peak output power*		Equivalent field strength limit @ 3m, dB(µV/m)*	Maximum antenna gain, dBi
	W	dBm		
902.0 – 928.0	0.25 (<50 hopping channels)	24.0(<50 hopping channels)	125.2 (<50 hopping channels)	6.0*
	1.0 (≥50 hopping channels)	30.0 (≥50 hopping channels)	131.2 (≥50 hopping channels)	
2400.0 – 2483.5	0.125 (<75 hopping channels)	21.0(<75 hopping channels)	122.2 (<75 hopping channels)	6.0*
	1.0 (≥75 hopping channels)	30.0 (≥75 hopping channels)	131.2 (≥75 hopping channels)	
5725.0 – 5850.0	1.0	30.0	131.2	

*- If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.


7.5.2 Test procedure

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available for end user RF output power.

7.5.2.3 The frequency span of spectrum analyzer was set approximately 5 times wider than 20 dB bandwidth of the EUT and the resolution bandwidth was set wider than 20 dB bandwidth of the EUT. The spectrum analyzer trace was allowed to stabilize and the maximum peak output power was measured as provided in Table 7.5.2 and associated plots.

Figure 7.5.1 Peak output power test setup





HERMON LABORATORIES

Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power	
Test procedure:	ANSI C63.10, section 7.8.5
Test mode:	Compliance
Date(s):	23-May-16
Temperature: 25 °C	Relative Humidity: 47 %
	Air Pressure: 1008 hPa
	Power: 120 VAC
Remarks:	

Table 7.5.2 Peak output power test results

ASSIGNED FREQUENCY BAND: 902 – 928 MHz
 MODULATION: 2GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 110 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 EUT 20 dB BANDWIDTH: 229.60 kHz
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz
 FREQUENCY HOPPING: Disabled
 NUMBER OF FREQUENCY HOPPING CHANNELS: 51

Carrier frequency, MHz	Spectrum analyzer reading, dBm	External attenuation, dB	Cable loss, dB	Peak output power, dBm	Limit, dBm	Margin*, dB	Verdict
904.8	26.49	NA	NA	26.49	30.00	-3.51	Pass
914.8	26.28	NA	NA	26.28	30.00	-3.72	Pass
924.8	25.72	NA	NA	25.72	30.00	-4.28	Pass

* - Margin = Peak output power – specification limit.

Note: Maximum peak output power was obtained at Unom input power voltage.

Reference numbers of test equipment used

HL 3818	HL 3901	HL 4068					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance			Verdict: PASS
Date(s): 23-May-16			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

Plot 7.5.1 Peak output power at low frequency and Unom

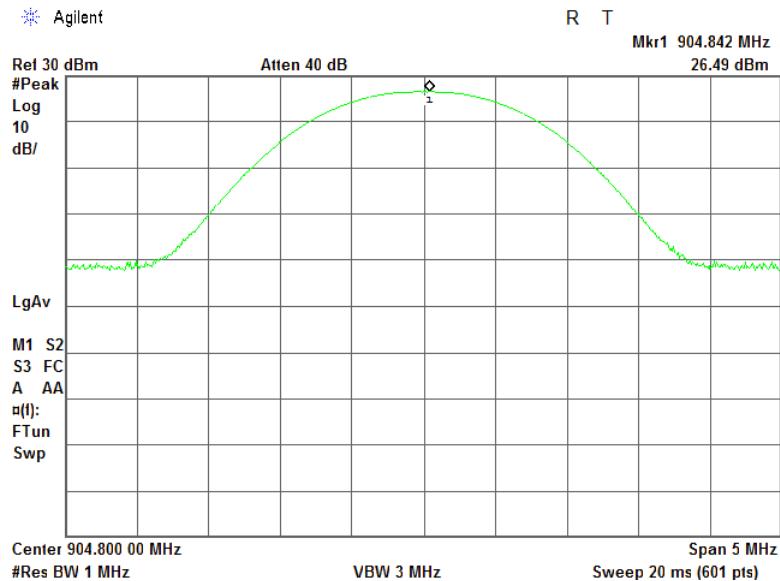

Plot 7.5.2 Peak output power at mid frequency and Unom

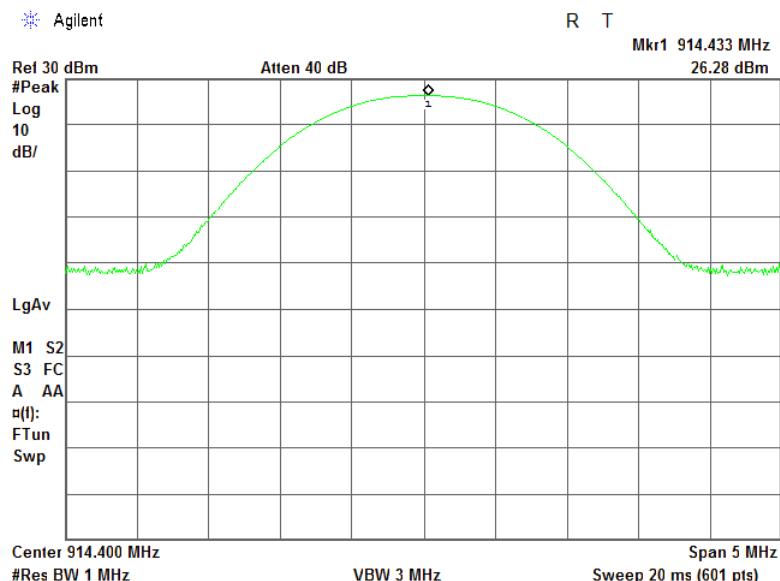



HERMON LABORATORIES

Test specification: Section 15.247(b), RSS-247 section 5.4(1), Peak output power			
Test procedure: ANSI C63.10, section 7.8.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-May-16			
Temperature: 25 °C		Relative Humidity: 47 %	Air Pressure: 1008 hPa
Remarks:		Power: 120 VAC	

Plot 7.5.3 Peak output power at high frequency and Unom





HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-247 section 5.5, Emissions at band edges		
Test procedure:	ANSI C63.10, section 7.8.6		
Test mode:	Compliance		
Date(s):	23-May-16 - 26-May-16	Verdict:	PASS
Temperature: 23.2 °C	Relative Humidity: 47 %	Air Pressure: 1004 hPa	Power: 120 VAC
Remarks:			

7.6 Band edge emissions at RF antenna connector

7.6.1 General

This test was performed to measure band edge emissions at RF antenna connector. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Band edge emission limits


Assigned frequency, MHz	Attenuation below carrier*, dBc
902.0 – 928.0	
2400.0 – 2483.5	
5725.0 – 5850.0	20.0

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.6.2 Test procedure

- 7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized normally modulated at the maximum data rate with its hopping function disabled and its proper operation was checked.
- 7.6.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.6.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.6.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.6.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.6.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.6.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.6.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.6.1 Band edge emission test setup





HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Emissions at band edges	
Test procedure:	ANSI C63.10, section 7.8.6
Test mode:	Compliance
Date(s):	23-May-16 - 26-May-16
Temperature: 23.2 °C	Relative Humidity: 47 %
	Air Pressure: 1004 hPa
	Power: 120 VAC
Remarks:	

Table 7.6.2 Band edge emission test results

ASSIGNED FREQUENCY BAND: 902 – 928 MHz
 DETECTOR USED: Peak
 MODULATION: 2GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 110 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: \geq RBW

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Frequency hopping disabled						
901.687	-31.77	26.63	58.40	20.0	38.40	Pass
928.295	-32.10	25.94	58.04		38.04	
Frequency hopping enabled						
901.340	-31.33	26.96	58.29	20.0	38.29	Pass
928.317	-30.88	26.27	57.15		37.15	

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 3787	HL 3788	HL 3818	HL 3903	HL 4068			
---------	---------	---------	---------	---------	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Emissions at band edges			
Test procedure: ANSI C63.10, section 7.8.6			
Test mode: Compliance			Verdict: PASS
Date(s): 23-May-16 - 26-May-16			
Temperature: 23.2 °C	Relative Humidity: 47 %	Air Pressure: 1004 hPa	Power: 120 VAC
Remarks:			

Plot 7.6.1 The highest band edge emission at low carrier frequency with hopping function disabled

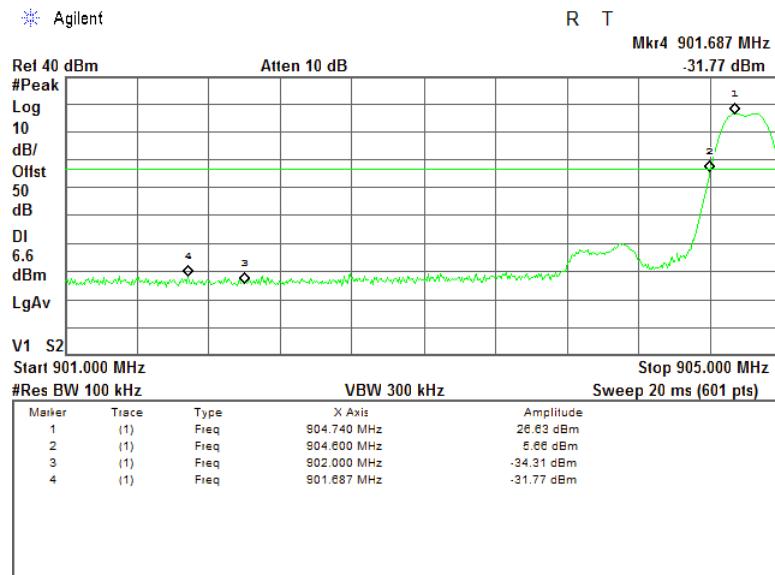

Plot 7.6.2 The highest band edge emission at high carrier frequency with hopping function disabled

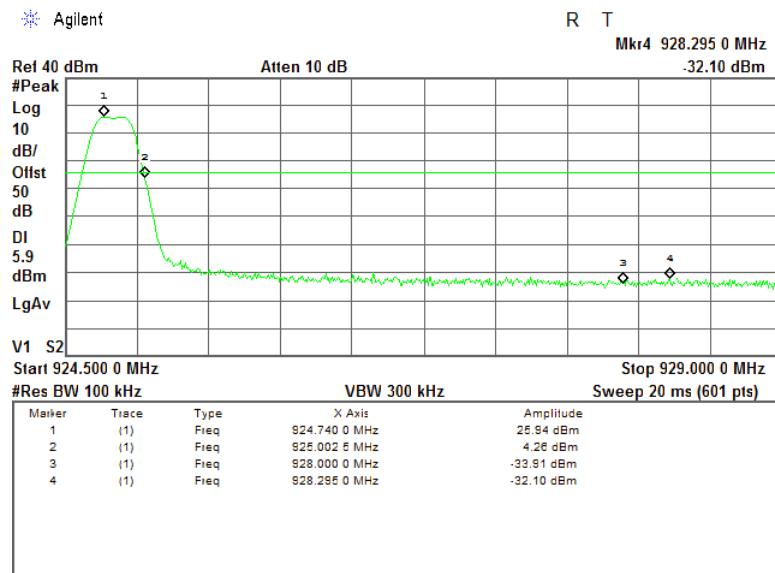





HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Emissions at band edges			
Test procedure: ANSI C63.10, section 7.8.6			
Test mode: Compliance			Verdict: PASS
Date(s): 23-May-16 - 26-May-16			
Temperature: 23.2 °C	Relative Humidity: 47 %	Air Pressure: 1004 hPa	Power: 120 VAC
Remarks:			

Plot 7.6.3 The highest band edge emission at low carrier frequency with hopping function enabled

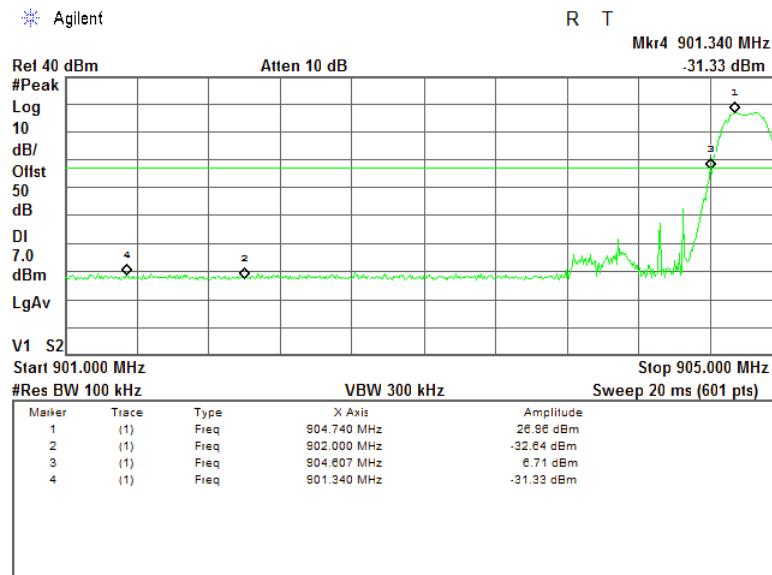

Plot 7.6.4 The highest band edge emission at high carrier frequency with hopping function enabled

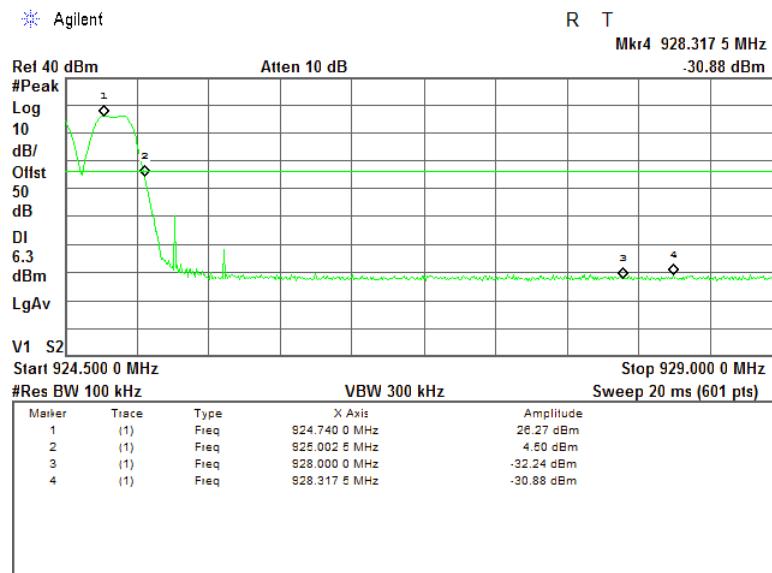



HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s):	22-May-16 - 26-May-16	Air Pressure:	1008 hPa
Temperature: 26 °C	Relative Humidity: 45 %	Power:	120 VAC
Remarks:			

7.7 Field strength of spurious emissions

7.7.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.7.1.

Table 7.7.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(µV/m)***			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***	
	Peak	Quasi Peak	Average		
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0	
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 – 1000		54.0			
1000 – 10 th harmonic		74.0	NA		
			54.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2)$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.7.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.7.2.1 The EUT was set up as shown in Figure 7.7.1, energized and the performance check was conducted.

7.7.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.7.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.7.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.7.3.1 The EUT was set up as shown in Figure 7.7.2, energized and the performance check was conducted.

7.7.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.7.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions		
Test procedure: ANSI C63.10, sections 6.5, 6.6		
Test mode: Compliance		Verdict: PASS
Date(s): 22-May-16 - 26-May-16		
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa
Remarks:		

Figure 7.7.1 Setup for spurious emission field strength measurements below 30 MHz


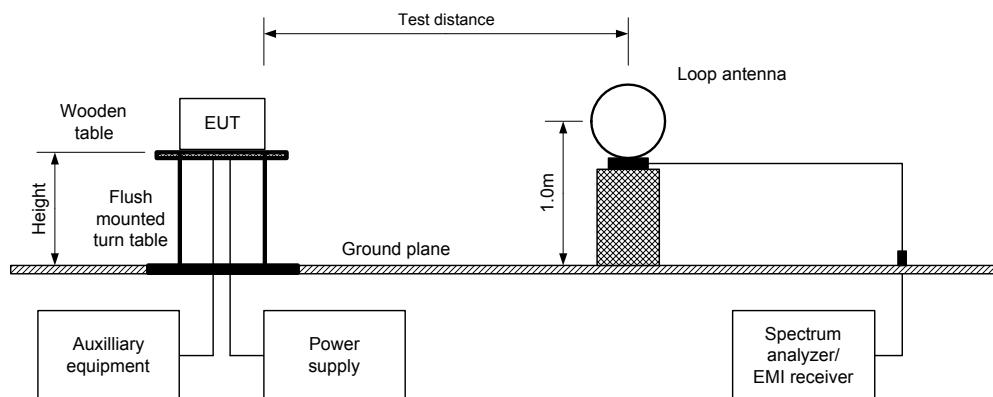


Figure 7.7.2 Setup for spurious emission field strength measurements above 30 MHz



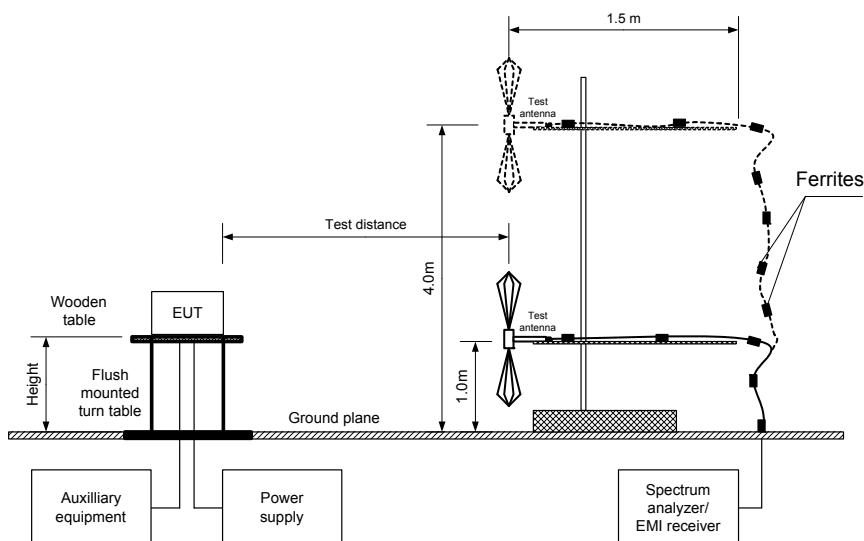

HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-16 - 26-May-16			
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

Table 7.7.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY BAND:	902.0 – 928.0 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 9500 MHz
TEST DISTANCE:	3 m
MODULATION:	2GFSK
MODULATING SIGNAL:	PRBS
BIT RATE:	110 kbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	300 kHz
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz) Disabled
FREQUENCY HOPPING:	

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
1809.71	60.73	Horizontal	1.3	175	125.49	64.76	20.0	44.76	Pass
6333.99	53.22	Vertical	1.6	180		72.27		52.27	
7238.85	56.17	Vertical	1.5	160		69.32		49.32	
Mid carrier frequency									
1828.70	55.25	Vertical	1.3	160	124.63	69.38	20.0	49.38	Pass
5486.75	56.99	Horizontal	1.6	0		67.64		47.64	
6401.20	55.07	Horizontal	1.4	90		69.56		49.56	
High carrier frequency									
1849.60	56.23	Vertical	1.4	80	124.14	67.91	20.0	47.91	Pass
5549.15	54.60	Vertical	1.5	170		69.54		49.54	
6473.13	54.89	Vertical	1.4	245		69.25		49.25	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.



HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-16 - 26-May-16			
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

Table 7.7.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 – 9500 MHz
 TEST DISTANCE: 3 m
 MODULATION: 2GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 110 kbps
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength (VBW=3 MHz)			Average field strength (VBW=3 MHz)			Verdict
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	
Low carrier frequency										
2714.58	Horizontal	1.3	180	59.37	74.00	-14.63	59.37	44.23	54.00	-9.77
3619.10	Vertical	2.0	315	56.33	74.00	-17.67	56.33	41.19	54.00	-12.81
4524.25	Vertical	1.8	300	56.98	74.00	-17.02	56.98	41.84	54.00	-12.16
5428.30	Vertical	1.6	130	57.99	74.00	-16.01	57.99	42.85	54.00	-11.15
Mid carrier frequency										
2743.32	Horizontal	1.6	20	57.36	74.00	-16.64	57.36	42.22	54.00	-11.78
3657.55	Horizontal	1.6	115	54.64	74.00	-19.36	54.64	39.50	54.00	-14.50
4571.63	Horizontal	1.3	85	54.44	74.00	-19.56	54.44	39.30	54.00	-14.70
7314.70	Vertical	1.6	90	61.31	74.00	-12.69	61.31	46.17	54.00	-7.83
High carrier frequency										
2774.50	Vertical	1.4	85	64.62	74.00	-9.38	64.62	49.48	54.00	-4.52
3699.53	Vertical	1.3	250	56.11	74.00	-17.89	56.11	40.97	54.00	-13.03
4623.78	Vertical	1.3	260	60.38	74.00	-13.62	60.38	45.24	54.00	-8.76

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

*** - Margin = Calculated field strength - specification limit,

where Calculated field strength = Measured field strength + average factor.

Table 7.7.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
17.5	100	NA	NA	NA	-15.14

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-16 - 26-May-16		Air Pressure: 1008 hPa	Power: 120 VAC
Temperature: 26 °C		Relative Humidity: 45 %	
Remarks:			

Table 7.7.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY:	902.0 – 928.0 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
TEST DISTANCE:	3 m
MODULATION:	2GFSK
MODULATING SIGNAL:	PRBS
BIT RATE:	60 kbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
RESOLUTION BANDWIDTH:	1.0 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	> Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)
FREQUENCY HOPPING:	Disabled

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
Low carrier frequency								
37.52	29.56	24.93	40.00	-15.07	Vertical	1.0	0	Pass
Mid carrier frequency								
37.82	31.35	25.98	40.00	-14.02	Vertical	1.0	0	Pass
High carrier frequency								
37.53	25.92	19.74	40.00	-20.26	Vertical	1.0	90	Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.



HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions					
Test procedure: ANSI C63.10, sections 6.5, 6.6					
Test mode: Compliance		Verdict: PASS			
Date(s): 22-May-16 - 26-May-16					
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC		
Remarks:					

Table 7.7.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

Table 7.7.7 Restricted bands according to RSS-Gen

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 2909	HL 3901	HL 3903	HL 4279	HL 4353
HL 4474							

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-16 - 26-May-16			
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

Plot 7.7.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 904.743 MHz
123.18 dB μ V/m

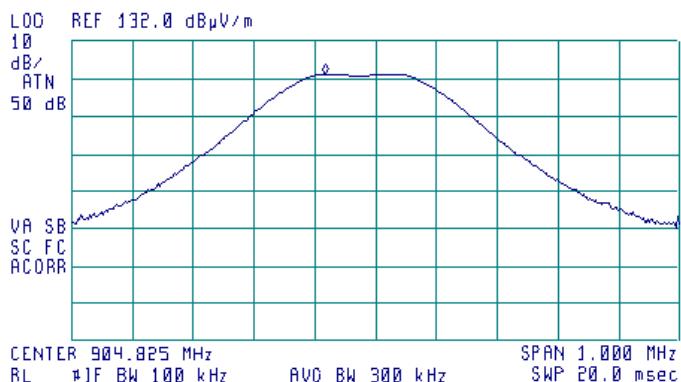


Plot 7.7.2 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 904.743 MHz
125.49 dB μ V/m

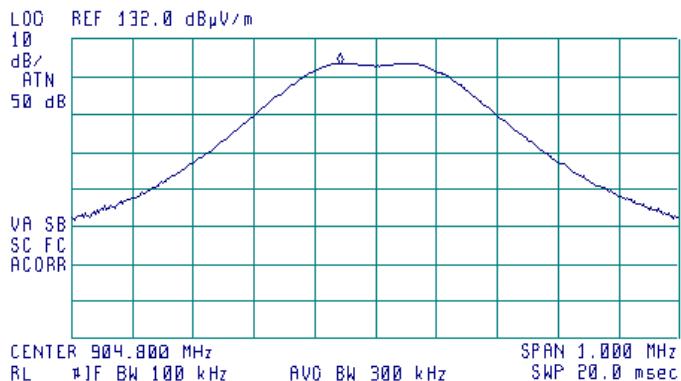



HERMON LABORATORIES


Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-16 - 26-May-16			
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

Plot 7.7.3 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 914.345 MHz
123.46 dB μ V/m

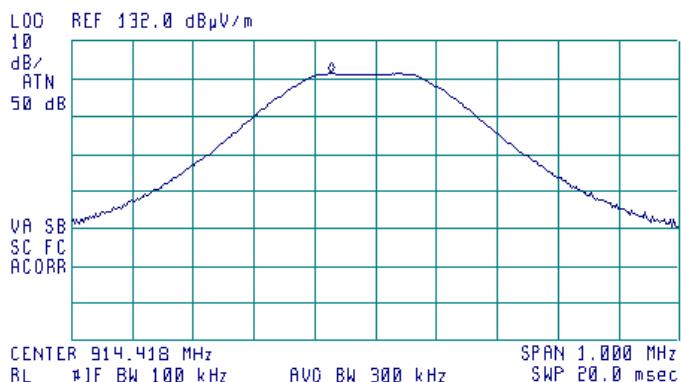


Plot 7.7.4 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 914.350 MHz
124.63 dB μ V/m

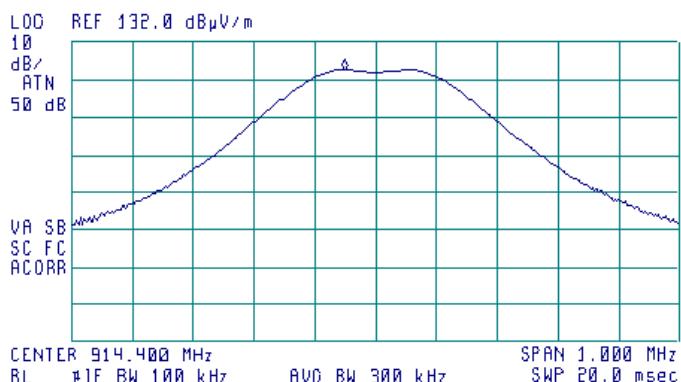



HERMON LABORATORIES


Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-16 - 26-May-16			
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

Plot 7.7.5 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 924.855 MHz
122.77 dB μ V/m

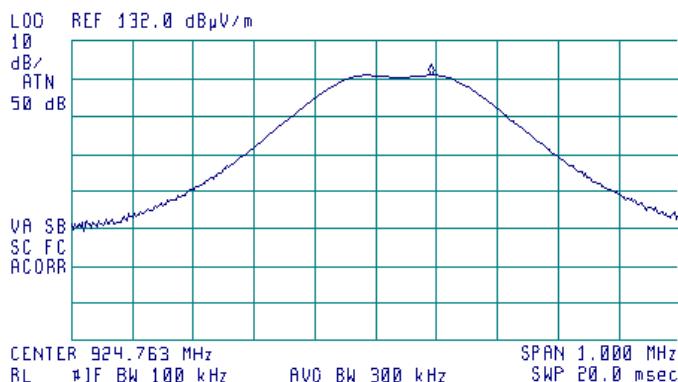


Plot 7.7.6 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 924.855 MHz
124.14 dB μ V/m

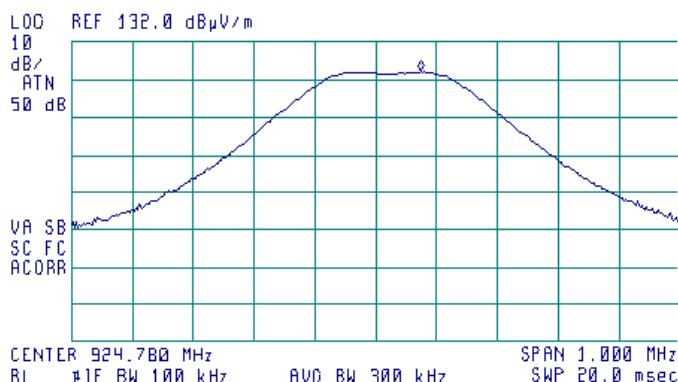




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s):	22-May-16 - 26-May-16	Air Pressure:	1008 hPa
Temperature: 26 °C	Relative Humidity: 45 %	Power:	120 VAC
Remarks:			


Plot 7.7.7 Radiated emission measurements from 9 to 150 kHz at the low, mid and high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

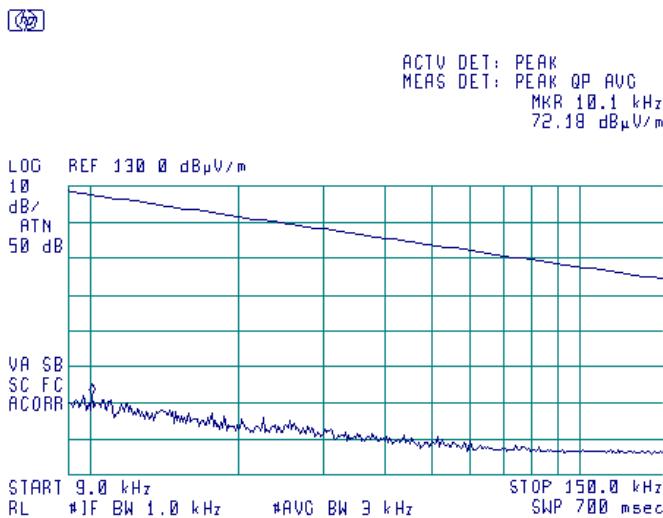

Plot 7.7.8 Radiated emission measurements from 0.15 to 30 MHz at the low, mid and high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

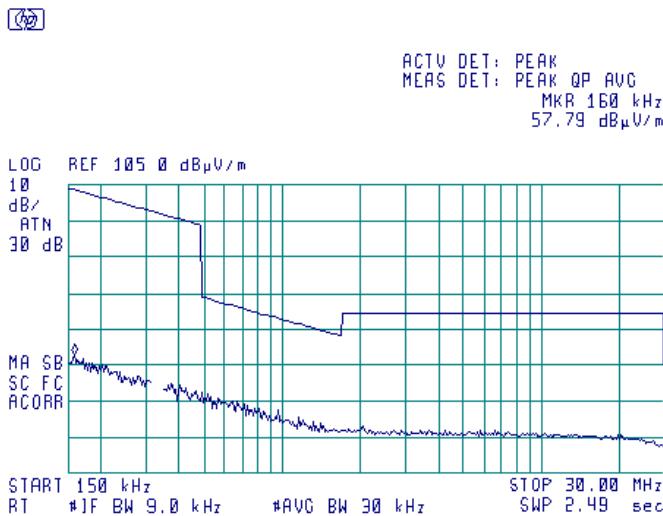




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-16 - 26-May-16			
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			


Plot 7.7.9 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

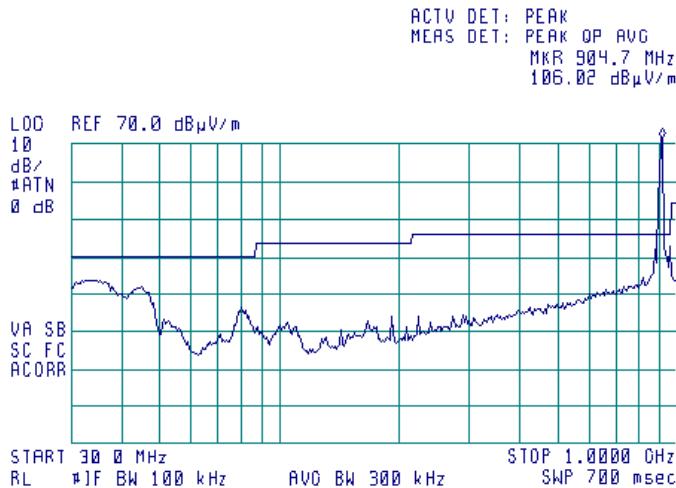

Plot 7.7.10 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

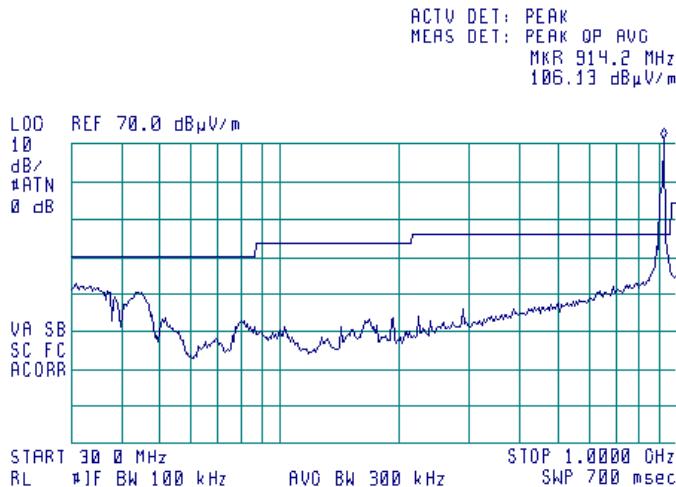



HERMON LABORATORIES


Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions		
Test procedure: ANSI C63.10, sections 6.5, 6.6		
Test mode: Compliance		Verdict: PASS
Date(s): 22-May-16 - 26-May-16		
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa
Remarks:		

Plot 7.7.11 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal





ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 923.7 MHz
 106.23 dBμV/m

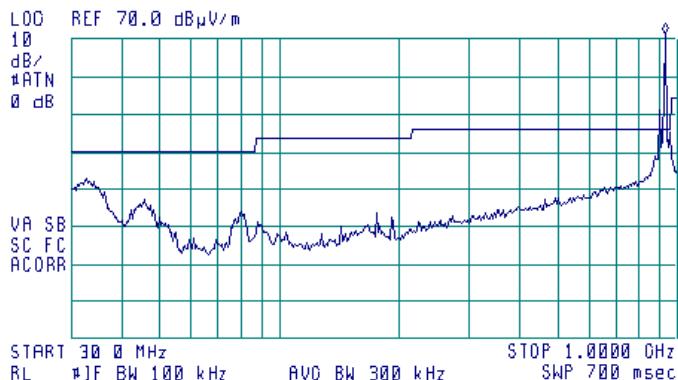**Plot 7.7.12 Radiated emission measurements from 1000 to 6000 MHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 1.816 GHz
 61.96 dBμV/m

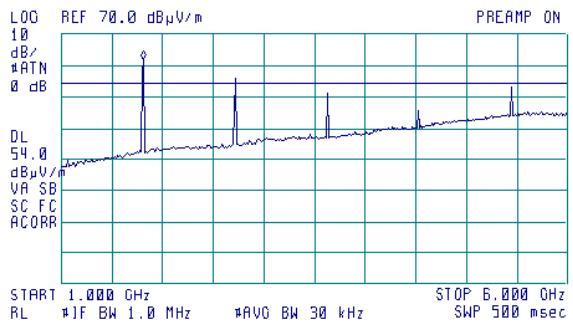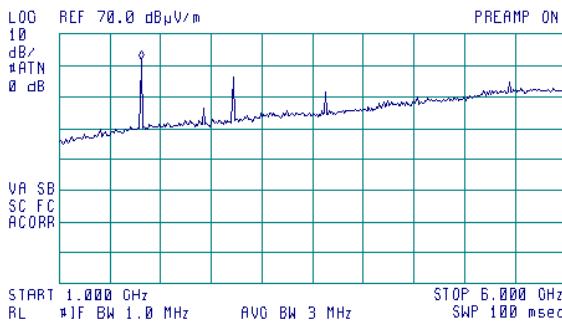




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10, sections 6.5, 6.6		
Test mode:	Compliance		
Date(s):	22-May-16 - 26-May-16		
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			


Plot 7.7.13 Radiated emission measurements from 1000 to 6000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

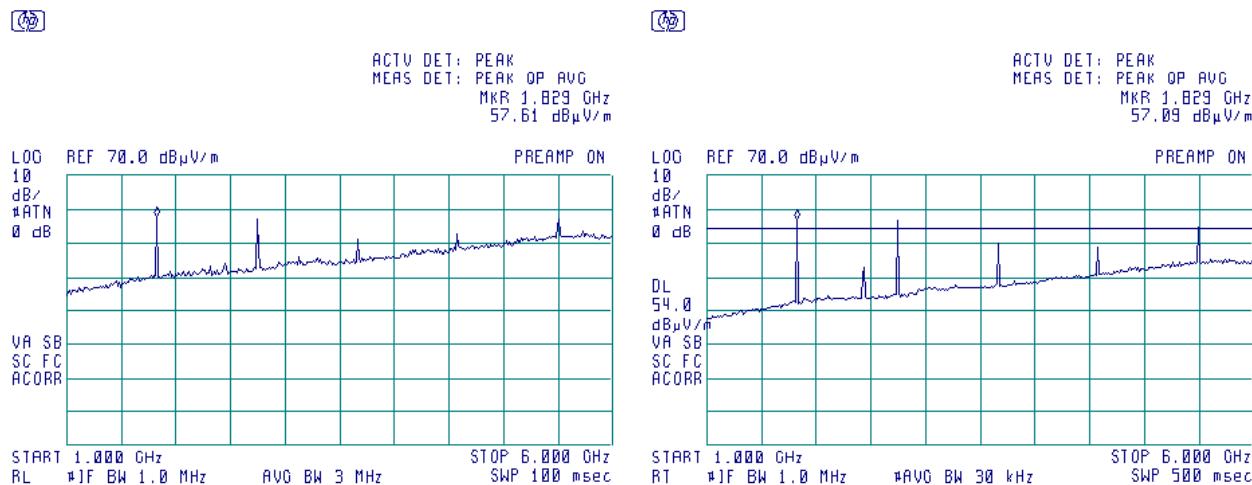

Plot 7.7.14 Radiated emission measurements from 1000 to 6000 MHz at the high carrier frequency



TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

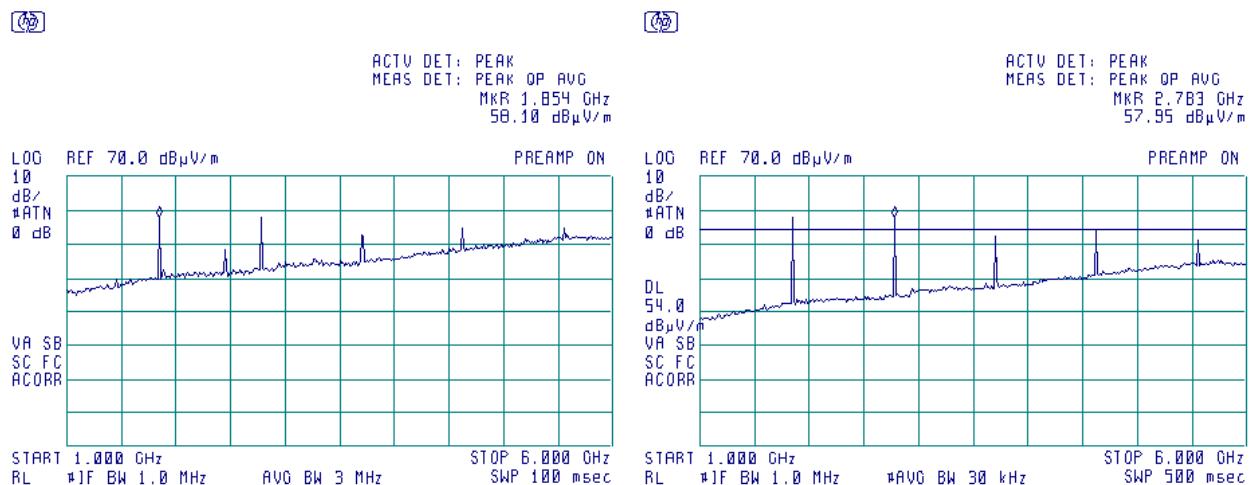



HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions		
Test procedure: ANSI C63.10, sections 6.5, 6.6		
Test mode: Compliance		Verdict: PASS
Date(s): 22-May-16 - 26-May-16		
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa
Remarks:		

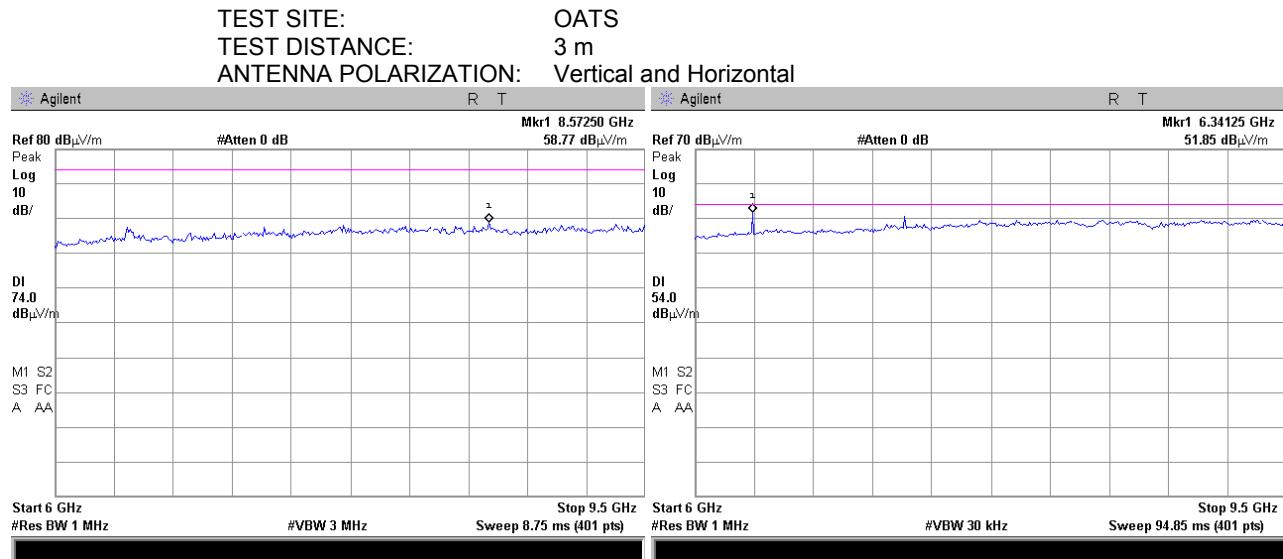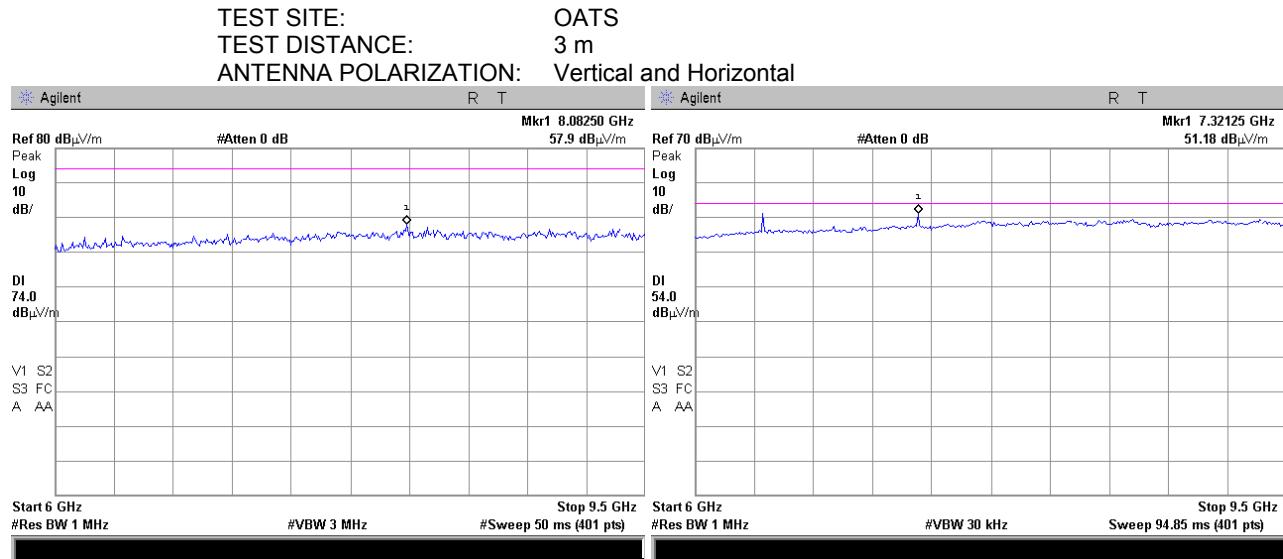
Plot 7.7.15 Radiated emission measurements from 6000 to 9500 MHz at the low carrier frequency**Plot 7.7.16 Radiated emission measurements from 6000 to 9500 MHz at the mid carrier frequency**



HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance			Verdict: PASS
Date(s): 22-May-16 - 26-May-16			
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

Plot 7.7.17 Radiated emission measurements from 6000 to 9500 MHz at the high carrier frequency

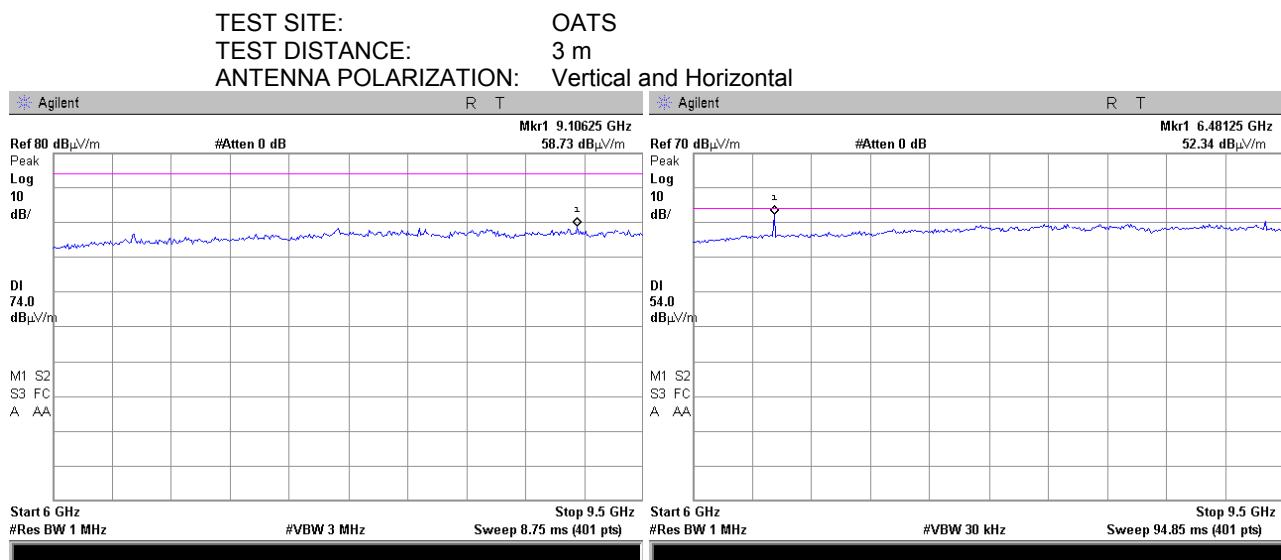




HERMON LABORATORIES


Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions		
Test procedure: ANSI C63.10, sections 6.5, 6.6		
Test mode: Compliance		Verdict: PASS
Date(s): 22-May-16 - 26-May-16		
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa
Remarks:		

Plot 7.7.18 Radiated emission measurements at the second harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

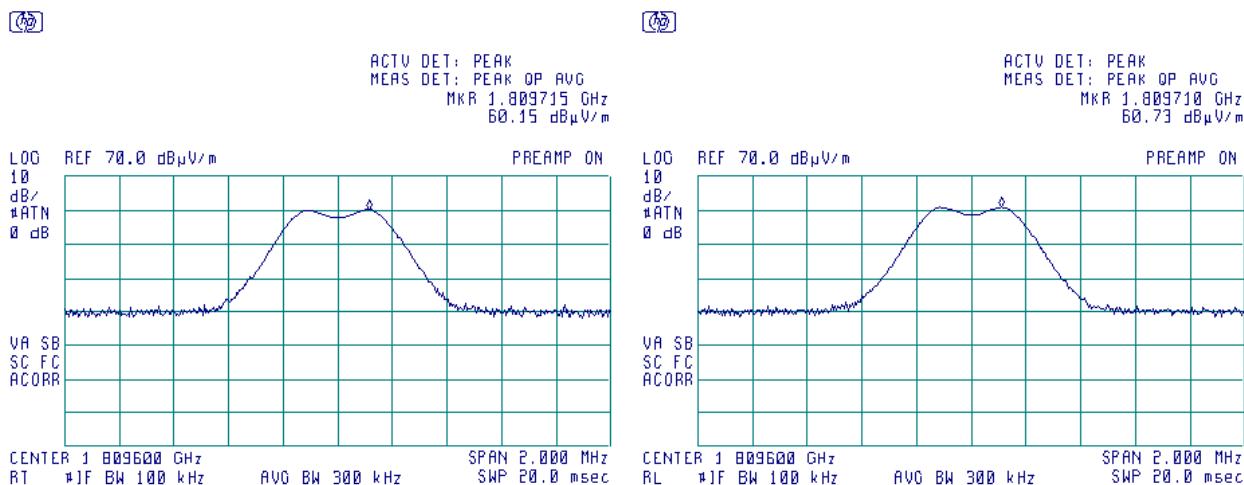**Plot 7.7.19 Radiated emission measurements at the second harmonic of mid carrier frequency**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

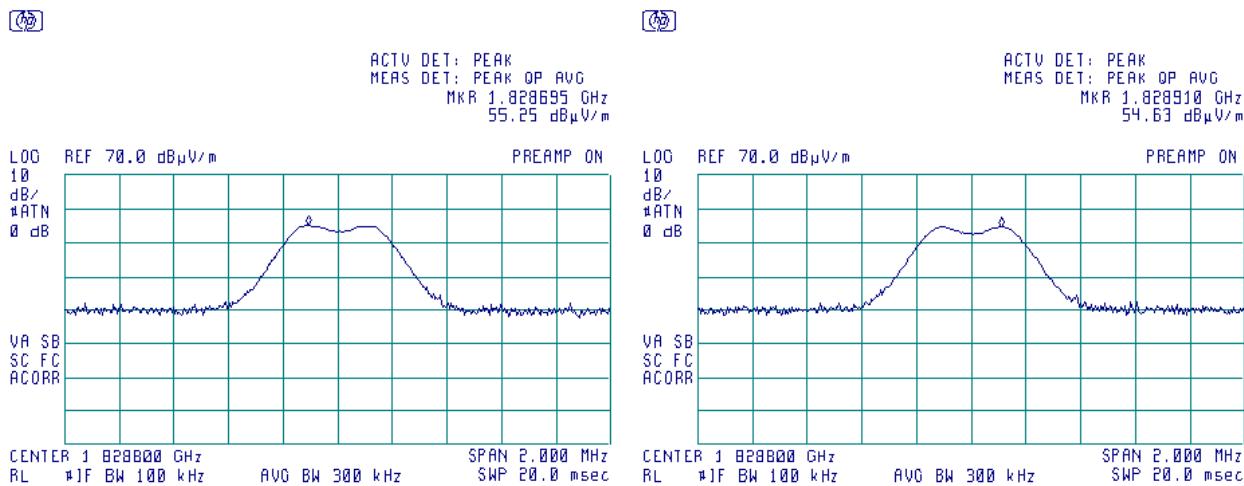





HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10, sections 6.5, 6.6		
Test mode:	Compliance		
Date(s):	22-May-16 - 26-May-16		
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

Plot 7.7.20 Radiated emission measurements at the second harmonic of high carrier frequency

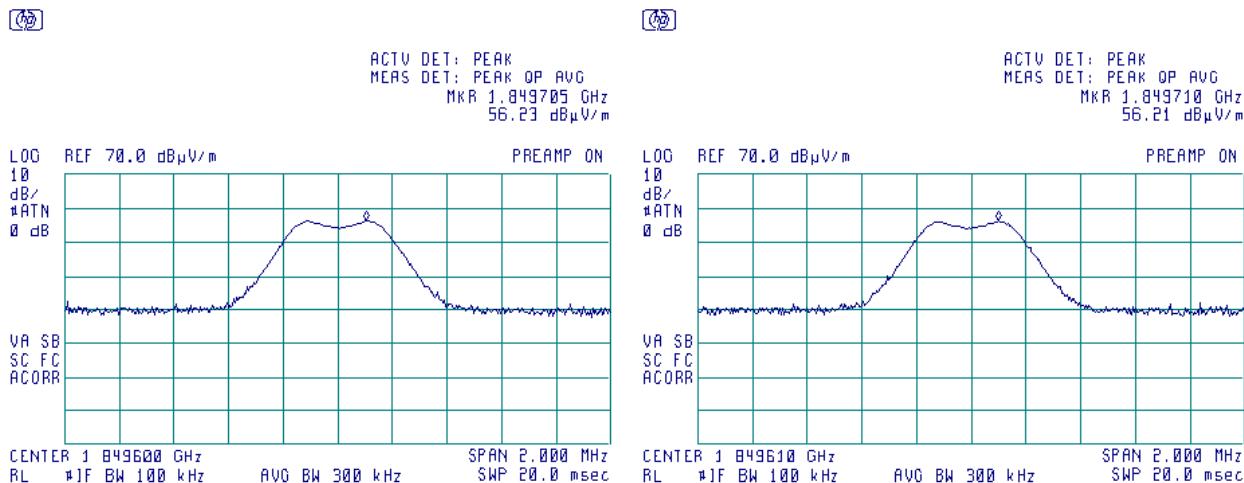TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m



Plot 7.7.21 Radiated emission measurements at the third harmonic of low carrier frequency

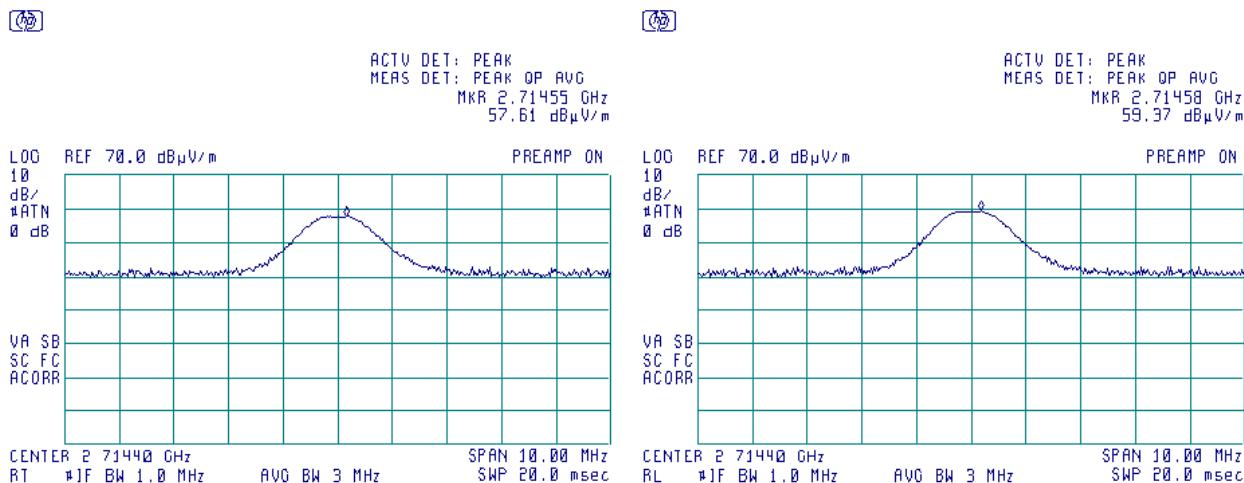TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m



HERMON LABORATORIES



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions		
Test procedure: ANSI C63.10, sections 6.5, 6.6		
Test mode: Compliance		Verdict: PASS
Date(s): 22-May-16 - 26-May-16		
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa
Remarks:		

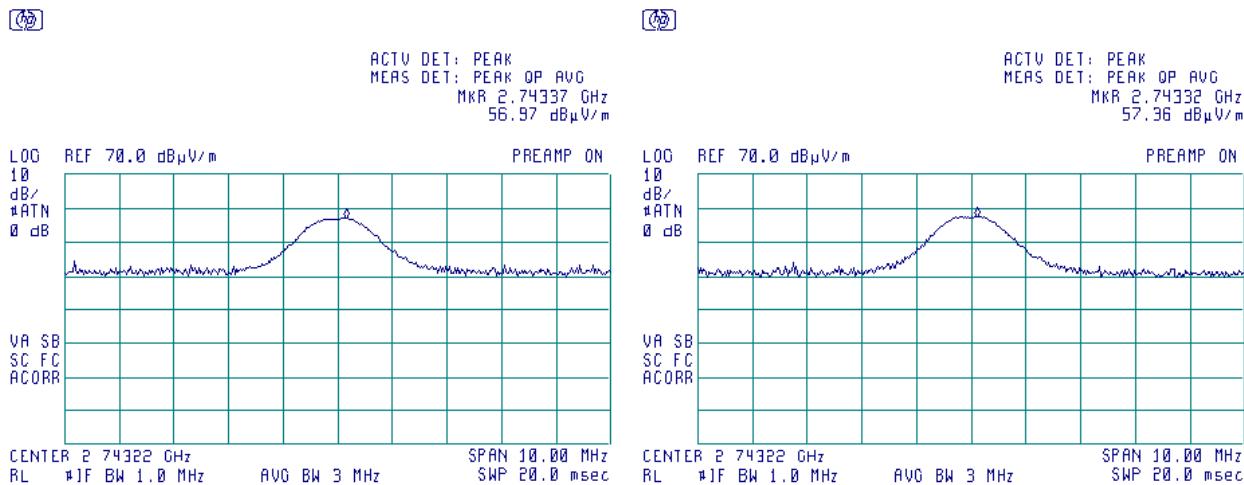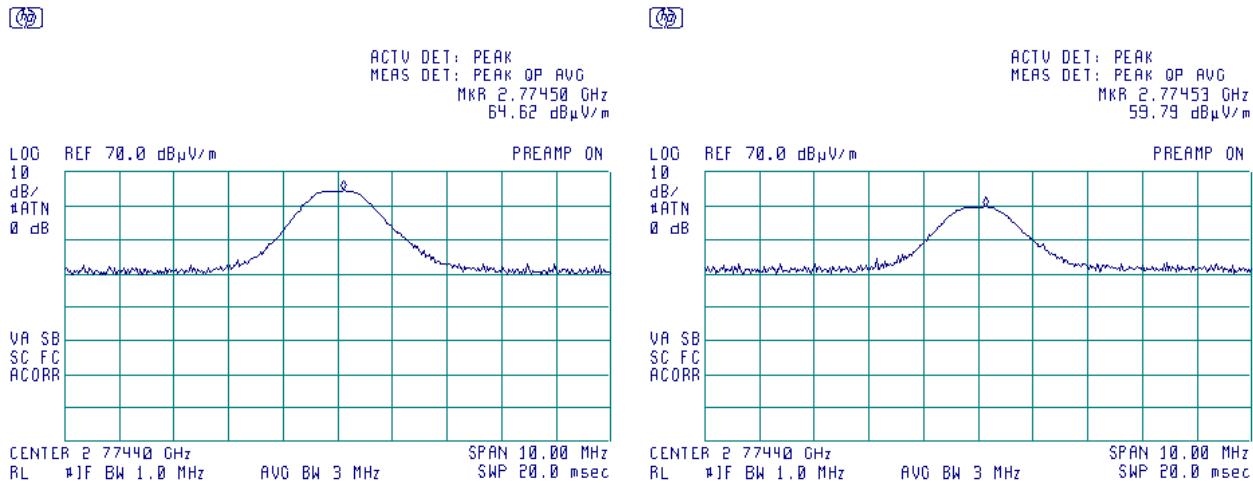Plot 7.7.22 Radiated emission measurements at the third harmonic of mid carrier frequencyTEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m**Plot 7.7.23 Radiated emission measurements at the third harmonic of high carrier frequency**TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m



HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions		
Test procedure: ANSI C63.10, sections 6.5, 6.6		
Test mode: Compliance		Verdict: PASS
Date(s): 22-May-16 - 26-May-16		
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa
Remarks:		

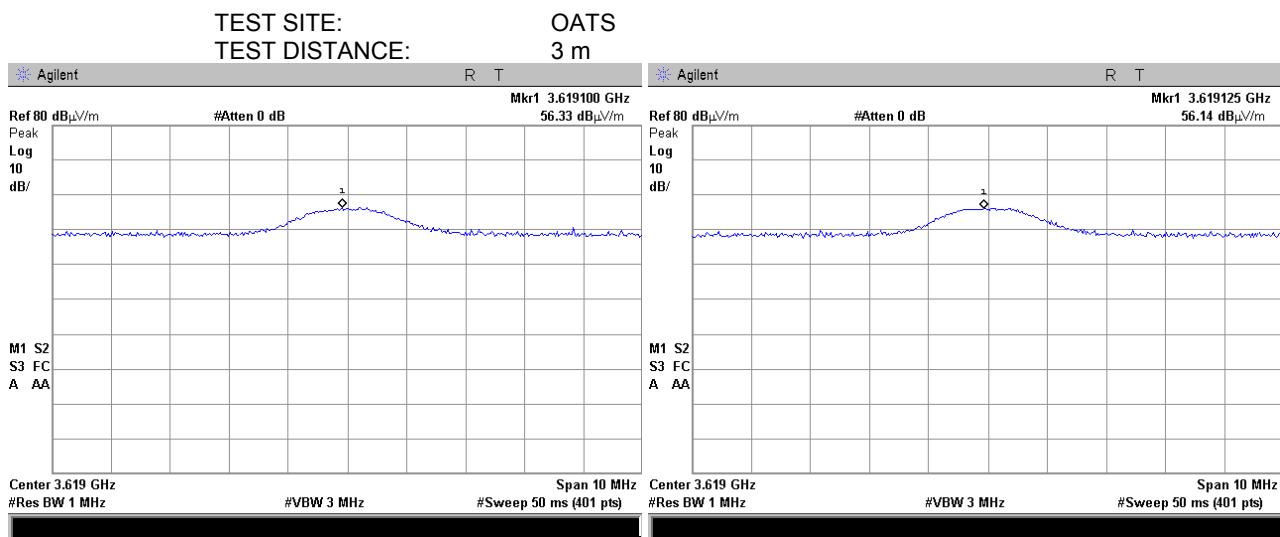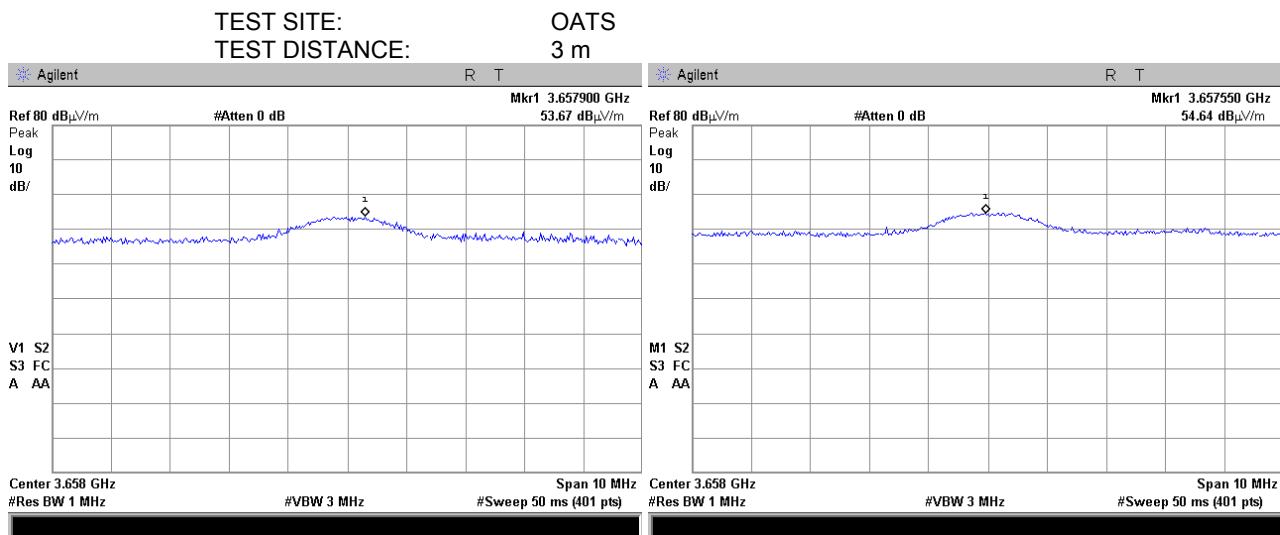
Plot 7.7.24 Radiated emission measurements at the fourth harmonic of low carrier frequency**Plot 7.7.25 Radiated emission measurements at the fourth harmonic of mid carrier frequency**



Test specification:	Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10, sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	22-May-16 - 26-May-16		
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			


Plot 7.7.26 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

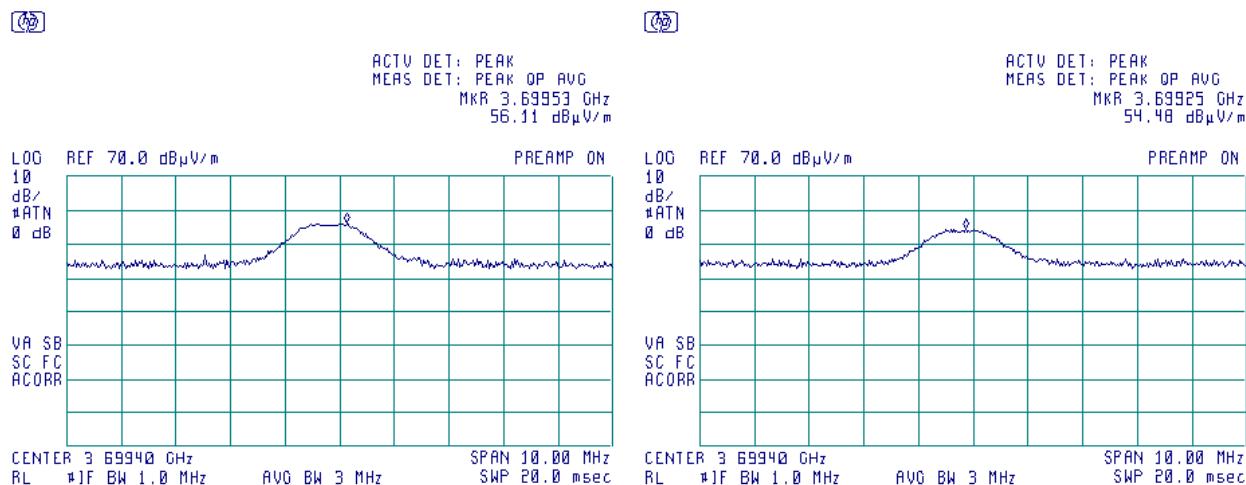

Plot 7.7.27 Radiated emission measurements at the fifth harmonic of low carrier frequency



TEST SITE: OATS
TEST DISTANCE: 3 m

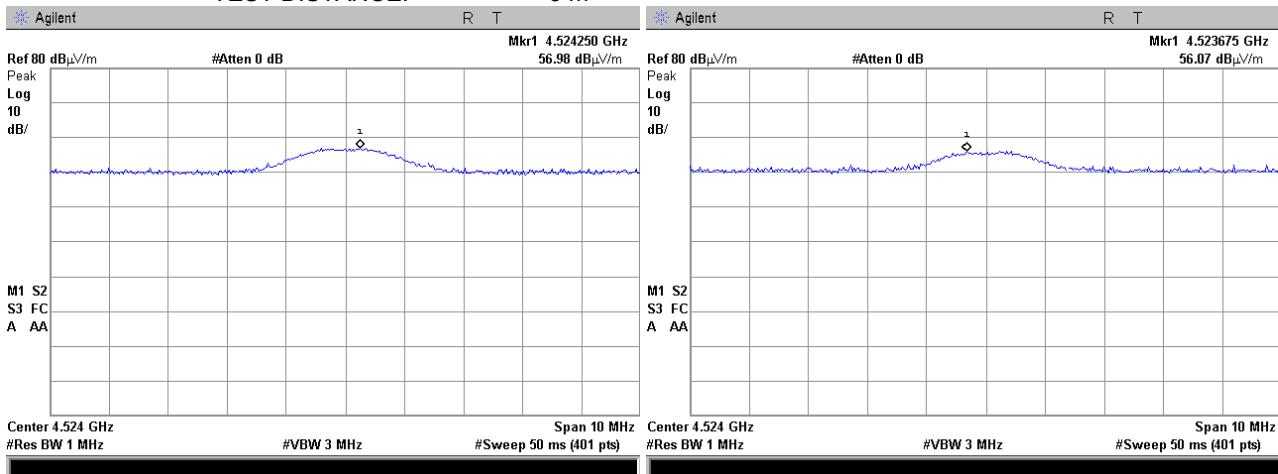



HERMON LABORATORIES



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions		
Test procedure: ANSI C63.10, sections 6.5, 6.6		
Test mode: Compliance	Verdict: PASS	
Date(s): 22-May-16 - 26-May-16		
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa
Remarks:		

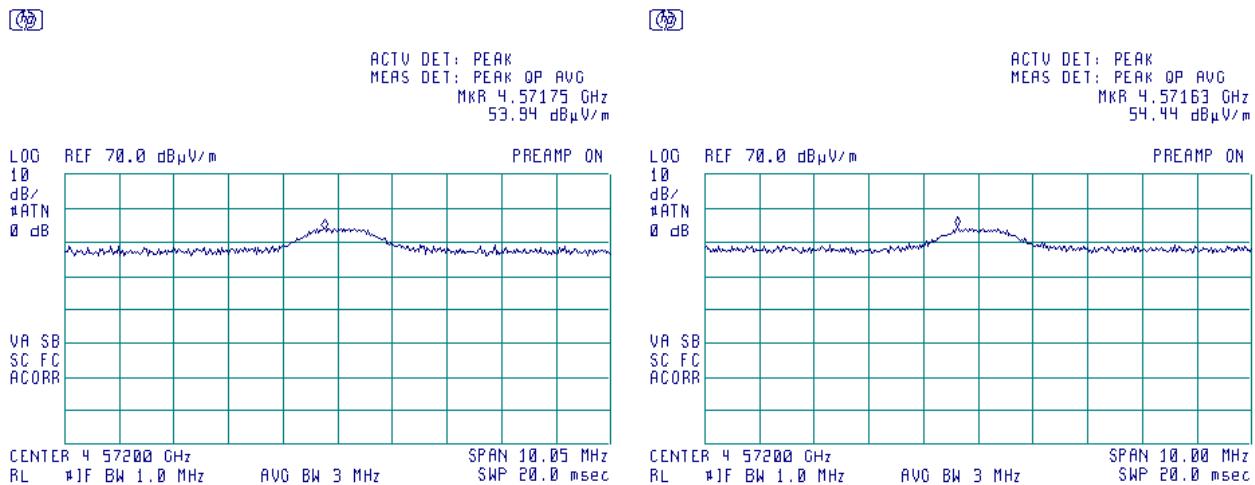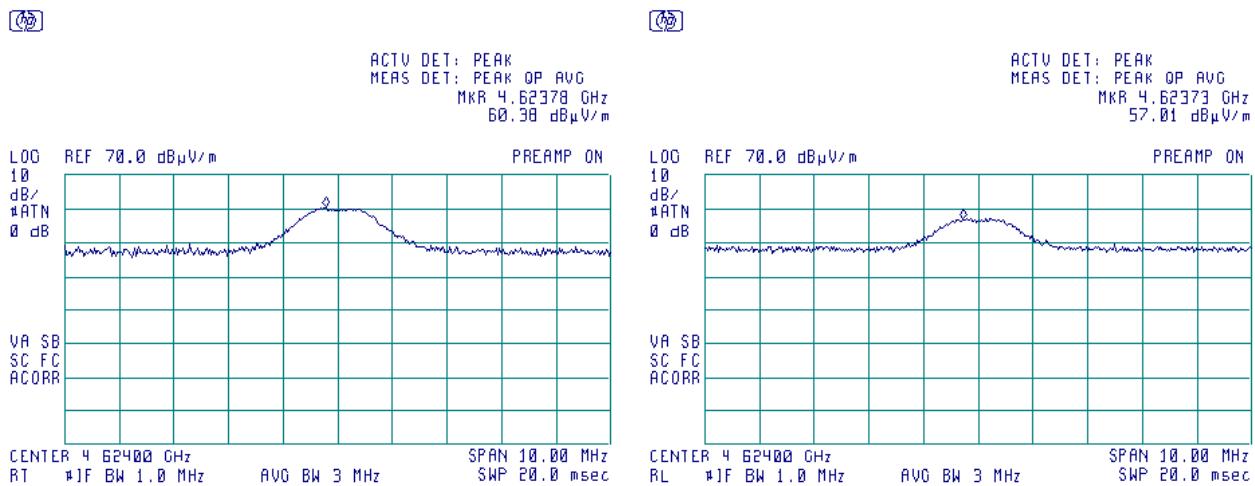Plot 7.7.28 Radiated emission measurements at the fifth harmonic of mid carrier frequencyTEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m**Plot 7.7.29 Radiated emission measurements at the fifth harmonic of high carrier frequency**TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m



HERMON LABORATORIES



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions		
Test procedure: ANSI C63.10, sections 6.5, 6.6		
Test mode: Compliance		Verdict: PASS
Date(s): 22-May-16 - 26-May-16		
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa
Remarks:		

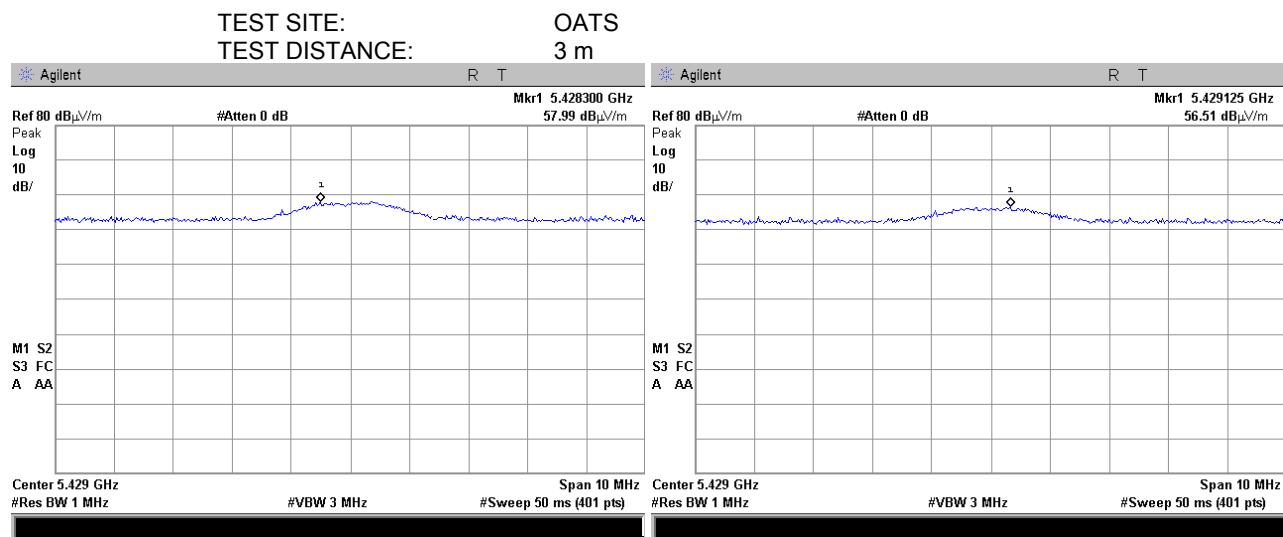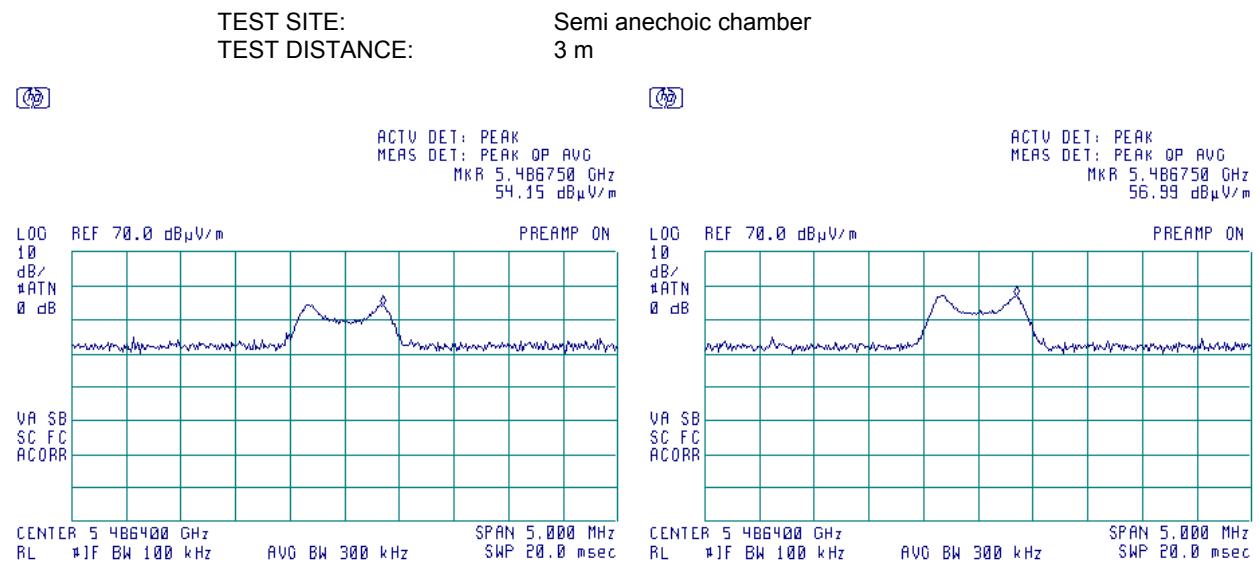Plot 7.7.30 Radiated emission measurements at the sixth harmonic of low carrier frequency**Plot 7.7.31 Radiated emission measurements at the sixth harmonic of mid carrier frequency**



HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions		
Test procedure: ANSI C63.10, sections 6.5, 6.6		
Test mode: Compliance		Verdict: PASS
Date(s): 22-May-16 - 26-May-16		
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa
Remarks:		

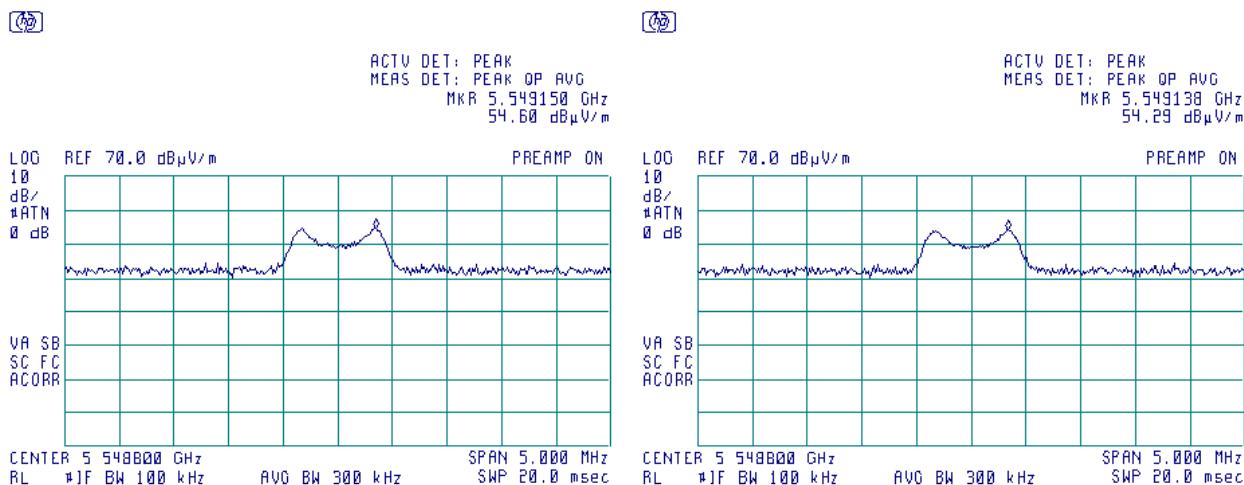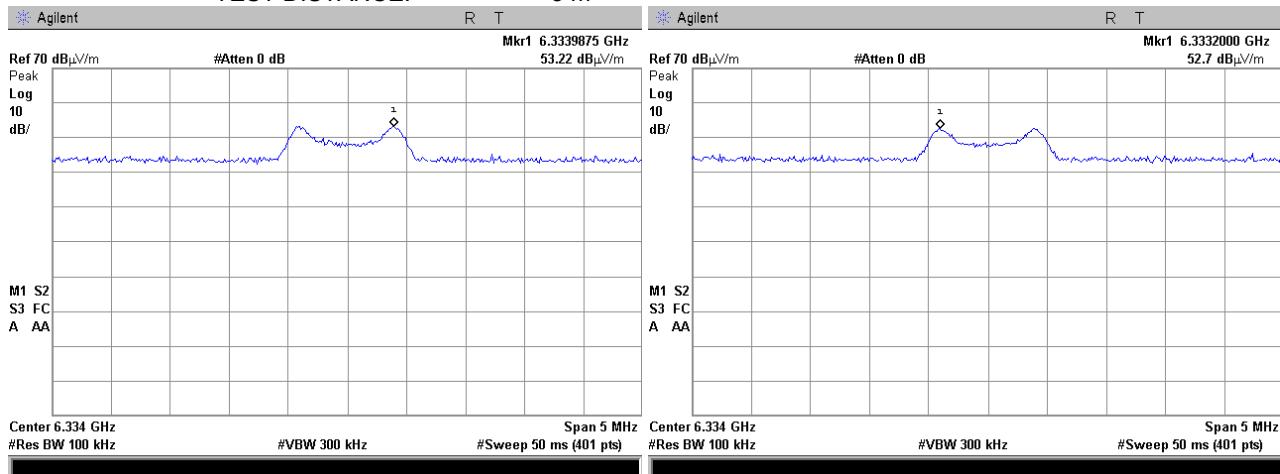
Plot 7.7.32 Radiated emission measurements at the sixth harmonic of high carrier frequencyTEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m**Plot 7.7.33 Radiated emission measurements at the seventh harmonic of low carrier frequency**TEST SITE: OATS
TEST DISTANCE: 3 m




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10, sections 6.5, 6.6	
Test mode:	Compliance	
Date(s):	22-May-16 - 26-May-16	
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa
Power: 120 VAC		
Remarks:		

Plot 7.7.34 Radiated emission measurements at the seventh harmonic of mid carrier frequency

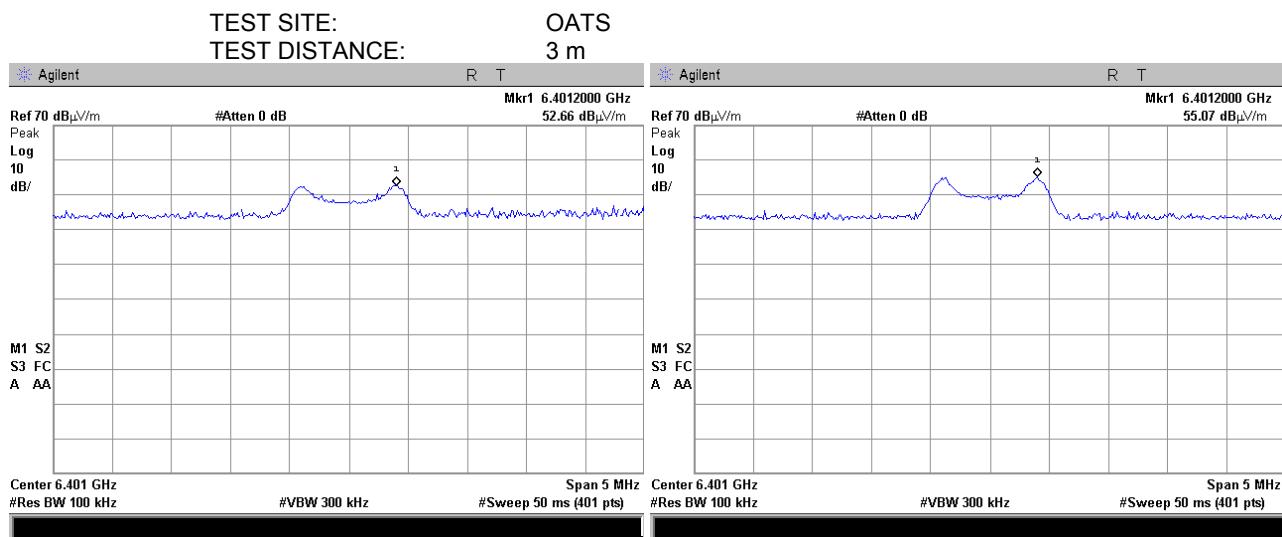



Plot 7.7.35 Radiated emission measurements at the seventh harmonic of high carrier frequency

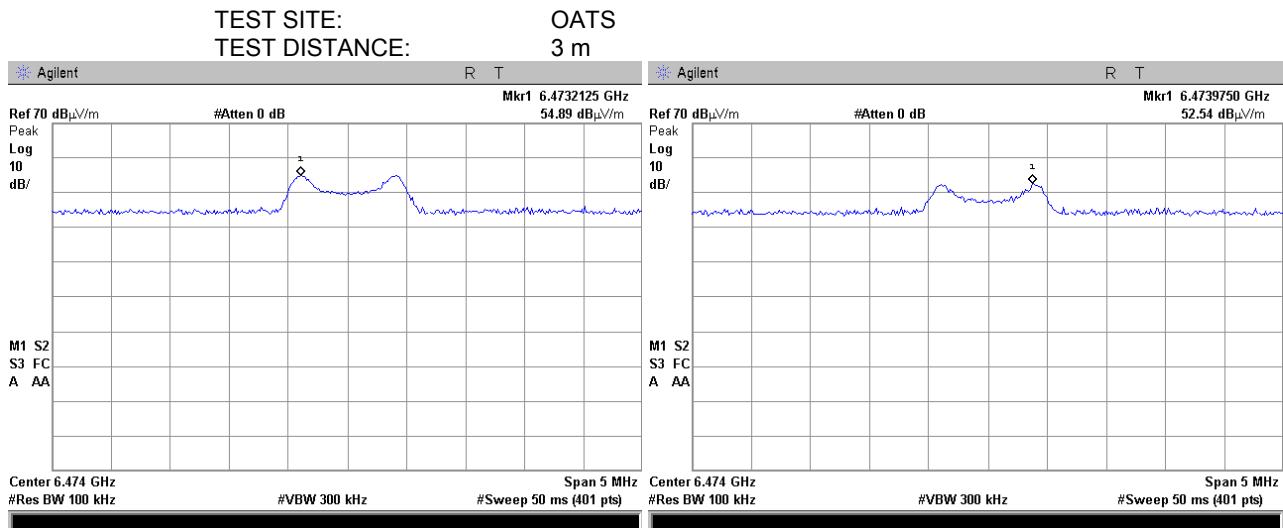



HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions		
Test procedure: ANSI C63.10, sections 6.5, 6.6		
Test mode: Compliance		Verdict: PASS
Date(s): 22-May-16 - 26-May-16		
Temperature: 26 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa
Remarks:		

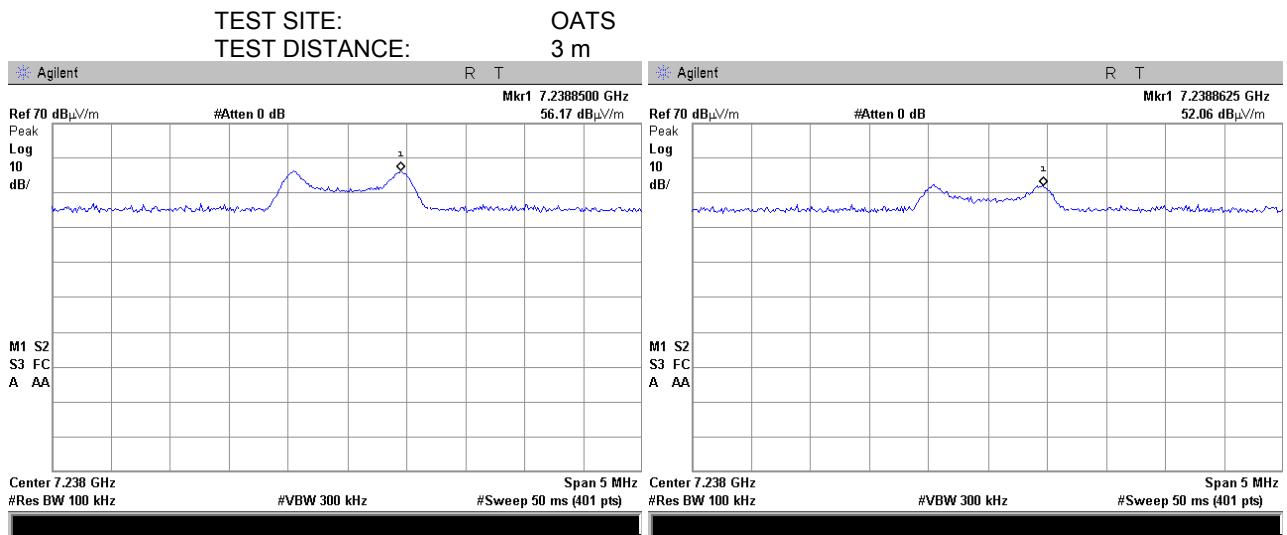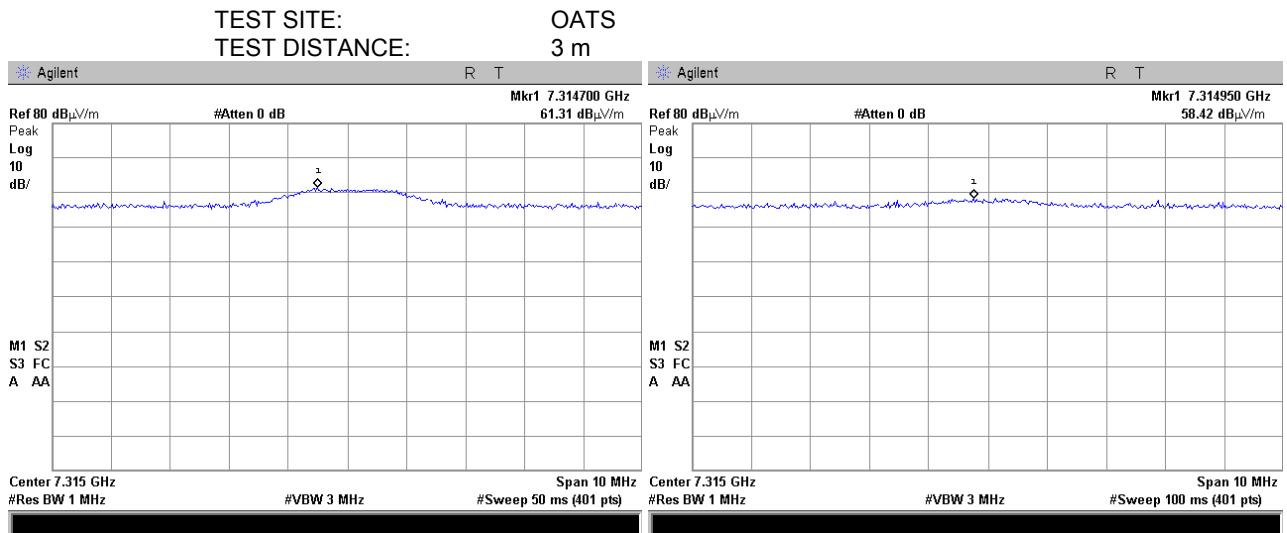
Plot 7.7.36 Radiated emission measurements at the eighth harmonic of low carrier frequency**Plot 7.7.37 Radiated emission measurements at the eighth harmonic of mid carrier frequency**




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-16 - 26-May-16		Air Pressure: 1008 hPa	Power: 120 VAC
Temperature: 26 °C Relative Humidity: 45 %			
Remarks:			

Plot 7.7.38 Transmission pulse duration

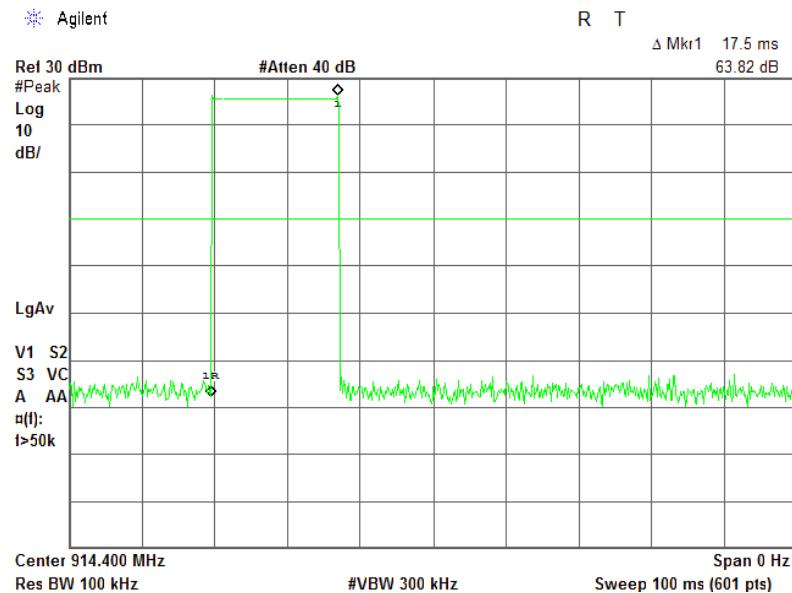

Plot 7.7.39 Transmission pulse period

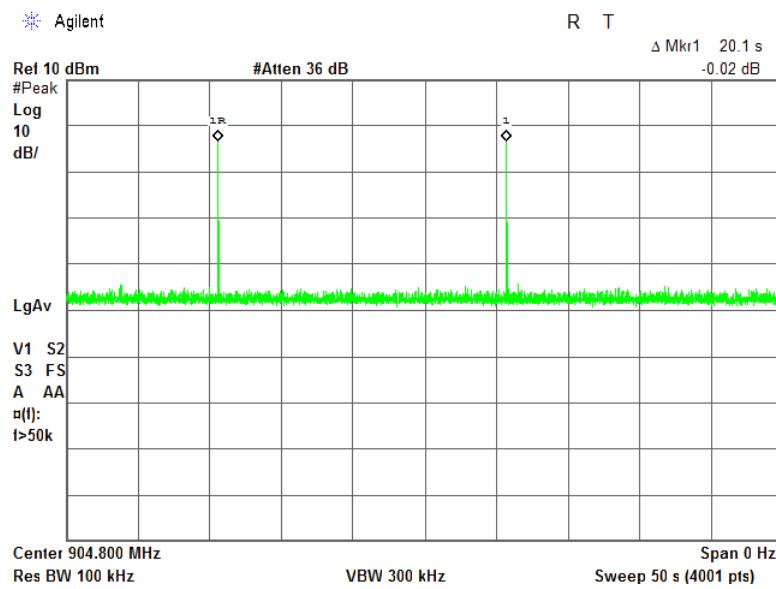



HERMON LABORATORIES

Test specification: Section 15.203, RSS-Gen, Section 7.1.4, Antenna requirements			
Test procedure:	Visual inspection		
Test mode:	Compliance		
Date(s):	23-May-16	Verdict:	PASS
Temperature: 23.2 °C	Relative Humidity: 47 %	Air Pressure: 1004 hPa	Power: 120 VAC
Remarks:			

7.8 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.8.1.

Table 7.8.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	NA	Comply
The transmitter employs a unique antenna connector	Visual inspection (MMCX connector)	
The transmitter requires professional installation	NA	

Photograph 7.8.1 Antenna assembly





HERMON LABORATORIES

Test specification: Section 15.207(a), RSS-Gen section 8.8, Conducted emission		
Test procedure: ANSI C63.10, section 6.2		
Test mode: Compliance		Verdict: PASS
Date(s): 24-May-16		
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa
Remarks:		

7.9 Conducted emissions

7.9.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 7.9.1.

Table 7.9.1 Limits for conducted emissions


Frequency, MHz	Class B limit, dB(μ V)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

* The limit decreases linearly with the logarithm of frequency.

7.9.2 Test procedure

- 7.9.2.1 The EUT was set up as shown in Figure 7.9.1 and associated photographs, energized and the performance check was conducted.
- 7.9.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 7.9.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.
- 7.9.2.3 The position of the device cables was varied to determine maximum emission level.
- 7.9.2.4 The worst test results (the lowest margins) were recorded in Table 7.9.2 and shown in the associated plots.

Figure 7.9.1 Setup for conducted emission measurements, table-top equipment

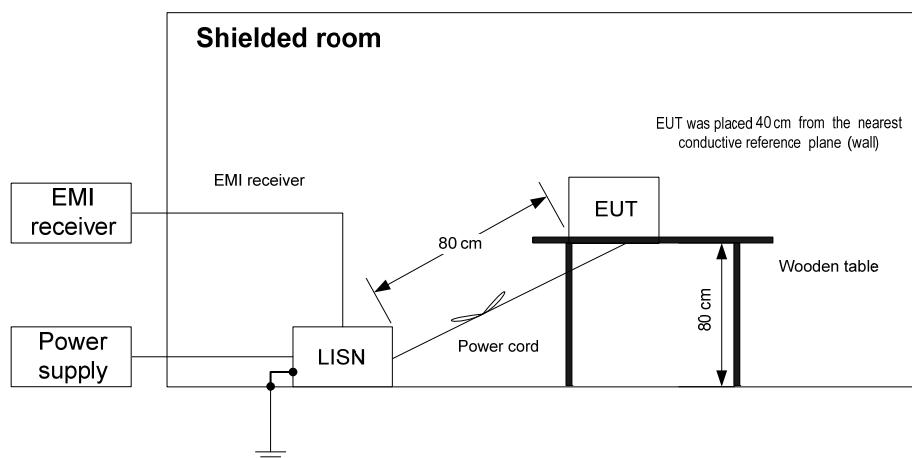



HERMON LABORATORIES

Test specification: Section 15.207(a), RSS-Gen section 8.8, Conducted emission	
Test procedure:	ANSI C63.10, section 6.2
Test mode:	Compliance
Date(s):	24-May-16
Temperature: 24 °C	Relative Humidity: 45 %
	Air Pressure: 1008 hPa
Remarks:	Power: 120 VAC

Table 7.9.2 Conducted emission test results

LINE: AC mains
 EUT OPERATING MODE: Transmit
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.228	46.77	37.21	62.58	-25.37	20.00	52.58	-32.58	L1	Pass
0.328	48.30	42.72	59.54	-16.82	32.55	49.54	-16.99		
0.483	50.20	44.67	56.32	-11.65	33.89	46.32	-12.43		
0.535	44.11	39.64	56.00	-16.36	28.83	46.00	-17.17		
0.635	44.57	40.51	56.00	-15.49	29.48	46.00	-16.52		
0.666	45.22	41.49	56.00	-14.51	30.82	46.00	-15.18		
0.339	41.97	36.51	59.29	-22.78	25.16	49.29	-24.13		
0.416	39.99	38.49	57.57	-19.08	24.33	47.57	-23.24		
0.485	44.90	38.96	56.29	-17.33	27.66	46.29	-18.63		
0.504	46.04	40.15	56.00	-15.85	28.31	46.00	-17.69		
0.805	38.70	33.07	56.00	-22.93	19.30	46.00	-26.70		
1.611	34.43	31.37	56.00	-24.63	19.60	46.00	-26.40		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0521	HL 0787	HL 3016	HL 4280				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification: Section 15.207(a), RSS-Gen section 8.8, Conducted emission			
Test procedure: ANSI C63.10, section 6.2			
Test mode: Compliance		Verdict: PASS	
Date(s):	24-May-16		
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

Plot 7.9.1 Conducted emission measurements

LINE: L1
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 480 kHz
48.94 dB μ V

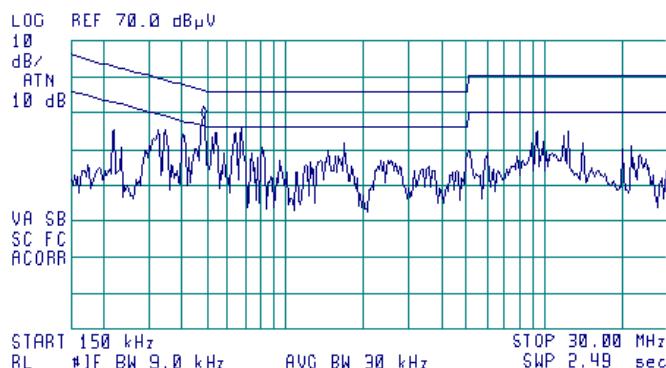


Plot 7.9.2 Conducted emission measurements

LINE: L2
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 430 kHz
44.73 dB μ V

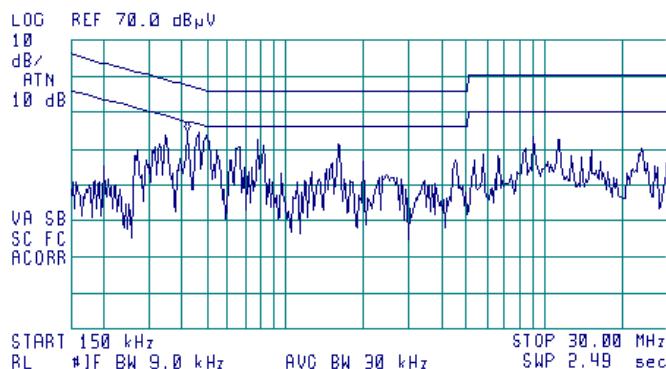



HERMON LABORATORIES

Test specification: Section 15.107, ICES-003, Conducted emission at AC power port			
Test procedure: ANSI C63.4, Section 12.2.4			
Test mode: Compliance			Verdict: PASS
Date(s): 24-May-16			
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

8 Unintentional emissions

8.1 Conducted emissions

8.1.1 General

This test was performed to measure common mode conducted emissions at the mains power port. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(µV)		Class A limit, dB(µV)	
	QP	AVRG	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*	79	66
0.5 - 5.0	56	46	73	60
5.0 - 30	60	50	73	60

* The limit decreases linearly with the logarithm of frequency.

8.1.2 Test procedure


- 8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photographs, energized and the performance check was conducted.
- 8.1.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 8.1.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.
- 8.1.2.3 The position of the device cables was varied to determine maximum emission level.
- 8.1.2.4 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.




HERMON LABORATORIES

Test specification: Section 15.107, ICES-003, Conducted emission at AC power port		
Test procedure: ANSI C63.4, Section 12.2.4		
Test mode: Compliance		Verdict: PASS
Date(s): 24-May-16		
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa
Remarks:		

Figure 8.1.1 Setup for conducted emission measurements, table-top equipment

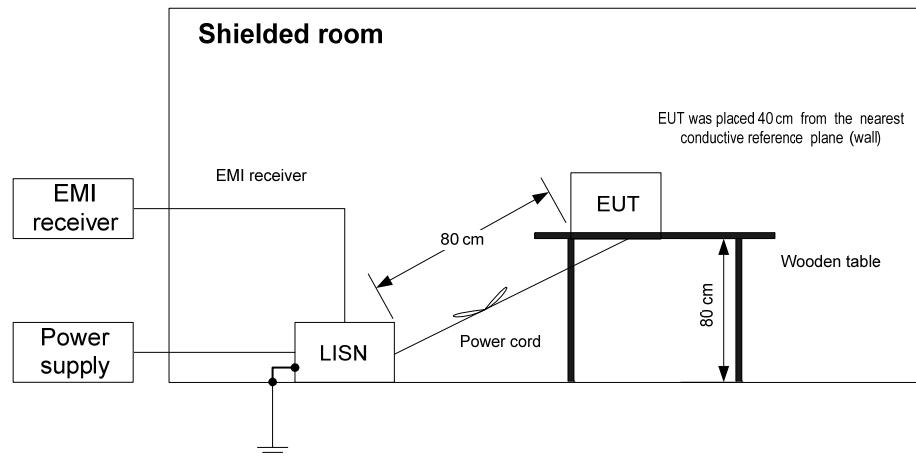

Photograph 8.1.1 Setup for conducted emission measurements

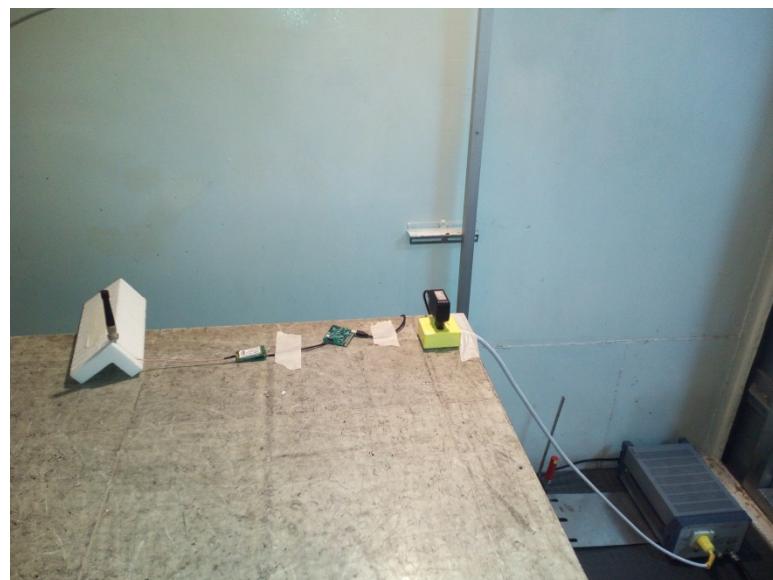



HERMON LABORATORIES

Test specification: Section 15.107, ICES-003, Conducted emission at AC power port	
Test procedure:	ANSI C63.4, Section 12.2.4
Test mode:	Compliance
Date(s):	24-May-16
Temperature: 24 °C	Relative Humidity: 45 %
	Air Pressure: 1008 hPa
	Power: 120 VAC
Remarks:	

Table 8.1.2 Conducted emission test results

LINE: AC mains
 LIMIT: Class A / B
 EUT OPERATING MODE: Receive / Stand-by
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.327	45.56	41.07	59.58	-18.51	31.09	49.58	-18.49	L1	Pass
0.465	45.39	40.80	56.66	-15.86	30.28	46.66	-16.38		
0.488	49.51	44.43	56.22	-11.79	33.45	46.22	-12.77		
0.642	43.57	39.96	56.00	-16.04	29.91	46.00	-16.09		
0.776	40.25	35.71	56.00	-20.29	24.19	46.00	-21.81		
1.494	37.46	33.49	56.00	-22.51	23.08	46.00	-22.92		
0.327	39.48	35.97	59.58	-23.61	25.45	49.58	-24.13	L2	Pass
0.465	42.38	36.03	56.66	-20.63	25.11	46.66	-21.55		
0.488	45.19	38.67	56.22	-17.55	27.43	46.22	-18.79		
0.642	39.42	35.45	56.00	-20.55	24.46	46.00	-21.54		
0.776	35.23	29.62	56.00	-26.38	18.52	46.00	-27.48		
1.494	32.89	28.46	56.00	-27.54	18.03	46.00	-27.97		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0521	HL 0787	HL 3016	HL 4280				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification: Section 15.107, ICES-003, Conducted emission at AC power port			
Test procedure: ANSI C63.4, Section 12.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 24-May-16			
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

Plot 8.1.1 Conducted emission measurements

LINE: L1
LIMIT: Class B
EUT OPERATING MODE: Receive
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 500 kHz
47.5B dB μ V

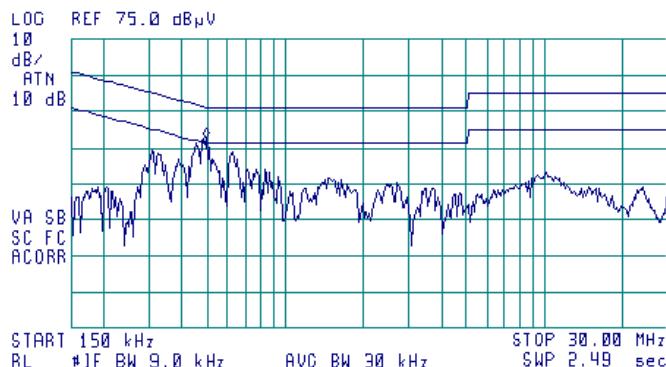


Plot 8.1.2 Conducted emission measurements

LINE: L2
LIMIT: Class B
EUT OPERATING MODE: Receive
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 500 kHz
42.5B dB μ V

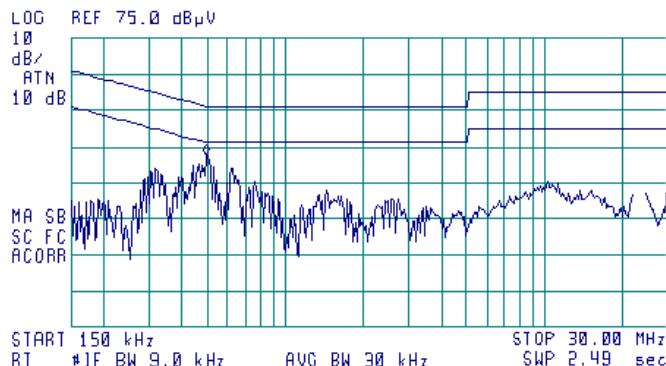



HERMON LABORATORIES

Test specification: Section 15.109, RSS-Gen, Section 7.1.2, ICES-003, Radiated emission			
Test procedure: ANSI C63.4, Section 12.2.5/ RSS-Gen, Section 4.10			
Test mode: Compliance			Verdict: PASS
Date(s): 15-May-16			
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			

8.2 Radiated emission measurements

8.2.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.2.1, Table 8.2.2.

Table 8.2.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(µV/m)		Class A limit, dB(µV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S_2} = \text{Lim}_{S_1} + 20 \log (S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

Table 8.2.2 Radiated emission limits according to RSS-Gen, Section 7.1.2

Frequency, MHz	Field strength limit at 3 m test distance, dB(µV/m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
960 - 5 th harmonic**	54.0

** - harmonic of the highest frequency the EUT generates, uses, operates or tunes to.

8.2.2 Test procedure


- 8.2.2.1 The EUT was set up as shown in Figure 8.2.1 and associated photograph/s, energized and the performance check was conducted.
- 8.2.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.
- 8.2.2.3 The worst test results (the lowest margins) were recorded in Table 8.2.3 and shown in the associated plots.




HERMON LABORATORIES

Test specification: Section 15.109, RSS-Gen, Section 7.1.2, ICES-003, Radiated emission		
Test procedure: ANSI C63.4, Section 12.2.5/ RSS-Gen, Section 4.10		
Test mode: Compliance		Verdict: PASS
Date(s): 15-May-16		
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa
Remarks:		

Figure 8.2.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

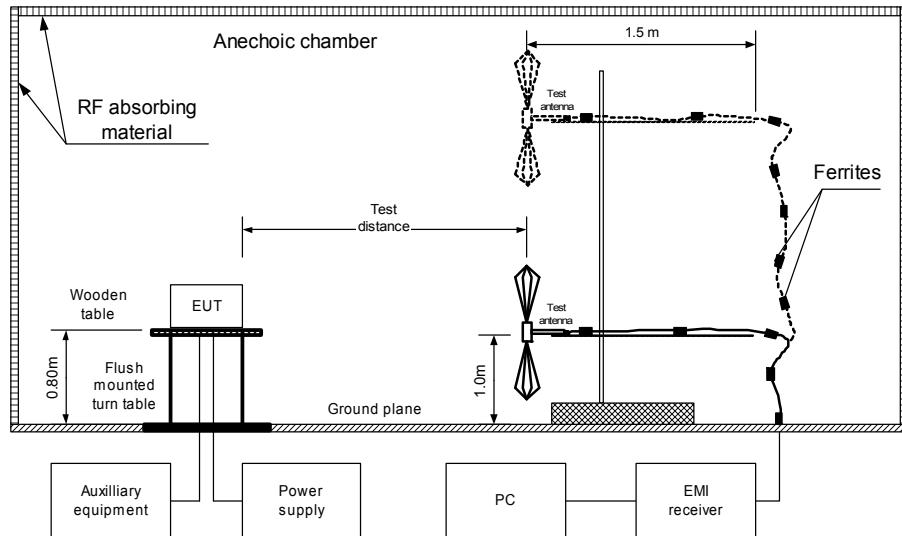

Photograph 8.2.1 Setup for preliminary radiated emission measurements

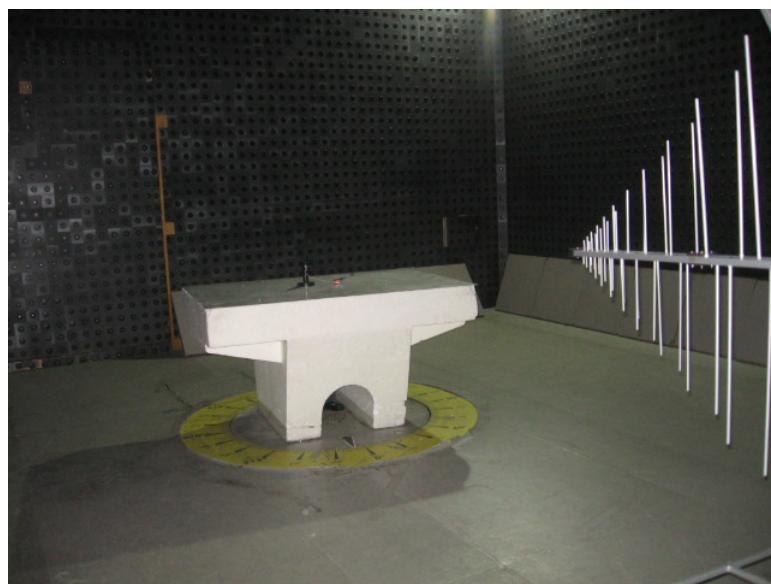



HERMON LABORATORIES

Test specification: Section 15.109, RSS-Gen, Section 7.1.2, ICES-003, Radiated emission	
Test procedure: ANSI C63.4, Section 12.2.5/ RSS-Gen, Section 4.10	
Test mode: Compliance	Verdict: PASS
Date(s): 15-May-16	
Temperature: 24 °C	Relative Humidity: 45 %
Air Pressure: 1008 hPa	
Power: 120 VAC	
Remarks:	

Table 8.2.3 Radiated emission test results

EUT SET UP: TABLE-TOP
 LIMIT: Class B
 EUT OPERATING MODE: Receive
 TEST SITE: SEMI ANECHOIC CHAMBER
 TEST DISTANCE: 3 m
 DETECTORS USED: PEAK / QUASI-PEAK
 FREQUENCY RANGE: 30 MHz – 1000 MHz
 RESOLUTION BANDWIDTH: 120 KHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found								

TEST SITE: SEMI ANECHOIC CHAMBER
 TEST DISTANCE: 3 m
 DETECTORS USED: PEAK / AVERAGE
 FREQUENCY RANGE: 1000 MHz - 1000 KHz
 RESOLUTION BANDWIDTH:

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found										

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0521	HL 0604	HL 1984	HL 4011	HL 4278	HL 4353		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.109, RSS-Gen, Section 7.1.2, ICES-003, Radiated emission			
Test procedure: ANSI C63.4, Section 12.2.5/ RSS-Gen, Section 4.10			
Test mode: Compliance			Verdict: PASS
Date(s): 15-May-16			
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa	Power: 120 VAC
Remarks:			


Plot 8.2.1 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

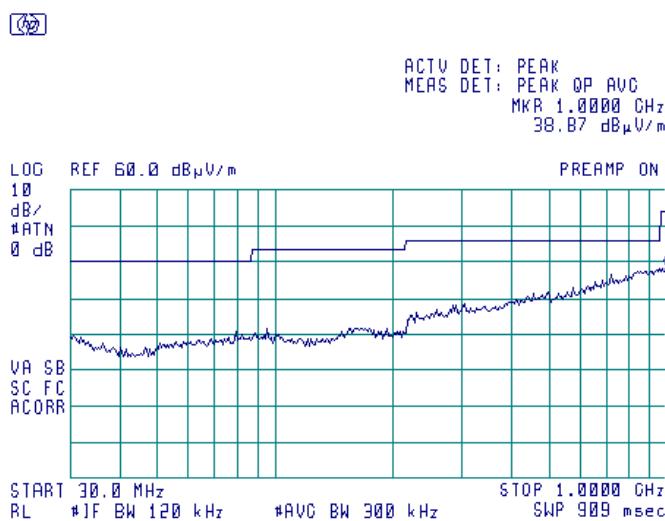

Plot 8.2.2 Radiated emission measurements in 30 - 1000 MHz range, horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

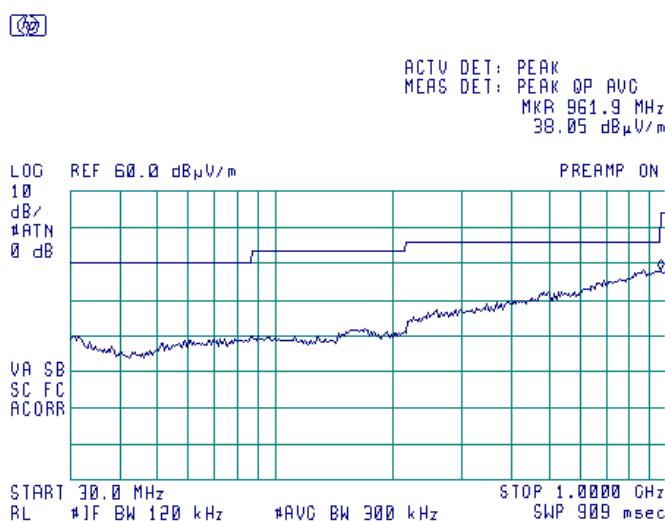




HERMON LABORATORIES


Test specification: Section 15.109, RSS-Gen, Section 7.1.2, ICES-003, Radiated emission		
Test procedure: ANSI C63.4, Section 12.2.5/ RSS-Gen, Section 4.10		
Test mode: Compliance	Verdict: PASS	
Date(s): 15-May-16		
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1008 hPa
Remarks:		

Plot 8.2.3 Radiated emission measurements above 1000 MHz, vertical antenna polarization

TEST SITE: Semi anechoic chamber
 LIMIT: Class B
 TEST DISTANCE: 3 m
 EUT OPERATING MODE: Receive

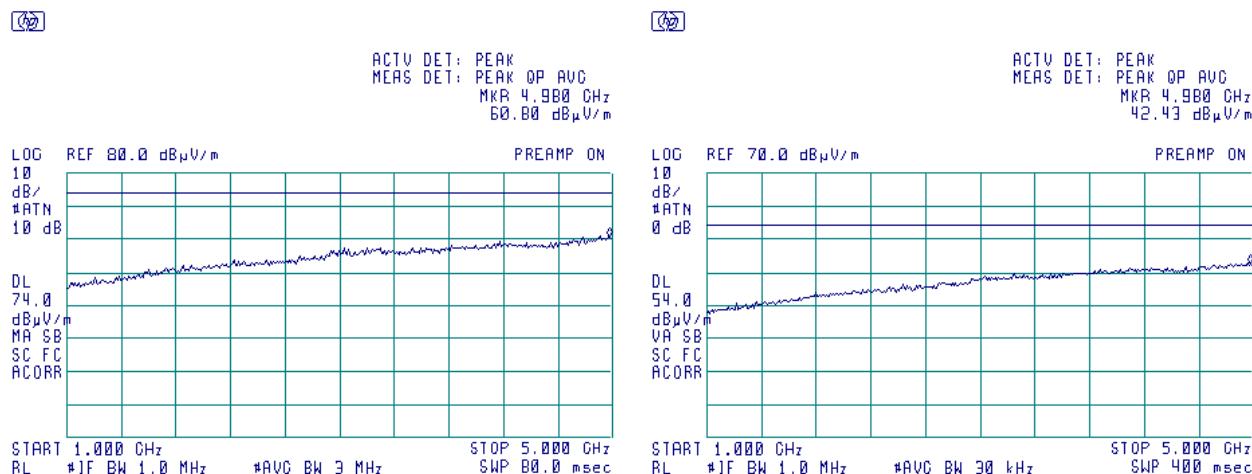**Plot 8.2.4 Radiated emission measurements above 1000 MHz, horizontal antenna polarization**

TEST SITE: Semi anechoic chamber
 LIMIT: Class B
 TEST DISTANCE: 3 m
 EUT OPERATING MODE: Receive

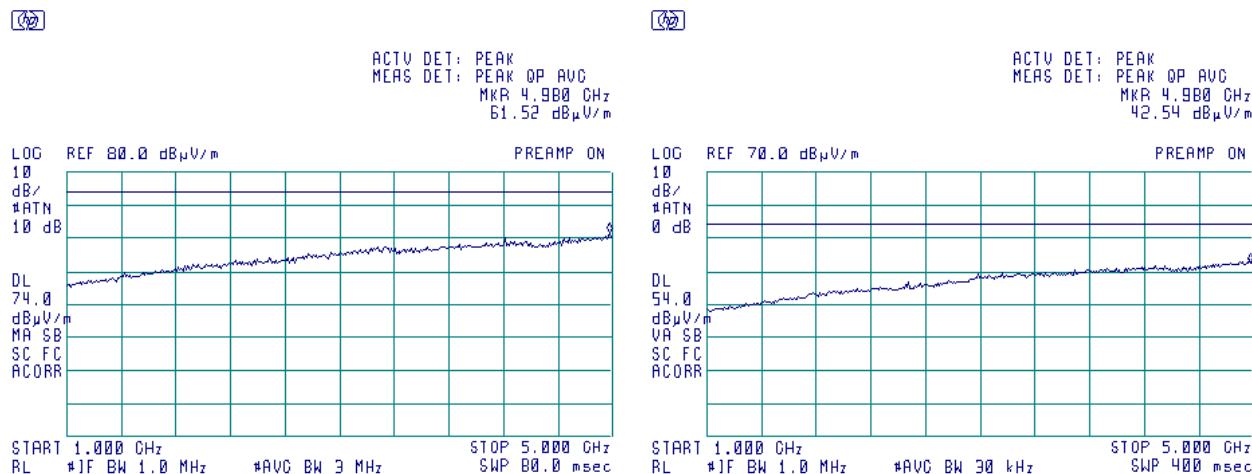



HERMON LABORATORIES

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	18-Jan-16	18-Jan-17
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	27-Oct-15	27-Oct-16
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	10-May-16	10-May-17
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A018 77	12-Oct-15	12-Oct-16
1984	Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz, 300 W	EMC Test Systems	3115	9911-5964	28-Mar-16	28-Mar-17
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	01-Jan-16	01-Jan-17
3016	LISN, Two-line V-network, 9 kHz to 30 MHz, (50 uH+5 Ohm), CISPR16-1, MIL-STD-461E	Rohde & Schwarz	ESH 3-Z5	892239/00 2	11-Jan-16	11-Jan-17
3787	Precision Fixed Attenuator, 50 Ohm, 5 W, 10 dB, DC to 18 GHz	Mini-Circuits	BW-S10W5+	NA	01-Dec-15	01-Dec-16
3788	Precision Fixed Attenuator, 50 Ohm, 5 W, 10 dB, DC to 18 GHz	Mini-Circuits	BW-S10W5+	NA	01-Dec-15	01-Dec-16
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	03-May-16	03-May-17
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1225/2A	15-Feb-16	15-Feb-17
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1226/2A	15-Feb-16	15-Feb-17
4011	Temp. & Humidity Meter, (-50 - +70) deg, (20 - 99) % RH	Mad Electronics	HTC-1	NA	07-Sep-15	07-Sep-16
4068	Attenuator, SMA, 30 dB, DC to 12.4 GHz	Midwest Microwave	ATT-0527-30-SMA-07	NA	13-Jul-15	13-Jul-16
4278	Test Cable , DC-18 GHz, 4.6 m, N/M - N/M	Mini-Circuits	APC-15FT-NMNM+	0755A	22-Nov-15	22-Nov-16
4279	Test Cable , DC-18 GHz, 4.6 m, N/M - N/M	Mini-Circuits	APC-15FT-NMNM+	0757A	22-Nov-15	22-Nov-16
4280	Test Cable , DC-18 GHz, 4.6 m, N/M - N/M	Mini-Circuits	APC-15FT-NMNM+	0763A	22-Nov-15	22-Nov-16
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	15-Mar-16	15-Mar-17
4474	Double Ridged Waveguide Antenna, 0.8 to 18 GHz	FT-RT Antenna, Inc.	HA-08M18G-NF	201206090 1	04-Sep-15	04-Sep-16



HERMON LABORATORIES

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file number IC 2186A-1 for OATS), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is IL1001.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

FCC 47CFR part 15: 2015	Radio Frequency Devices
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-247 Issue 1: 2015	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence- Exempt Local Area Network (LE-LAN) Devices
RSS-Gen Issue 4: 2014	General Requirements for Compliance of Radio Apparatus
ICES-003: 2016, Issue 6	Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement



HERMON LABORATORIES

13 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Report ID: TELRAD_FCC.28384.docx
Date of Issue: 19-Sep-16

Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A
HL 3901

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	9500	4.29	21000	6.67
100	0.41	10000	4.40	22000	6.92
500	0.93	10500	4.52	23000	7.00
1000	1.33	11000	4.64	24000	7.18
1500	1.63	11500	4.76	25000	7.29
2000	1.90	12000	4.87	26000	7.55
2500	2.12	12500	4.99	27000	7.70
3000	2.33	13000	5.11	28000	7.88
3500	2.50	13500	5.20	29000	8.02
4000	2.67	14000	5.31	30000	8.15
4500	2.82	14500	5.42	31000	8.35
5000	2.99	15000	5.51	32000	8.40
5500	3.16	15500	5.58	33000	8.62
6000	3.32	16000	5.68	34000	8.73
6500	3.51	16500	5.78	35000	8.78
7000	3.65	17000	5.91	36000	8.94
7500	3.79	17500	5.99	37000	9.21
8000	3.92	18000	6.07	38000	9.37
8500	4.04	19000	6.36	39000	9.45
9000	4.18	20000	6.49	40000	9.52



HERMON LABORATORIES

Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 1.5 m, SMA-SMA, S/N 1226/2A
HL 3903

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	-0.02	9500	1.84	21000	2.98
100	0.15	10000	1.86	22000	3.07
500	0.38	10500	1.93	23000	3.13
1000	0.56	11000	1.99	24000	3.21
1500	0.69	11500	2.04	25000	3.26
2000	0.82	12000	2.10	26000	3.48
2500	0.90	12500	2.15	27000	3.44
3000	0.98	13000	2.21	28000	3.53
3500	1.06	13500	2.25	29000	3.59
4000	1.11	14000	2.29	30000	3.66
4500	1.17	14500	2.34	31000	3.70
5000	1.24	15000	2.36	32000	3.79
5500	1.32	15500	2.40	33000	3.88
6000	1.40	16000	2.45	34000	3.94
6500	1.50	16500	2.48	35000	3.91
7000	1.56	17000	2.56	36000	4.05
7500	1.62	17500	2.58	37000	4.22
8000	1.68	18000	2.60	38000	4.25
8500	1.74	19000	2.84	39000	4.27
9000	1.78	20000	2.88	40000	4.33



HERMON LABORATORIES

Cable loss
Test cable, Mini-Circuits, S/N 0755A, 18 GHz, 4.6 m, N/M - N/M
APC-15FT-NMNM+, HL 4278

Frequency, MHz	Cable loss, dB						
10	0.24	4900	4.19	10000	6.47	15100	8.33
30	0.26	5000	4.25	10100	6.50	15200	8.35
50	0.34	5100	4.29	10200	6.52	15300	8.37
100	0.50	5200	4.32	10300	6.57	15400	8.40
200	0.72	5300	4.38	10400	6.59	15500	8.42
300	0.90	5400	4.41	10500	6.61	15600	8.46
400	1.06	5500	4.46	10600	6.64	15700	8.50
500	1.20	5600	4.51	10700	6.64	15800	8.52
600	1.32	5700	4.56	10800	6.65	15900	8.56
700	1.44	5800	4.59	10900	6.68	16000	8.61
800	1.54	5900	4.64	11000	6.68	16100	8.64
900	1.64	6000	4.69	11100	6.69	16200	8.66
1000	1.74	6100	4.72	11200	6.70	16300	8.70
1100	1.83	6200	4.77	11300	6.74	16400	8.73
1200	1.92	6300	4.80	11400	6.78	16500	8.74
1300	2.01	6400	4.83	11500	6.81	16600	8.75
1400	2.09	6500	4.89	11600	6.84	16700	8.78
1500	2.18	6600	4.90	11700	6.87	16800	8.79
1600	2.25	6700	4.95	11800	6.92	16900	8.81
1700	2.33	6800	5.01	11900	6.98	17000	8.85
1800	2.39	6900	4.99	12000	7.02	17100	8.90
1900	2.47	7000	5.04	12100	7.08	17200	8.95
2000	2.53	7100	5.11	12200	7.15	17300	8.99
2100	2.60	7200	5.14	12300	7.20	17400	9.03
2200	2.67	7300	5.21	12400	7.26	17500	9.07
2300	2.73	7400	5.29	12500	7.31	17600	9.11
2400	2.80	7500	5.33	12600	7.36	17700	9.15
2500	2.87	7600	5.38	12700	7.41	17800	9.19
2600	2.93	7700	5.46	12800	7.46	17900	9.24
2700	3.00	7800	5.52	12900	7.51	18000	9.28
2800	3.06	7900	5.58	13000	7.55		
2900	3.12	8000	5.64	13100	7.59		
3000	3.18	8100	5.69	13200	7.65		
3100	3.24	8200	5.75	13300	7.69		
3200	3.30	8300	5.80	13400	7.72		
3300	3.35	8400	5.84	13500	7.78		
3400	3.42	8500	5.90	13600	7.82		
3500	3.46	8600	5.97	13700	7.86		
3600	3.52	8700	5.99	13800	7.91		
3700	3.57	8800	6.04	13900	7.96		
3800	3.61	8900	6.10	14000	8.01		
3900	3.67	9000	6.13	14100	8.06		
4000	3.71	9100	6.17	14200	8.10		
4100	3.77	9200	6.23	14300	8.13		
4200	3.83	9300	6.27	14400	8.16		
4300	3.89	9400	6.30	14500	8.19		
4400	3.94	9500	6.35	14600	8.21		
4500	4.00	9600	6.37	14700	8.23		
4600	4.05	9700	6.40	14800	8.26		
4700	4.10	9800	6.44	14900	8.28		
4800	4.16	9900	6.45	15000	8.30		



HERMON LABORATORIES

Cable loss
Test cable, Mini-Circuits, S/N 0757A, 18 GHz, 4.6 m, N/M - N/M
APC-15FT-NMNM+, HL 4279

Frequency, MHz	Cable loss, dB						
10	0.26	5000	4.23	10200	6.47	15400	8.46
30	0.26	5100	4.28	10300	6.53	15500	8.49
50	0.34	5200	4.32	10400	6.57	15600	8.50
100	0.50	5300	4.37	10500	6.59	15700	8.53
200	0.72	5400	4.41	10600	6.62	15800	8.56
300	0.90	5500	4.46	10700	6.64	15900	8.60
400	1.05	5600	4.51	10800	6.66	16000	8.62
500	1.20	5700	4.57	10900	6.69	16100	8.65
600	1.31	5800	4.61	11000	6.69	16200	8.68
700	1.44	5900	4.64	11100	6.70	16300	8.70
800	1.53	6000	4.70	11200	6.72	16400	8.72
900	1.63	6100	4.75	11300	6.74	16500	8.76
1000	1.74	6200	4.76	11400	6.79	16600	8.77
1100	1.83	6300	4.82	11500	6.83	16700	8.78
1200	1.92	6400	4.83	11600	6.85	16800	8.82
1300	2.01	6500	4.88	11700	6.89	16900	8.85
1400	2.09	6600	4.90	11800	6.94	17000	8.91
1500	2.17	6700	4.95	11900	7.00	17100	8.94
1600	2.25	6800	5.01	12000	7.04	17200	8.98
1700	2.33	6900	4.98	12100	7.10	17300	9.03
1800	2.39	7000	5.03	12200	7.18	17400	9.05
1900	2.47	7100	5.11	12300	7.23	17500	9.08
2000	2.53	7200	5.13	12400	7.29	17600	9.10
2100	2.60	7300	5.20	12500	7.34	17700	9.12
2200	2.67	7400	5.28	12600	7.39	17800	9.14
2300	2.74	7500	5.33	12700	7.45	17900	9.17
2400	2.80	7600	5.37	12800	7.49	18000	9.21
2500	2.87	7700	5.44	12900	7.53		
2600	2.92	7800	5.52	13000	7.58		
2700	3.00	7900	5.56	13100	7.62		
2800	3.06	8000	5.63	13200	7.67		
2900	3.12	8100	5.67	13300	7.71		
3000	3.18	8200	5.71	13400	7.74		
3100	3.24	8300	5.76	13500	7.79		
3200	3.30	8400	5.79	13600	7.82		
3300	3.35	8500	5.85	13700	7.84		
3400	3.41	8600	5.88	13800	7.87		
3500	3.46	8700	5.92	13900	7.90		
3600	3.51	8800	5.96	14000	7.94		
3700	3.56	8900	6.02	14100	7.98		
3800	3.61	9000	6.05	14200	8.01		
3900	3.66	9100	6.08	14300	8.05		
4000	3.71	9200	6.15	14400	8.10		
4100	3.77	9300	6.18	14500	8.12		
4200	3.83	9400	6.20	14600	8.16		
4300	3.89	9500	6.25	14700	8.22		
4400	3.94	9600	6.28	14800	8.26		
4500	3.99	9700	6.31	14900	8.29		
4600	4.05	9800	6.35	15000	8.33		
4700	4.09	9900	6.37	15100	8.39		
4800	4.15	10000	6.40	15200	8.41		
4900	4.19	10100	6.45	15300	8.44		



HERMON LABORATORIES

Cable loss
**Test cable, Mini-Circuits, S/N 0763A, 18 GHz, 4.6 m, N/M - N/M
APC-15FT-NMNM+, HL 4280**

Frequency, MHz	Cable loss, dB						
10	0.21	5000	4.27	10200	6.50	15400	8.49
30	0.26	5100	4.32	10300	6.55	15500	8.50
50	0.34	5200	4.35	10400	6.59	15600	8.55
100	0.51	5300	4.41	10500	6.62	15700	8.58
200	0.63	5400	4.43	10600	6.65	15800	8.61
300	0.73	5500	4.49	10700	6.66	15900	8.64
400	0.91	5600	4.54	10800	6.68	16000	8.68
500	1.07	5700	4.58	10900	6.70	16100	8.72
600	1.21	5800	4.63	11000	6.71	16200	8.73
700	1.33	5900	4.67	11100	6.72	16300	8.75
800	1.45	6000	4.73	11200	6.74	16400	8.77
900	1.55	6100	4.76	11300	6.77	16500	8.80
1000	1.65	6200	4.81	11400	6.81	16600	8.80
1100	1.75	6300	4.86	11500	6.84	16700	8.82
1200	1.85	6400	4.89	11600	6.87	16800	8.83
1300	1.94	6500	4.94	11700	6.89	16900	8.87
1400	2.03	6600	4.95	11800	6.94	17000	8.92
1500	2.11	6700	4.99	11900	7.00	17100	8.96
1600	2.19	6800	5.04	12000	7.05	17200	9.01
1700	2.27	6900	5.04	12100	7.10	17300	9.07
1800	2.34	7000	5.09	12200	7.17	17400	9.09
1900	2.42	7100	5.15	12300	7.23	17500	9.14
2000	2.49	7200	5.19	12400	7.29	17600	9.17
2100	2.56	7300	5.25	12500	7.34	17700	9.21
2200	2.63	7400	5.33	12600	7.38	17800	9.24
2300	2.69	7500	5.39	12700	7.44	17900	9.28
2400	2.76	7600	5.42	12800	7.48	18000	9.31
2500	2.83	7700	5.51	12900	7.55		
2600	2.89	7800	5.58	13000	7.58		
2700	2.95	7900	5.62	13100	7.63		
2800	3.02	8000	5.68	13200	7.67		
2900	3.08	8100	5.73	13300	7.72		
3000	3.15	8200	5.78	13400	7.76		
3100	3.21	8300	5.83	13500	7.81		
3200	3.27	8400	5.87	13600	7.85		
3300	3.33	8500	5.92	13700	7.88		
3400	3.38	8600	5.96	13800	7.93		
3500	3.44	8700	6.00	13900	7.97		
3600	3.49	8800	6.04	14000	8.01		
3700	3.55	8900	6.10	14100	8.05		
3800	3.60	9000	6.13	14200	8.09		
3900	3.65	9100	6.17	14300	8.12		
4000	3.71	9200	6.22	14400	8.15		
4100	3.75	9300	6.25	14500	8.19		
4200	3.81	9400	6.28	14600	8.22		
4300	3.86	9500	6.32	14700	8.26		
4400	3.93	9600	6.36	14800	8.29		
4500	3.98	9700	6.37	14900	8.32		
4600	4.03	9800	6.41	15000	8.36		
4700	4.08	9900	6.42	15100	8.40		
4800	4.13	10000	6.45	15200	8.43		
4900	4.18	10100	6.48	15300	8.44		



HERMON LABORATORIES

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		



HERMON LABORATORIES

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT