

TMW – 25U

Specification

Rev V2

Table Of Content

1. INTRODUCTION	3
1.1. DEFINITIONS, ABBREVIATION AND ACRONYMS	3
2. TMW DESCRIPTION.....	4
2.1. BLOCK DIAGRAM.....	4
2.2. OPERATIONAL MODES.....	5
2.3. MECHANICAL SIZE.....	5
3. ELECTRICAL PERFORMANCE	6
3.1. TRANSMIT UNIT	6
3.1.1. <i>Transmit Parameters</i>	6
3.1.2. <i>Transmit Protocol</i>	7
3.1.3. <i>Tx Timing</i>	8
3.2. RECEIVE UNIT	9
3.2.1. <i>Receive Parameters</i>	9
3.2.2. <i>Receive Protocol</i>	10
3.3. ANTENNA	11
3.4. POWER SOURCE	11
3.4.1. <i>Operating Voltage</i>	11
3.4.2. <i>Battery Life</i>	11
3.5. ENVIRONMENTAL CONDITIONS.....	11

1. Introduction

The following document describes the technical specification of the Water Meter transceiver board (called TMW-25U TransMeter Water) for the USA market.

The TMW-25U is actually a water odometer, offering Automatic Meter Reading – AMR.

The TMW-25U is 2-way wireless RF Transceiver that is attached to water meters .It monitors and transmits the meter readings. In addition specific parameters can be programmed via the RF link.

The TMW-25U consists of the following units: RF Transmitter & Receiver with integral Antenna that operate at 916.3 MHz and a Microcontroller plus simple Digital Logic and interface (to external reed switches).

1.1. Definitions, Abbreviation and Acronyms

RFD : RF Dialog

2. TMW Description

2.1. Block Diagram

A block diagram of the TMW-25U is described below.

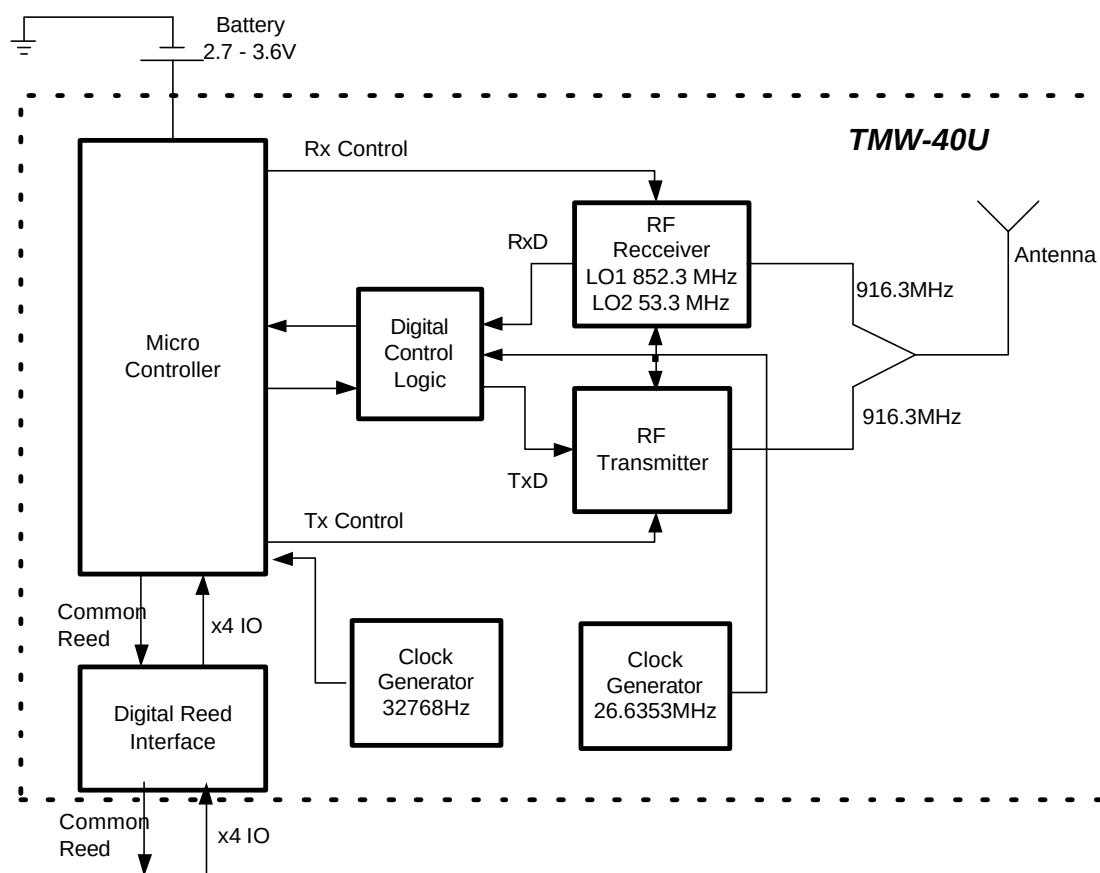


Figure 1: TMW-25U Block Diagram

2.2. Operational Modes

Mode	Microcontroller	Reed SW	Digital Logic	RF Receiver	RF Transmitter
Transmit	On (fast clock)	Disabled	On	Off	On
Receive	On (fast clock)	Disabled	On	On	Off
Reading Reeds SW	On (fast clock)	Enabled	Off	Off	Off
Idle/Sleep	On (32768Hz clock)	Disabled	Off	Off	Off

Notes:

1. When the Microcontroller reads the Reed SW it enables the *Common_Reed* signal for a period of 30uSec. In this case, if the Reed SW is closed then the current via the Reeds shall be ~480uA, otherwise the current shall be zero.
2. When the Reeds are disabled (*Common_Reed* = "0"), then the Reed current consumption is zero regardless of their state.

2.3. Mechanical Size

The unit size is 5" x 3" x 1.5" (height, width, depth).

3. Electrical Performance

3.1. Transmit Unit


3.1.1. Transmit Parameters

Table 1 – Transmit Parameters

Parameter	Value
Transmit Frequency	916.3 MHz
Modulation	FSK
Modulation Coding	Manchester
Bit rate (net data rate)	60 kbps
Frequency deviation	±180kHz
Frequency stability (including initial stability, temperature and aging)	±50 ppm
Peak Output power (without Antenna)	14dBm
Harmonics	< - 54dBm
Tx Pulse duration	~3.5ms
Transmission rate	Programmable*

* The device is factory programmed. In any case the interval between two successive transmissions will be greater than 10 s.

3.1.2. Transmit Protocol

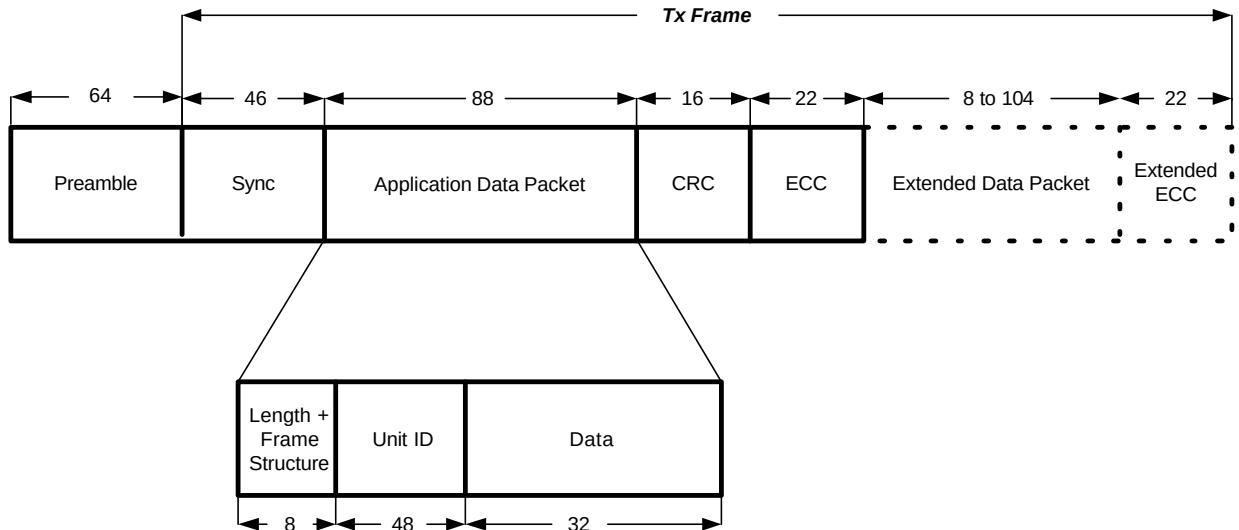

Notes:

1. All numbers indicate number of bits
2. The preamble is alternating ones and zeros. The Preamble length is ~64 bits (at 120kbps).
3. When "Length + Frame Structure" field is all zero then the "Data Packet" field is used by the communication layer (Telematics) and not by the application layer.
4. If the "Application Data Packet" is less than 11 bytes then the communication layer shall fill this field to 11 bytes (88 bits).
5. CRC is used as an error detection code. It is calculated on the entire data packet.
6. ECC is used as an error correction code. The ECC is calculated on the Packet data + CRC.

Figure 2: Transmit Frame

3.1.3. Tx Timing

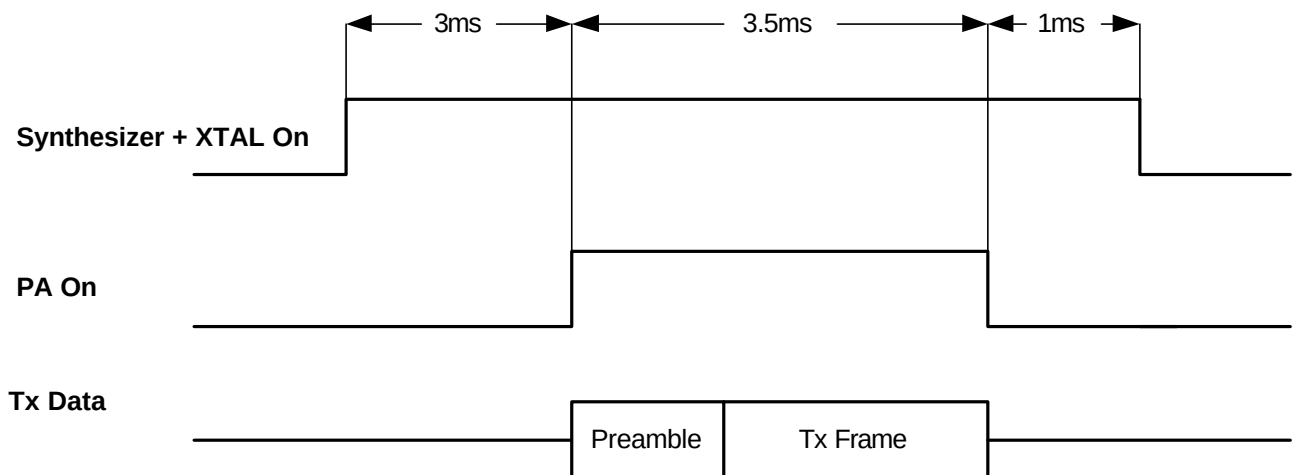


Figure 3: Transmit Timing

3.2. Receive Unit

3.2.1. Receive Parameters

Table 2 – Receive Parameters

Parameter	Value
Receive frequency	916.3 MHz
Sensitivity (BER 1E-3)	-92 dBm
Modulation	FSK
Frequency deviation	100 kHz
Bit rate	20 Kbps
Coding	Manchester

3.2.2. Receive Protocol

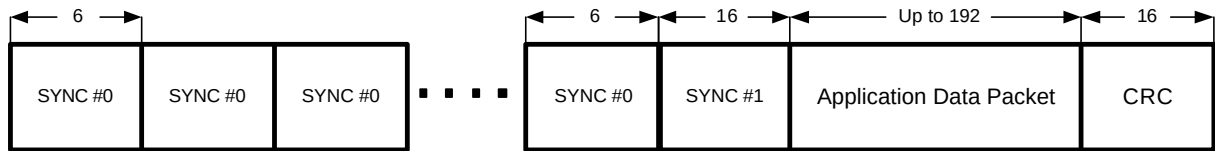


Figure 4: Wake Up Sequence and Receive Frame

Notes:

1. All numbers indicate number of bits
2. CRC is used as an error detection code. It is calculated on the entire data packet.

3.3. **Antenna**

The TMW has an integral Antenna.

The Antenna type is Printed Inverted “F” Antenna. The Antenna is Omni Directional in horizontal plane. The max gain is 3dBi. The Antenna is printed on the board.

3.4. **Power Source**

3.4.1. **Operating Voltage**

Battery rated voltage 3.6V.

Operating voltage: 2.7-3.6V

3.4.2. **Battery Life**

The battery life shall be at least 6 years

3.5. **Environmental Conditions**

Operating Temperature: -10° C to + 70° C

Storage Temperature: : -40° C to +85° C

Humidity: Up to 95%