

Installation Instructions

Overview of Generic UHF Antenna Bracket Installation


FCC Antenna Warning

Use of any antenna other than the one provided with this kit may expose the user or nearby persons to radio frequency (RF) emission levels outside the FCC safety guidelines.

- Left (drivers side) and Right side of cart will be identified as someone sitting forward in cart.
- Before doing any work on golf cart, make sure that the key is in the off position.
- Ensure the parking brake is set.
- Remove windshields if installed before beginning as per Cart Manufacture User's Manual.
- The UHF antenna cable is not attached to the Display Unit during this phase of the installation. Leave cable assemble available for easy access for latter in the installation.

Specific UHF Antenna Bracket Installation instructions per cart type (ex. Club Car, EZ-GO, Yamaha), and model.

Club Car Pre 2000 UHF Antenna Bracket Installation Parts

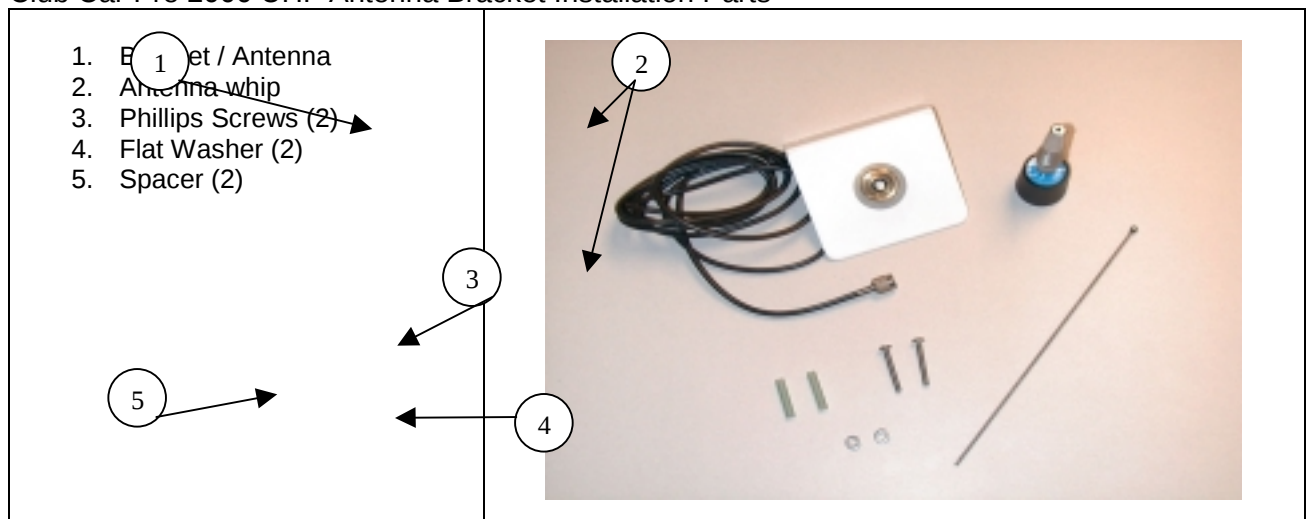

Club Car Completed Pre 2000 UHF Bracket Installation

Future picture of completed UHF Bracket Installation.

Club Car UHF Pre 2000 Bracket Installation

1. Remove right side of cart bracket

- 2 7/16 b



1. Mount UHF antenna on right side of cart using the two Phillips head screws, flat washer and sheathing pieces.

Important: UHF bracket needs to be isolated from cart ground.

FCC Antenna Warning Label

While the device is in operation, a separation of at least 500 mm (20 in.) must be maintained between antennae and the body of the user or nearby persons in order to meet the FCC RF exposure guidelines.



Future picture of Antenna whip being installed.

3. Attach Antenna whip upon completion of UHF antenna Bracket.