

GlobTek

Summary: P/N: TR9CC2000CCP-U
Series: SA-072A0-11

Type: SMPS
Power: 15W


Specifications:

INPUT	OUTPUT	GENERAL
Voltage: 90-264 V AC	Voltage: 7.5 V DC $\pm$ 5 %	Size: 84 x 56 x 50 $\pm$ 1 mm
Frequency: 47 - 63 Hz	Current: 2 A	Encl: Black Plastic.
		Marking: Standard
Current: < 500 mA	Regulation: < 5 %	Operating Temp: 0 to +40 C
	Total Power: 15 W Max	Storage Temp: -20 to +85 C
Inrush Current: < 40 A	Noise & ripple: < 100 mV pp	Efficiency: 70 % typical
Protection: fuse	Protection: Short Ckt, Over Load, Over Volt	
	Hold up Time: 10 mS	Approvals : UL 1950, CSA, TUV, GS, CE
Connector: IEC320 / C14 / 3 Pins	Connector: FB, 5.5 x 2.1 x 11 mm, CP	
	Cable: 2C / 18AWG / SPT-2 / 183 $\pm$ 5 cm	

Rev. 'A' Dt. 05 / 10 /96

Notes:

1. All parameters are typical values.
2. O/P connector has center +Ve

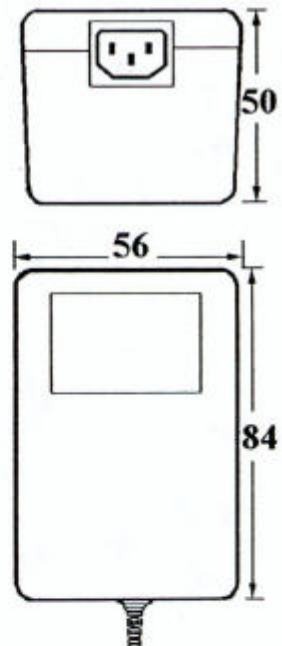

Customer
Approval: _____