

NOTES: UNLESS OTHERWISE SPECIFIED

1. FCC ID LABEL FOR THE SBD 10-BUTTON VHC LOCK

2
1

REV	DESCRIPTION	DATE	DRAFTER	ENGINEER	APPROVED
1	PRODUCTION RELEASE PER EO14672-09	07/03/24	P. BECKMAN	J. DAVIS	JA. LIN
2	REVISED PER EO14672-16	10/11/24	P. BECKMAN	J. DAVIS	JA. LIN

A. IC: 3022A-450126HCT
WHERE IC --- INDUSTRY CANADA
WHERE 3022A-450126VHC --- INDUSTRY CANADA NUMBERB. FCC ID: NUL450126HCT
WHERE NUL --- FIRST THREE CHARACTERS OF GRANTEE CODE
WHERE --- REMAINING NUMBERS/CHARACTERS FCC IDC. MODEL: 450126VHC
WHERE 450126VHC --- INTERNAL HHI FCC MODEL NUMBER.D. HVIN: GED2152
WHERE HVIN --- HARDWARE VERSION IDENTIFICATION NUMBER
WHERE GED2152 --- WEISER MODEL NUMBER


E. LABEL COLOR: BLACK.

F. LABEL MATERIAL:
REFER TO 695-00006-001 FOR LABEL SPECIFICATION

G. FONT: FIT ON LABEL, WHITE.

H. LABEL LOCATION: REFER TO DRAWING 5052244.

I. ALL DIMENSIONS ARE IN INCHES.

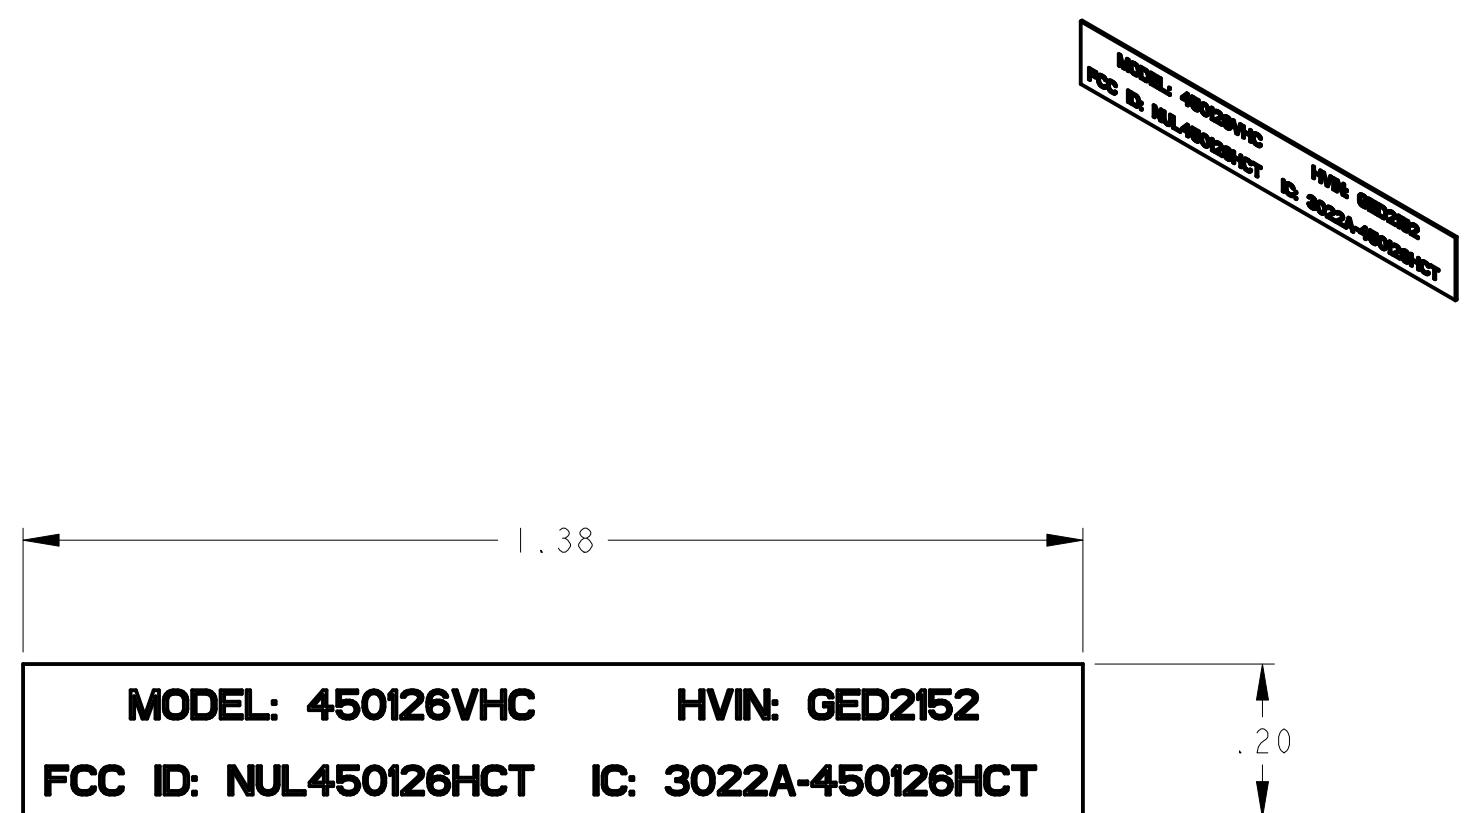

DRAFTER DATE P. BECKMAN 06/26/24
CHECKED DATE P. BECKMAN 06/26/24
ENGINEER DATE J. DAVIS 06/26/24

SPECTRUM BRANDS, INC HARDWARE AND HOME IMPROVEMENT
19701 DA VINCI, LAKE FOREST, CA 92610

TITLE
LABEL, FCC, 918

APPROVED DATE JA. LIN 06/26/24
SIZE B DO NOT SCALE DRAWING DWG NO 5054780

THIRD ANGLE PROJECTION RELEASE STATE Production REV 2 2
SCALE 4 / 1 SHEET 1 OF 1

KWIKSET
Spectrum Brands | Hardware & Home Improvement

THIS DOCUMENT IS THE PROPERTY OF SPECTRUM BRANDS, INC AND/OR ITS AFFILIATES. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO SPECTRUM BRANDS. NEITHER THIS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON, COPIED, OR PUBLISHED WITHOUT SPECTRUM BRANDS' PRIOR WRITTEN CONSENT.



WS Packaging Group, Inc.[®]

Leaders in Printing and Packaging Worldwide

PRODUCTION SPECIFICATION SHEET

Item Code: R2WPET-PERM-50KRAF-104

Old FAL: 0097-0H52-0002

Total Construction Caliper: 6 mils +/- 10%

FACESHET: A white topcoated polyester featuring excellent tear strength, heat resistance, dimensional stability, opacity, and chemical resistance. Excellent thermal transfer printability with some resin enhanced wax and most resin based ribbons.

Caliper: 2 mil +/- 10%

ADHESIVE: A high performance permanent adhesive with balanced adhesion to a wide variety of substrates, including low surface energy plastics, engineering grade plastics, bare, coated, or painted metals, including powder coat and enamel paints. It features medium tack and excellent chemical and UV resistance for outdoor industrial applications.

Minimum Application Temperature: +50° F

Service Temperature Range: - 40°F - + 302° F

LINER: A 50# bleached super-calendered paper kraft liner for roll to roll label applications.

Caliper: 3.2 mil +/- 10%

UL and c-UL Recognized.

Shelf Life:

One year when stored at 72°F at 50% RH

All original documents remain on file at WS Packaging Group, Algoma, Wisconsin.



FCC ID: NUL450126HCT
IC:3022A-450126HCT

View of the EUT with no Plastic Cover and Label Location
HVIN: GED2152