

Thuan Nguyen Senior Electronics Engineer

19701 DaVinci Foothill Ranch, CA 92610 (T) 949.672.4452

8/10/2017

Compatible Electronics TCB 114 Olinda Drive Brea, California 92823

## Subject: FCC LABEL, LOCATION, AND USER MANUAL STATEMENT

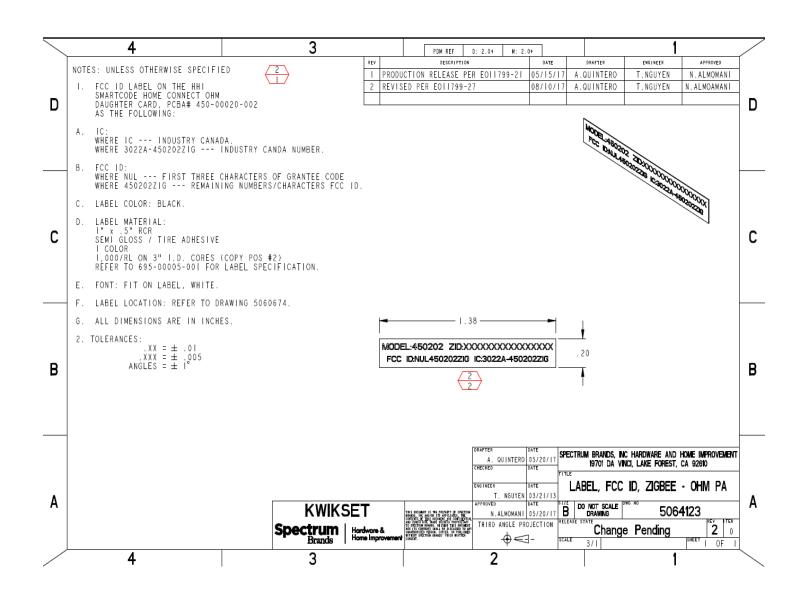


Figure 1. FCC Label

















Thuan Nguyen Senior Engineer 19701 DaVinci Foothill Ranch, CA 92610 (T) 949.672.4452

## Label Location for Models 910, 912,914, 916 & Class II Version





Email This Page

**Facestock(60# Ultra White Semigloss C1S):** A premium coated one side stock with outstanding ink receptivity and print characteristics. It also offers good flexibility and high internal strength for ease in converting. This face offers a 90% Brightness and an 88% opacity.

Туре:	Paper	Basis Weight:	60 lb/ream		<u>Federal Regulation</u> <u>Approval</u>	
Caliper:	3.20 mil	Tensile:	MD: 28 lb/in	CD: 15 lb/in	Heavy Metals:	Yes
Opacity:	88.5 %	Tear:	MD: 40 grams	CD: 50 grams	Toy Safety: Indirect	Yes Yes
Brightness:	90 %	Elongation:	MD: N/A	CD: N/A	Food: Direct Food:	No

**Adhesive(TL250 ):** An outstanding general purpose permanent adhesive which has high initial tack and high ultimate adhesion. It is used for tire label and many other difficult to label substrates.

Coat Weight:	Heavy	<u>Federal Regulation</u> <u>Approval</u>		<u>Typical Adhesion Values</u> Stainless Steel:		
_						
Adhesive Type:	Permanent Latex	<b>Heavy Metals:</b>	Yes	180° Peel:	8.3 lb/in	
	Latex	Toy Safety:	Yes	Loop Tack:	5.40 lb/in <sup>2</sup>	
Shear:	80	<b>Indirect Food:</b>	Yes	Glass:		
	minutes	Direct Food:	No		C 7 11- /:	
Minimum				180° Peel:	6.7 lb/in	
Application	25° F			Polyethylene:		
Temperature:				180° Peel:	7.5 lb/in	
Service	ervice -65° F to			Corrugated:		
Temperature:	220° F			180° Peel:	8.3 lb/in	
ACTS Approval:	Yes	Painted Metal:				
				180° Peel:	8.5 lb/in	

**Release Liner(50#SCK L-2):** Supercalendered Kraft (SCK) liner which has been silicone coated one side to give a controlled release. This paper has a smooth, caliper contistent surface. Due to its high internal strength it will withstand all conventional processing operations including die-cutting, butt cutting, line scoring and dispensing.

**Basis Weight:** 50 lb/ream **Tensile:** MD: 43 lb/in CD: 27 lb/in **Caliper:** 3.2 mil **Tear:** MD: 44 grams CD: 48 grams

WARRANTY: All data obtained through ASTM standards and are typical and should not be used for specification purposes. Because of the variety of possible uses, the buyer should test the suitability of each intended use. The buyer assumes all risks in connection with such use. Technicote will not be liable for damages in excess of the purchase price of products or for incidental or consequential damages. TECHNICOTE warrants the products to be free from defects in material and workmanship. Should any failure to conform to this warranty appear within one year after the initial date of shipment (unless otherwise stated), TECHNICOTE shall, upon notification thereof and substantiation that the products have been stored and applied in accordance with TECHNICOTE'S standards, correct such defects by suitable repair or replacement without charge at TECHNICOTE's plant or at the location of the products (at TECHNICOTE's election); provided, however, if TECHNICOTE determines that repair or replacement is not commercially practical, TECHNICOTE shall issue a credit in favor of BUYER in an amount not to exceed the purchase price of the products.