


APPLICATIONS		REVISIONS			
NEXT ASSY	USED ON	REV	DESCRIPTION	DATE	APPROVED

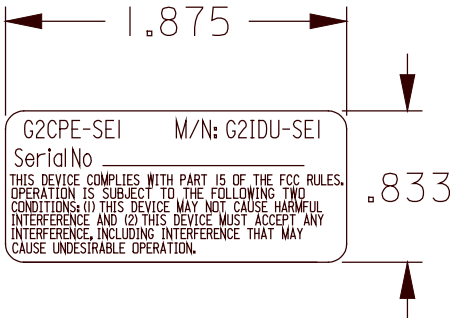

SUGGESTED LABEL
LAT-13-410-2.5 (24568)
(BRADY) OR EQUIVALENT

MARK SERIAL #,
MFG AND DATE CODE
.063 HIGH CHARACTERS
MUST BE READABLE

NOTES: UNLESS OTHERWISE INDICATED

1. IDENTIFY PART BY BAG OR TAG
(P/N LBL_2950BARCODE)
2. PROGRAM TO PROVIDE THE CONTENT
DESCRIBED IN THIS DRAWING.
3. MARKING: PERMANENT
PER IPC-A-610B (6.0 MARKING)

CAD DRAWING - MAINTAINED BY THE DESIGN ACTIVITY
© CLEARWIRE TECHNOLOGIES, INC 1998-2001

DIM IAW ANSI Y14.5M-1982		△SEE NOTE INDICATED		C CLEARWIRE TECHNOLOGIES, INC 1998-2001	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES .XX ± .03, .XXX ± .010 ANGLE: ± 0° 30'				Clearwire Technologies, Inc.	
				485 CAYUGA RD, PO BOX 850	
				BUFFALO, NEW YORK 14225-0850	
				LABEL, IDU, GEN 2, CPE	
.501 THRU .750		+ .008 - .001		MFG	
.251 THRU .500		+ .006 - .001		APVD	
.126 THRU .250		+ .005 - .001		ENGRG REL NOTICE NO.	
.013 THRU .125		+ .004 - .001		DATE	
HOLE TOLERANCES				SCALE NONE WT	
				SHEET OF	