

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET

Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Uplink (Low) - Output at 1851.25 MHz		


14:55:34 AUG 18, 2006

REF 30.0 dBm

#AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

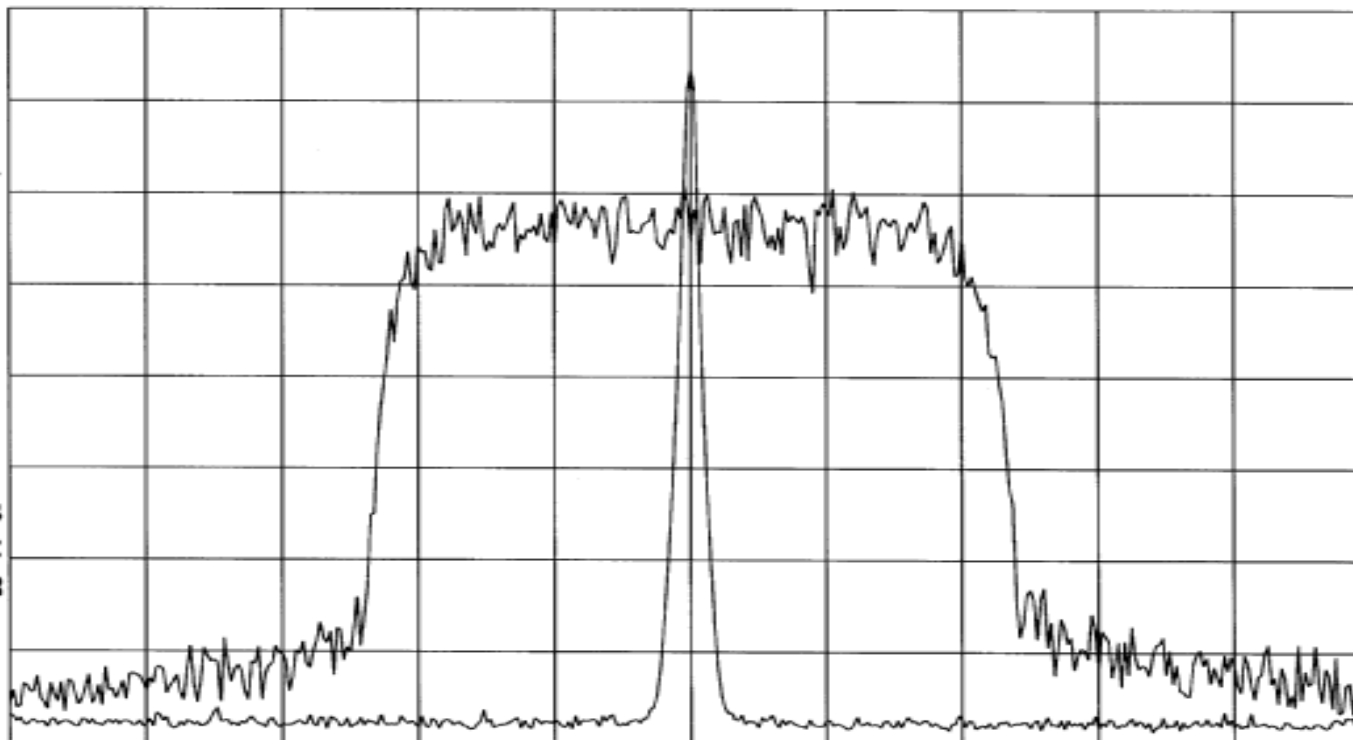

CENTER 1.85125 GHz
#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Uplink (Low) - Input at 1851.25 MHz		

15: 10: 29 AUG 18, 2006

REF 30.0 dBm #AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

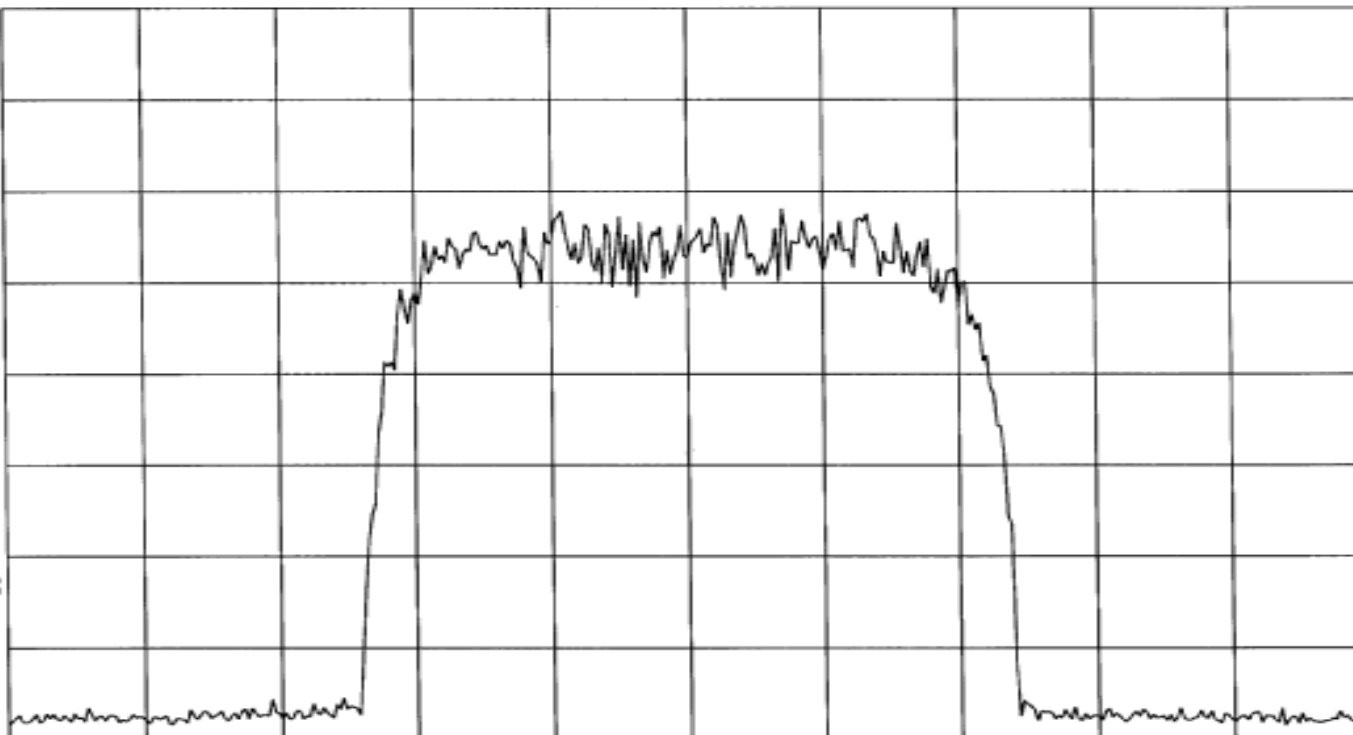

CENTER 1.85125 GHz

#RES BW 30 KHz

#VBW 100 KHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Uplink (High) - Output at 1908.75 MHz		

14: 57: 36 AUG 18, 2006

REF 30.0 dBm #AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

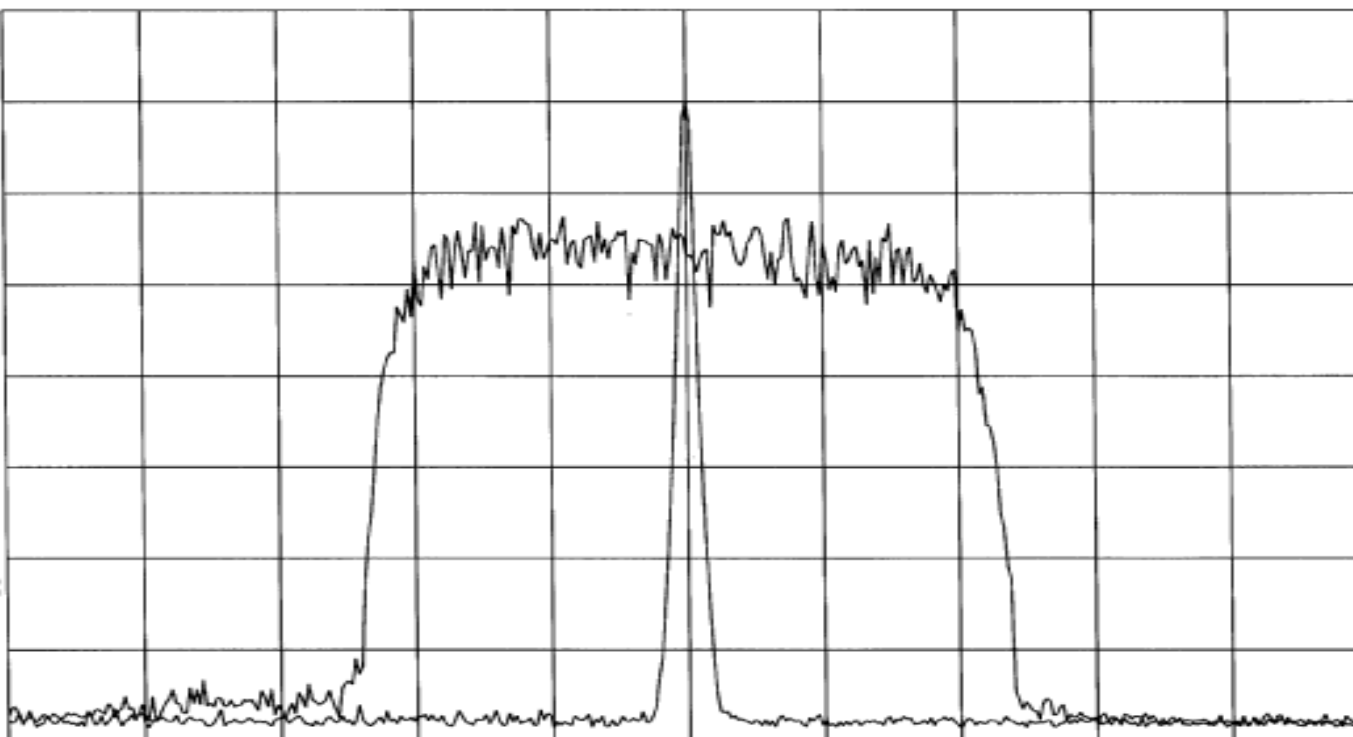

CENTER 1.90875 GHz
#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Uplink (High) - Input at 1908.75 MHz		

15:09:51 AUG 18, 2006

REF 30.0 dBm #AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

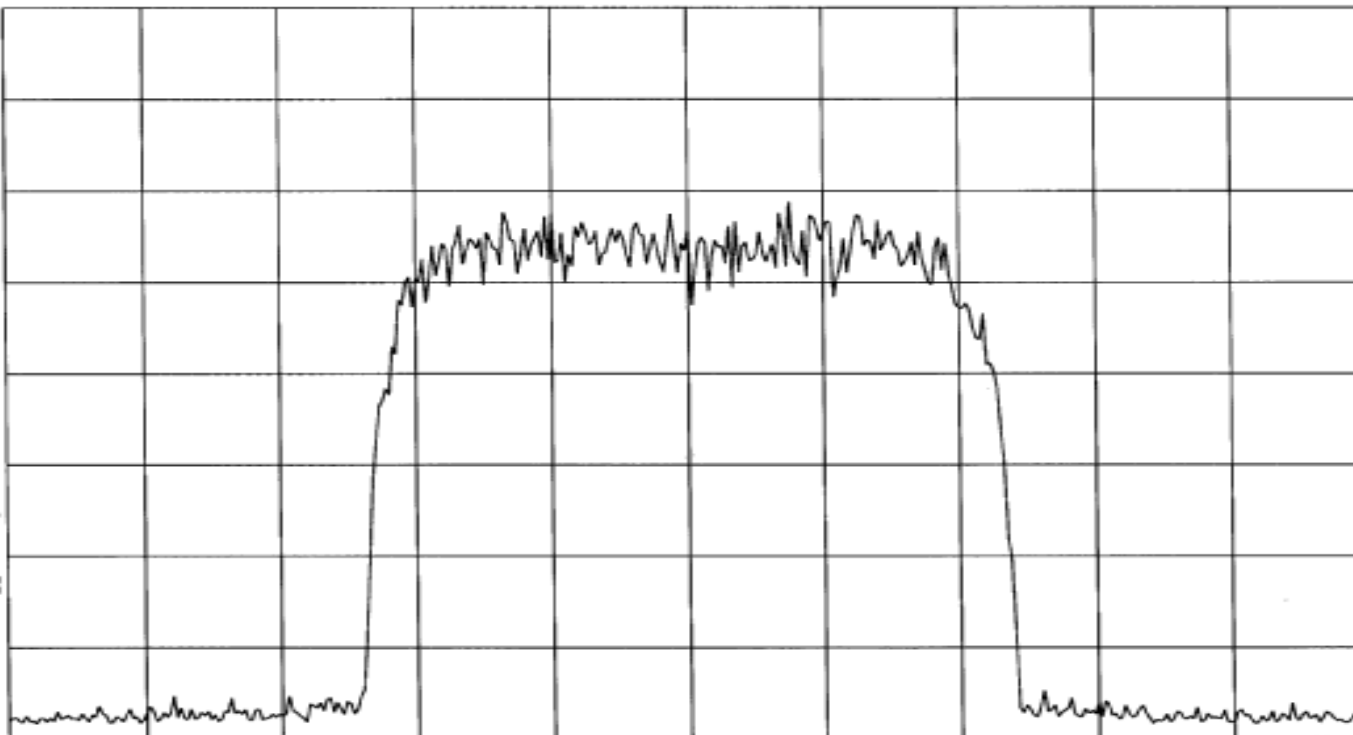

CENTER 1.90875 GHz
#RES BW 30 KHz

#VBW 100 KHz

SPAN 10.00 MHz
SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Downlink (low) - Output at 1931.25 MHz		

15:00:10 AUG 18, 2006

REF 30.0 dBm #AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

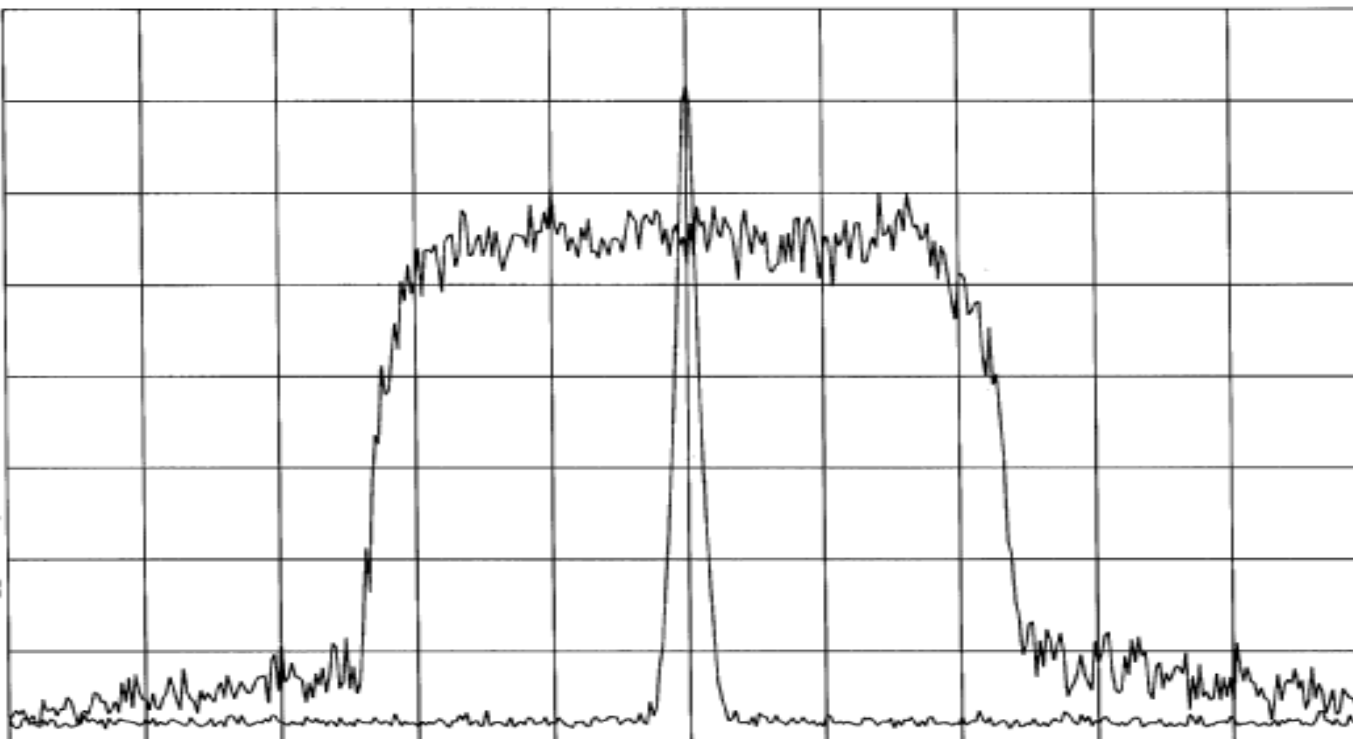

CENTER 1.93125 GHz
#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Downlink (low) - Input at 1931.25 MHz		

15:08:24 AUG 18, 2006

REF 30.0 dBm #AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

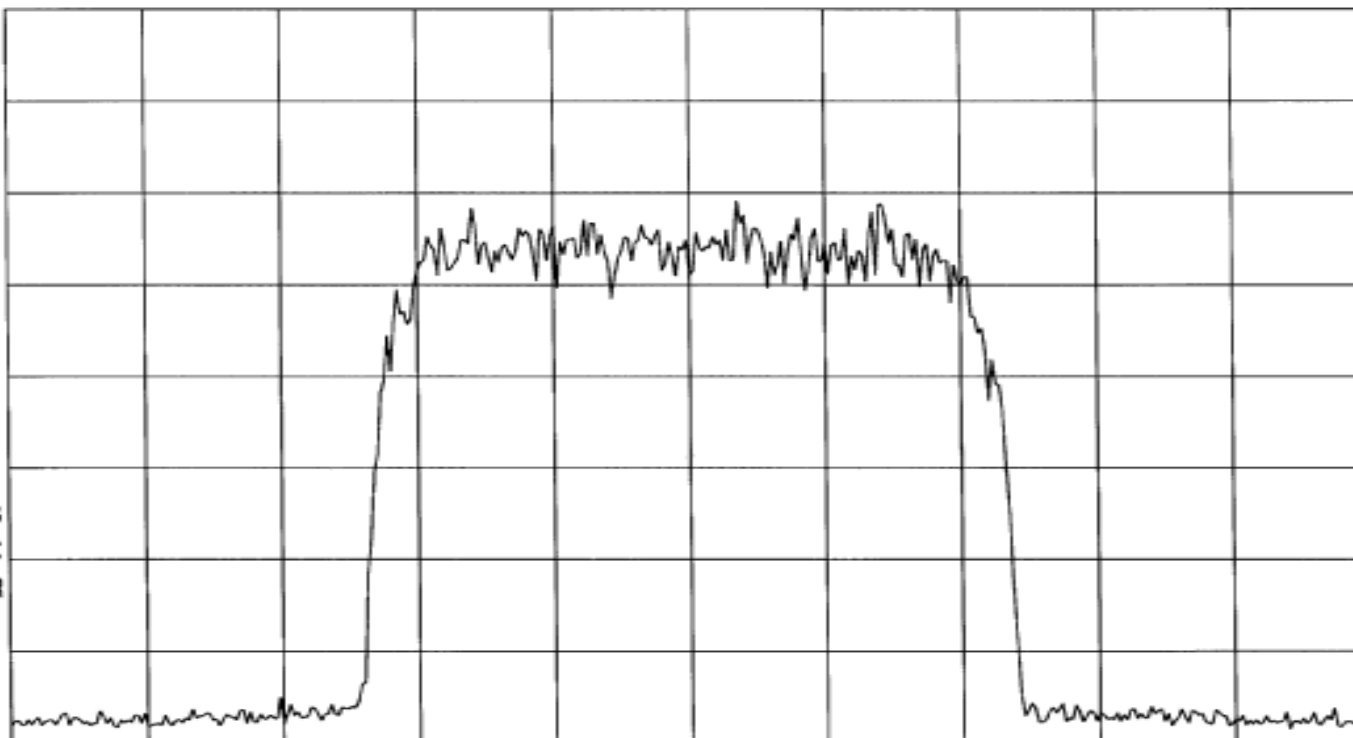

CENTER 1.93125 GHz
#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date:
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Downlink (High) - Output at 1988.75 MHz		

15:03:45 AUG 18, 2006

REF 30.0 dBm #AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

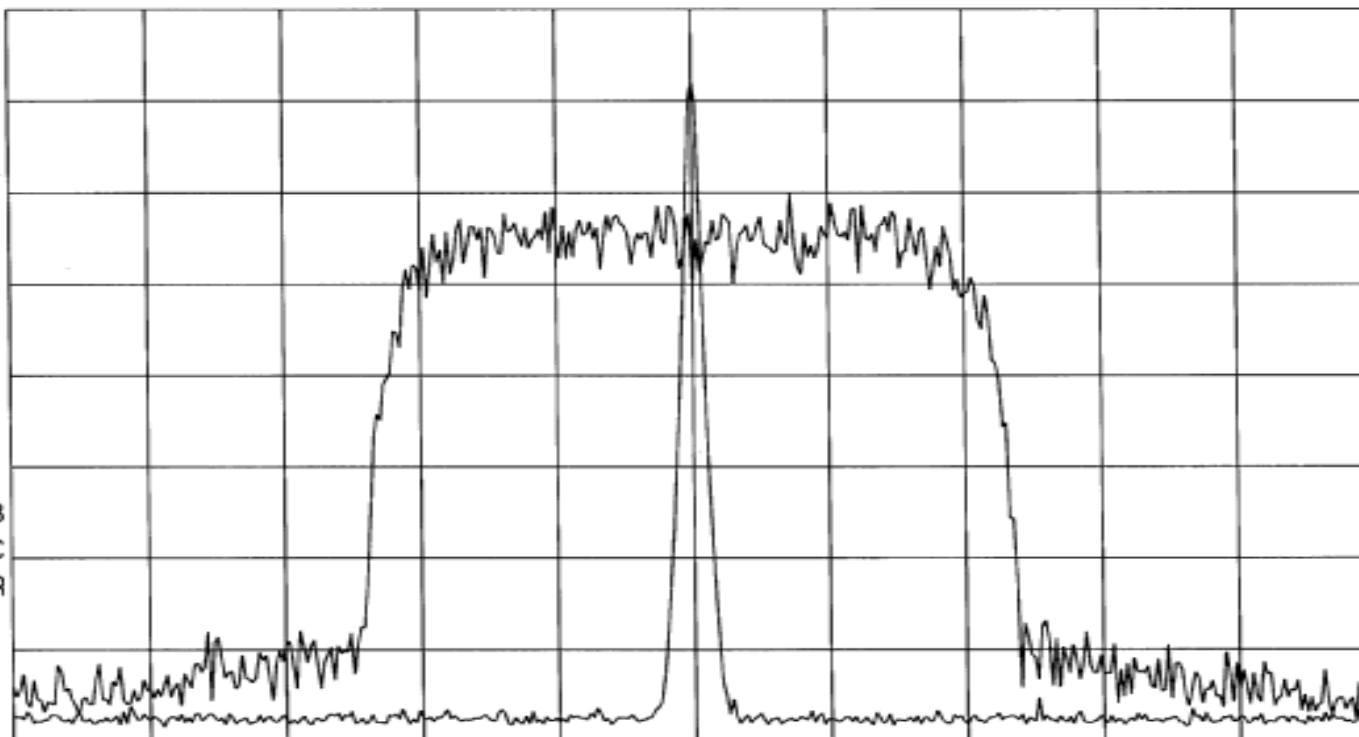

CENTER 1.98875 GHz

#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date:
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Downlink (High) - Input at 1988.75 MHz		

15:06:44 AUG 18, 2006

REF 30.0 dBm #AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

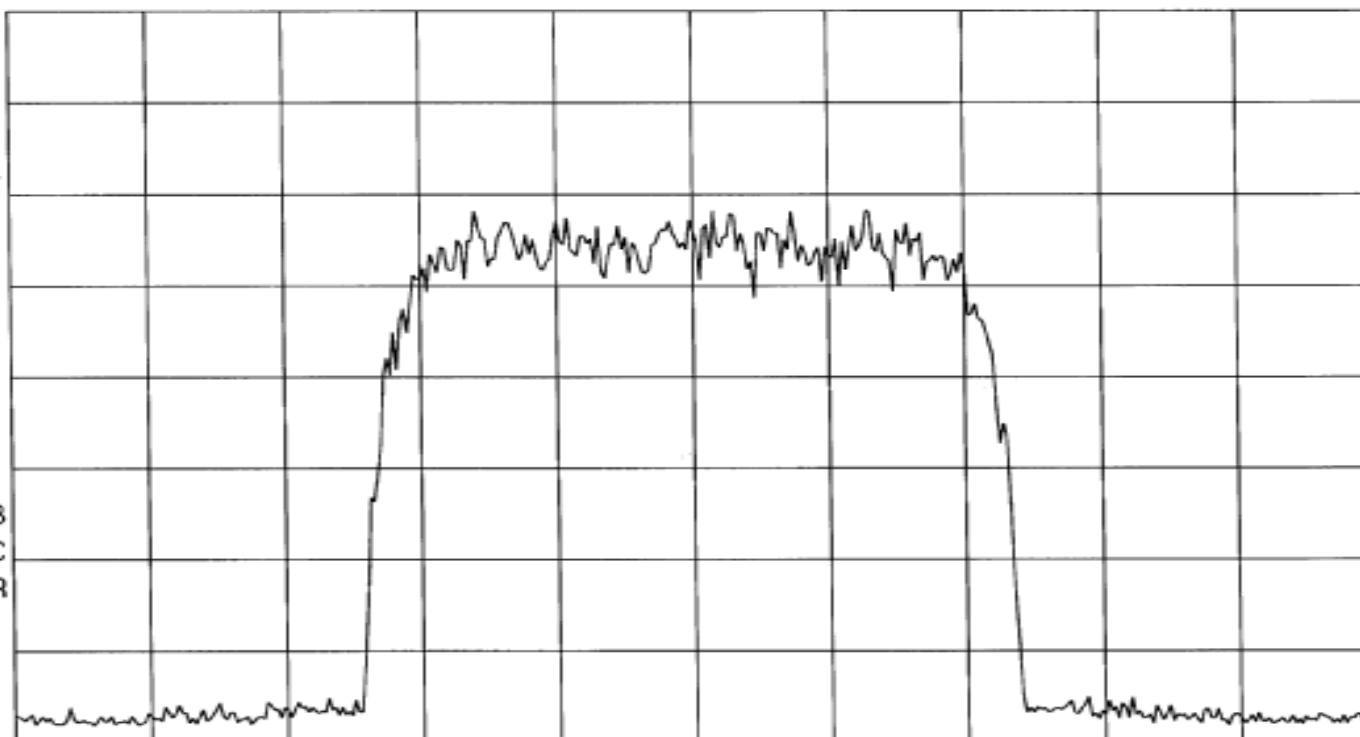

CENTER 1.98875 GHz
#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 33.3 msec