

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	FM - Uplink (Low) - Output at 1850.03 MHz		
Job No:	R-4609N-1		Technician:
		M.Seamans	Date:
		8/16/2006	

14: 28: 39 AUG 18, 2006

REF 30.0 dBm #AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

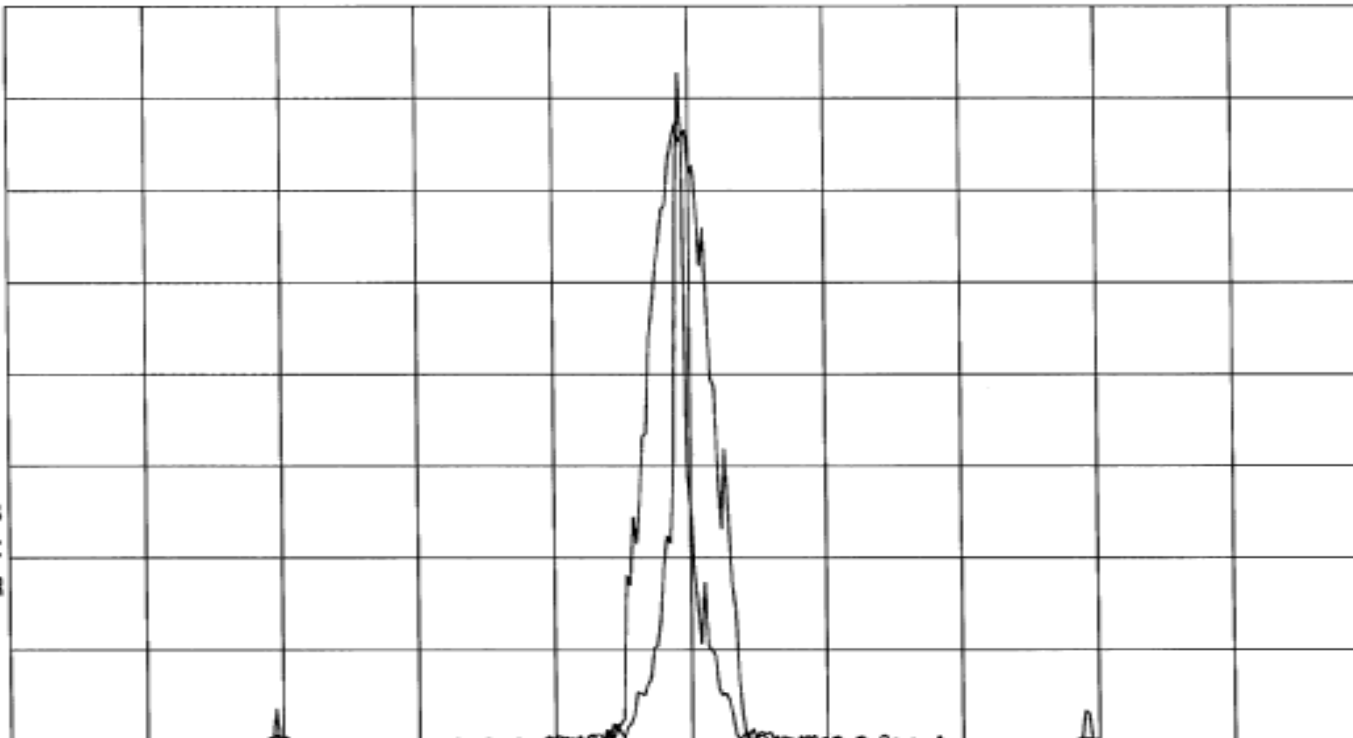

CENTER 1.8500300 GHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	FM - Uplink (Low) - Input at 1850.03 MHz		
Job No:	R-4609N-1		Technician:
		M.Seamans	
		Date:	8/16/2006

14: 44: 59 AUG 18, 2006

REF 30.0 dBm #AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

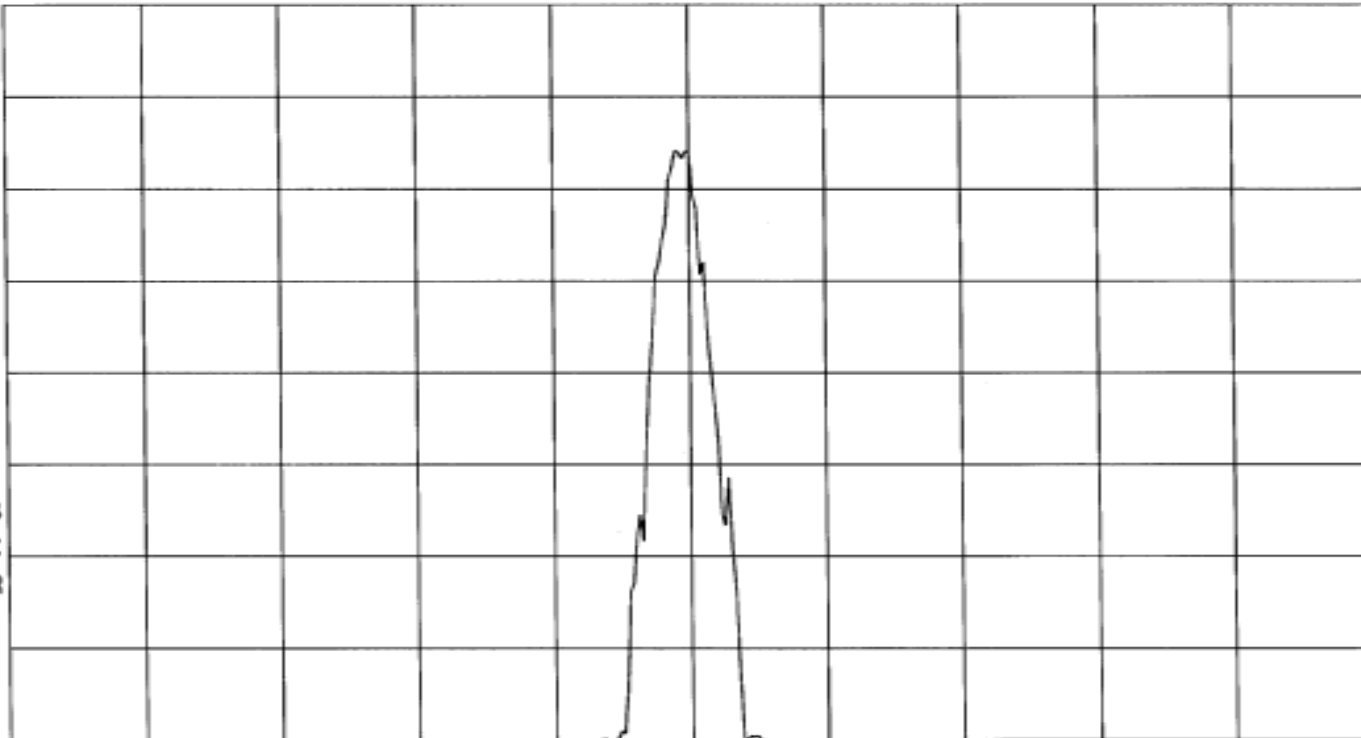

CENTER 1.8500300 GHz
#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz
SWP 8.33 sec

RETLIF TESTING LABORATORIES


EMISSIONS DATA SHEET

Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	FM - Uplink (High) - Output at 1909.97MHz		

14: 37: 05 AUG 18, 2006

REF 30.0 dBm #AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

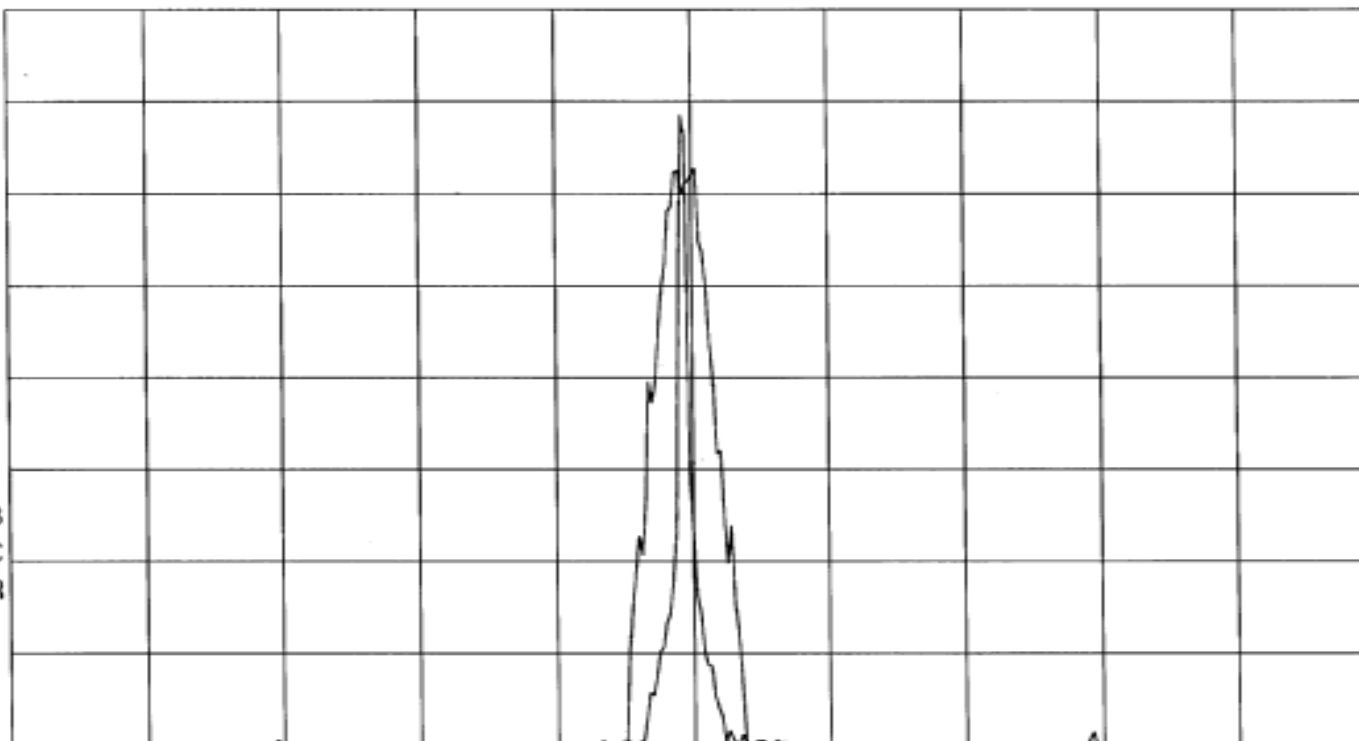

CENTER 1.9099700 GHz
#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz
SWP 8.33 sec

RETLIF TESTING LABORATORIES


EMISSIONS DATA SHEET

Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	FM - Uplink (High) - Input at 1909.97MHz		

14: 40: 22 AUG 18, 2006

REF 30.0 dBm #AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

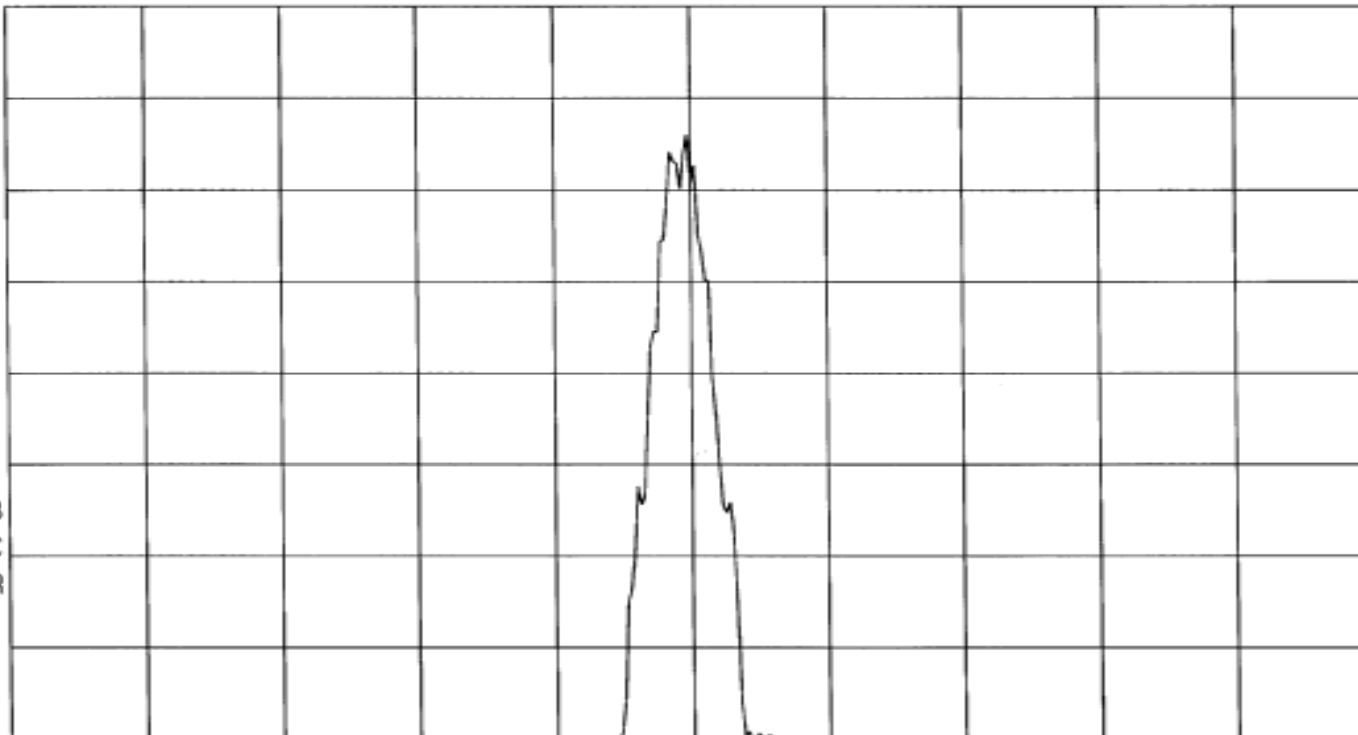

CENTER 1.9099700 GHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	FM - Downlink (low) - Output at 1930.03 MHz		
Job No:	R-4609N-1		Technician:
		M.Seamans	Date:
		8/16/2006	

14: 18: 27 AUG 18. 2006

REF 30.0 dBm

#AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

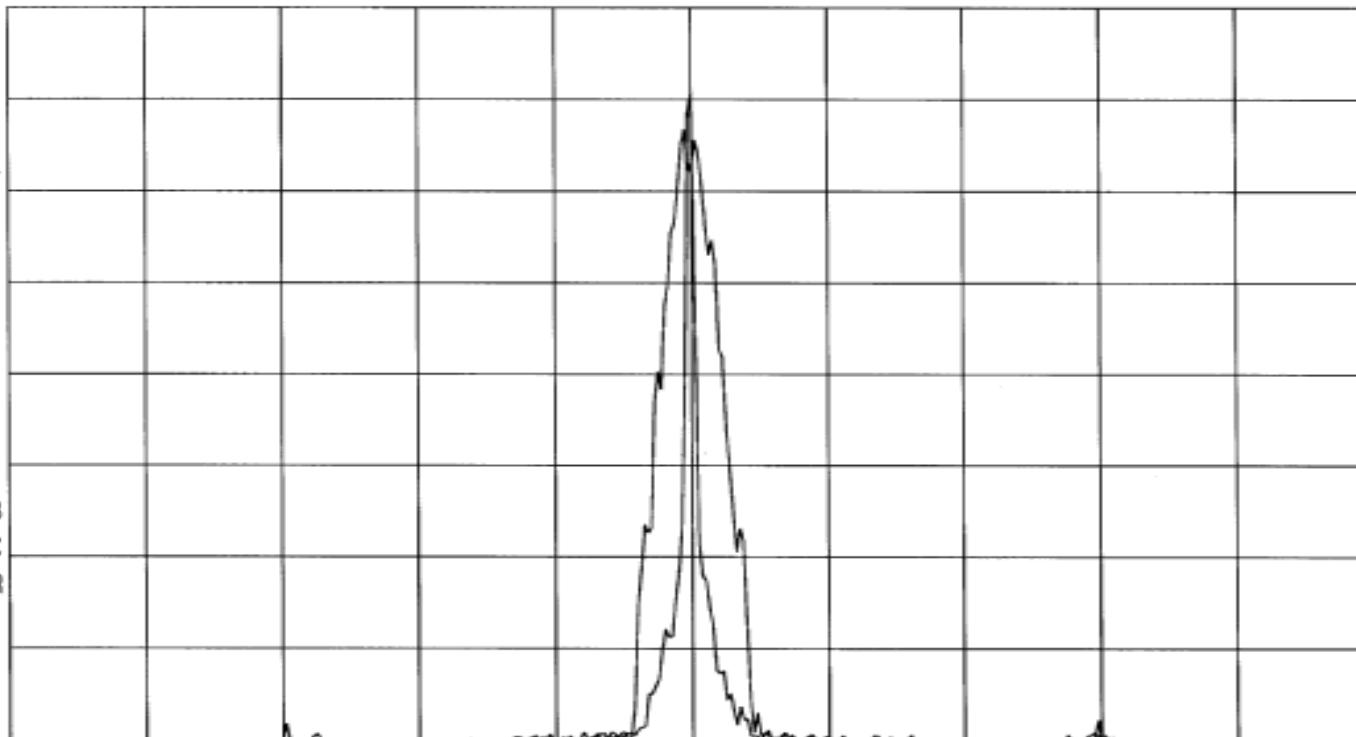

CENTER 1.9300284 GHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	FM - Downlink (low) - Input at 1930.03 MHz		
Job No:	R-4609N-1		Technician:
		M.Seamans	
		Date:	8/16/2006

14: 49: 52 AUG 18, 2006

REF 30.0 dBm #AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

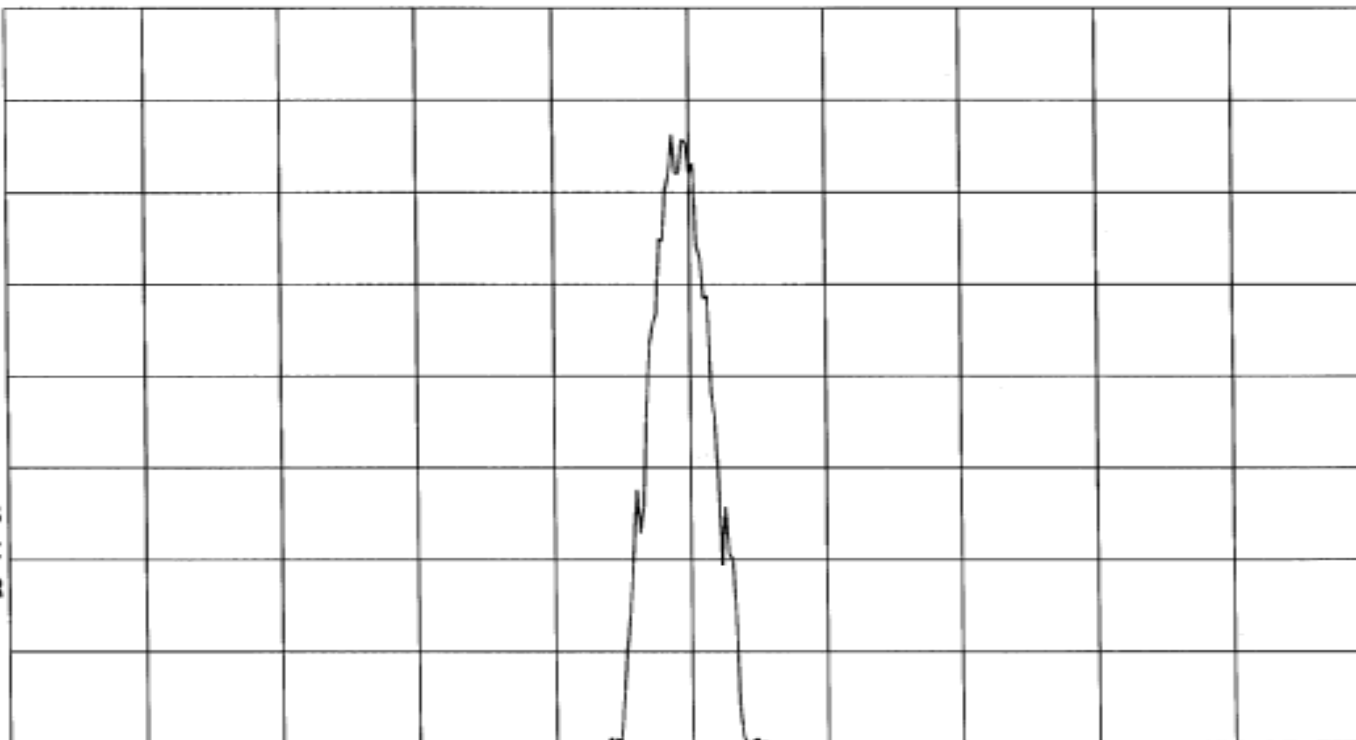

CENTER 1.9300300 GHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date:
Operating Mode:	Amplifying input signal		
Notes:	FM - Downlink (High) - Output at 1989.97 MHz		

14: 24: 33 AUG 18, 2006
hp

REF 30.0 dBm #AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

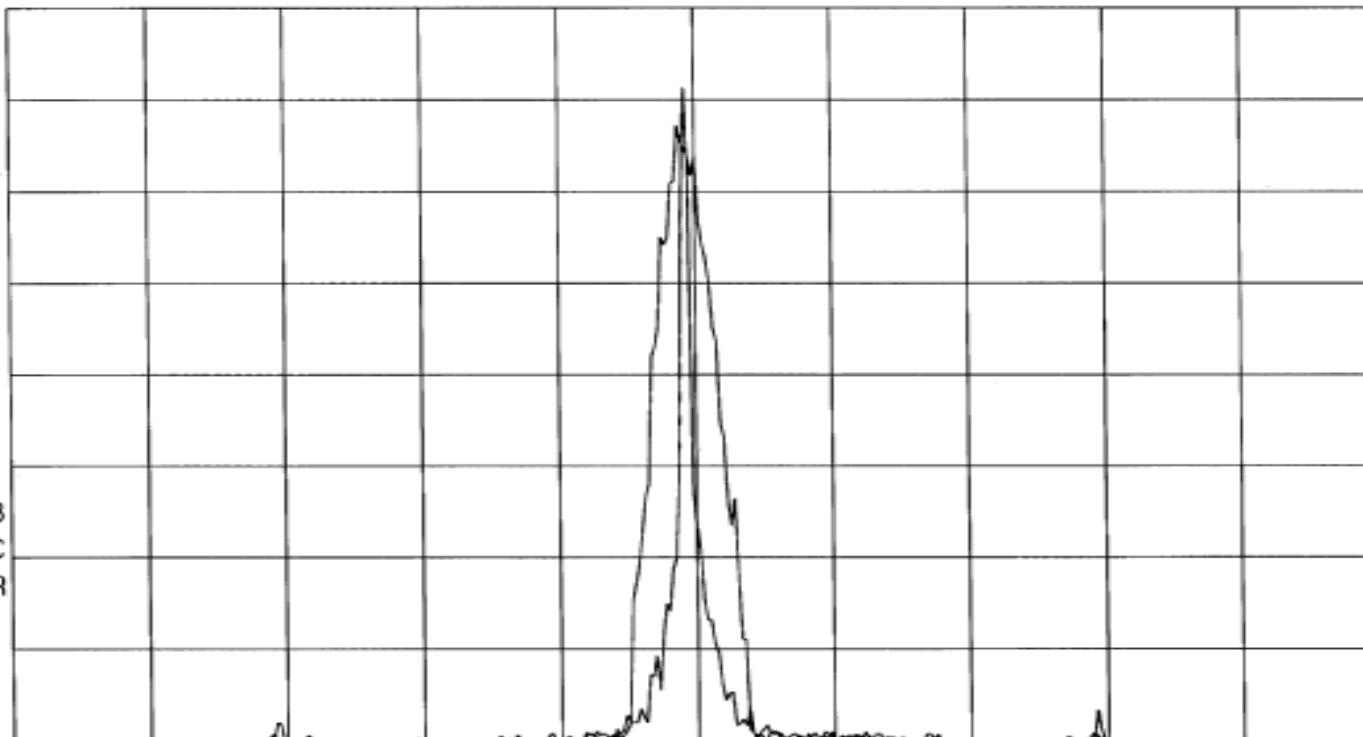

CENTER 1.9899700 GHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date:
Operating Mode:	Amplifying input signal		
Notes:	FM - Downlink (High) - Input at 1989.97 MHz		

14: 46: 40 AUG 18, 2006

REF 30.0 dBm #AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

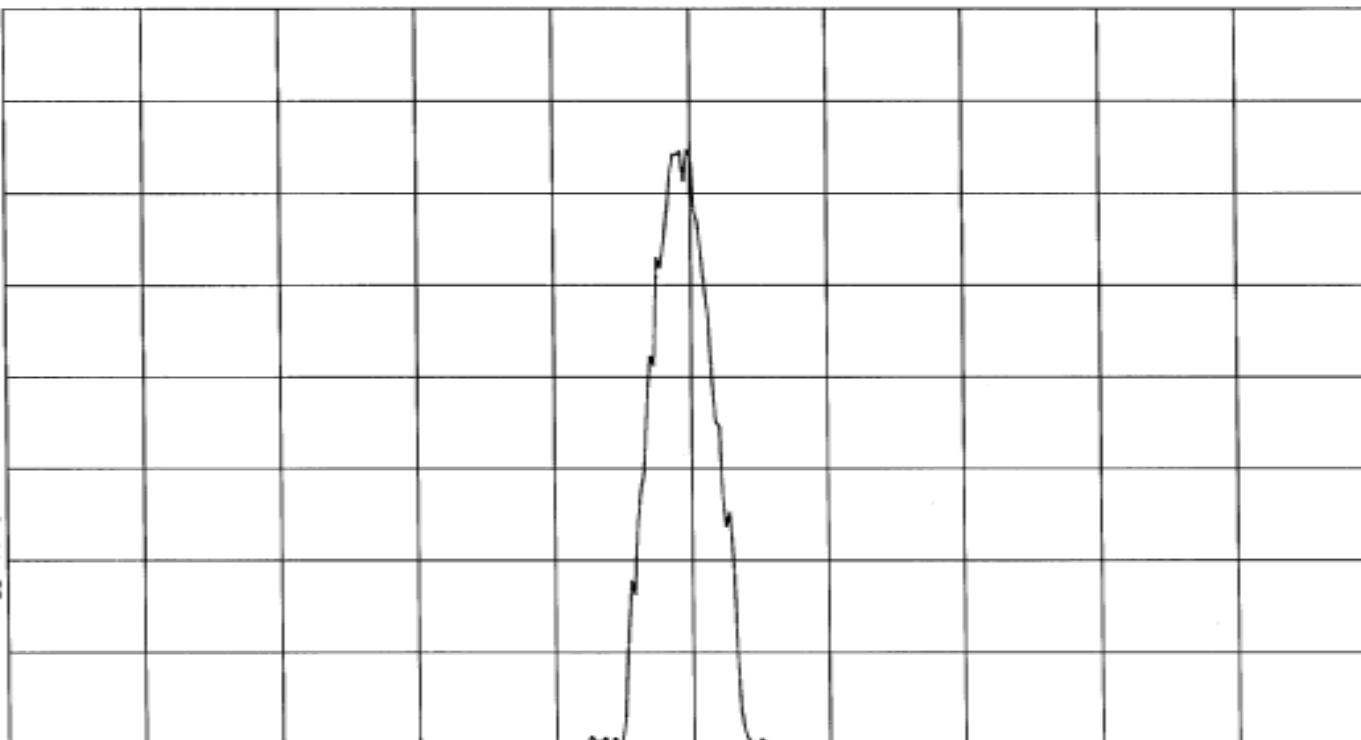

CENTER 1.9899700 GHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec