

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	FM - Uplink (Low) - Output at 824.03 MHz		

11: 57: 11 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

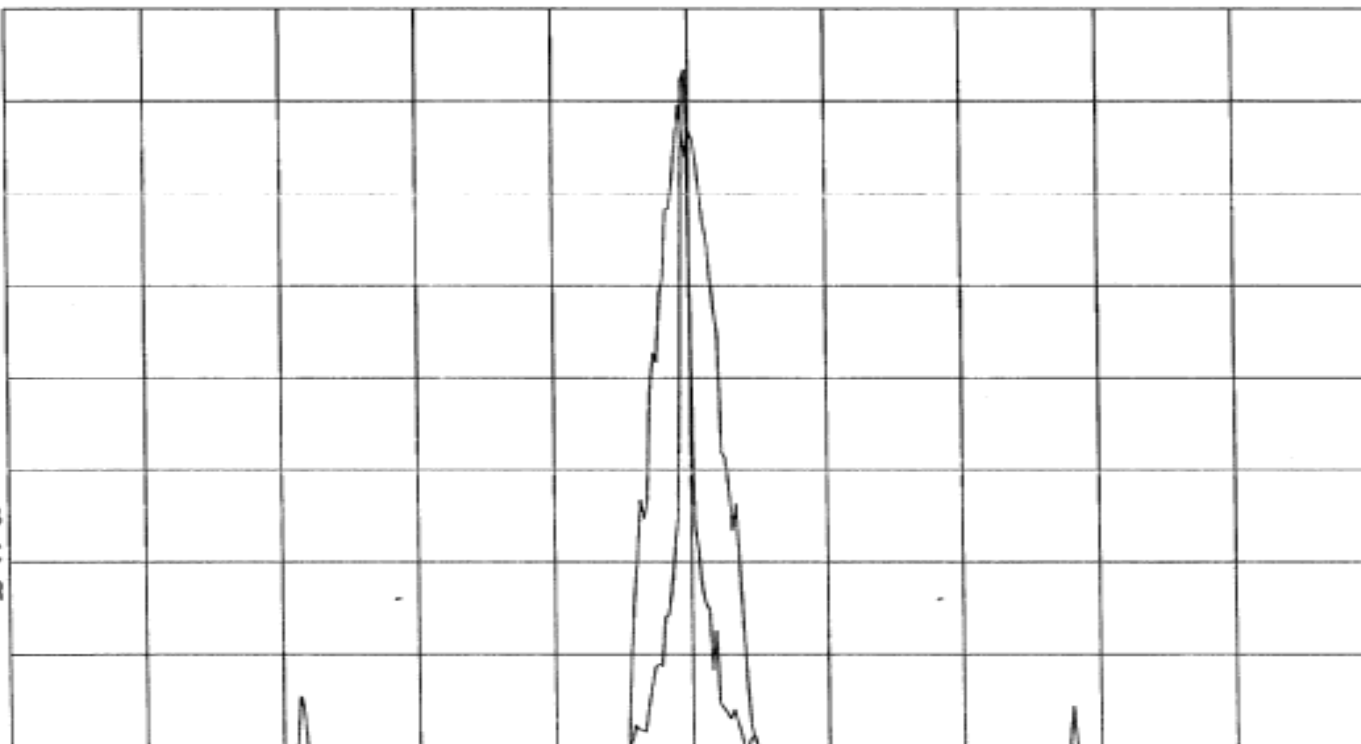

CENTER 824.0300 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	FM - Uplink (Low) - Input at 824.03 MHz		
Job No:	R-4609N-1		Technician:
		M.Seamans	Date:
		8/16/2006	

11: 42: 37 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CQRR

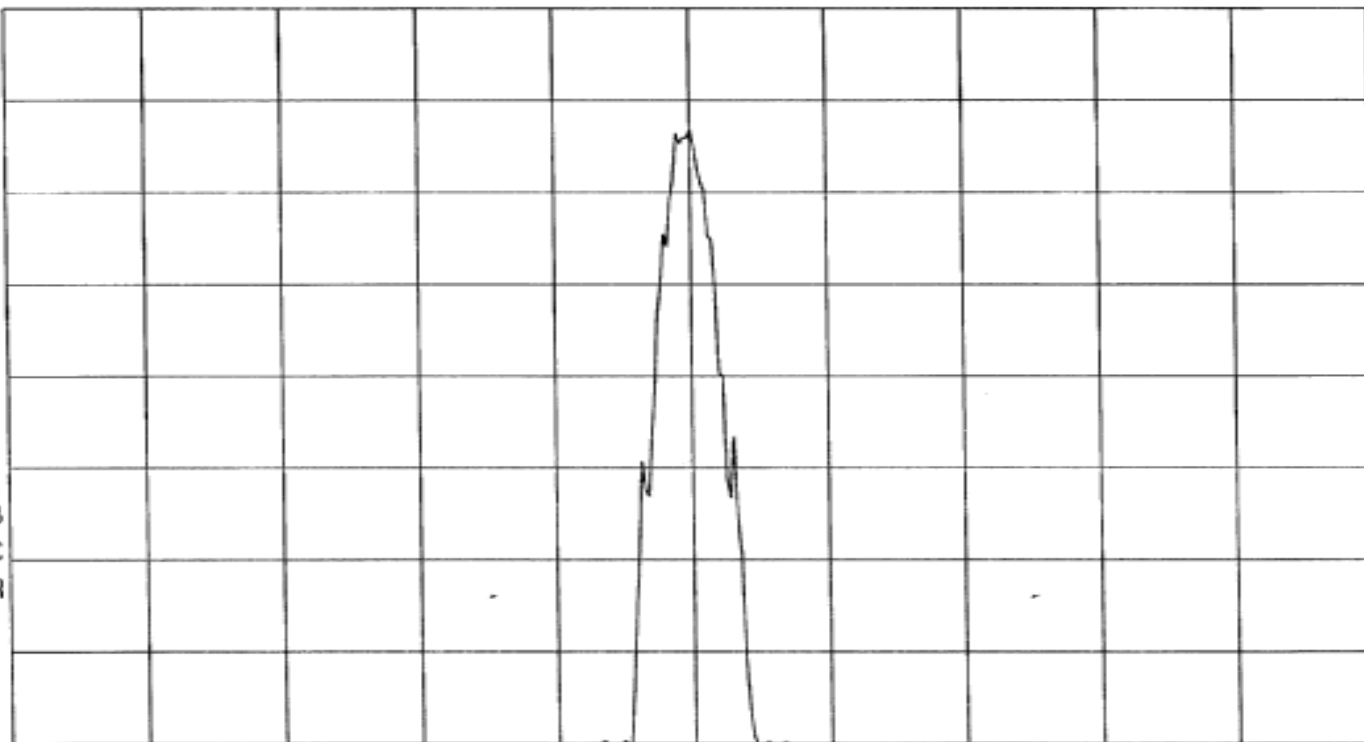

CENTER 824.0300 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	FM - Uplink (High) - Output at 848.97 MHz		

11:48:19 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

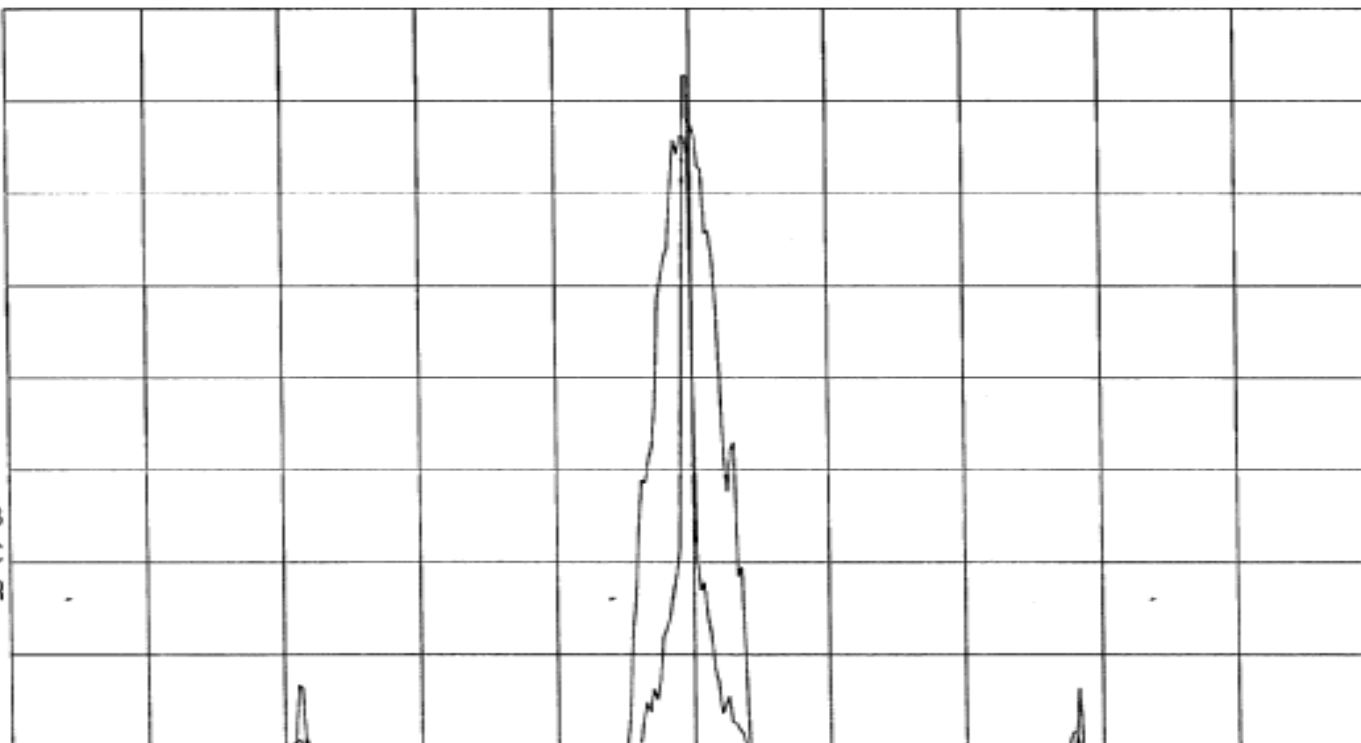

CENTER 848.9700 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	FM - Uplink (High) - Input at 848.97 MHz		

11:41:40 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

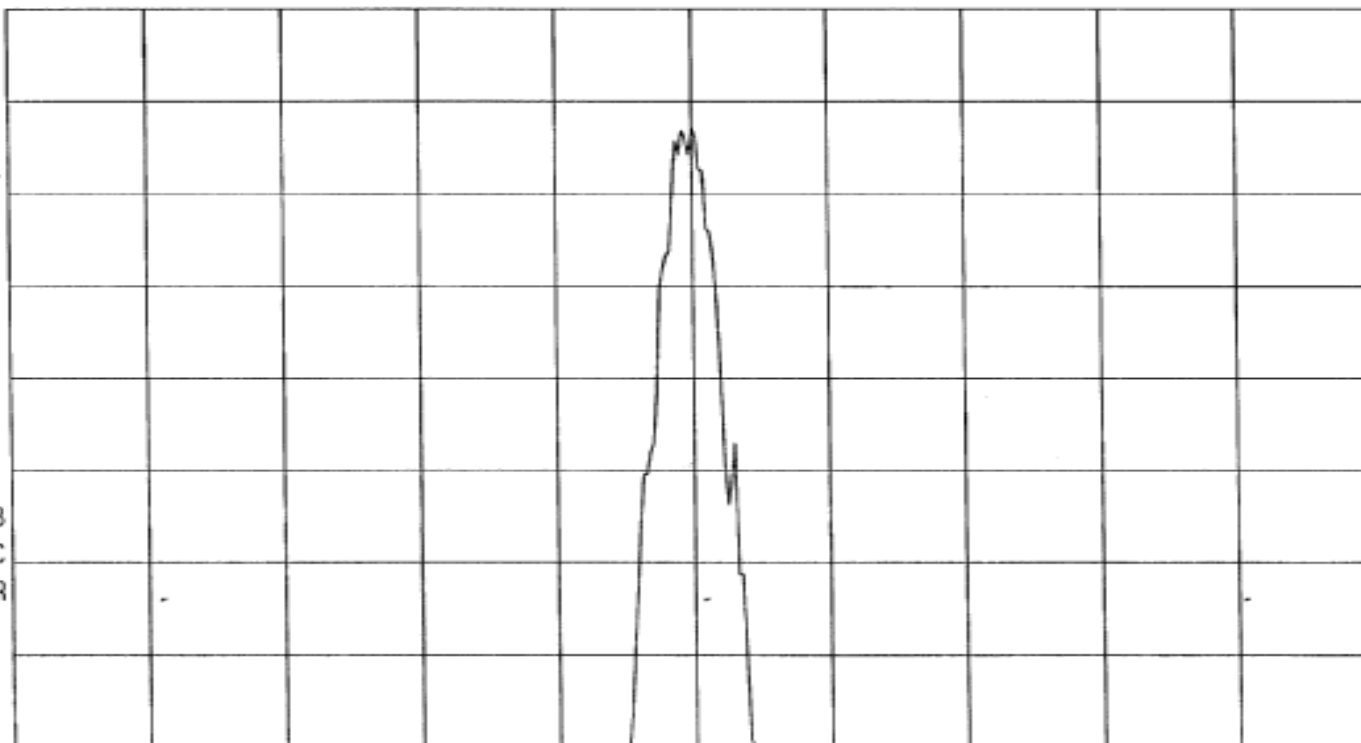

CENTER 848.9700 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	FM - Downlink (low) - Output at 869.03 MHz		

12: 02: 13 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

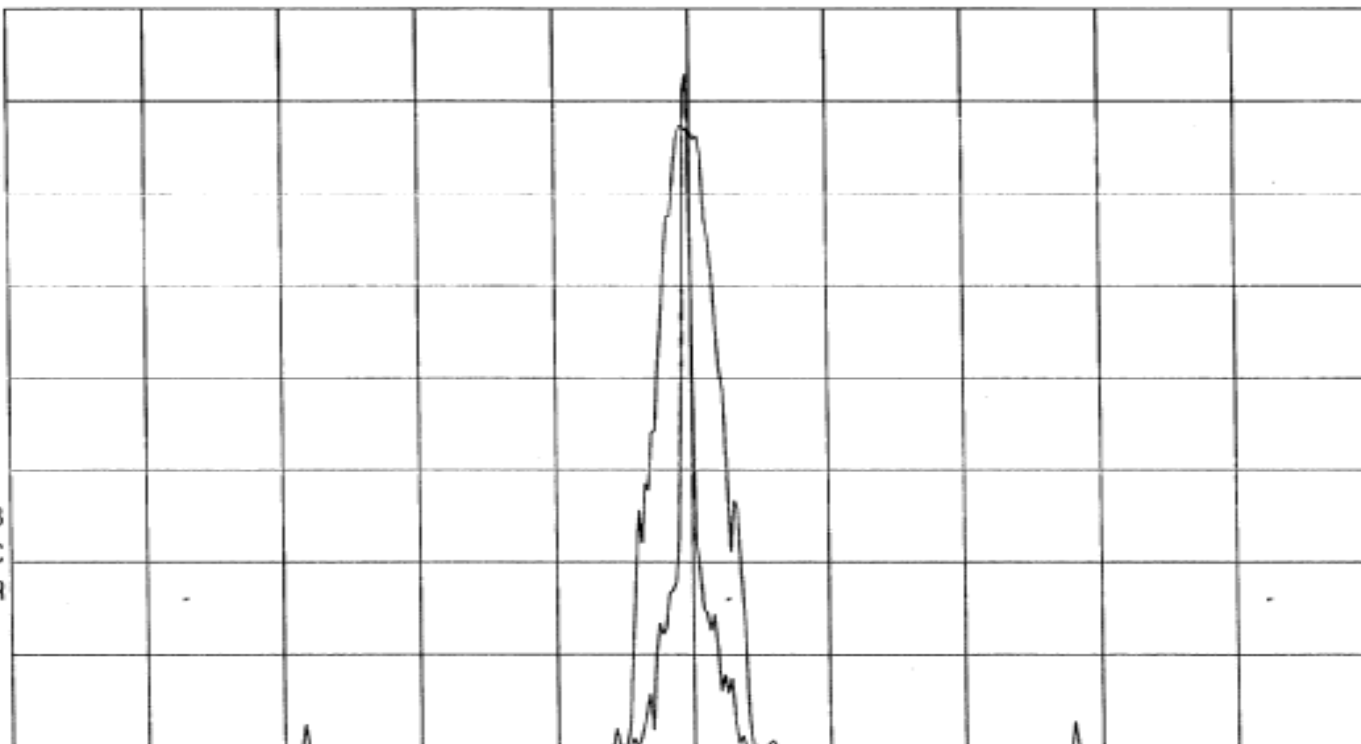

CENTER 869.0300 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	FM - Downlink (low) - Input at 869.03 MHz		
Job No:	R-4609N-1		Technician:
		M.Seamans	Date:
		8/16/2006	

11:40:17 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

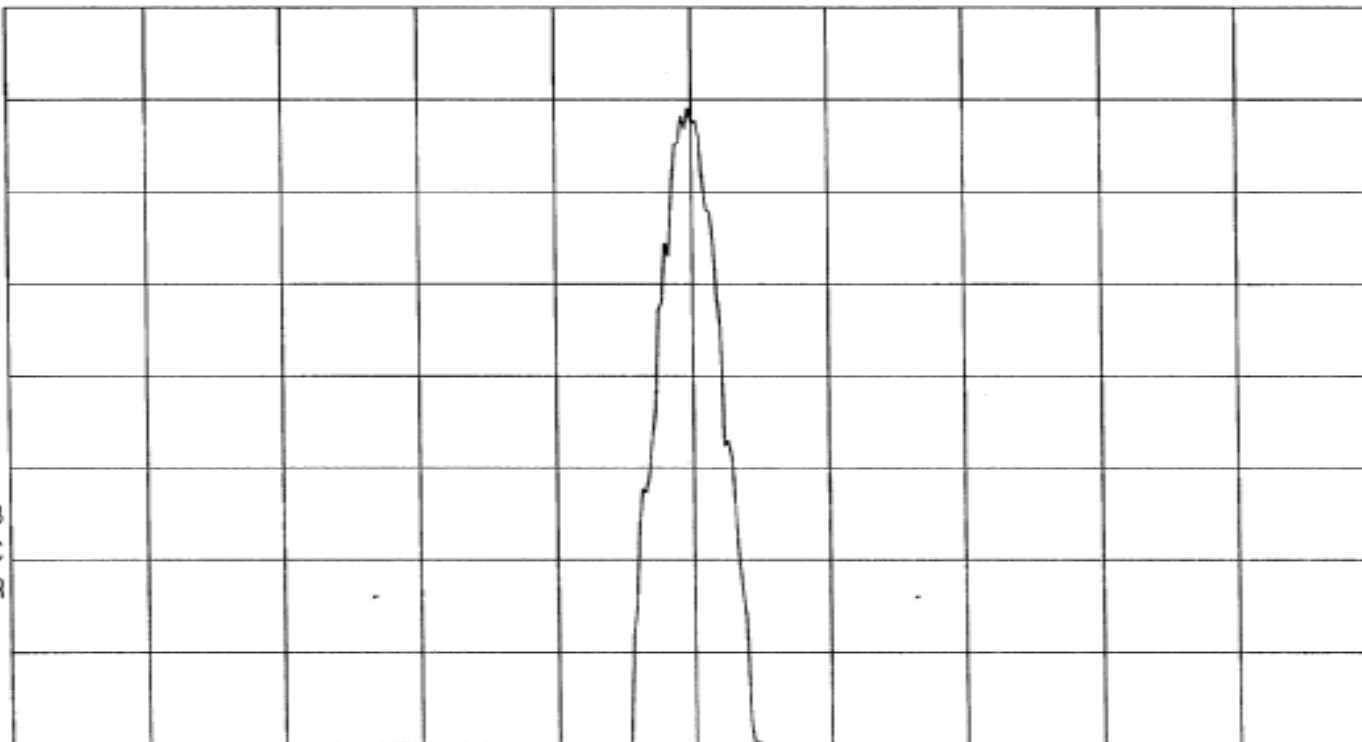

CENTER 869.0300 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date:
Operating Mode:	Amplifying input signal		
Notes:	FM - Downlink (High) - Output at 893.97 MHz		

12: 03: 43 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

WA VB
SC FC
CORR

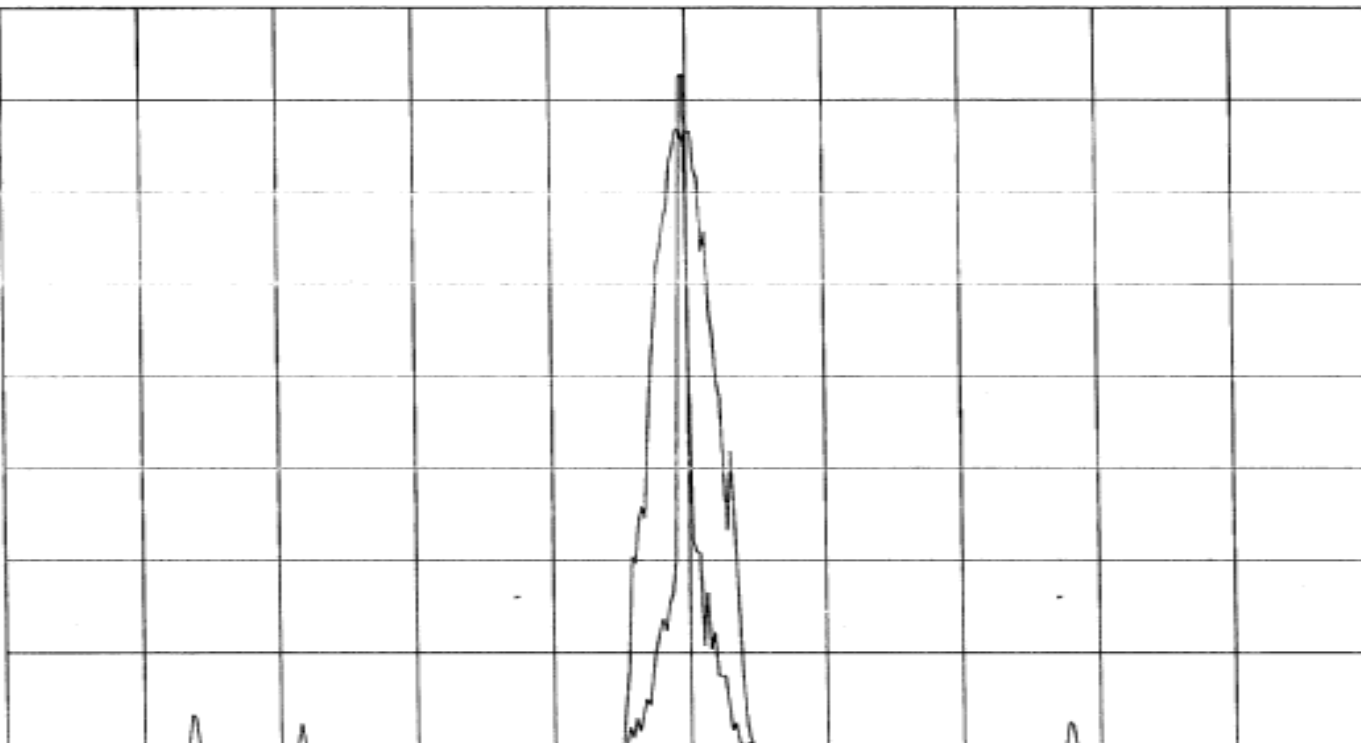

CENTER 893.9700 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date: 8/16/2006
Operating Mode:	Amplifying input signal		
Notes:	FM - Downlink (High) - Input at 893.97 MHz		

11: 43: 19 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

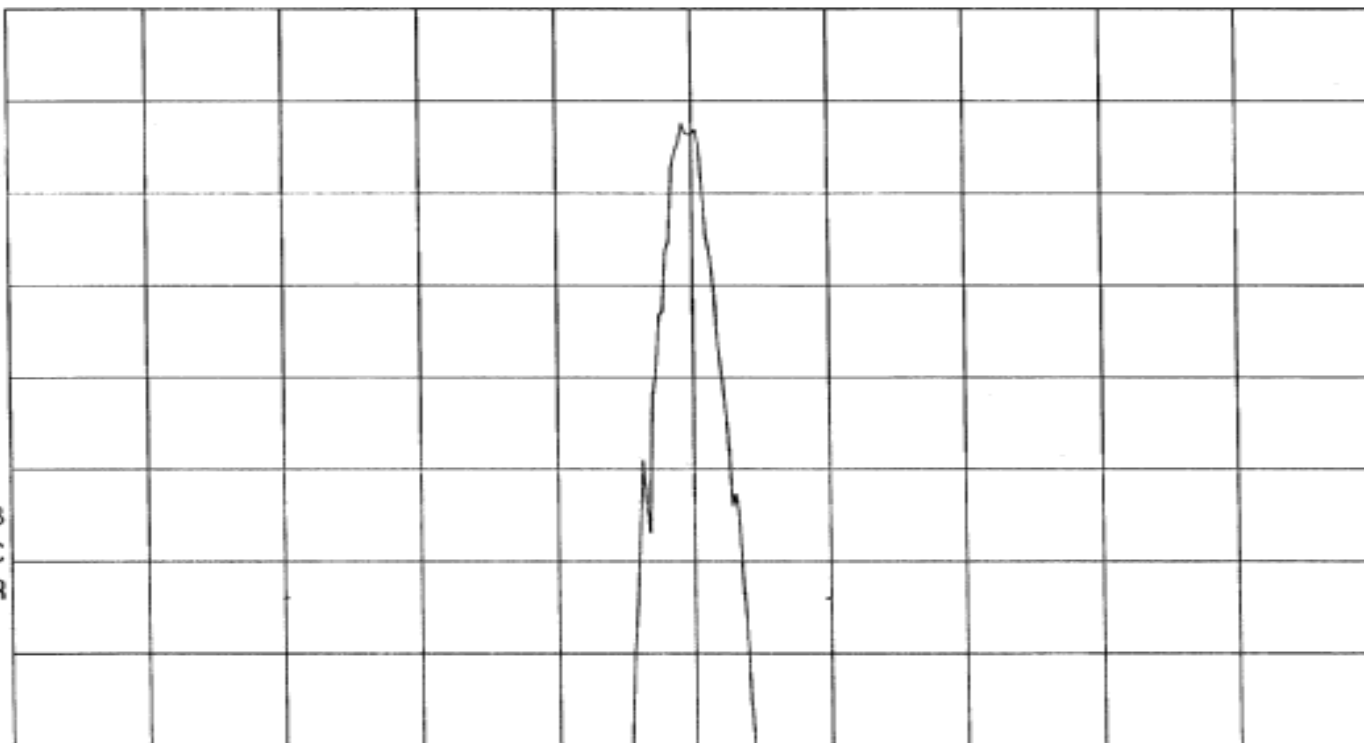

CENTER 893.9700 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec