

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date: 8/16/2006
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Uplink (Low) - Output at 1851.25 MHz		

11: 10: 46 AUG 24, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

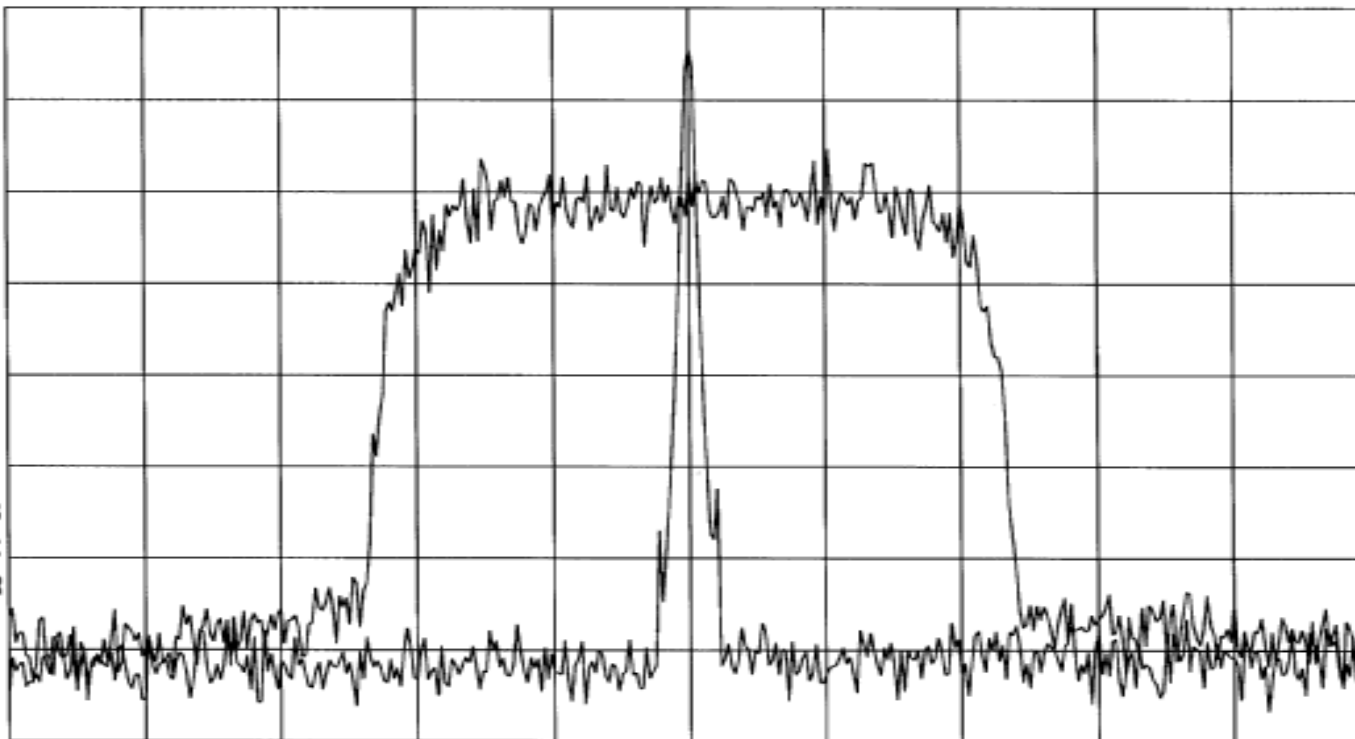

CENTER 1.85125 GHz
#RES BW 30 KHz

#VBW 100 KHz

SPAN 10.00 MHz
SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Uplink (Low) - Input at 1851.25 MHz		
Job No:	R-4609N-3		Technician:
		M.Seamans	Date:
		8/16/2006	

11: 21: 37 AUG 24, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

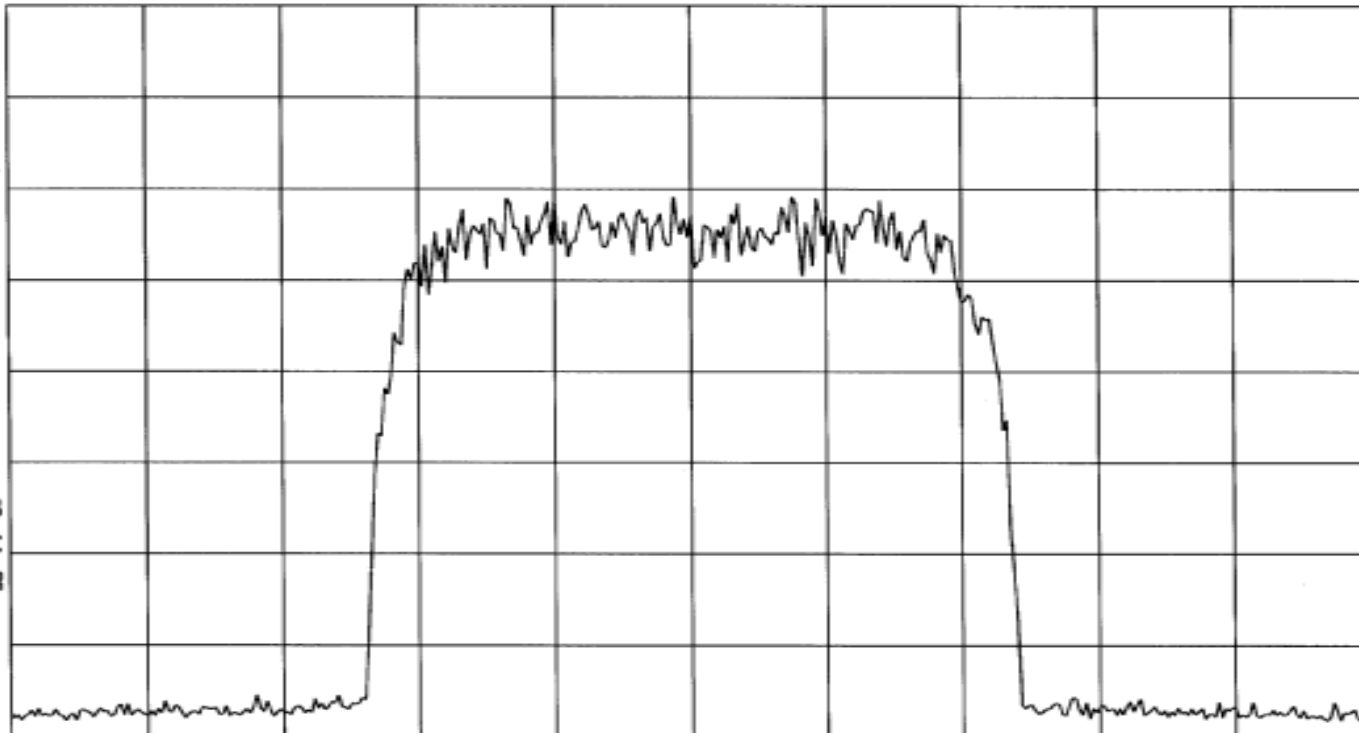

CENTER 1.85125 GHz
#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Uplink (High) - Output at 1908.75 MHz		

11: 11: 46 AUG 24, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

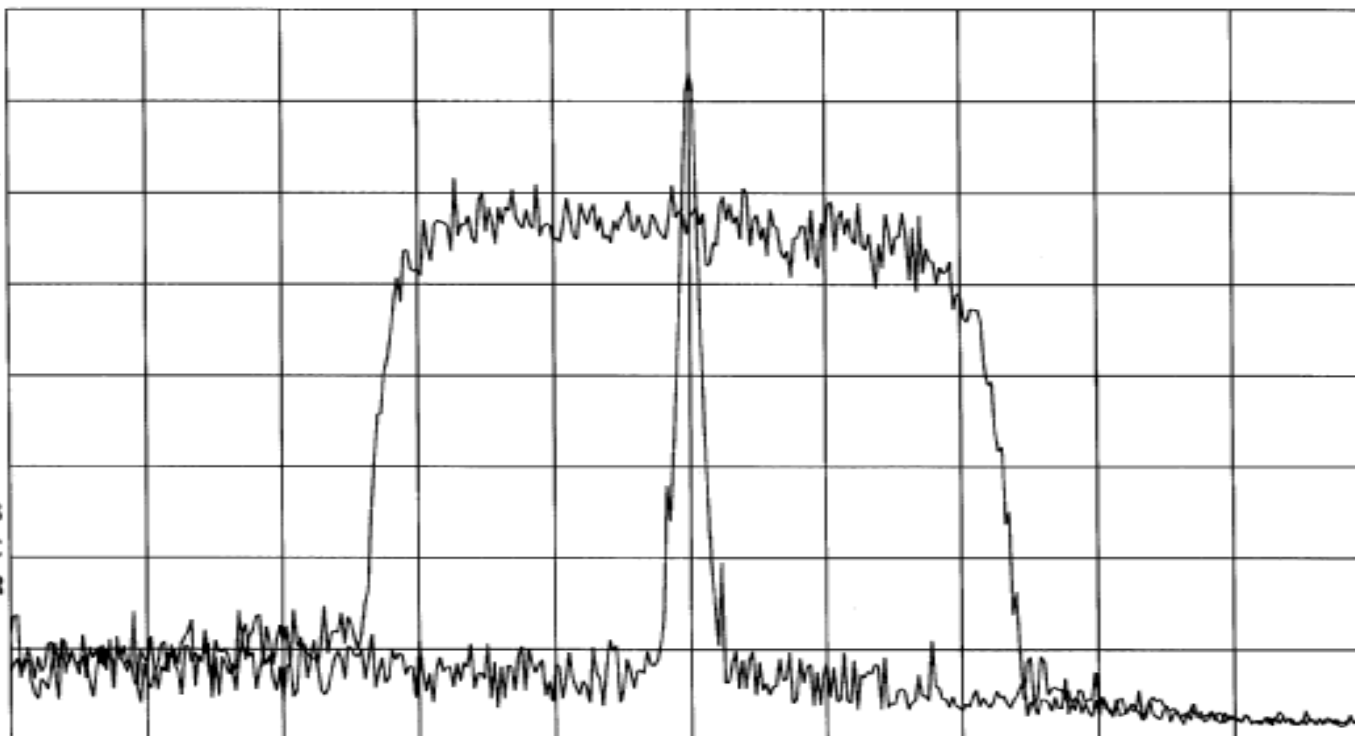

CENTER 1.90875 GHz

#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Uplink (High) - Input at 1908.75 MHz		

11:22:56 AUG 24, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

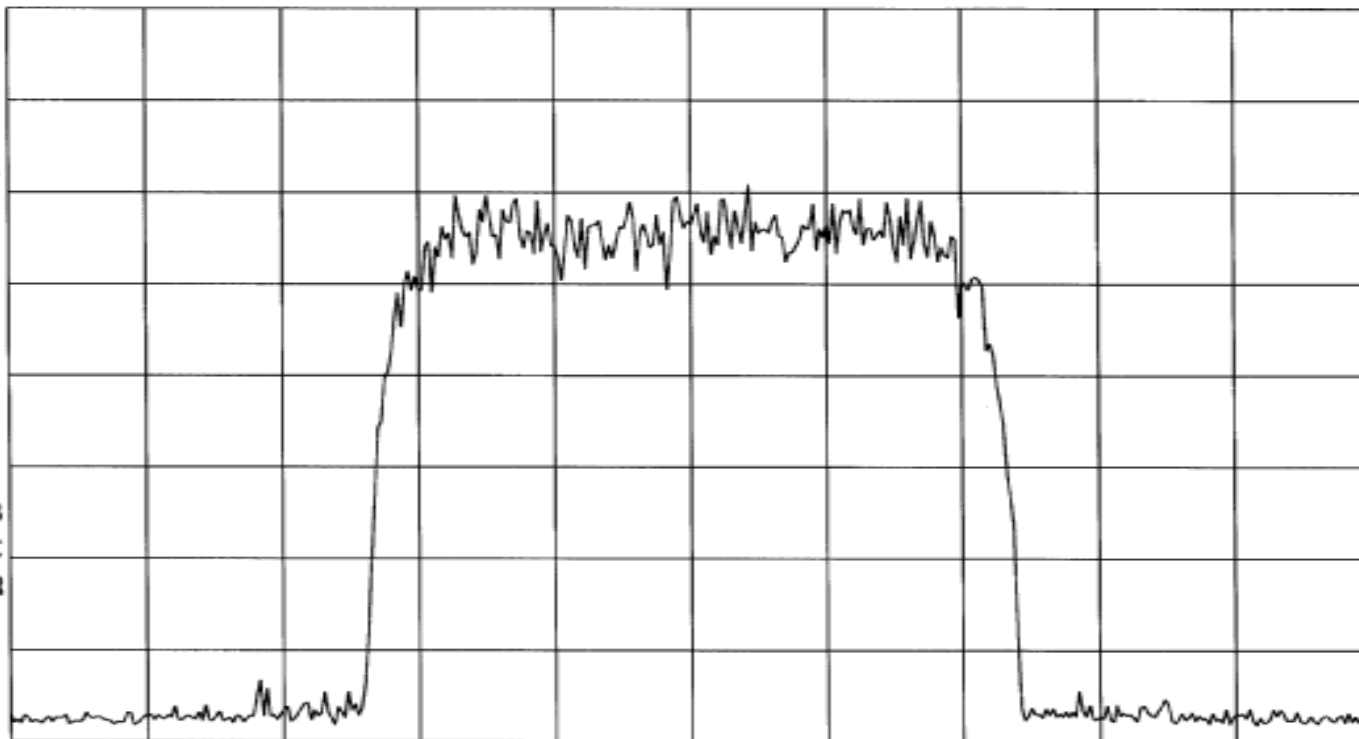

CENTER 1.90875 GHz
#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET

Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date: 8/16/2006
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Downlink (low) - Output at 1931.25 MHz		


11: 14: 13 AUG 24, 2006

REF 30.0 dBm

AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

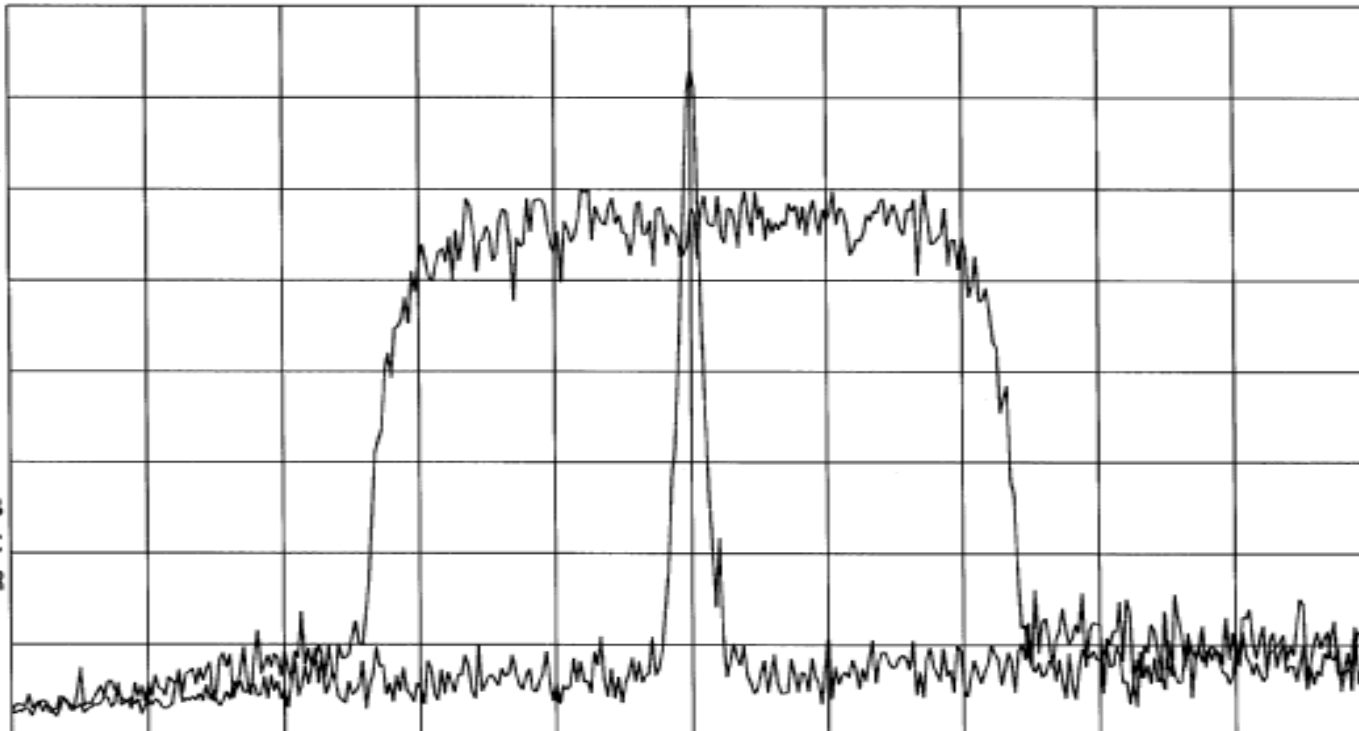

CENTER 1.93125 GHz

#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Downlink (low) - Input at 1931.25 MHz		
Job No:	R-4609N-3		Technician:
		M.Seamans	Date:
		8/16/2006	

11:20:06 AUG 24, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

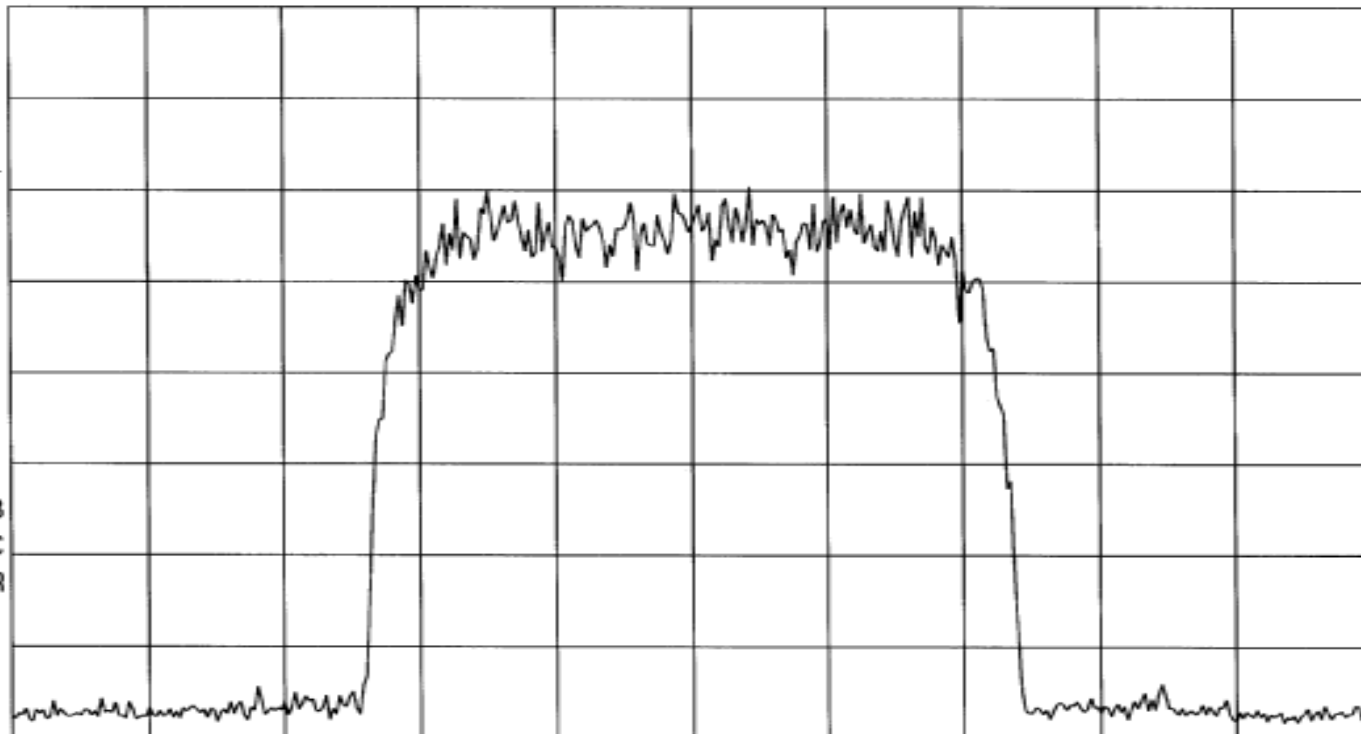

CENTER 1.93125 GHz

#RES BW 30 KHz

#VBW 100 KHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date: 8/16/2006
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Downlink (High) - Output at 1988.75 MHz		

11: 14: 54 AUG 24, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

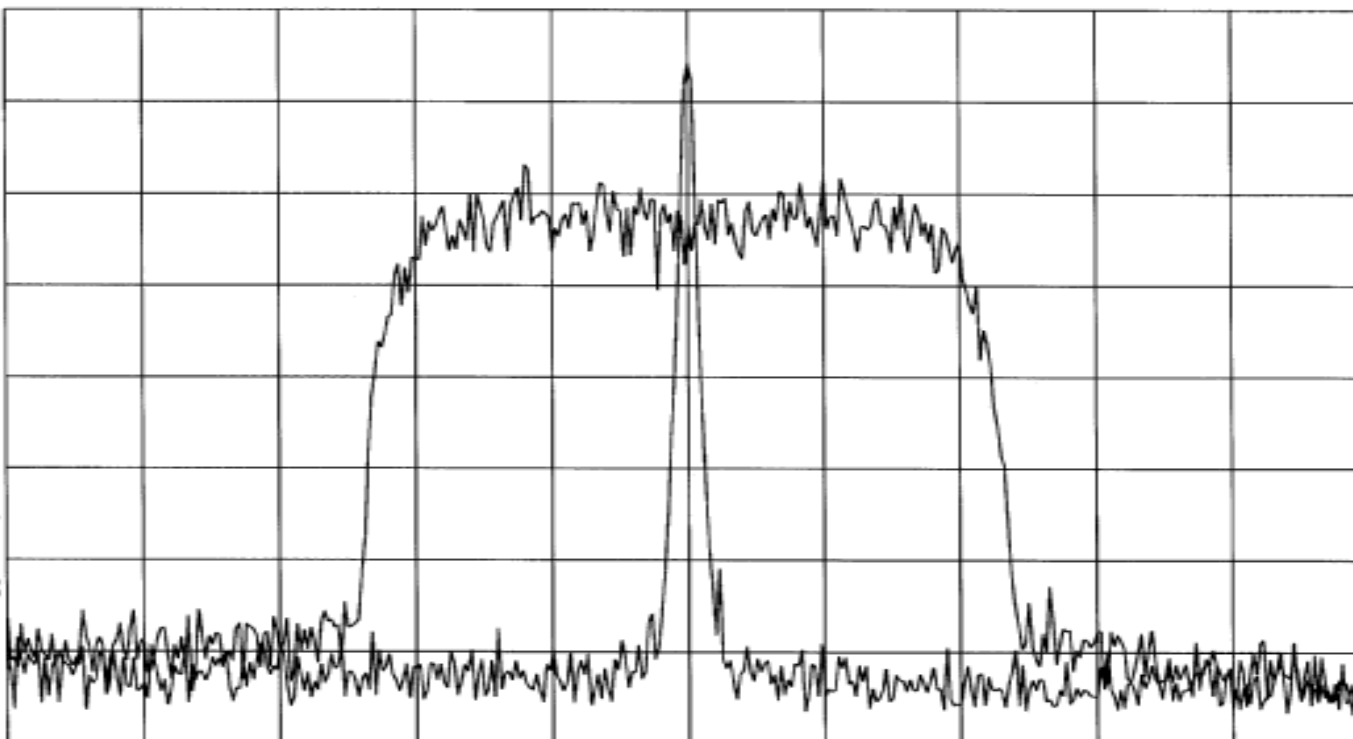

CENTER 1.98875 GHz
#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date:
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Downlink (High) - Input at 1988.75 MHz		

11: 36: 42 AUG 24, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

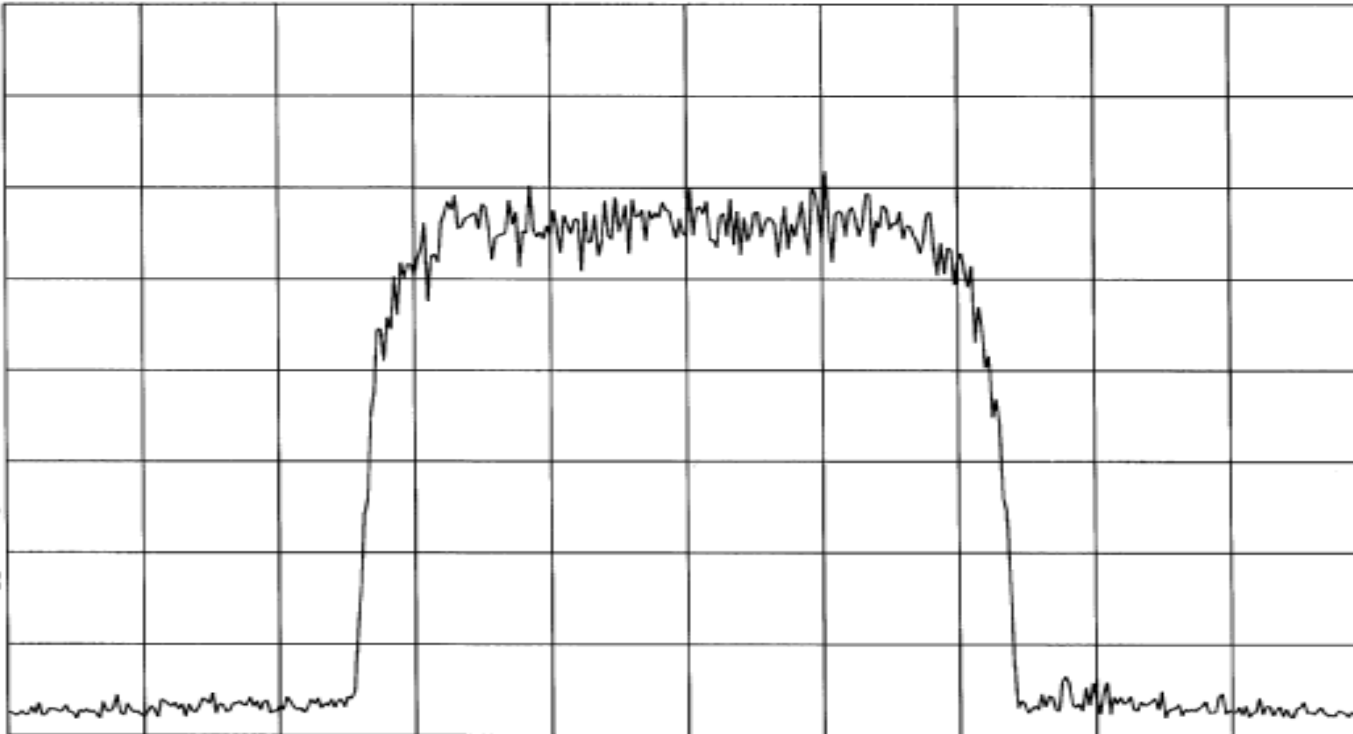

CENTER 1.98875 GHz
#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz
SWP 33.3 msec