

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date: 8/16/2006
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Uplink (Low) - Output at 825.25 MHz		

10: 43: 09 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

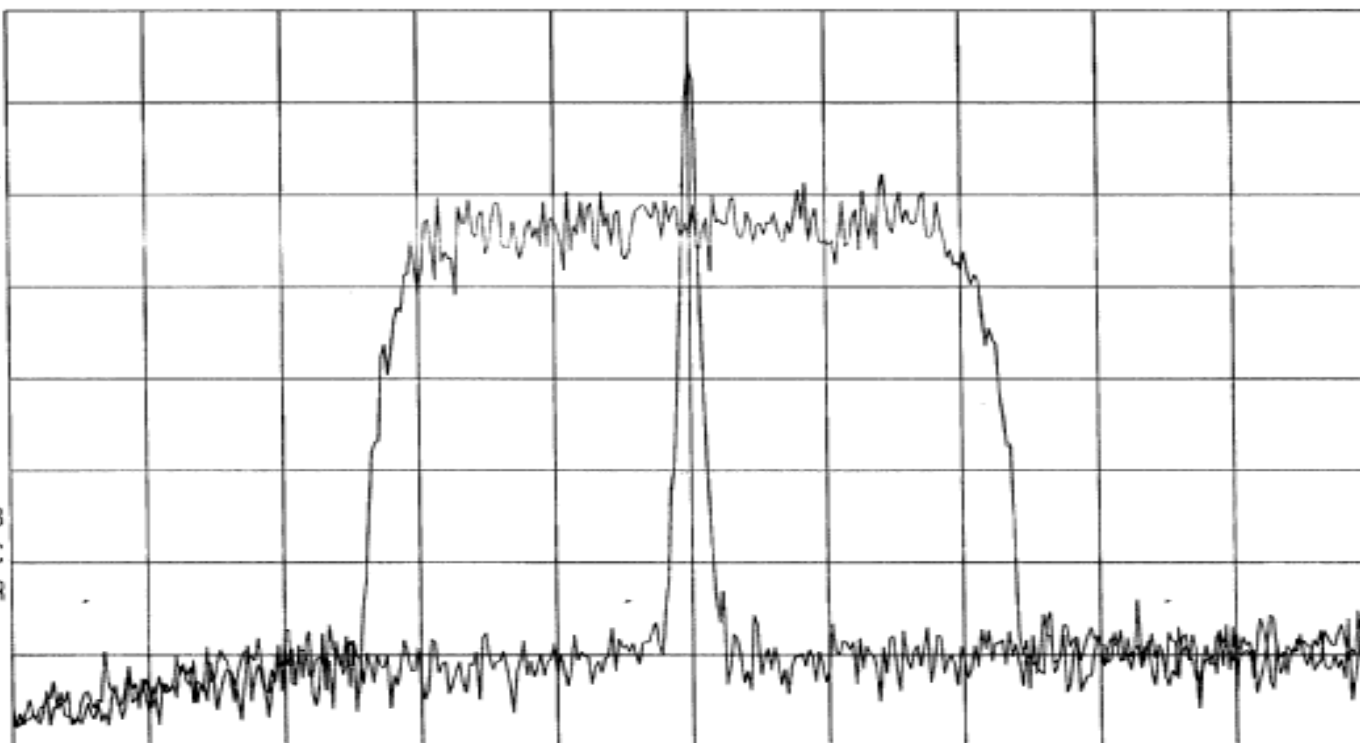

CENTER 825.25 MHz

#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Uplink (Low) - Input at 825.25 MHz		
Job No:	R-4609N-3		Technician:
		M.Seamans	Date:
		8/16/2006	

10:30:50 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

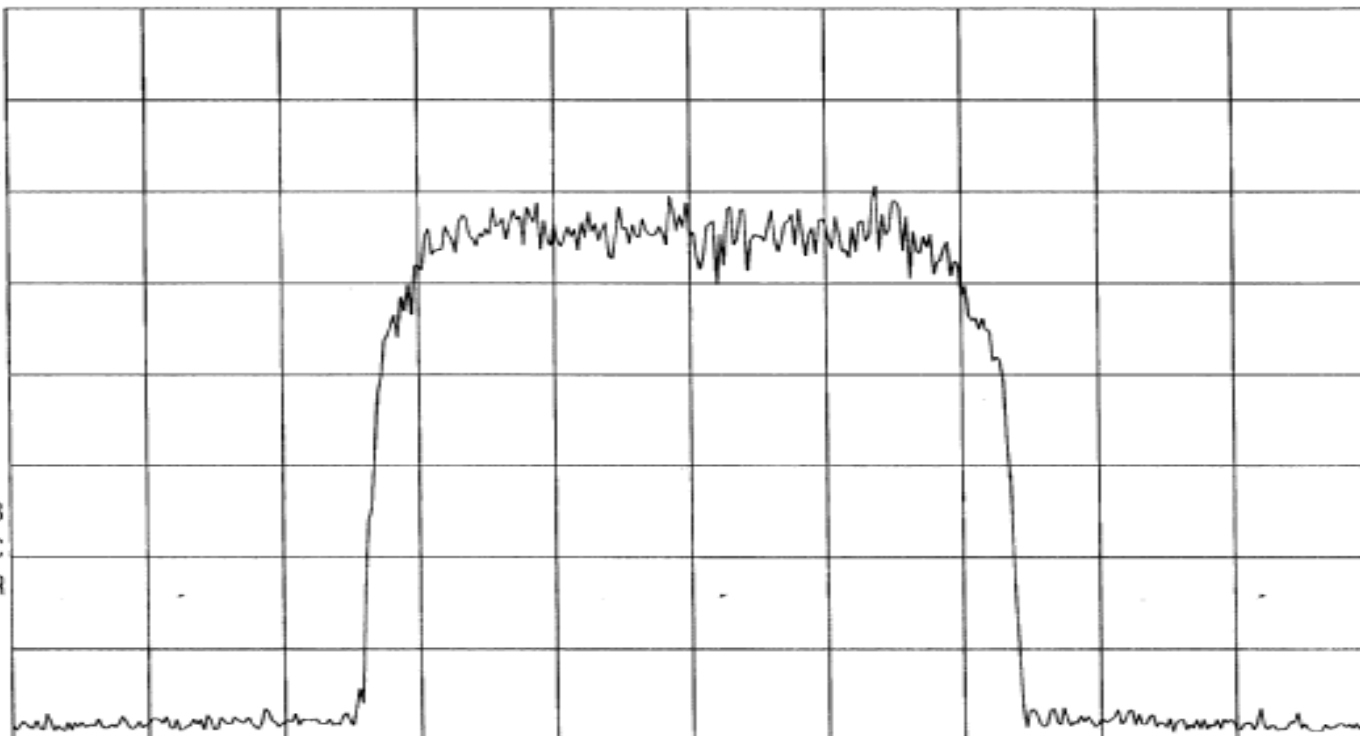

CENTER 825.25 MHz

#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET

Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date:
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Uplink (High) - Output at 847.75 MHz		


10: 41: 21 AUG 16, 2006

REF 30.0 dBm

AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

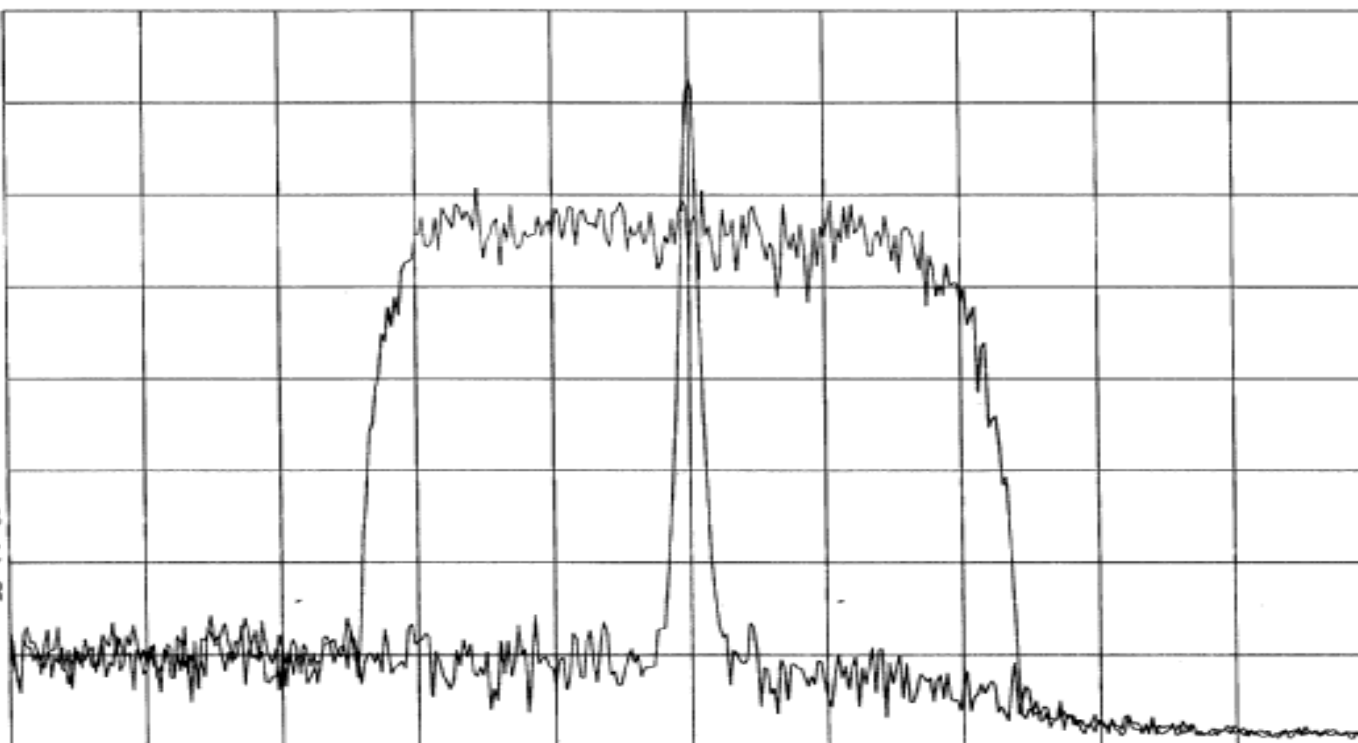

CENTER 847.75 MHz

#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Uplink (High) - Input at 847.75 MHz		

10: 33: 17 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

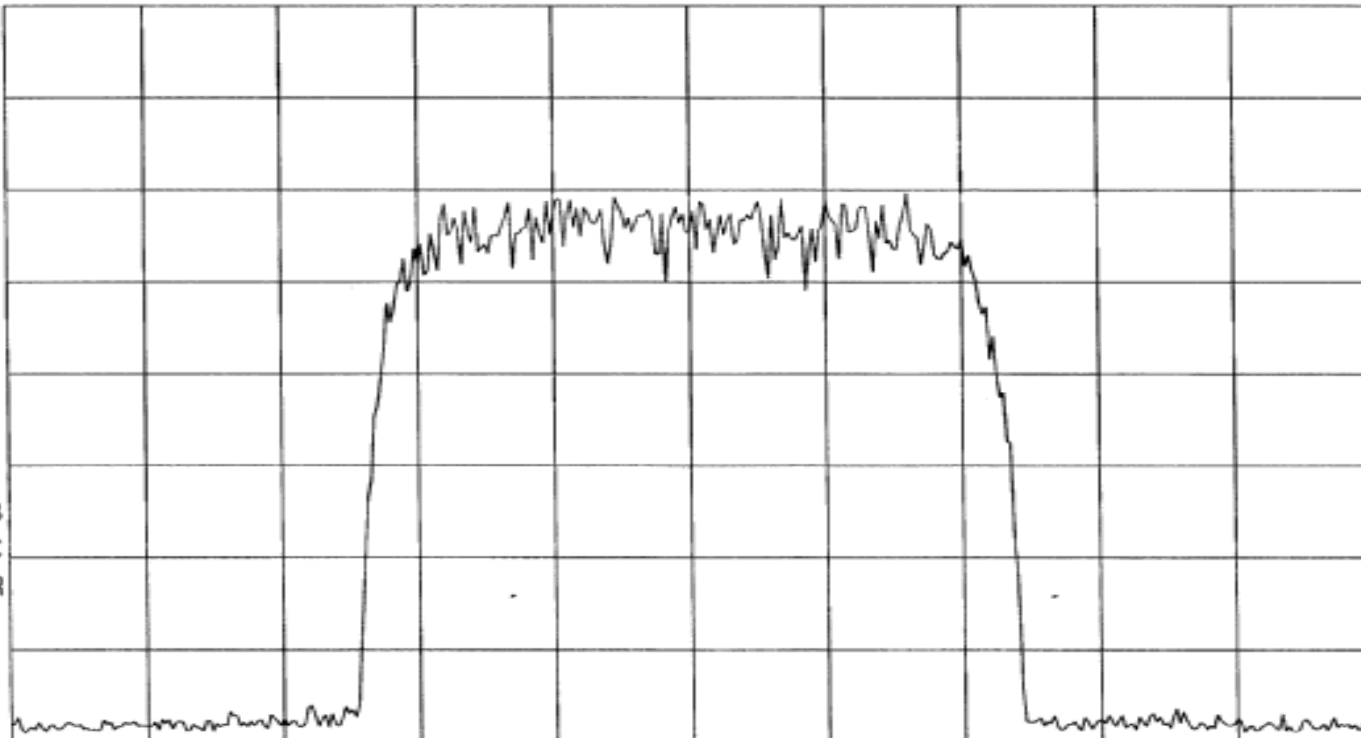

CENTER 847.75 MHz

#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET

Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date: 8/16/2006
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Downlink (low) - Output at 870.25 MHz		


10: 24: 41 AUG 16, 2006

REF 30.0 dBm

AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

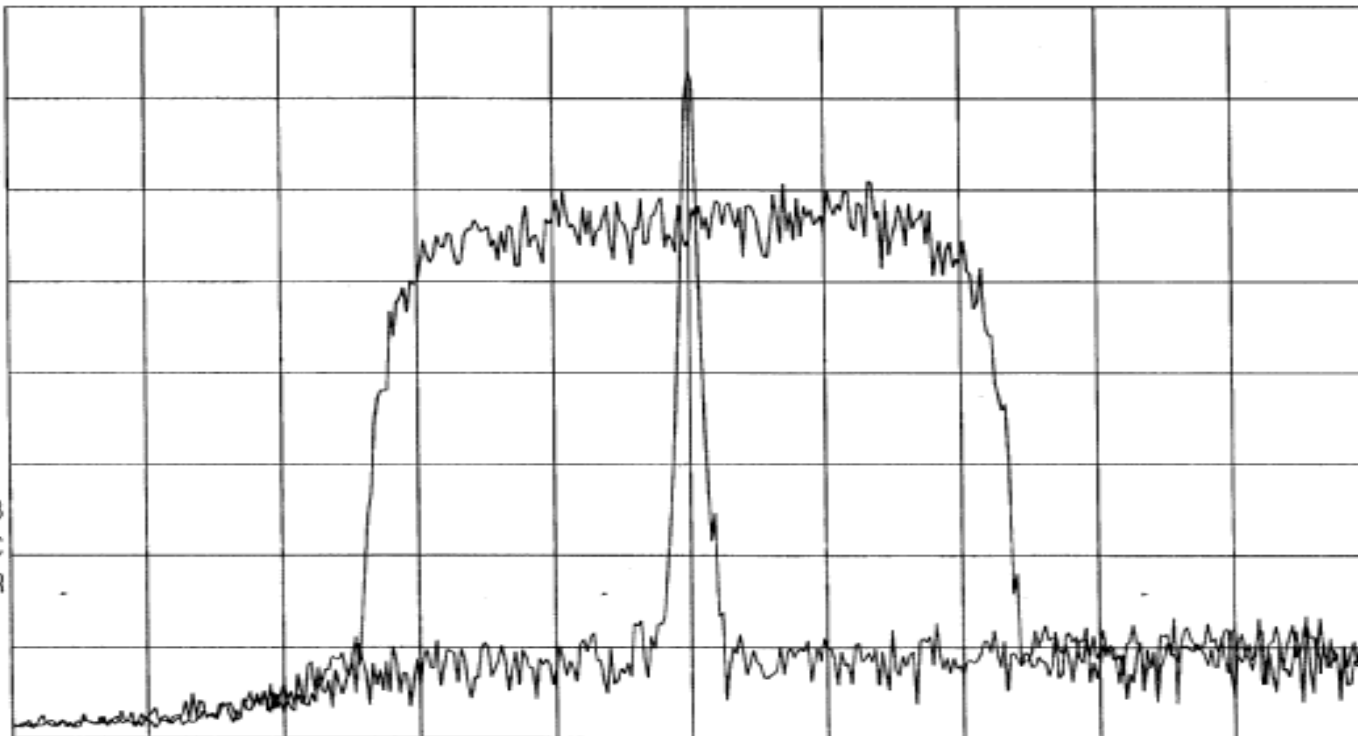

CENTER 870.25 MHz

#RES BW 30 KHz

#VBW 100 KHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Downlink (low) - Input at 870.25 MHz		

10: 29: 18 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

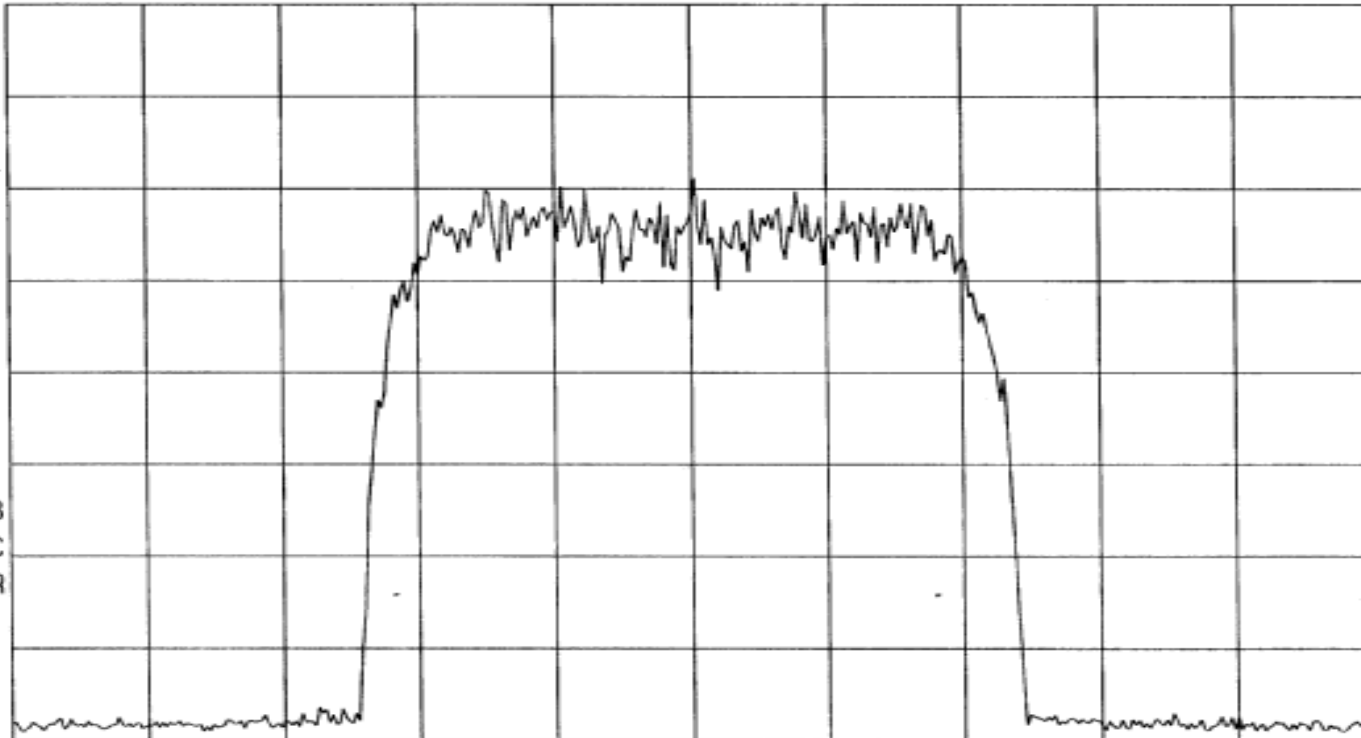

CENTER 870.25 MHz

#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date: 8/16/2006
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Downlink (High) - Output at 892.65 MHz		

10:09:12 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CQRR

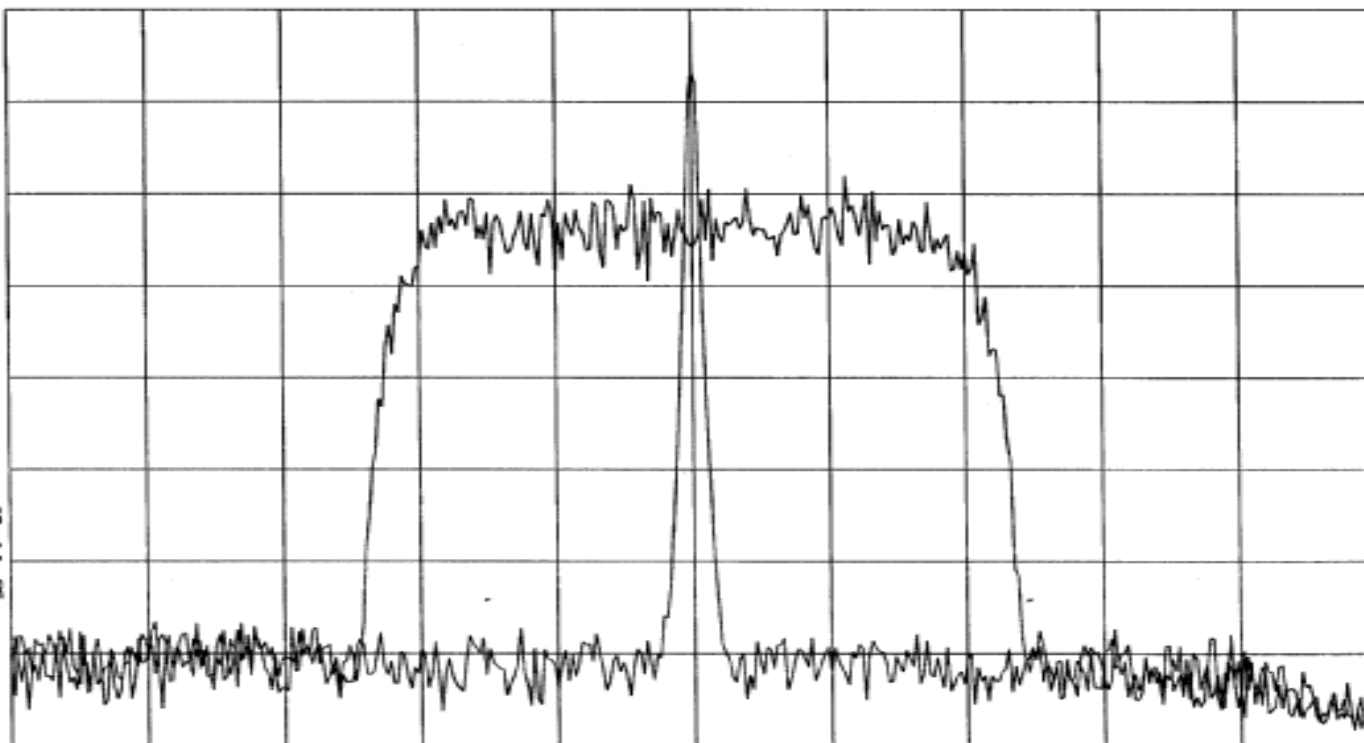

CENTER 892.75 MHz

#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 33.3 msec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date: 8/16/2006
Operating Mode:	Amplifying input signal		
Notes:	CDMA - Downlink (High) - Input at 892.65 MHz		

10: 12: 22 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

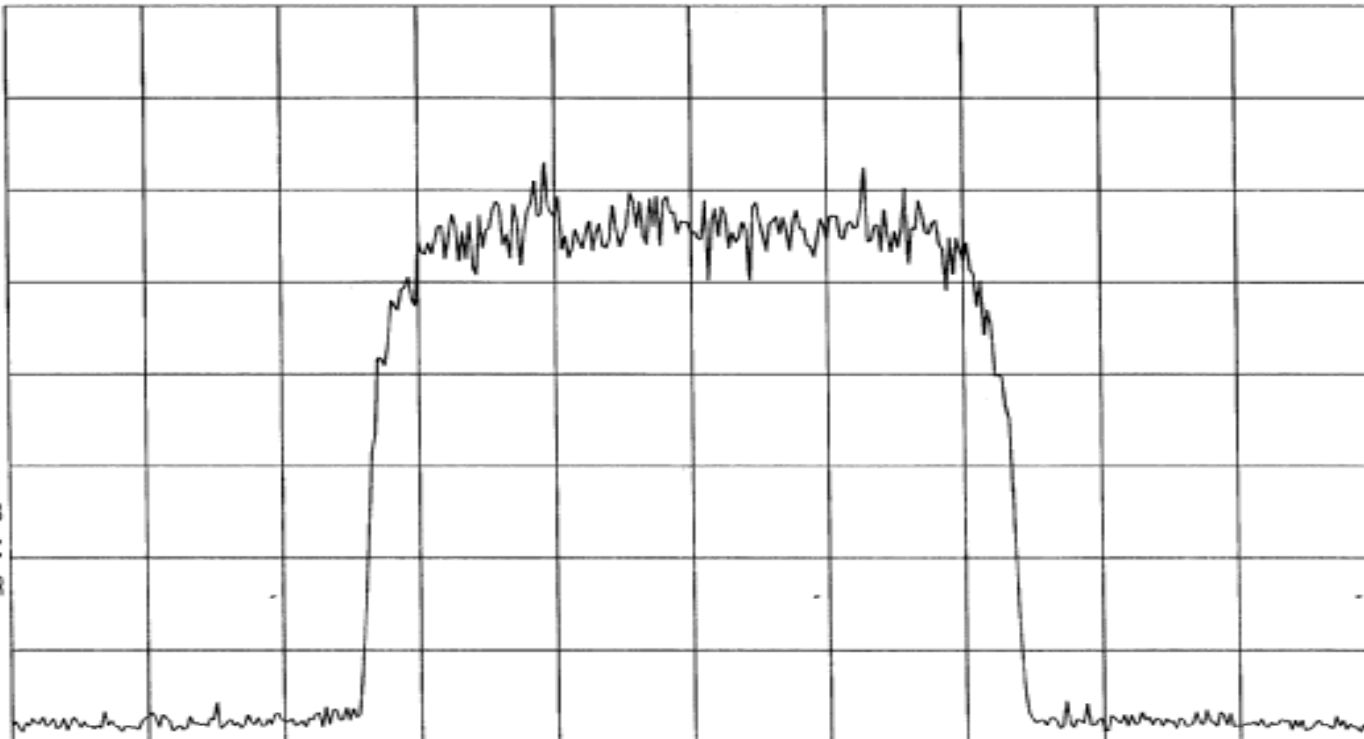

CENTER 892.75 MHz

#RES BW 30 kHz

#VBW 100 kHz

SPAN 10.00 MHz

SWP 33.3 msec