

Instrument	Manufacturer	Model No.	Asset No.	Calibration Status
Line Impedance Stabilization Network	EMCO	3825/2r	9331	Annual Inspection
Line Impedance Stabilization Network	EMCO	3825/2r	9259	Annual Inspection

Isolation Frequency Range: 10 kHz to 100 MHz

Power Source Frequencies: 0 Hz to 400 Hz

Current Rating: 25 amps

The 3825/2r LISN is designed to stabilize test units which operate with two line, single phase power.

Instrument	Manufacturer	Model No.	Asset No.	Calibration Status
Biconal-Log	ARA	Lpb-2520/A	4318	Annual Calibration

Measurement Range: 25 MHz to 2000 MHz


Power Handling Capability: 1000 W

Average VSWR: 2:1

### 4.3 Test Configuration

The following diagrams illustrate the configuration of the E-9000 Tower with Version 2 Transmitter, and the test and measurement equipment used for FCC part 15 Radiated and Conducted Emissions Testing.

#### Radiated Emissions

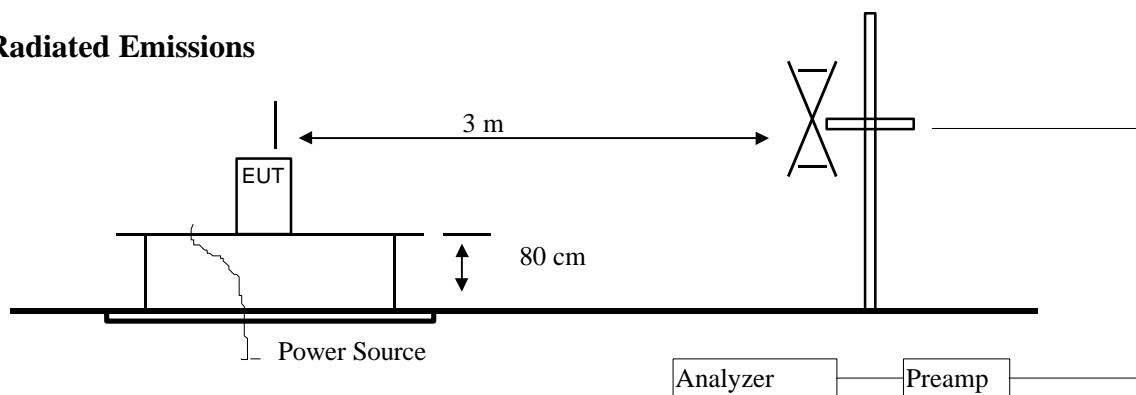

#### Conducted Emissions

