

FCC ID: NXIM1BT

EMI -- TEST REPORT

Test Report No. :

T30746-00-00XF

April 10, 2006

Date of issue

Type / Model Name : M1BT RF

Product Description : Serial Interface Bluetooth module

Applicant : Marposs S.p.A.

Address : Via Saliceto, 13

I – 40010 Bentivoglio (BO) Italia

Manufacturer : Marposs S.p.A.

Address : Via Saliceto, 13

I – 40010 Bentivoglio (BO) Italia

Licence holder : Marposs S.p.A.

Address : Via Saliceto, 13

I – 40010 Bentivoglio (BO) Italia

Test Result according to the
standards listed in clause 1 test
standards:

Positive



The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test
results without the written permission of the test
laboratory.

FCC ID: NXIM1BT

Contents

1 TEST STANDARDS	3
2 SUMMARY	4
3 EQUIPMENT UNDER TEST	5
3.1 PHOTO DOCUMENTATION OF THE EUT	5
3.2 POWER SUPPLY SYSTEM UTILISED	7
3.3 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	7
4 TEST ENVIRONMENT	9
4.1 ADDRESS OF THE TEST LABORATORY	9
4.2 ENVIRONMENTAL CONDITIONS	9
4.3 STATEMENT OF THE MEASUREMENT UNCERTAINTY	9
4.4 MEASUREMENT PROTOCOL FOR FCC, VCCI AND AUSTEL	9
5 TEST CONDITIONS AND RESULTS	11
5.1 CONDUCTED EMISSIONS	11
5.2 MAXIMUM PEAK OUTPUT POWER	12
5.3 RADIATED EMISSIONS 9 KHZ – 40 GHz	15
5.4 SPURIOUS RF CONDUCTED EMISSION	24
5.5 HOPPING SEQUENCE	27
5.6 EQUAL HOPPING FREQUENCY USE	27
5.7 RECEIVER INPUT BANDWIDTH	27
5.8 RECEIVER HOPPING CAPABILITY	28
5.9 20dB BANDWIDTH	29
5.10 BAND EDGE TEST	34
5.12 TIME OF OCCUPANCY (DWELL TIME)	38
5.13 CHANNEL SEPARATION TEST	42
5.14 QUANTITY OF HOPPING CHANNEL TEST	45
5.15 ANTENNA APPLICATION	50
5.17 RECEIVER RADIATED EMISSIONS 9 KHZ - 40 GHz	51
6 USED TEST EQUIPMENT AND ACCESSORIES	58

FCC ID: NXIM1BT

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15 Subpart C - Intentional Radiators (October 01, 2005)

Part 15, Subpart C, Section 15.35(c)	Correction for Pulse Operation (Duty Cycle)
Part 15, Subpart C, Section 15.207(a)	AC Line conducted emissions
Part 15, Subpart C, Section 15.209(a)	Radiated emissions, general requirements
Part 15, Subpart C, Section 15.247(c)	Radiated emissions, outside the used frequency band
Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.247(1)(iii)	Bandwidth requirement
Part 15, Subpart C, Section 15.247(b)(1)	Maximum Peak output Power of intentional radiator

FCC Rules and Regulations Part 15 Subpart B - Unintentional Radiators (October 01, 2005)

Part 15, Subpart B, Section 15.107(a)	AC Line conducted emissions
Part 15, Subpart B, Section 15.109(a)	Radiated emissions, general requirements

FCC ID: NXIM1BT

2 SUMMARY

GENERAL REMARKS:

The frequency range was scanned from 9 kHz to 25000 MHz. All emissions not reported in this test report were more than 10 dB below the specified limit.

During all tests the EuT was in connection with the test board where it was possible to set up the different test modes with the software "BlueTest" in order to changes the channels and the type of data stream.

FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records
Testing commenced on : April 03, 2006
Testing concluded on : April 06, 2006

Checked by:

Tested by:

Klaus Gegenfurtner
Dipl.-Ing.(FH)
Manager: Radio Group

Fischer Xaver

FCC ID: NXIM1BT


3 EQUIPMENT UNDER TEST

3.1 Photo documentation of the EuT

Test board with EuT "M1BT RF"

T30746-00-00XF


External Photo
Top view

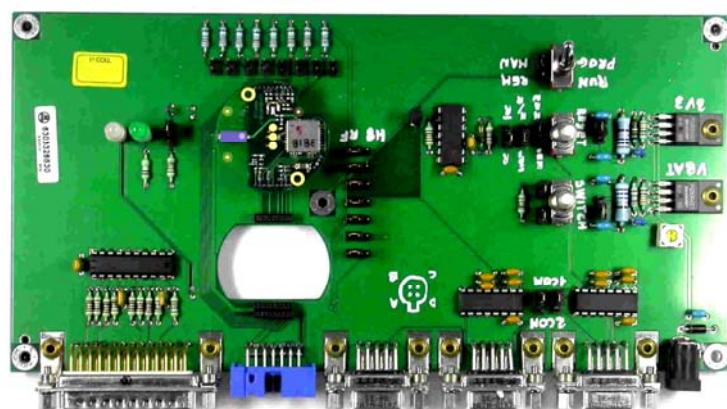

Bluetooth module M1BT RF

T30746-00-00XF

External Photo
Top view

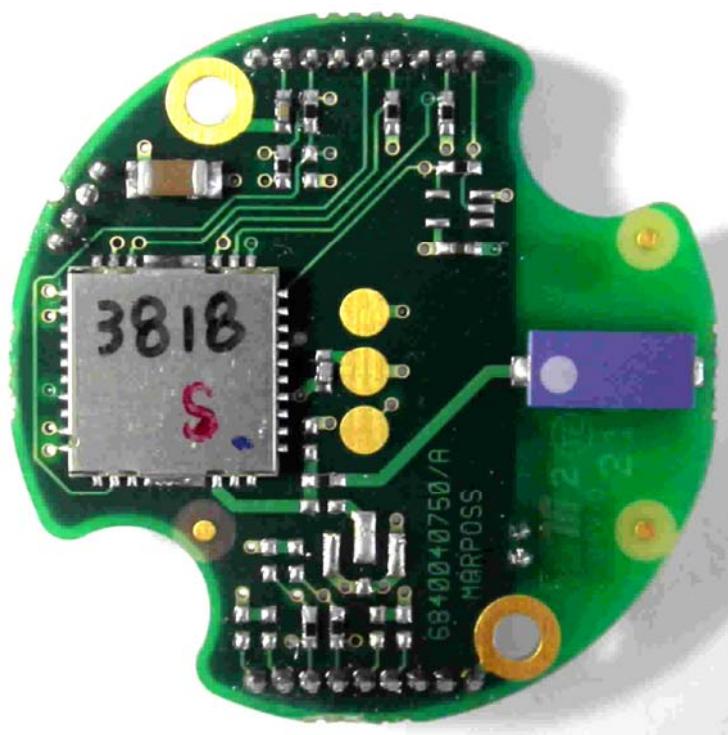

FCC ID: NXIM1BT

Bluetooth module M1BT RF
T30746-00-00XF

External Photo
Rear view



FCC ID: NXIM1BT


3.2 Power supply system utilised

Power supply voltage : 3,3 V / DC

3.3 Short description of the Equipment under Test (EuT)

"M1BT RF Interface" communicate with external devices through a serial interface and through a PIO (Parallel Input Output) interface.

The Serial Interface is RS-232 like at 3.3V and is capable of operating at data rates of 115.2Kbps. The command set implementation exposes an interface that is used to configure the system as SPP initiator (MASTER) or acceptor (SLAVE) of the connection and to transfer data. The data can be transferred from and to the micro-processor in "command mode", in which the payload data is preceded by an header, or in "transparent mode" in which no additional data are used beyond the payload data. PIO are used by "M1BT RF Interface" to communicate its internal state and to acquire data from I2C external devices.

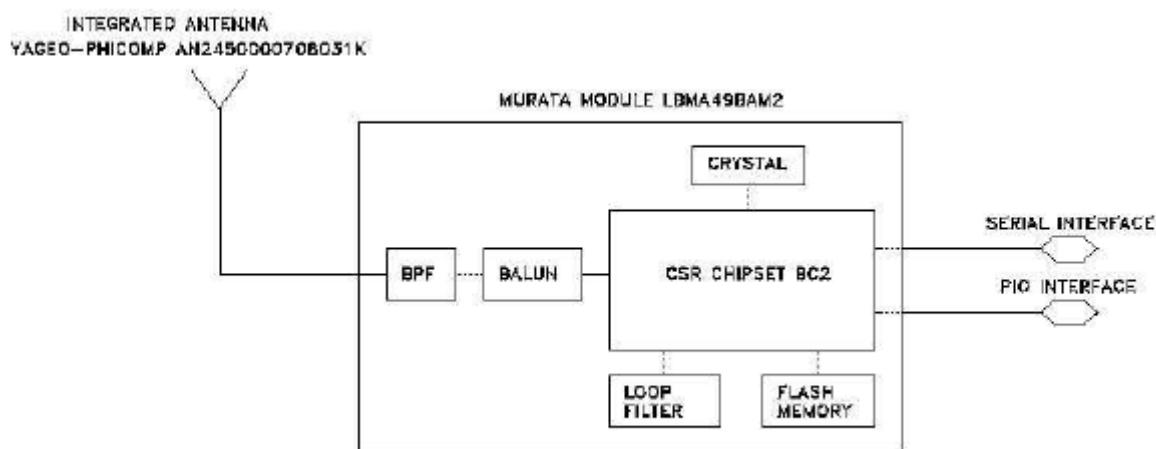

Number of tested samples: 2
 Serial number: Prototype

EuT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- TX-mode with modulation

- RX-mode

FCC ID: NXIM1BT

EuT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

The following peripheral devices and interface cables were connected during the measurements:

- Test Board
- Industrial PC
- _____
- _____
- _____
- _____
- _____

Model : _____

mikes

FCC ID: NXIM1BT

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

mikes-testingpartners gmbh
Ohmstrasse 2-4
94342 Strasskirchen
Germany

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 /11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

4.4 Measurement Protocol for FCC, VCCI and AUSTEL

4.4.1 GENERAL INFORMATION

4.4.1.1 Test Methodology

Conducted and radiated disturbance testing is performed according to the procedures in International Special Committee on Radio Interference (CISPR) Publication 22 (1997), European Standard EN 55022 and Australian Standard AS 3548 (which are based on CISPR 22).

The Japanese standard, "Voluntary Control Council for Interference (VCCI) by Data Processing Equipment and Electronic Office Machines, Technical Requirements" is technically equivalent to CISPR 22 (1997). For official compliance, a conformance report must be sent to and accepted by the VCCI.

In compliance with FCC Docket 92-152, "Harmonization of Rules for Digital Devices Incorporate International Standards", testing for FCC compliance may be done following the ANSI C63.4-2003 procedures and using the CISPR 22 Limits.

FCC ID: NXIM1BT

4.4.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into it's characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum disturbances from the unit.

4.4.2 DETAILS OF TEST PROCEDURES

4.4.2.1 General Standard Information

The test methods used comply with CISPR Publication 22 (1997), EN 55022 (2001) and AS 3548 (1992) - "Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment" and with ANSI C63.4-2003 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

FCC ID: NXIM1BT

TEST CONDITIONS AND RESULTS

5.1 Conducted emissions

For test instruments and accessories used see section 6 Paf.

5.1.1 Description of the test location

Test location:

5.1.2 Photo documentation of the test set-up

5.1.3 Description of Measurement

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC Limit or to the CISPR limit, which is equivalent to the Australian AS 3548 limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EuT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with $50\Omega/50 \mu\text{H}$ (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeter's above the floor and is positioned 40 centimeter's from the vertical ground plane (wall) of the screen room. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

5.1.4 Test result

Frequency range:

Min. limit margin

Remarks: The measurement is not applicable because the EuT is battery powered.

FCC ID: NXIM1BT



5.2 Maximum Peak Output Power

For test instruments and accessories used see section 6 Part CPC 3.

5.2.1 Description of the test location

Test location: AREA4

5.2.2 Photo documentation of the test set-up

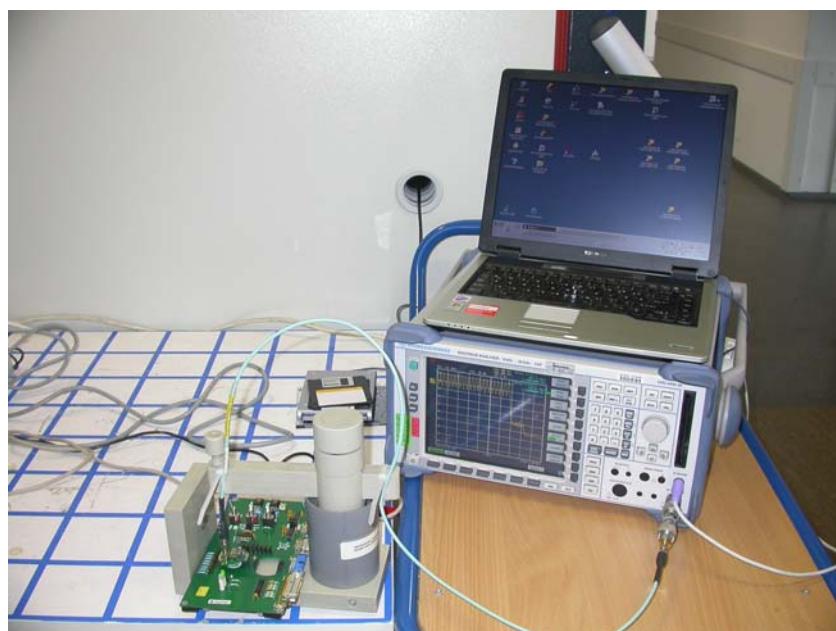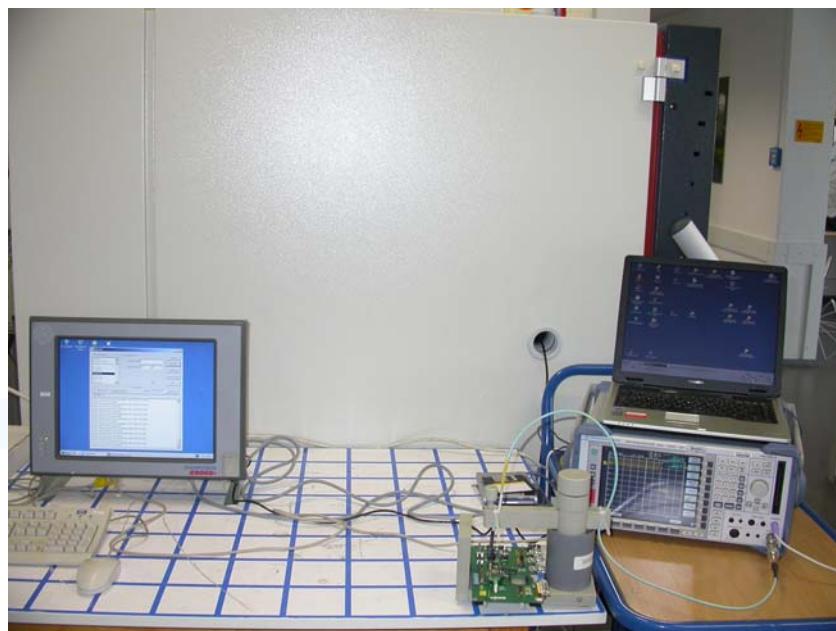

FCC ID: NXIM1BT

5.2.3 Description of Measurement

Conducted maximum peak output power:

A spectrum analyzer / EMI test receiver is connected to the output of the transmitter via a suitable attenuator while EuT was operating in transmit mode using the assigned frequency.

Analyzer Settings:

- Detector: Max hold
- RBW: greater than 20 dB Bandwidth
- VBW: \geq RBW
- Sweep Time: Coupled

Alternative test procedure:

If antenna conducted tests cannot be performed on the EuT, radiated tests to show compliance with the various conducted requirements of Section 15.247 are performed. A pre-amp have been used in making the following requirements.

Radiated maximum peak output power:

Radiated maximum peak output power from the EuT is measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization's and the EuT are rotated 360 degrees.

The final level, expressed in dB μ V/m, is arrived by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

Radiated maximum peak output power from the EuT is measured above 1 GHz, using a tuned receiver (Spectrum Analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area.

Measurement are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 1 MHz. All tests are performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration procedure the highest emission relative the limit and therefore shall be used for final testing. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions. When the EuT is larger than the beamwidth of the measuring antenna, the measurement

FCC ID: NXIM1BT

antenna will be moved over the surfaces for the four sides or the test distance will be reduced to demonstrate that emissions were at maximum at the limit distance.

Analyzer Settings:

- Detector: Max hold
- RBW: greater than 20 dB Bandwidth
- VBW: \geq RBW
- Sweep Time: Coupled

5.2.4 Test result

Channel	Frequency [MHz]	Peak Power Output (dBm)	Correct. [dB]	Corr. Peak Power Output (dBm)	Peak Power Limit (dBm)	Delta [dB]
0	2402	--	--	4,24	30	-25,76
39	2441	--	--	3,89	30	-26,11
78	2480	--	--	3,73	30	-26,27

Peak Power Limit according to FCC Subpart 15.247(b)(3)

Frequency (MHz)	Peak Power Limit	
	(dBm)	(Watt)
902-928	30	1,0
2400-2483,5	30	1,0
5725-5850	30	1,0

The requirements are **FULFILLED**.

Remarks: It was used the "conducted test procedure".

Bluetooth Specifications: Packet type: DH5

Packet size: 339 Bytes (max.)

Antenne gain: 0 dBi

FCC ID: NXIM1BT

5.3 Radiated emissions 9 kHz – 40 GHz

For test instruments and accessories used see section 6 Part **SER 1, SER 2 and SER 3**.

5.3.1 Description of the test location


Test location: OATS1
Anechoic Chamber A2

Test distance: 3 metres


5.3.2 Photo documentation of the test set-up



FCC ID: NXIM1BT

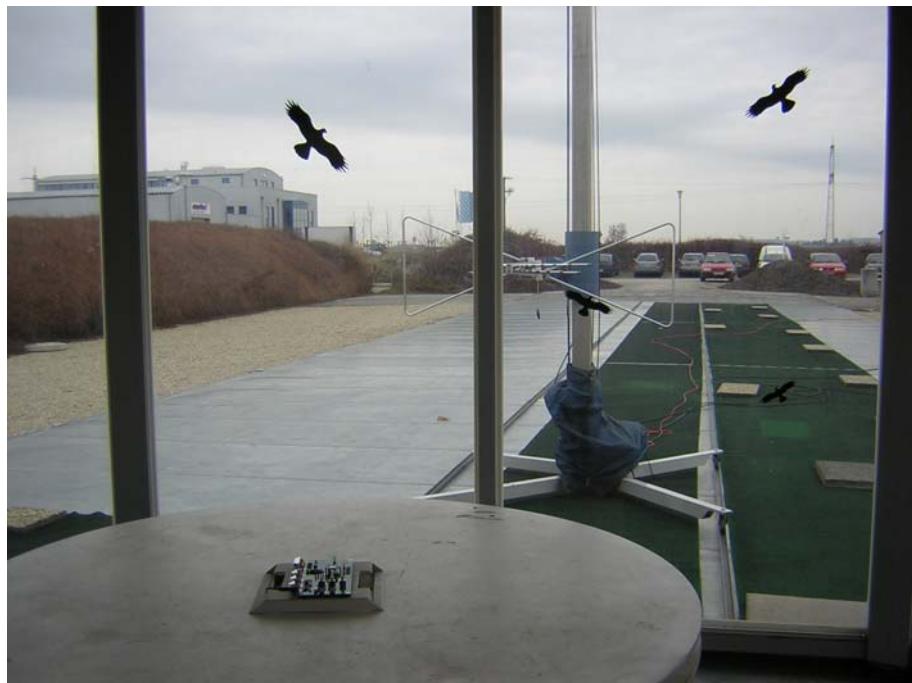

FCC ID: NXIM1BT

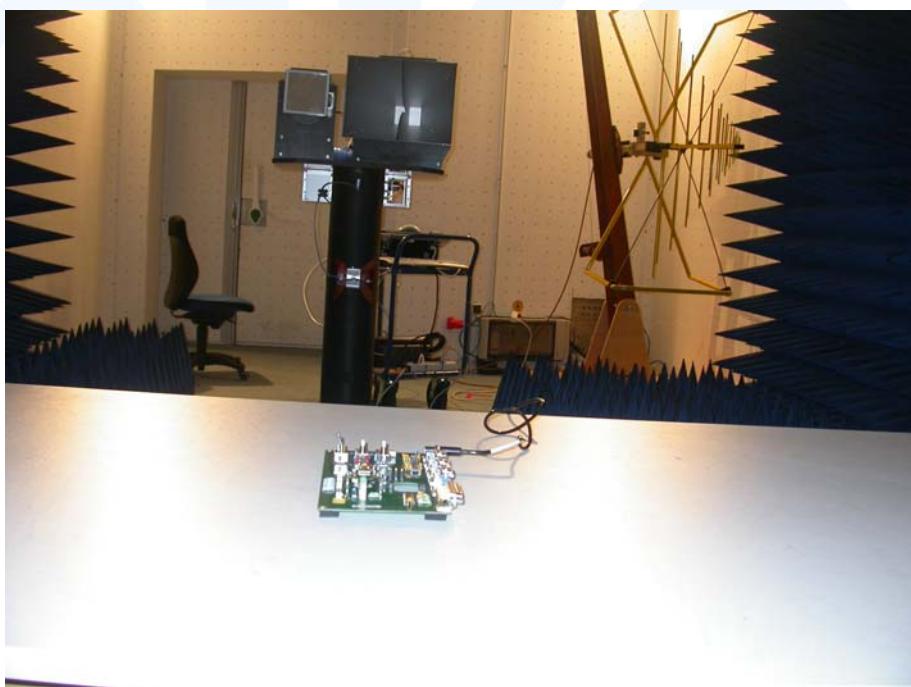

FCC ID: NXIM1BT

5.3.3 Description of Measurement

The spurious emissions from the EuT will be measured on an open area test site in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with an EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209 (d) [2].

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the EMI receiver (Level dB μ V) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit.

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

Radiated spurious emissions from the EuT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003. The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization's and the EuT are rotated 360 degrees.

The final level, expressed in dB μ V/m, is arrived by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The radiated emissions from the EuT are measured in the frequency range of 1 GHz to maximum frequency as specified in section 15.33, using a tuned receiver (Spectrum Analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3m horizontally from the EuT.

Measurement are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz and for any spurious emission or modulation product that falls in Restricted Band, as defined in Section 15.205, set the resolution and video bandwidth to 1 MHz.

All tests are performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration procedure the highest emission relative the limit and therefore shall be used for final testing. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions. When the EuT is larger than the beamwidth of the measuring antenna, the measurement antenna will be moved over the surfaces for the four sides or the test distance will be reduced to demonstrate that emissions were at maximum at the limit distance.

FCC ID: NXIM1BT

Analyzer Settings (EMI receiver) for spurious emissions which fall not in Restricted Band:

- Detector: Max hold
- RBW: 100 kHz for $f \geq 1\text{GHz}$, 120 kHz for $f \leq 1\text{GHz}$
- VBW: \geq RBW
- Sweep Time: Coupled
- Detecter function: Peak

Analyzer Settings (EMI receiver) for spurious emissions which fall in Restricted Band:

- Detector: Max hold
- RBW: 1 MHz for $f \geq 1\text{GHz}$, 120 kHz for $f \leq 1\text{GHz}$
- VBW: \geq RBW
- Sweep Time: Coupled
- Detecter function: Peak for $f \geq 1\text{GHz}$, Quasi Peak for $f \leq 1\text{GHz}$

mikes

FCC ID: NXIM1BT

5.3.4 Test result

Testresult in detail: (<1GHz)

Corrected field strength of fundamental wave as reference for radiated emissions:

109,8 dB μ V/m

Frequency [MHz]	Restricted Band	Reading Level QP [dB μ V]	Reading Level AV [dB μ V]	Reading Level PK [dB μ V]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dB μ V/m]	Corrected Level AV [dB μ V/m]	Corrected Level PK [dB μ V/m]	Limit [dB μ V/m]		Delta [dB]
										PK	QP	
0,009-0,15					0,2		< 30					
0,15-30					9		< 30					
30-1000					120				< 30	89,9		> -59,8
30-88	■				120		< 30				40	> -10,0
88-216	■				120		< 30				43,5	> -13,5
216-960	■				120		< 30				46	> -16,0
960-1000	■				120		< 30				54	> -24,0

Corrected field strength of fundamental wave as reference for radiated emissions:

108,4 dB μ V/m

Frequency [MHz]	Restricted Band	Reading Level QP [dB μ V]	Reading Level AV [dB μ V]	Reading Level PK [dB μ V]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dB μ V/m]	Corrected Level AV [dB μ V/m]	Corrected Level PK [dB μ V/m]	Limit [dB μ V/m]		Delta [dB]
										PK	QP	
0,009-0,15					0,2		< 30					
0,15-30					9		< 30					
30-1000					120				< 30	88,4		> -58,4
30-88	■				120		< 30				40	> -10,0
88-216	■				120		< 30				43,5	> -13,5
216-960	■				120		< 30				46	> -16,0
960-1000	■				120		< 30				54	> -24,0

Corrected field strength of fundamental wave as reference for radiated emissions:

105,9 dB μ V/m

Frequency [MHz]	Restricted Band	Reading Level QP [dB μ V]	Reading Level AV [dB μ V]	Reading Level PK [dB μ V]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dB μ V/m]	Corrected Level AV [dB μ V/m]	Corrected Level PK [dB μ V/m]	Limit [dB μ V/m]		Delta [dB]
										PK	QP	
0,009-0,15					0,2		< 30					
0,15-30					9		< 30					
30-1000					120				< 30	85,9		> -55,9
30-88	■				120		< 30				40	> -10,0
88-216	■				120		< 30				43,5	> -13,5
216-960	■				120		< 30				46	> -16,0
960-1000	■				120		< 30				54	> -24,0

FCC ID: NXIM1BT
Testresult in detail:(>1GHz)

Corrected field strength of fundamental wave as reference for radiated emissions:

109,8 dB μ V/m

Channel 0											
Frequency [MHz]	Restricted Band	Reading Level PK [dB μ V]	Corr. Duty Cycle [dB]	Level AV [dB μ V *])	Band-width [kHz]	Correct. Factor [dB]	Corrected Level PK [dB μ V/m]	Corrected Level AV [dB μ V/m]	Limit PK [dB μ V/m]	Limit AV [dB μ V/m]	Delta [dB]
1201	■	55,6	--	55,0	1000	-14,2	41,4	40,6	74,0	54,0	-13,4
4800	■	55,3	--	51,6	1000	0,6	55,9	52,2	74,0	54,0	-1,8
7200		40,3	--	--	1000	7,2	47,5	--	89,8		-42,3

Corrected field strength of fundamental wave as reference for radiated emissions:

108,4 dB μ V/m

Channel 39											
Frequency [MHz]	Restricted Band	Reading Level PK [dB μ V]	Corr. Duty Cycle [dB]	Level AV [dB μ V *])	Band-width [kHz]	Correct. Factor [dB]	Corrected Level PK [dB μ V/m]	Corrected Level AV [dB μ V/m]	Limit PK [dB μ V/m]	Limit AV [dB μ V/m]	Delta [dB]
1216	■	57,3	--	50,8	1000	-14,3	43,0	36,5	74,0	54,0	-17,5
4880	■	54,6	--	51,3	1000	0,8	55,4	52,1	74,0	54,0	-1,9

Corrected field strength of fundamental wave as reference for radiated emissions:

105,9 dB μ V/m

Channel 78											
Frequency [MHz]	Restricted Band	Reading Level PK [dB μ V]	Corr. Duty Cycle [dB]	Level AV [dB μ V *])	Band-width [kHz]	Correct. Factor [dB]	Corrected Level PK [dB μ V/m]	Corrected Level AV [dB μ V/m]	Limit PK [dB μ V/m]	Limit AV [dB μ V/m]	Delta [dB]
1240	■	54,9	--	51,4	1000	-14,4	40,5	36,9	74,0	54,0	-17,1
4960	■	49,5	--	47,1	1000	1,0	50,4	48,1	74,0	54,0	-5,9

*) Average values were measured with spectrum analyzer by taking the following Settings

RBW: 1 MHz

VBW: 10 Hz

Sweep: Auto

FCC ID: NXIM1BT

Peak-Limit according to FCC Subpart 15.247(c)

In any 100 kHz bandwidth outside the frequency band 2400 – 2483.50 MHz, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limit specified in §15.209(a) (see §15.205(c)).

Final radiated limits for spurious emissions which fall not in restricted band:

Frequency [MHz]	Limits acc. 15.209 [dB μ V/m]	Measure- ment dis- tance (meters)	Limits acc. 15.247(c) [dB μ V/m]			Final Radiated Limits [dB μ V/m]		
			Ch 0	Ch 39	Ch 78	Ch 0	Ch 39	Ch 78
0,009-0,490	2400/F(kHz)	300	89,8	88,4	85,9	89,8	88,4	85,9
0,490-1,705	24000/F(kHz)	30	89,8	88,4	85,9	89,8	88,4	85,9
1,705-30	30	30	89,8	88,4	85,9	89,8	88,4	85,9
30-88	40	3	89,8	88,4	85,9	89,8	88,4	85,9
88-216	43,5	3	89,8	88,4	85,9	89,8	88,4	85,9
216-960	46	3	89,8	88,4	85,9	89,8	88,4	85,9
Above 960	54	3	89,8	88,4	85,9	89,8	88,4	85,9

Radiated limits according to FCC Part 15 Subpart 15.209(a) for spurious emissions which fall in restricted band:

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (meters)
	(μ V/m)	dB (μ V/m)	
0,009-0,490	2400/F(kHz)		300
0,490-1,705	24000/F(kHz)		30
1,705-30	30	29,5	30
30-88	100	40	3
88-216	150	43,5	3
216-960	200	46	3
Above 960	500	54	3

FCC ID: NXIM1BT

Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209

MHz	MHz	GHz
25.5 – 25.67	960 – 1240	4.5 – 5.15
37.5 – 38.25	1300 – 1427	5.35 – 5.46
73 – 74.6	1435 – 1626.5	7.25 – 7.75
74.8 – 75.2	1645.5 – 1646.5	8.025 – 8.5
108 – 121.94	1660 – 1710	9.0 – 9.2
123 – 138	1718.8 – 1722.2	9.3 – 9.5
149.9 – 150.05	2200 – 2300	10.6 – 12.7
156.52475 – 156.52525	2310 – 2390	13.25 – 13.4
156.7 – 156.9	2483.5 – 2500	14.47 – 14.5
162.0125 – 167.17	2655 – 2900	15.35 – 16.2
167.72 – 173.2	3260 – 3267	17.7 – 21.4
240 – 285	3332 – 3339	22.01 – 23.12
322 – 335.4	3345.8 – 3358	23.6 – 24.0
399.9 – 410	3600 – 4400	31.2 – 31.8
608 – 614		36.43 – 36.5

The requirements are **FULFILLED**.

Remarks:	During the test, the Eut was set into normal modulation mode as intented for use.
	The measurement was performed up to the 10 th harmonic (25000MHz).
Bluetooth Specifications:	Packet type: DH5
	Packet size: 339 (max.)
Antenne gain:	0 dBi

FCC ID: NXIM1BT

5.4 Spurious RF Conducted Emission

For test instruments and accessories used see section 6 Part **SEC1, SEC2 and SEC3**.

5.4.1 Description of the test location

Test location: AREA4



5.4.2 Description of Measurement

A Spectrum analyzer / EMI test receiver is connected to the output of the transmitter via a suitable attenuator while EuT was operating in transmit mode using the assigned frequency.

Analyzer Settings:

- Detector: Max Hold
- RBW: 100 kHz
- VBW: \geq RBW
- Sweep Time: Coupled
- Detector function: Peak

5.4.3 Photo documentation of the test set-up

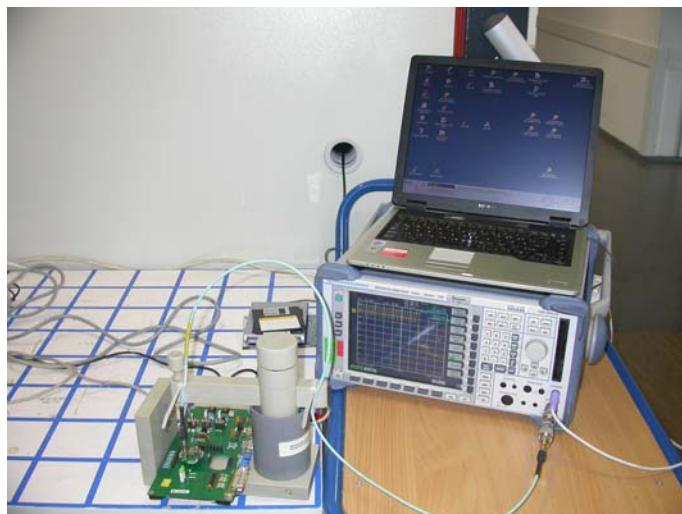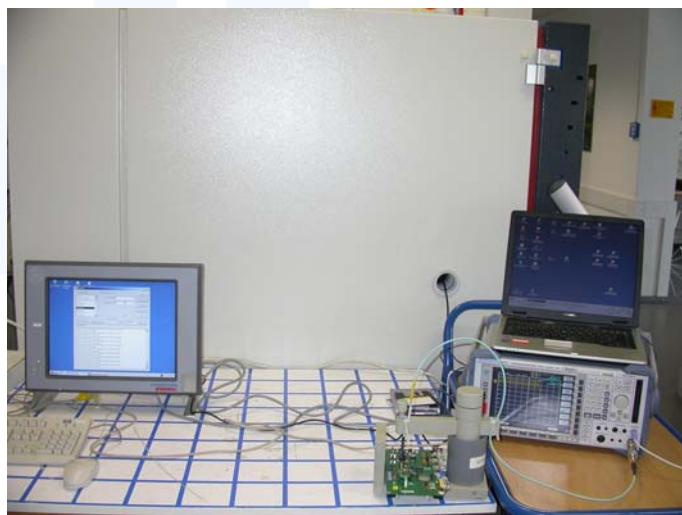

FCC ID: NXIM1BT

5.4.4 Test result

Corrected field strength of fundamental wave as reference for conducted emissions: 109,8 dB μ V

Channel 0											
Frequency [MHz]	Restricted Band	Reading Level PK [dB μ V]	Corr. Duty Cycle [dB]	Level AV [dB μ V *)	Band-width [kHz]	Correct. Factor [dB]	Corrected Level PK [dB μ V/m]	Corrected Level AV [dB μ V/m]	Limit PK [dB μ V/m]	Limit AV [dB μ V/m]	Delta [dB]
0,009-0,15					0,2		< 30				
0,15-30					9		< 30				
664					100		53,6		89,8		-36,2

Corrected field strength of fundamental wave as reference for conducted emissions: 108,4 dB μ V

Channel 39											
Frequency [MHz]	Restricted Band	Reading Level PK [dB μ V]	Corr. Duty Cycle [dB]	Level AV [dB μ V *)	Band-width [kHz]	Correct. Factor [dB]	Corrected Level PK [dB μ V/m]	Corrected Level AV [dB μ V/m]	Limit PK [dB μ V/m]	Limit AV [dB μ V/m]	Delta [dB]
0,009-0,15					0,2		< 30				
0,15-30					9		< 30				
704,6					100		52,4		88,4		-36,0

FCC ID: NXIM1BT

Corrected field strength of fundamental wave as reference for conducted emissions:

105,9 dB μ V

Channel 78											
Frequency [MHz]	Restricted Band	Reading Level PK [dB μ V]	Corr. Duty Cycle [dB]	Level AV [dB μ V] *)	Bandwidth [kHz]	Correct. Factor [dB]	Corrected Level PK [dB μ V/m]	Corrected Level AV [dB μ V/m]	Limit PK [dB μ V/m]	Limit AV [dB μ V/m]	Delta [dB]
0,009-0,15					0,2		< 30				
0,15-30					9		< 30				
742,4					100		51,5		85,9		-34,4

Peak-Limit according to FCC Subpart 15.247(c)

In any 100 kHz bandwidth outside the frequency band 2400 – 2483.50 MHz, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limit specified in §15.209(a) (see §15.205(c)).

Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209

MHz	MHz	GHz
25.5 – 25.67	960 – 1240	4.5 – 5.15
37.5 – 38.25	1300 – 1427	5.35 – 5.46
73 – 74.6	1435 – 1626.5	7.25 – 7.75
74.8 – 75.2	1645.5 – 1646.5	8.025 – 8.5
108 – 121.94	1660 – 1710	9.0 – 9.2
123 – 138	1718.8 – 1722.2	9.3 – 9.5
149.9 – 150.05	2200 – 2300	10.6 – 12.7
156.52475 – 156.52525	2310 – 2390	13.25 – 13.4
156.7 – 156.9	2483.5 – 2500	14.47 – 14.5
162.0125 – 167.17	2655 – 2900	15.35 – 16.2
167.72 – 173.2	3260 – 3267	17.7 – 21.4
240 – 285	3332 – 3339	22.01 – 23.12
322 – 335.4	3345.8 – 3358	23.6 – 24.0
399.9 – 410	3600 – 4400	31.2 – 31.8
608 – 614		36.43 – 36.5

The requirements are **FULFILLED**.

Remarks: Only spurious emission which fall not in restricted bands has been measured conducted.

Spurious emissions which fall in restricted band have been measured radiated. Please refer to

„Radiated emissions 9 kHz – 40 GHz“ on page 15-23.

The measurement was performed up to the 10th harmonic (25000MHz).

Bluetooth Specifications: Packet type: DH5

Packet size: 339 Bytes (max.)

FCC ID: NXIM1BT

5.5 Hopping Sequence

Requirement according to FCC Subpart 15.247(a)

The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies.

Remarks: The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF-channels. For details refer to Bluetooth standard.

5.6 Equal Hopping Frequency Use

Requirement according to FCC Subpart 15.247(a)

Each of the transmitter's hopping channels is used equally on average.

Remarks: The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth Standard.

5.7 Receiver Input Bandwidth

Requirement according to FCC Subpart 15.247(a)

The associated receiver(s) complies with the requirement that its input bandwidth matches the bandwidth of the transmitted signal.

Remarks: The receiver bandwidth is equal to the receiver bandwidth in the 79 hopping channel mode, which is 1 MHz.

The receiver bandwidth was verified during Bluetooth RF conformance testing.

FCC ID: NXIM1BT

5.8 Receiver Hopping Capability

Requirement according to FCC Subpart 15.247(a)

The associated receiver has the ability to shift frequencies in synchronisation with the transmitted signals.

Remarks: The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth standard.

mikes

FCC ID: NXIM1BT



5.9 20dB Bandwidth

For test instruments and accessories used see section 6 Part **MB**.

5.9.1 Description of the test location

Test location: AREA4

5.9.2 Photo documentation of the test set-up

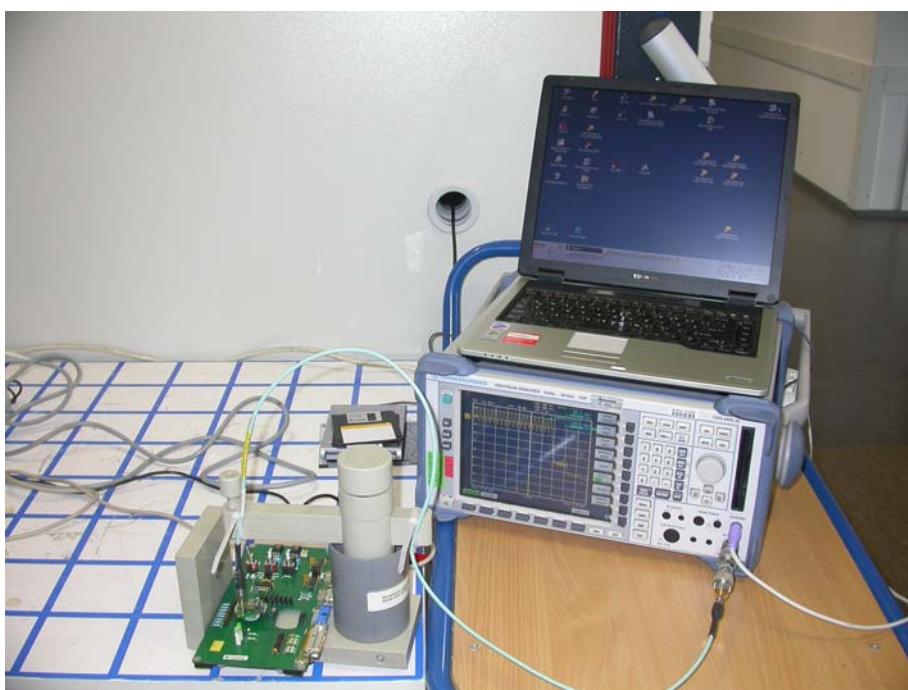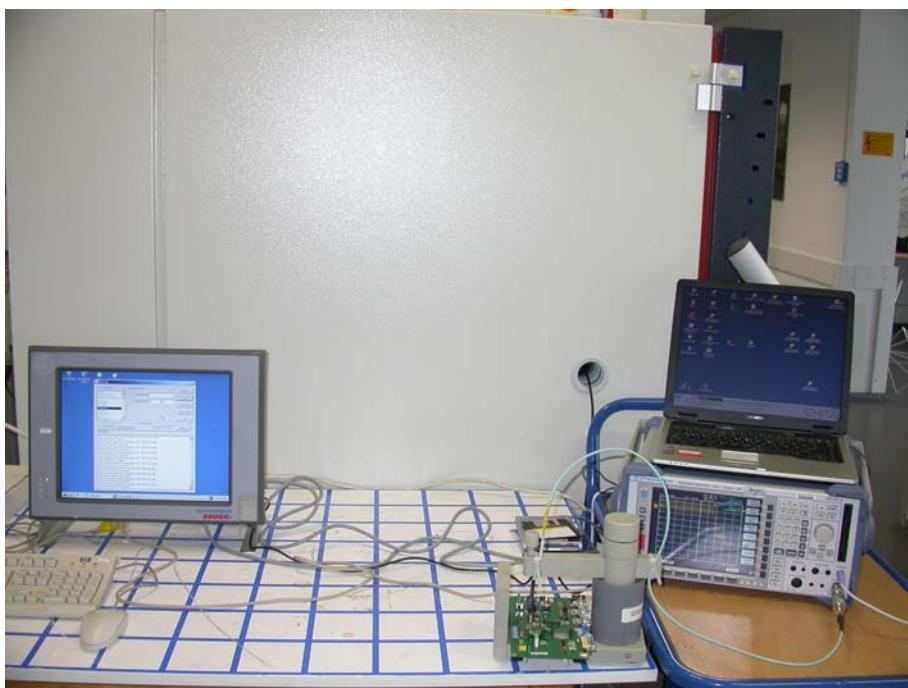

FCC ID: NXIM1BT

5.9.3 Description of Measurement

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio of -20 dB. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or the first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The resolution bandwidth of measuring instrument was set to a value as shown in the Public Notice DA 00-705 (1% of the 20 dB Bandwidth)

5.9.4 Test result

Channel Frequency [MHz]	20 dB Bandwidth [kHz]
2402	870
2441	876
2480	846

Requirement according to FCC Subpart 15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Remarks: For detailed test result please refer to following test protocol.


Bluetooth Specifications: Packet type: DH5

Packet size: 339 Bytes (max.)

FCC ID: NXIM1BT

5.9.5 Test protocol


Channel 0
2402 MHz

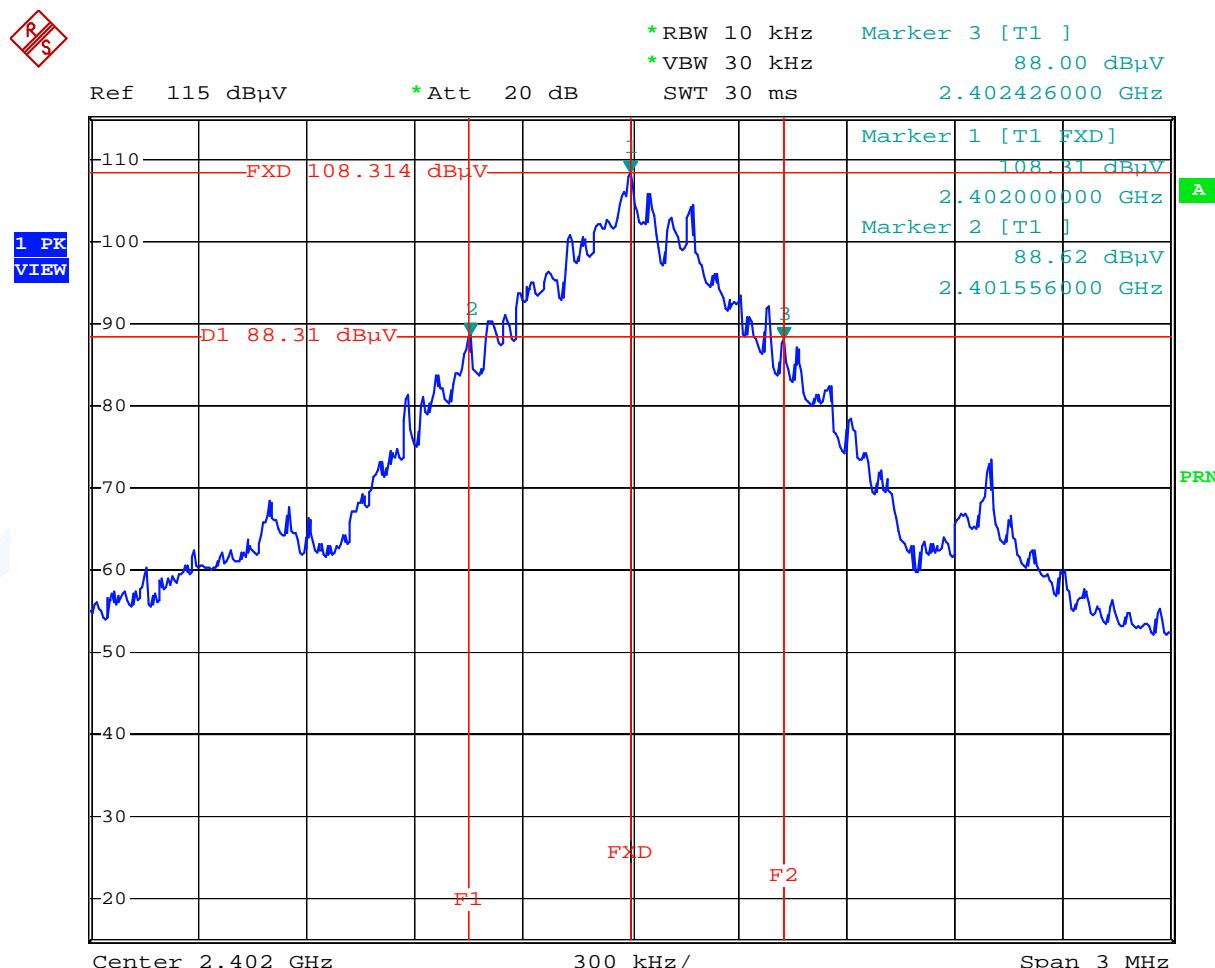

Date: 4.APR.2006 08:53:58

FCC ID: NXIM1BT


Channel 39
2441 MHz

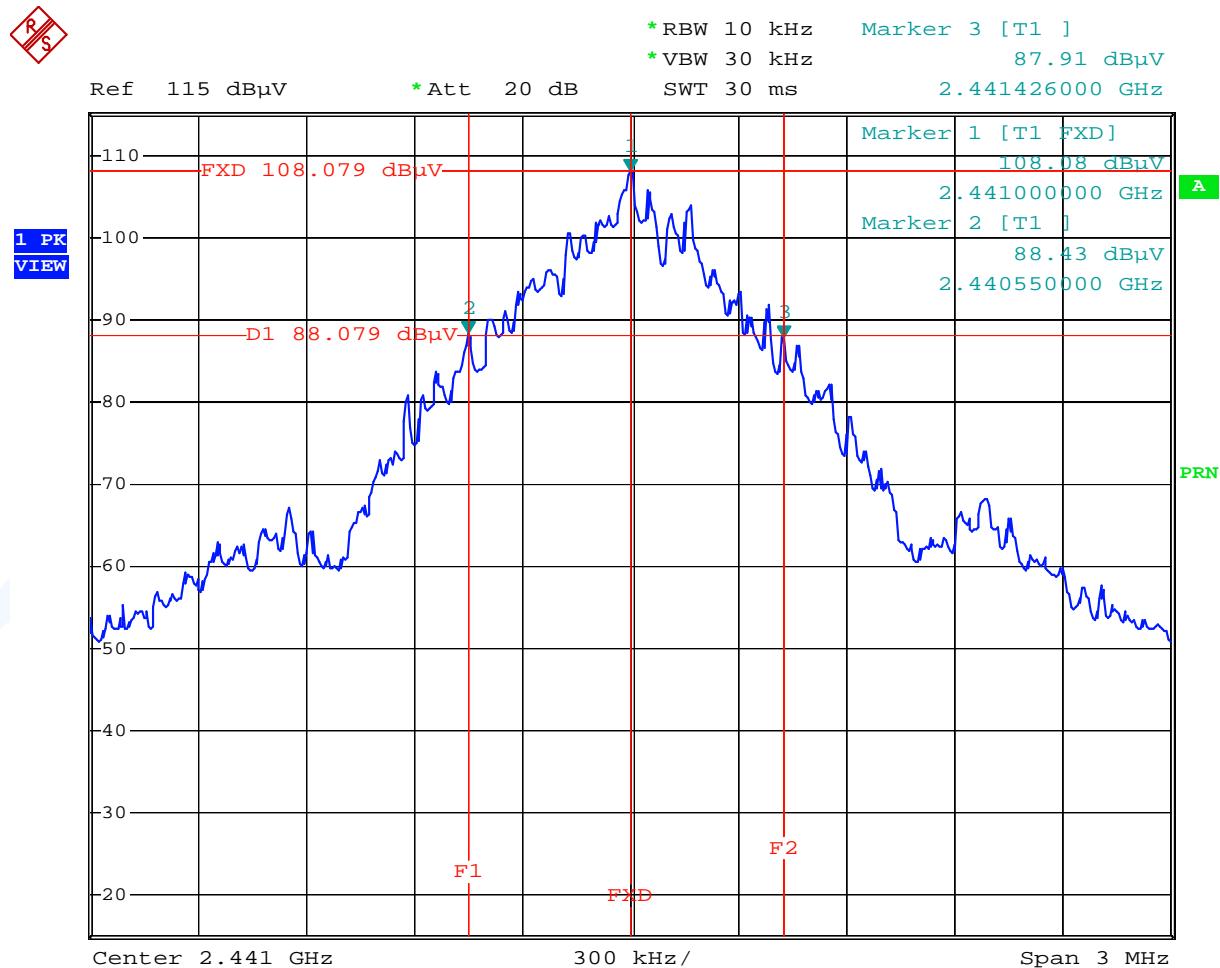

Date: 4.APR.2006 09:01:50

FCC ID: NXIM1BT

Channel 78
2480 MHz

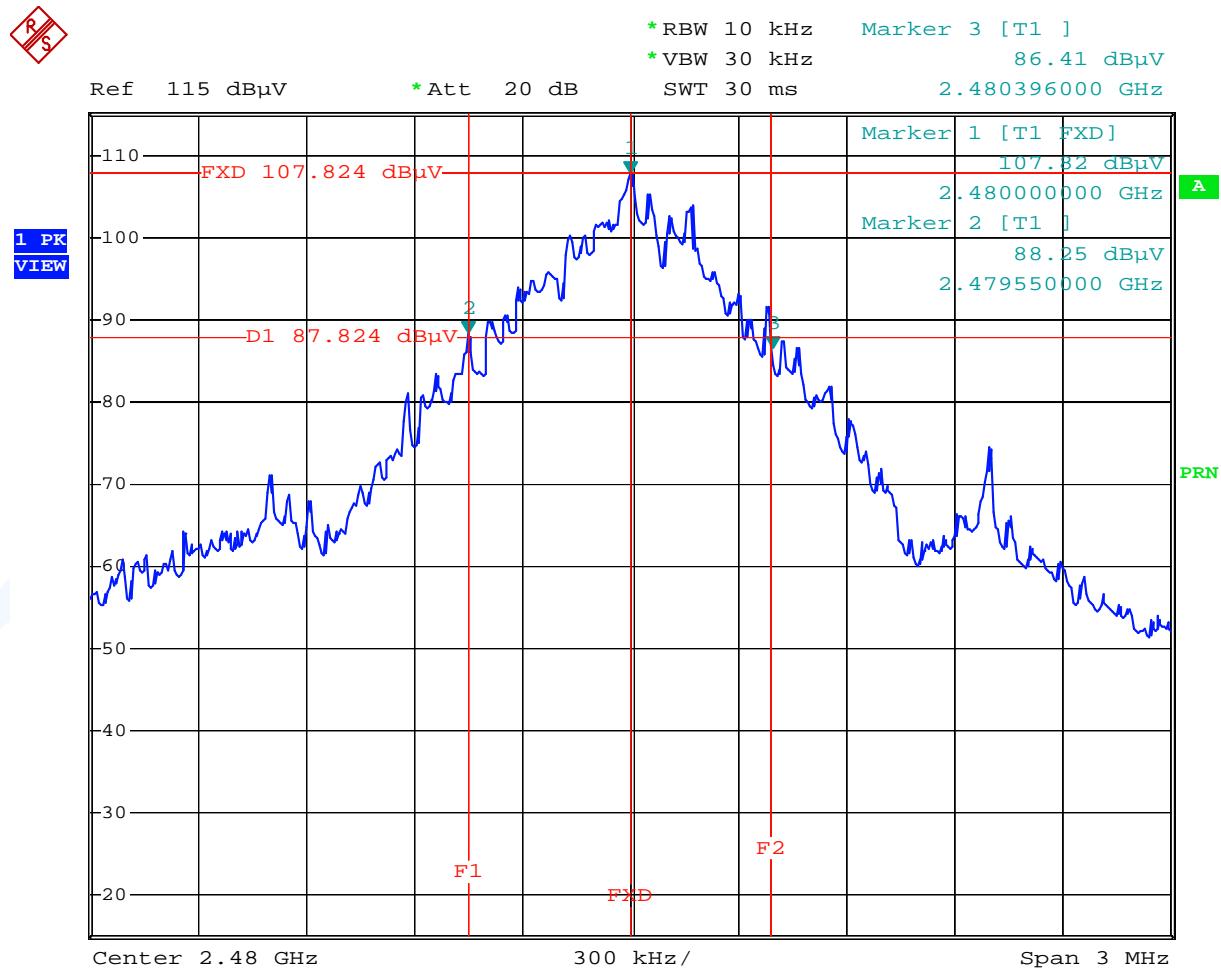

Date: 4.APR.2006 09:06:16

FCC ID: NXIM1BT



5.10 Band edge test

For test instruments and accessories used see section 6 Part **MB**.

5.10.1 Description of the test location

Test location: AREA4

5.10.2 Photo documentation of the test set-up

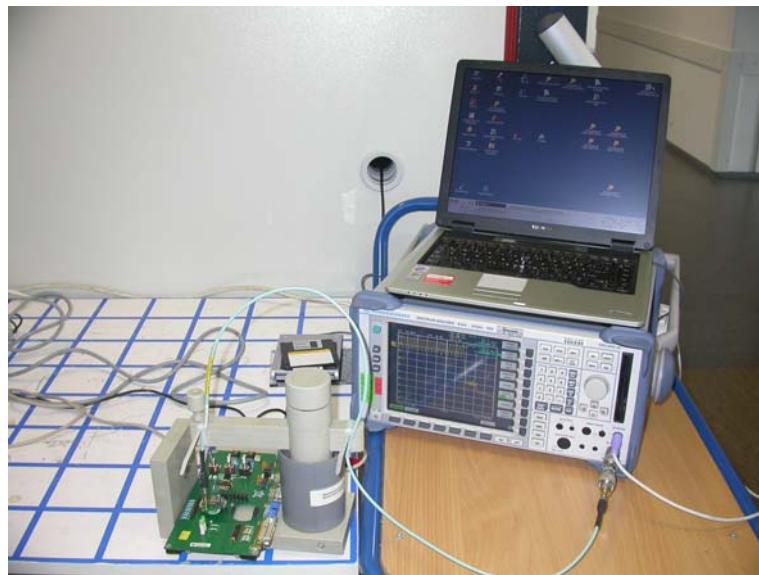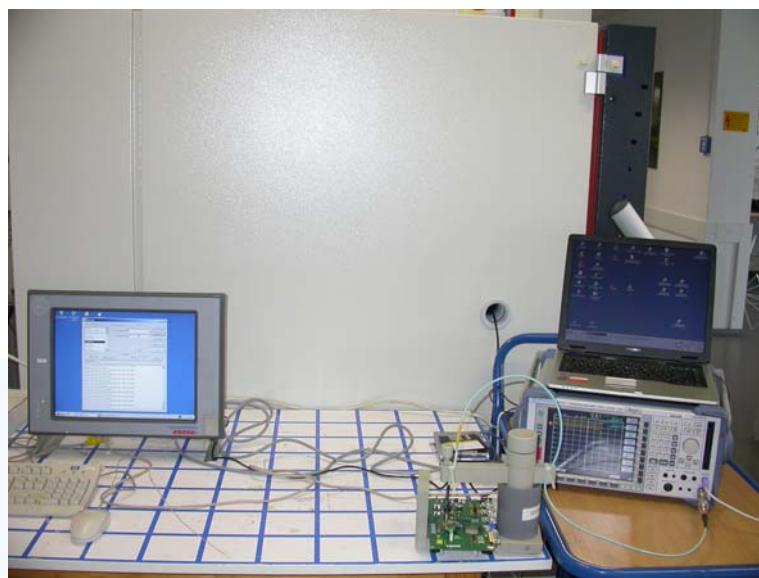

FCC ID: NXIM1BT

5.10.3 Description of Measurement

The EuT was connected to the spectrum analyzer with a suitable attenuator. The span of the spectrum analyzer was set wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation. The highest amplitude appearing on sprectal display was measured and it was set as the reference level for the emission mask. It was allowed the trace to stabilize and after then it was set the emission mask on the reference level to show the compliance with the bandedge requirements.

Further settings on the spectrum analyzer:

RBW: $\geq 1\%$ of the span

VBW: \geq RBW

Sweep: Auto

Detector function: Peak

5.10.4 Test result

Frequency [MHz]	Peak Power Output [dB μ V]	Spurious emission read value [dB μ V]	Result of Band edge [dBc]	Band edge LIMIT [dBc]
< 2400	111,29	59,22	52,07	≥ 20
> 2483,5	110,83	63,24	47,59	≥ 20

Peak-Limit according to FCC Subpart 15.247(c)

In any 100 kHz bandwidth outside the frequency band 2400 – 2483.50 MHz, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limit specified in §15.209(a) (see §15.205(c)).

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

Bluetooth Specifications: Packet type: DH5

Packet size: 339 Bytes (max.)

FCC ID: NXIM1BT

5.10.5 Test protocol


Lower Channel
2402 MHz



Date: 4.APR.2006 09:29:38

FCC ID: NXIM1BT

**Higher Channel
2480 MHz**

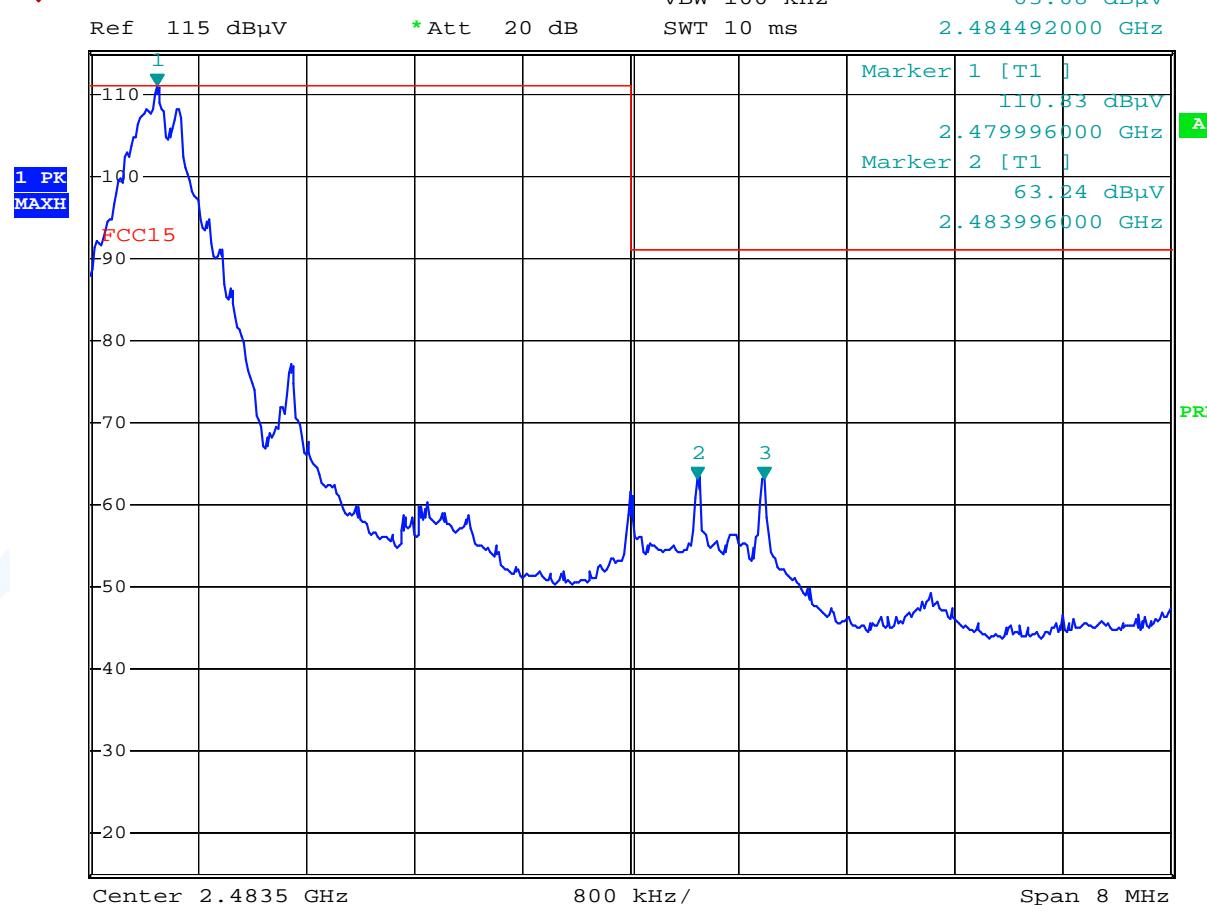

Date: 4.APR.2006 09:26:10

FCC ID: NXIM1BT


Time of occupancy (Dwell Time)

For test instruments and accessories used see section 6 Part DC.

5.12.1 Description of the test location

Test location: AREA4

5.12.2 Photo documentation of the test set-up

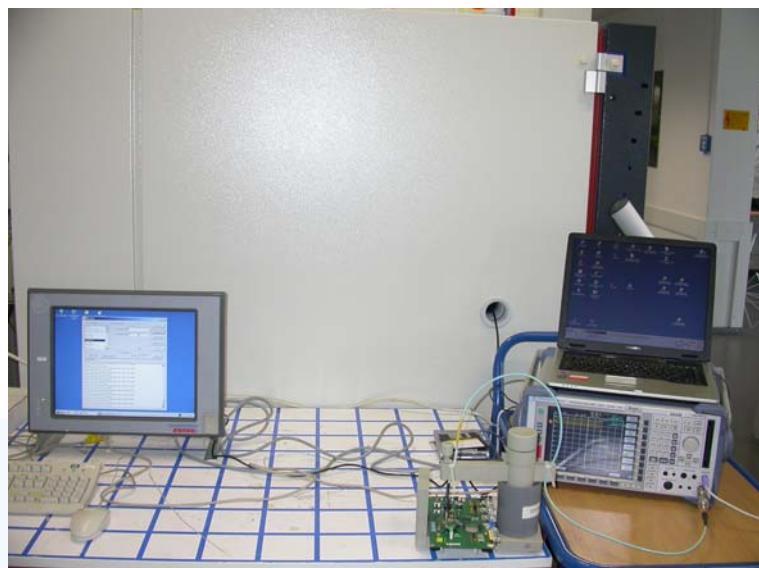

FCC ID: NXIM1BT

5.12.3 Test result

Channel frequency [MHz]	Pulse Time [ms]	Bursts (in 1 second)	Time of occupancy (Dwell time) [ms]	Average time of Occupancy LIMIT [ms]
2441	2,9584	4	373,942	400

Limit according to FCC Subpart 15.247 (1)(iii)

Frequency hopping systems shall be used at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.


Bluetooth Specifications: Packet type: DH5

Packet size: 339 Bytes (max.)

FCC ID: NXIM1BT

Time of occupancy (Dwell time)
FCC Part 15 Subpart 15.247 (1)(iii)

R
S

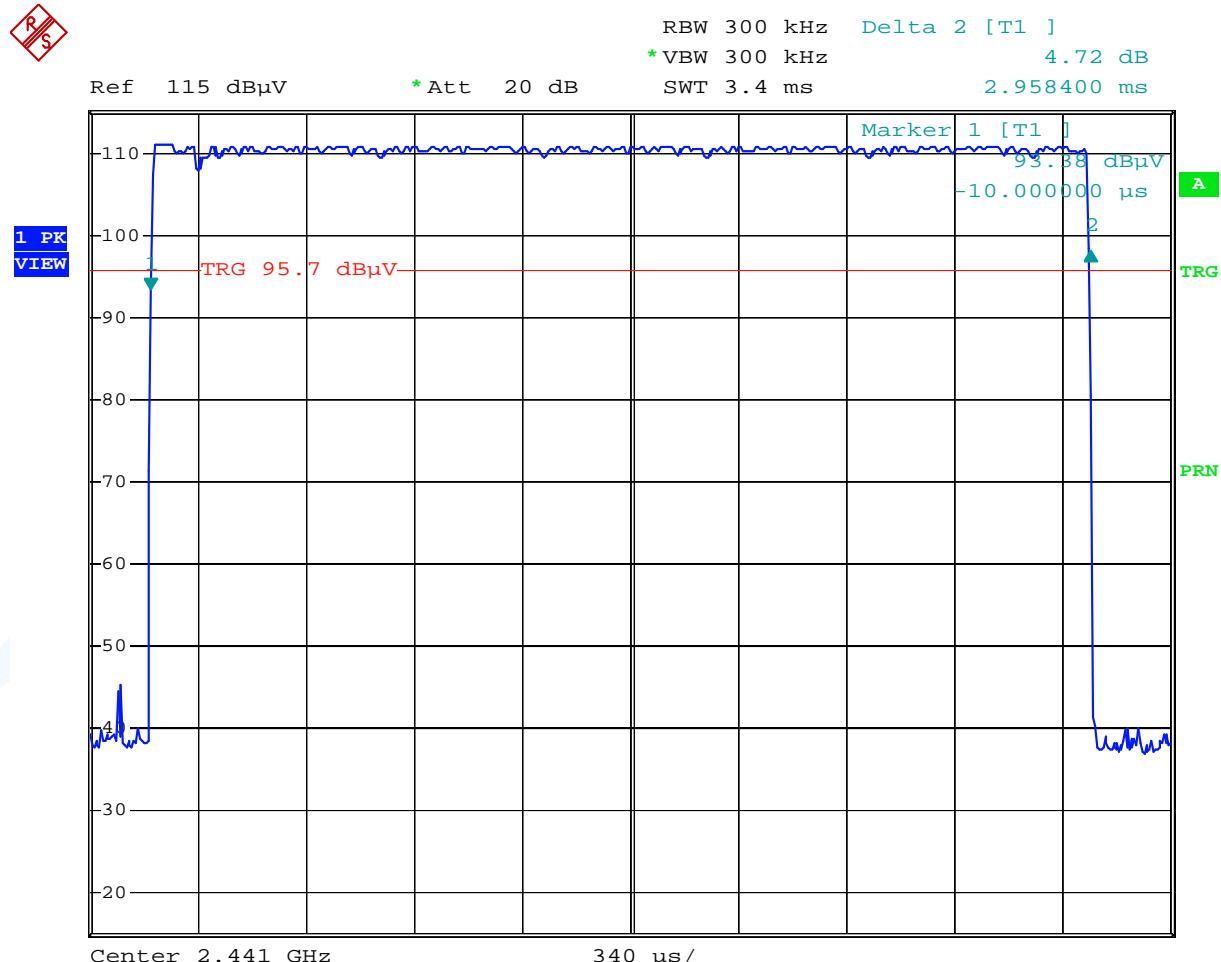


Date: 4.APR.2006 10:02:04

FCC ID: NXIM1BT

Time of occupancy (Dwell time)
FCC Part 15 Subpart 15.247 (1)(iii)

RS

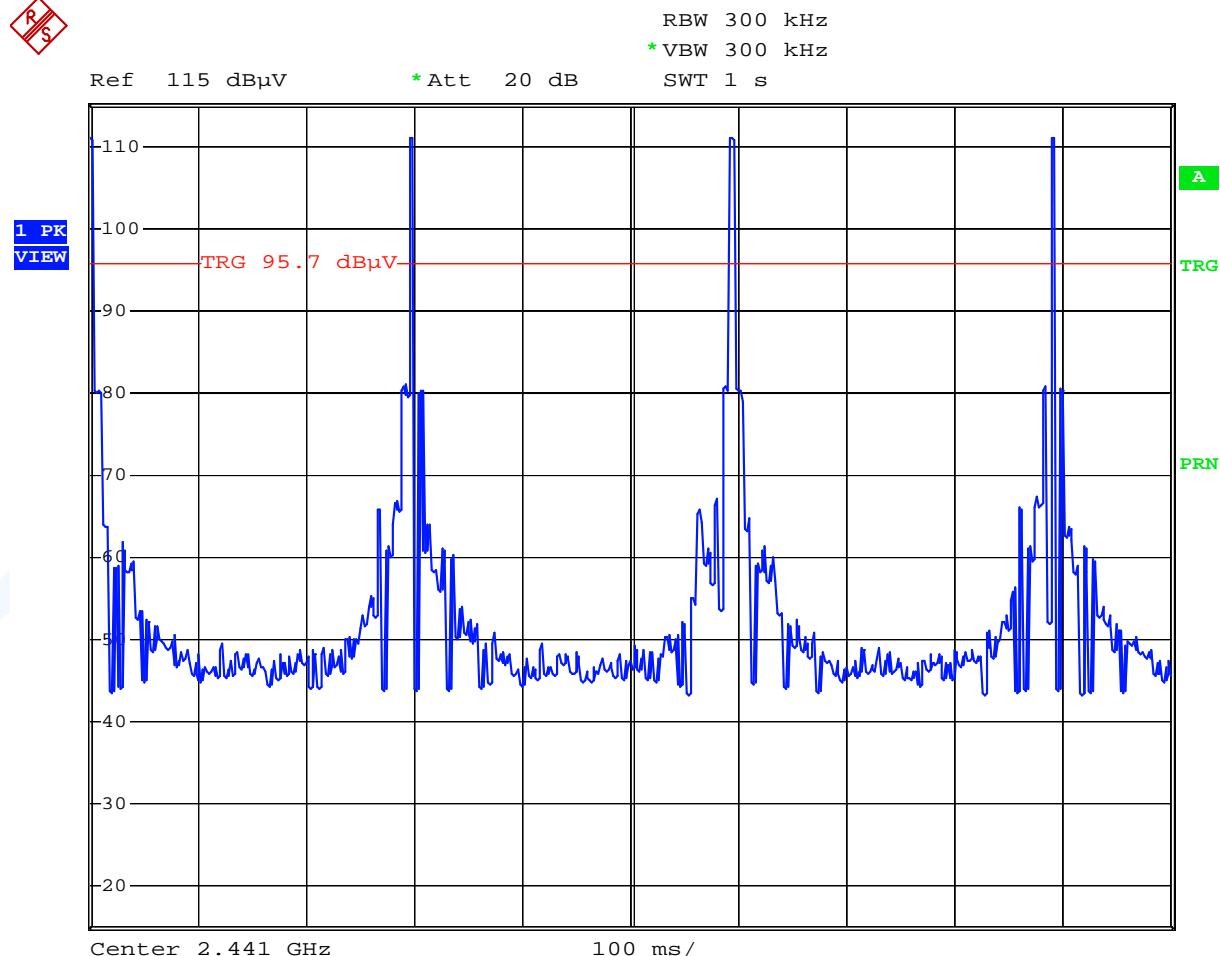

Date: 4.APR.2006 10:04:19

FCC ID: NXIM1BT



5.13 Channel separation test

For test instruments and accessories used see section 6 Part **MB**.

5.13.1 Description of the test location

Test location: AREA4

5.13.2 Photo documentation of the test set-up

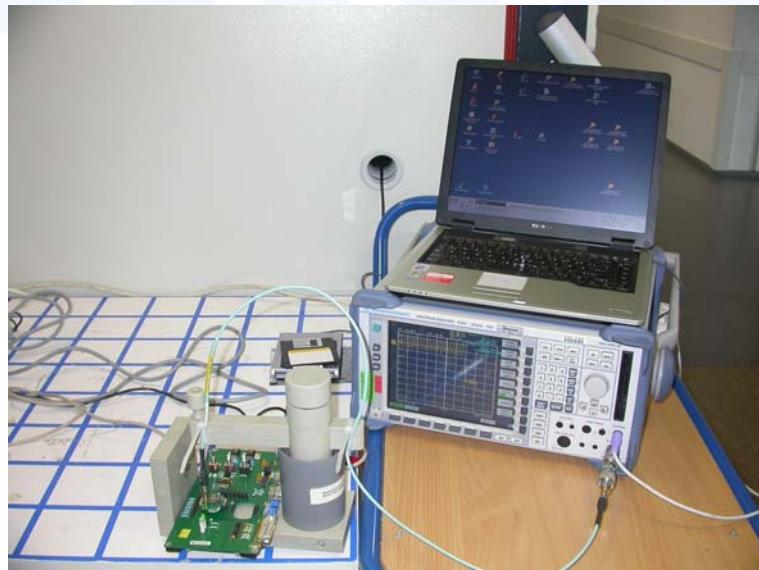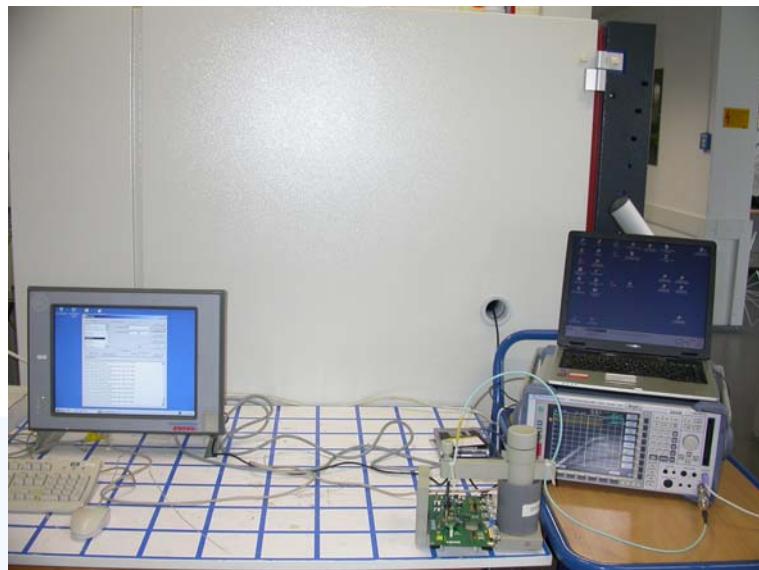

FCC ID: NXIM1BT**5.13.3 Test result**

Channel 0 [MHz]	Channel 1 [MHz]	Separation Value [kHz]	Separation LIMIT [kHz]
2402	2403	1000	≥ 834

Limit according to FCC Subpart 15.247 (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.


Bluetooth Specifications: Packet type: DH5

Packet size: 339 Bytes (max.)

FCC ID: NXIM1BT

Channel separation test
FCC Subpart 15.247 (1)

REFS

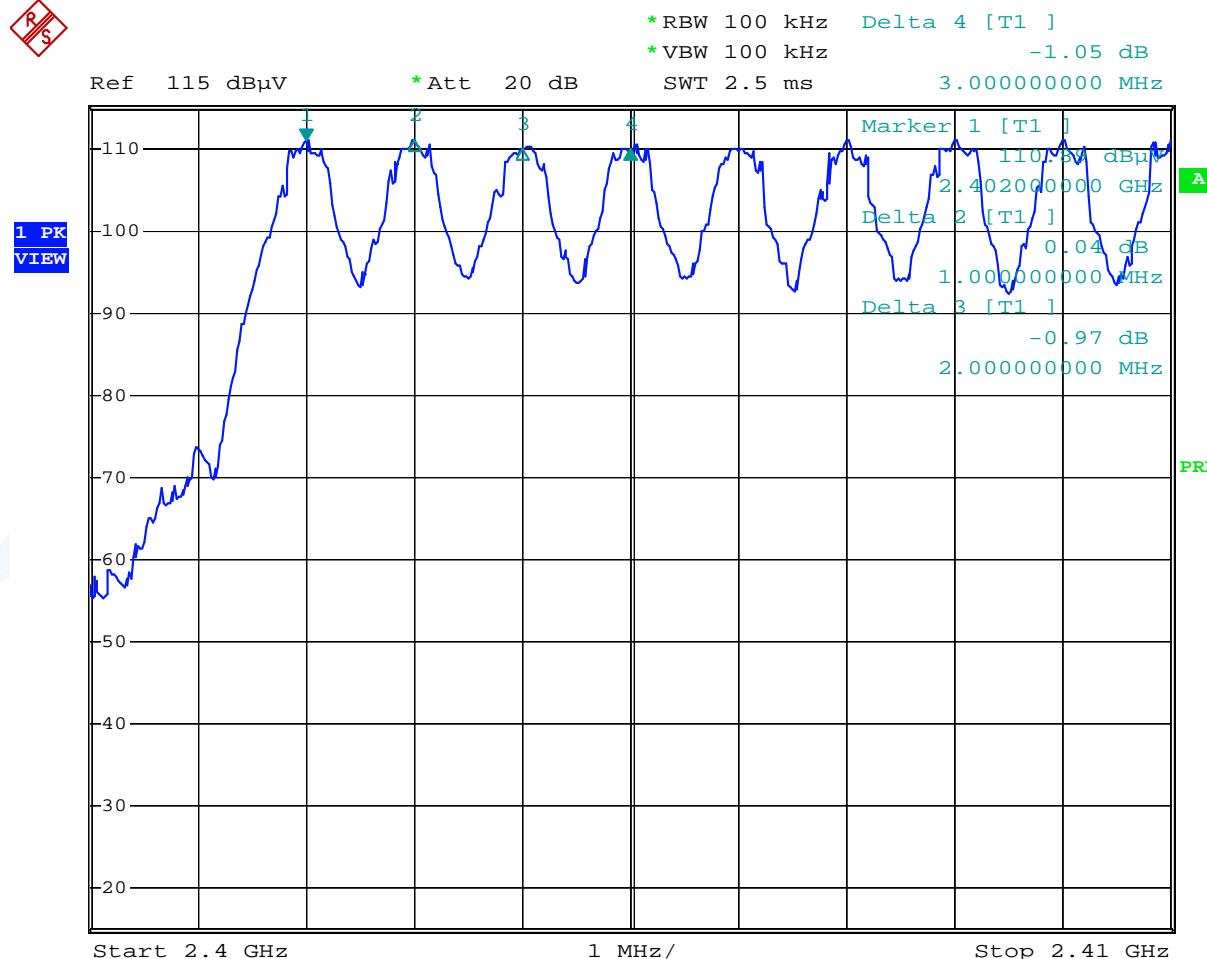

Date: 4.APR.2006 10:17:09

FCC ID: NXIM1BT


5.14 Quantity of Hopping Channel test

For test instruments and accessories used see section 6 Part **MB**.

5.14.1 Description of the test location

Test location: AREA4

5.14.2 Photo documentation of the test set-up

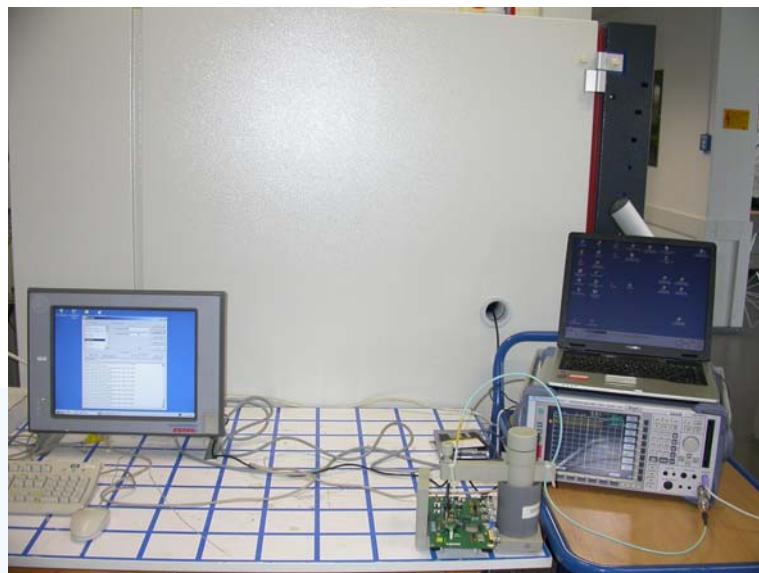

FCC ID: NXIM1BT

5.14.3 Test result

Hopping Channel Frequency range	Quantitiy of hopping Channel value	Quantitiy of hopping Channel MINIMUM LIMIT
2402-2480	79	15

Limit according to FCC Subpart 15.247 (1)(iii)

Frequency range [MHz]	LIMIT (Quantity of Hopping Channel)			
	20dB Bandwidth < 250kHz	20dB Bandwidth > 250kHz	20dB Bandwidth < 1 MHz	20dB Bandwidth > 1MHz
902 - 928	50	25	n.A	n.A
2400 – 2483,5	15	15	15	15
5725 - 5850	n.A	n.A	75	n.A


The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

FCC ID: NXIM1BT

Quantity of hopping channel
FCC Subpart 15.247 (1)(iii)
Channel 0-28


R
S

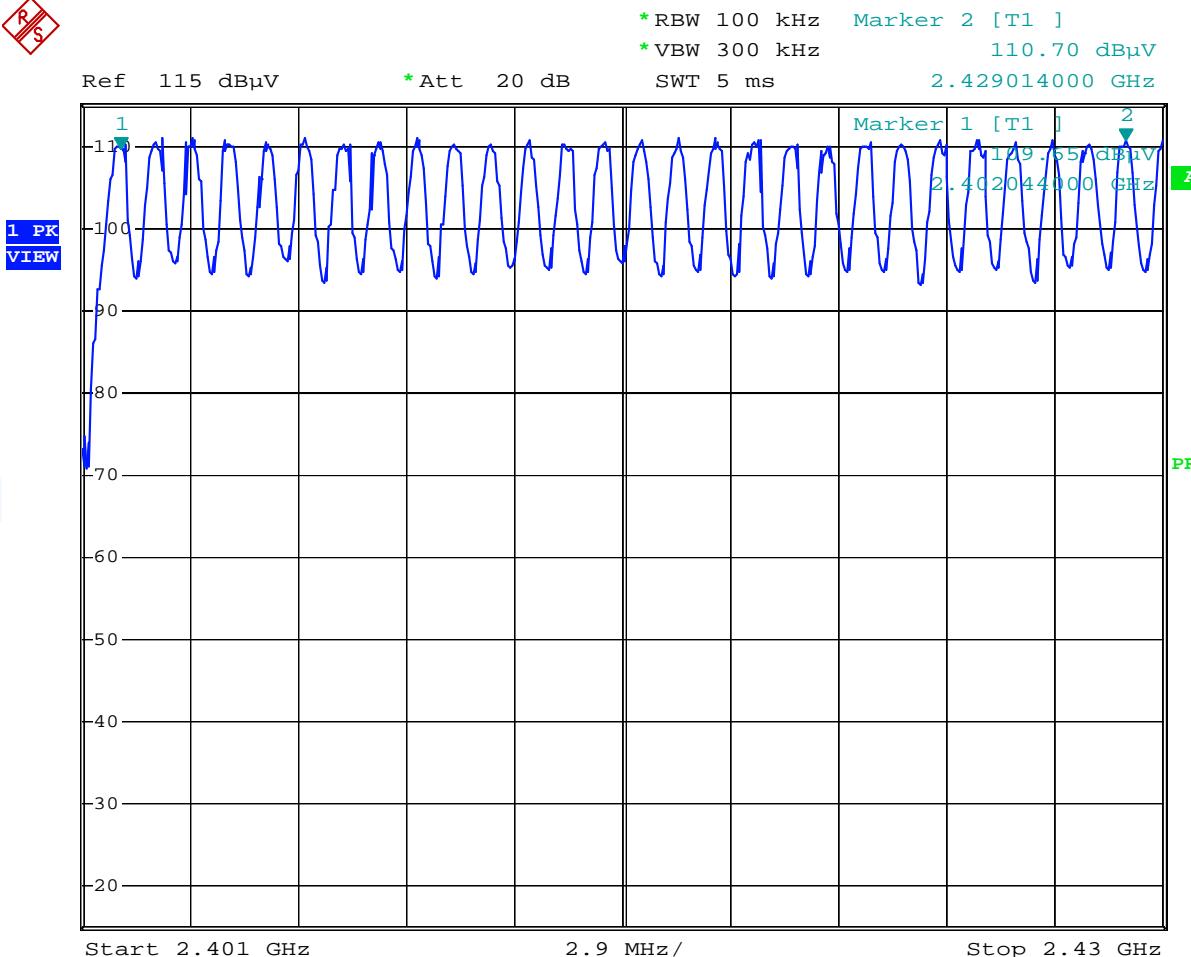

Date: 4.APR.2006 10:21:41

FCC ID: NXIM1BT

Quantity of hopping channel
FCC Subpart 15.247 (1)(iii)
Channel 29-58

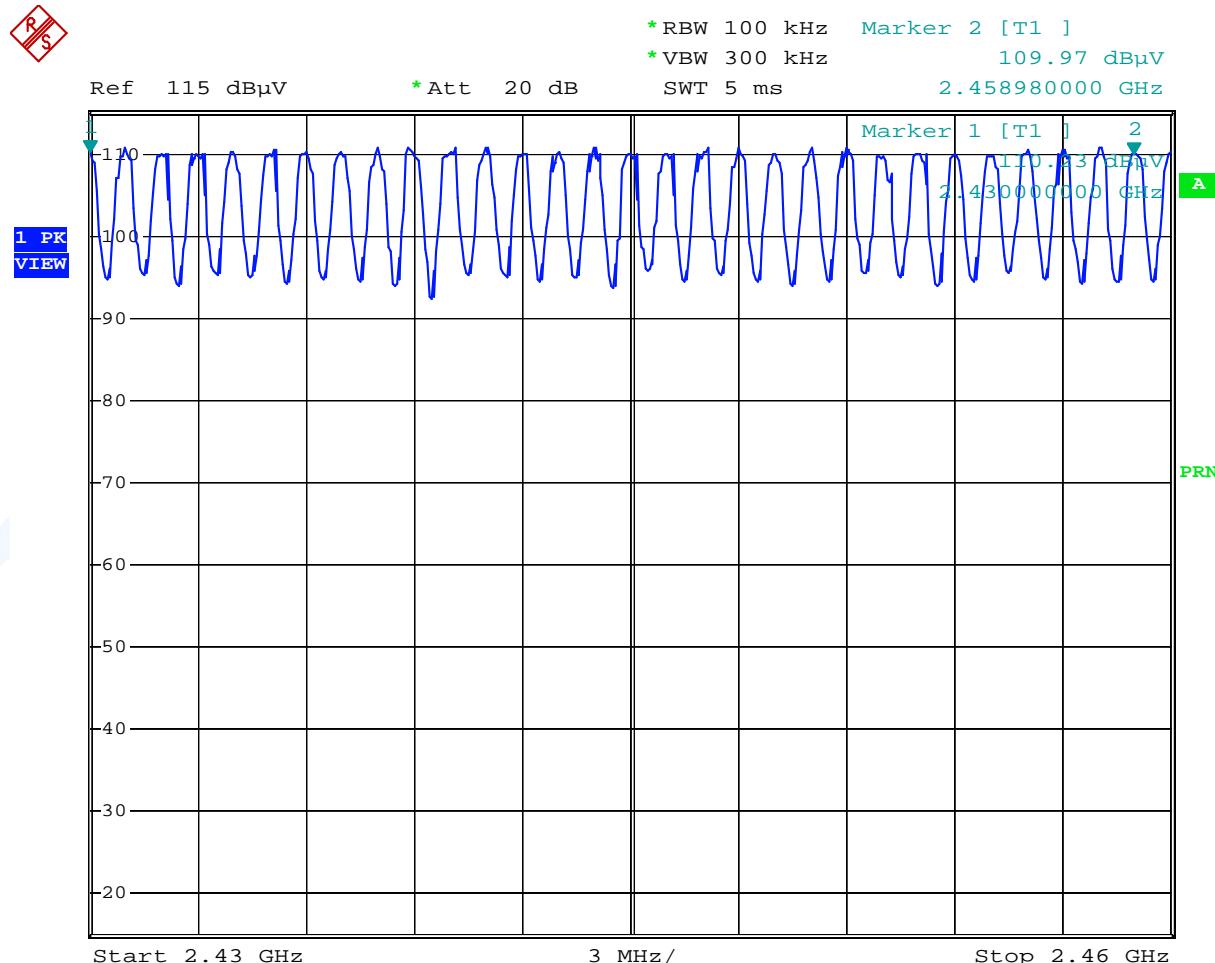


Date: 4.APR.2006 10:24:18

FCC ID: NXIM1BT

Quantity of hopping channel
FCC Subpart 15.247 (1)(iii)
Channel 59-78

RS

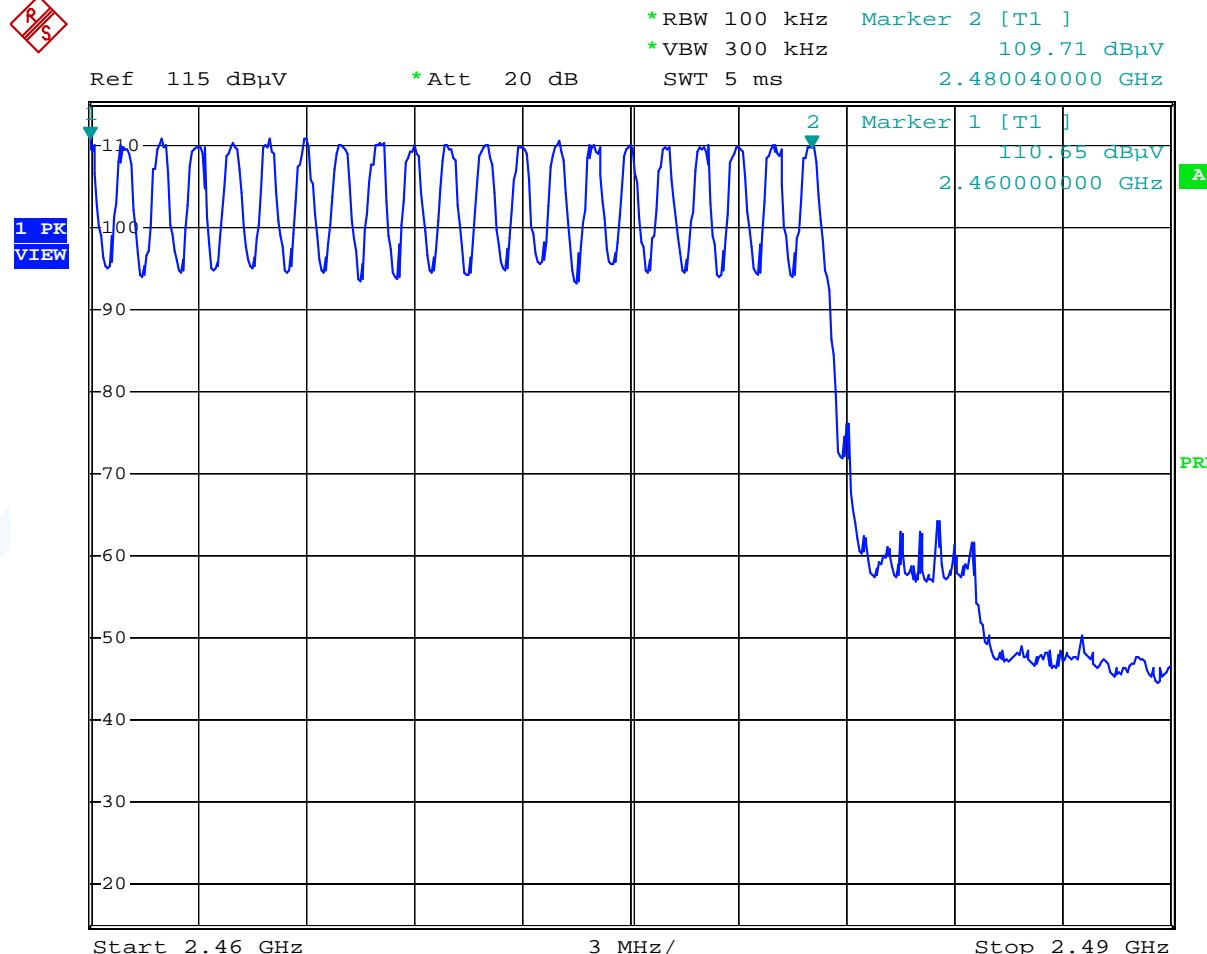

Date: 4.APR.2006 10:26:13

FCC ID: NXIM1BT

5.15 Antenna application

5.15.1 Antenna requirements

The EuT's antenna is met the requirement of FCC part 15C section 15.203 and 15.204.

FCC part 15C section 15.247 requirement:

Systems operating in the 2400-2483,5 MHz band that are used exclusively for fixed, point to point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dbi.

5.15.2 Result

The EuT's antenna used a patch antenna and integrated on an own PCB. The antenna's gain is 0 dBi and therefore the requirement are met.

FCC ID: NXIM1BT

Receiver radiated emissions 9 kHz - 40 GHz

For test instruments and accessories used see section 6 Part **SER1**, **SER2** and **SER3**.

5.17.1 Description of the test location

Test location: OATS1
Anechoic Chamber A2

Test distance: 3 metres



5.17.2 Photo documentation of the test set-up



FCC ID: NXIM1BT



FCC ID: NXIM1BT

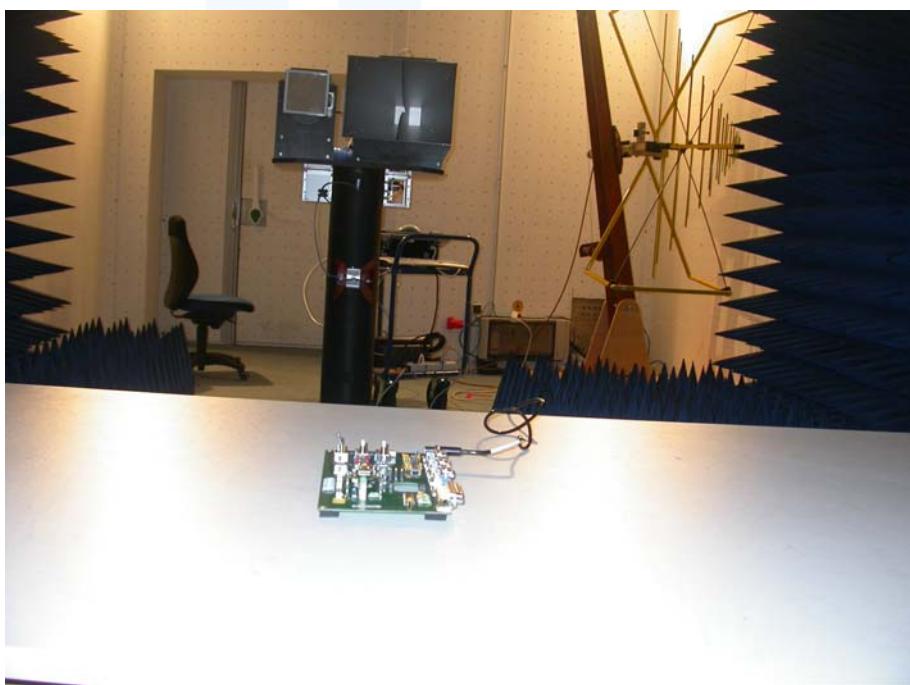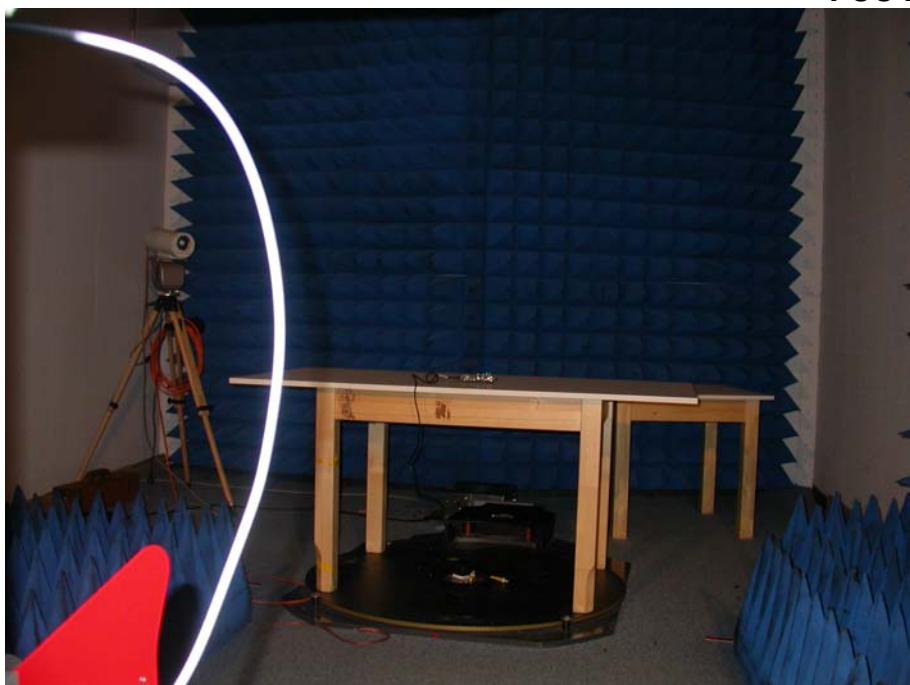

FCC ID: NXIM1BT

5.17.3 Description of Measurement

The spurious emissions from the EuT will be measured on an open area test site in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with an EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209 (d) [2].

The final level, expressed in $\text{dB}\mu\text{V}/\text{m}$, is arrived at by taking the reading from the EMI receiver (Level $\text{dB}\mu\text{V}$) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit.

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

Radiated spurious emissions from the EuT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003. The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization's and the EuT are rotated 360 degrees.

The final level, expressed in $\text{dB}\mu\text{V}/\text{m}$, is arrived by taking the reading from the EMI receiver (Level $\text{dB}\mu\text{V}$) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The radiated emissions from the EuT are measured in the frequency range of 1 GHz to maximum frequency as specified in section 15.33, using a tuned receiver (Spectrum Analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3m horizontally from the EuT.

Measurement are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz and for any spurious emission or modulation product that falls in Restricted Band, as defined in Section 15.205, set the resolution and video bandwidth to 1 MHz.

All tests are performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration procedure the highest emission relative the limit and therefore shall be used for final testing. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions. When the EuT is larger than the beamwidth of the measuring antenna, the measurement antenna will be moved over the surfaces for the four sides or the test distance will be reduced to demonstrate that emissions were at maximum at the limit distance.

FCC ID: NXIM1BT

Analyzer Settings (EMI receiver) for spurious emissions which fall not in Restricted Band:

- Detector: Max hold
- RBW: 100 kHz for $f \geq 1\text{GHz}$, 120 kHz for $f \leq 1\text{GHz}$
- VBW: \geq RBW
- Sweep Time: Coupled
- Detecter function: Peak

Analyzer Settings (EMI receiver) for spurious emissions which fall in Restricted Band:

- Detector: Max hold
- RBW: 1 MHz for $f \geq 1\text{GHz}$, 120 kHz for $f \leq 1\text{GHz}$
- VBW: \geq RBW
- Sweep Time: Coupled
- Detecter function: Peak for $f \geq 1\text{GHz}$, Quasi Peak for $f \leq 1\text{GHz}$

5.17.4 Test result

Testresult in detail: (<1GHz)

Channel 0												
Frequency [MHz]	Reading Level QP [dB μ V]	Reading Level AV [dB μ V]	Reading Level PK [dB μ V]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dB μ V/m]	Corrected Level AV [dB μ V/m]	[Corrected Level PK [dB μ V/m]	Limit [dB μ V/m]			Delta [dB]
									QP	AV	PK	
0,009-0,15				0,2		< 30						
0,15-30				9		< 30						
30-1000				120		< 30						

Channel 39												
Frequency [MHz]	Reading Level QP [dB μ V]	Reading Level AV [dB μ V]	Reading Level PK [dB μ V]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dB μ V/m]	Corrected Level AV [dB μ V/m]	[Corrected Level PK [dB μ V/m]	Limit [dB μ V/m]			Delta [dB]
									QP	AV	PK	
0,009-0,15				0,2		< 30						
0,15-30				9		< 30						
30-1000				120		< 30						
30-1000				120		< 30						

Channel 78												
Frequency [MHz]	Reading Level QP [dB μ V]	Reading Level AV [dB μ V]	Reading Level PK [dB μ V]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dB μ V/m]	Corrected Level AV [dB μ V/m]	[Corrected Level PK [dB μ V/m]	Limit [dB μ V/m]			Delta [dB]
									QP	AV	PK	
0,009-0,15				0,2		< 30						
0,15-30				9		< 30						
30-1000				120		< 30						

FCC ID: NXIM1BT
Test result >1GHz

Channel 0									
Frequency [MHz]	Reading Level PK [dB μ V]	Reading Level AV [dB μ V] *)	Band-width [kHz]	Correct. Factor [dB]	Corrected Level PK [dB μ V/m]	Corrected Level AV [dB μ V/m]	Limit PK [dB μ V/m]	Limit AV [dB μ V/m]	Delta [dB]
1198	54,3	--	1000	-14,2	40,1	--	74,0	54,0	-33,9
1552	47,1	--	1000	-14,2	32,9	--	74,0	54,0	-41,1
2398	54,4	--	1000	-10,0	44,4	--	74,0	54,0	-29,60

Channel 39									
Frequency [MHz]	Reading Level PK [dB μ V]	Reading Level AV [dB μ V] *)	Band-width [kHz]	Correct. Factor [dB]	Corrected Level PK [dB μ V/m]	Corrected Level AV [dB μ V/m]	Limit PK [dB μ V/m]	Limit AV [dB μ V/m]	Delta [dB]
1216	56,7	--	1000	-14,3	42,4	--	74,0	54,0	-31,6
1636	61,4	--	1000	-13,8	47,6	--	74,0	54,0	-26,4
2440	56,8	--	1000	-10,1	46,7	--	74,0	54,0	-27,3

Channel 78									
Frequency [MHz]	Reading Level PK [dB μ V]	Reading Level AV [dB μ V] *)	Band-width [kHz]	Correct. Factor [dB]	Corrected Level PK [dB μ V/m]	Corrected Level AV [dB μ V/m]	Limit PK [dB μ V/m]	Limit AV [dB μ V/m]	Delta [dB]
1234	53,6	--	1000	-14,4	39,2	--	74,0	54,0	-34,8
1552	46,9	--	1000	-14,2	32,7	--	74,0	54,0	-41,3
2476	53,4	--	1000	-10,1	43,2	--	74,0	54,0	-30,8

Limit according to FCC Subpart 15.109(a)

Frequency of emission [MHz]	Field strength Limits [μ V/m]	Field strength Limits [dB μ V/m]
0,009-0,490	2400/F(kHz)	
0,490-1,705	24000/F(kHz)	
1,705-30	30	
30-88	100	40
88-216	150	44
216-960	200	46
Above 960	500	54

 The requirements are **FULFILLED**.

Remarks: During the test, the Eut was set into continuous receiving mode.

FCC ID: NXIM1BT

The measurement was performed up to the 5th harmonic (13000 MHz).

mikes

FCC ID: NXIM1BT

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used, in addition to the test accessories, are calibrated and verified regularly.

The calibration intervals and the calibration history will be given out on request.

Test ID	Model / Type	Kind of Equipment	Manufacturer	Equipment No.
CPC 3	FSP 30 Sucoflex SMA-1000-SMA	Spectrum Analyzer RF Cable	Rohde & Schwarz München novotronik Signalverarbeitung	02-02/11-05-001 02-02/50-05-085
DC	FSP 30 Sucoflex SMA-1000-SMA	Spectrum Analyzer RF Cable	Rohde & Schwarz München novotronik Signalverarbeitung	02-02/11-05-001 02-02/50-05-085
MB	FSP 30 Sucoflex SMA-1000-SMA	Spectrum Analyzer RF Cable	Rohde & Schwarz München novotronik Signalverarbeitung	02-02/11-05-001 02-02/50-05-085
SEC 1-3	FSP 30 Sucoflex SMA-1000-SMA	Spectrum Analyzer RF Cable	Rohde & Schwarz München novotronik Signalverarbeitung	02-02/11-05-001 02-02/50-05-085
SER 1	FMZB 1516 ESHS 30 S10162-B / +11N-50-10-5 / + KK-EF393-21N-16	Antenna 9kHz - 30 MHz EMI Test Receiver RF Cable 33m RF Cable 20m	Schwarzbeck Mess-Elektronik Rohde & Schwarz München Huber + Suhner Huber + Suhner	01-02/24-01-018 02-02/03-05-002 02-02/50-05-031 02-02/50-05-033
SER 2	ESVS 30 VULB 9168 S10162-B / +11N-50-10-5 / + KK-EF393-21N-16 NW-2000-NB	EMI Test Receiver Trilog-Broadband Antenna RF Cable 33m RF Cable 20m RF Cable	Rohde & Schwarz München Schwarzbeck Mess-Elektronik Huber + Suhner Huber + Suhner Huber + Suhner	02-02/03-05-006 02-02/24-05-005 02-02/50-05-031 02-02/50-05-033 02-02/50-05-113
SER 3	AFS4-01000400-10-10P-4 AMF-4F-04001200-15-10P AFS5-12001800-18-10P-6 3117 Sucoflex N-1600-SMA Sucoflex N-2000-SMA	RF Amplifier 1-4GHz RF Amplifier 4-12GHz RF Amplifier 12-18GHz Horn Antenna 1-18 GHz RF Cable RF Cable	PARZICH GMBH PARZICH GMBH PARZICH GMBH EMCO Elektronik GmbH novotronik Signalverarbeitung novotronik Signalverarbeitung	02-02/17-05-003 02-02/17-05-004 02-02/17-05-005 02-02/24-05-009 02-02/50-05-073 02-02/50-05-075