

Temperature Stability Test Report:

Altiostar Networks

PCS Band iRM4451 RRH

FCC ID: NXP-44510200

SC_TR_202_A

Prepared for:

Altiostar Inc.
100 Ames Pond Drive
Tewksbury
MA 01876
USA

Contents

1	Revision History	3
2	Purpose.....	3
3	Reference Documents	3
4	Test configuration.....	4
4.1	Test sample and Operating mode	4
4.2	Support equipment.....	4
5	Test Results.....	5
6	Test equipment and location	6

Tables

Table 1: Equipment under test	4
Table 2: Support Equipment	4
Table 3: Test results	5
Table 4: Test Equipment.....	6

Figures

Figure 1: Test Configuration.....	4
-----------------------------------	---

1 Revision History

Revision	Originator	Date	Comment
A	C Blackham	14 July 2016	1 st release

2 Purpose

This document details the temperature stability testing performed on the Altiostar PCS Band iRM4451 RRH (Remote Radio Head), model number iRM44510200, designed to transmit in the 1930-1990 MHz band.

3 Reference Documents

[Ref 1]	47CFR2	Title 47 Code of Federal Regulations Part 2: frequency allocations and radio treaty matters; general rules and regulations
[Ref 2]	47 CRF24	Title 47 Code of Federal Regulations Part 24: Personal Communications Services
[Ref 3]	TIA-603-E	Land Mobile FM or PM – Communications Equipment – Measurement and Performance Standards

4 Test configuration

The iRM4451 was configured to transmit a 10 MHz wide E-TM3.1 waveform at 1960.0 MHz and the EVM of the signal was measured using the Analyser.

In order for the Analyser to be able to accurately measure the EVM, it was locked to a reference signal from the iRM4451 unit. The transmit Frequency of the iRM4451 is locked to GPS in typical install and 0.016 ppm was added to the EVM error as that represents the worst case baseband card frequency stability.

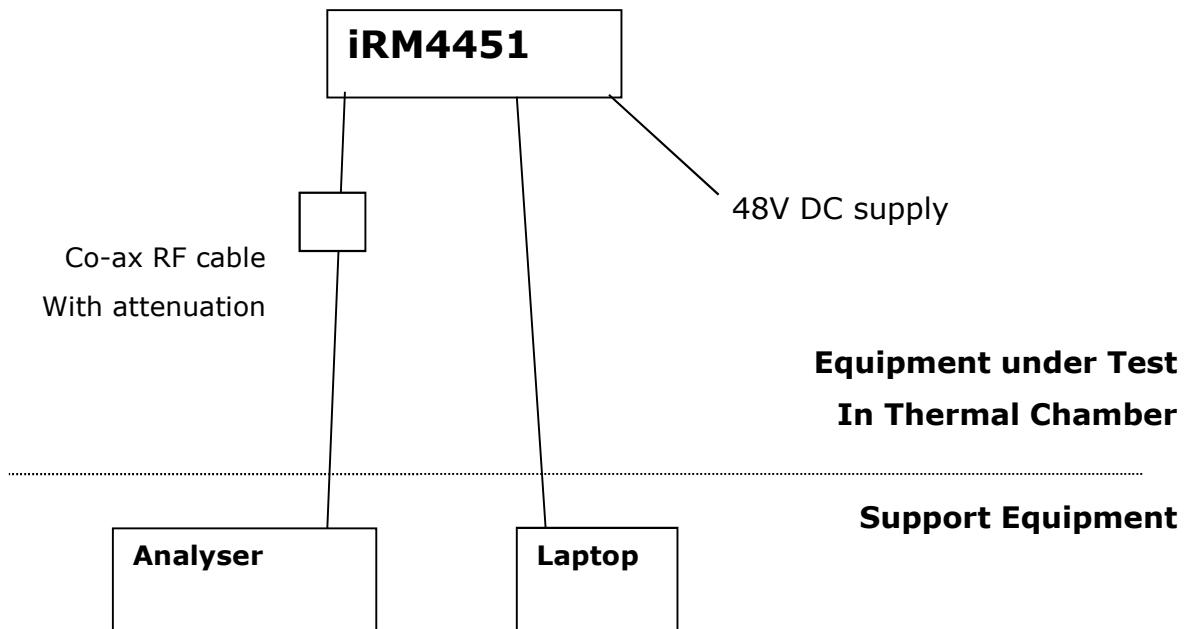


Figure 1: Test Configuration

4.1 Test sample and Operating mode

The equipment under test (EUT) was:

Manufacturer	Model Number	Serial Number
Altostar	iRM44510200	PLW01160008

Table 1: Equipment under test

4.2 Support equipment

The support equipment was:

Description	Manufacturer	Name	Serial Number
Laptop	HP	250	Dvt-mobile altostar

Table 2: Support Equipment

5 Test Results

Temp (°C)	System Freq Error (ppm)
-40.0	0.023
-30.0	0.025
-20.0	0.023
-10.0	0.025
0.0	0.022
10.0	0.022
20.0	0.020
30.0	0.020
40.0	0.021
50.0	0.022
60.0	0.021

Table 3: Test results

Note : Varying DC input voltage by $\pm 15\%$ did not have any effect on the DC voltage output from the DC-DC power supply nor on voltage rails within the product and the frequency error at 20°C is unchanged for variations in supply voltage.

6 Test equipment and location

Testing was performed at:

Altiostar Networks UK Ltd
No 1 the Heights
Brooklands
Weybridge
KT13 0NY

Description	Manufacturer	Model	Serial Number	Calibration certificate
Chamber	CTS	C-70/600	137108	Internally verified by Altiostar
PXA Signal Analyser	Agilent	N9030A	MY54200197	1-7032980367-1 Due 05/07/17
Attenuator	Fairview Microwave	SA18N100-30	None	N/A for frequency measurements
RF cable	Times Microwave	SLU18-SMNM-01.5m	3155	

Table 4: Test Equipment