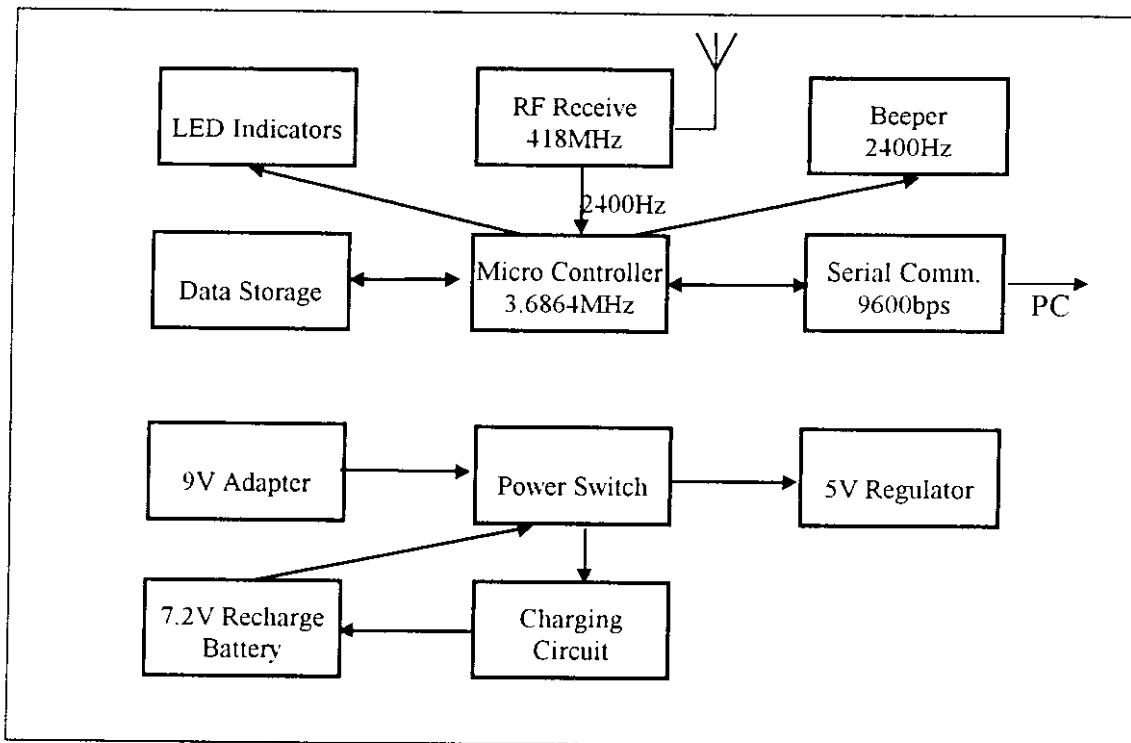


EXHIBIT B

BLOCK DIAGRAM / EXPOSITORY STATEMENT

B

Block diagram**Battery operation**

The receiver has a rechargeable battery pack for backed up operation. When the main power is on the battery is charged to full. When the main power is off, the receiver will operate on the battery for at least 24 hours. The battery-backed operation has the following features:

- The main power LED is off.
- The operation LED flashes with a shorter on time to indicate that receiver works on battery.
- All other LEDs are off to minimize power consumption
- There is no communication with the host computer. The receiver assumes the host computer lost power as well.
- All received data are stored internally in the receiver's memory. The data will be loaded to the host computer after the main power and serial communication are recovered.

Installation

- Connect the receiver to a host PC with the serial cable