

## Test Report

### 47 CFR FCC Part 15 subpart C Intentional Radiators


**Report reference no.** ..... : 28111932\_007

**FCC Designation Number** ..... : IT0008

**FCC Test Firm Registration #** ..... : 804595

Tested by (name + signature).....:

Alessandro Zappa \ Tester



Approved by (name + signature).....:

Giovanni Molteni \ TM



Date of issue ..... : October, 19<sup>th</sup> 2018

Total number of pages ..... : 81 Pages

**Testing Laboratory** ..... : TÜV Rheinland Italia S.r.l.

Address ..... : Via Mattei 3 - 20010 - Pogliano Milanese (MI) – Italy

**Applicant's name** ..... : Siemens AG Industry Sector

Address ..... : Postfach 48 48 90026 NÜRNBERG - GERMANY

**Test item description** ..... : Wireless Reader

Trade Mark ..... : SIEMENS

Manufacturer ..... : Siemens AG Industry Sector

Model/Type reference ..... : RF615R

FCC id ..... : NXW-RF615R

Ratings ..... : 20-30 V  
Supplied by an external power supply (100-240V 50/60 Hz)

**Sample** ..... :

Samples received on ..... : 21/Aug/2018

TUV reference samples ..... : 180514 (sampled by the customer)

Samples tested n. ..... : 1

**Testing** ..... :

Start Date: ..... : 07/Sept/2018

End Date: ..... : 14/Sept/2018

*The results in this Test Report are exclusively referred to the tested samples. Without the written authorization of TÜV Rheinland Italia S.r.l., this document can be reproduced only integrally*

## SUMMARY

1. Reference Standards	3
2. Summary of testing	4
3. General product information	6
4. General Chipset information	7
5. General Antennas information	8
6. Photographic documentation	9
7. Equipment Used During Test	10
8. Input/Output Ports	10
9. Power Interface	11
10. EUT Operation Modes	11
11. EUT Configuration Modes	12
12. Test Conditions and Results	13
12.1 TEST: Antenna requirements	13
12.2 TEST: AC Power Conducted Emission	14
12.3 TEST: Radiated Emission	19
12.4 TEST: 20dB Bandwidth	54
12.5 TEST: RF power output	58
12.6 TEST: Out-of-band emissions	62
12.7 TEST: 100 kHz Bandwidth of Frequency Band Edges	67
12.8 TEST: Number of Hopping frequencies	72
12.9 TEST: Carrier frequency separation	74
12.10 TEST: Average time of occupancy	78
12.11 TEST: RF Exposure Requirements	80

<b>1. Reference Standards</b>	
<b>Standard</b>	<b>Description</b>
FCC Part 15 (Subpart C)	§15.247 Operation within the bands 902-928 MHz, 2400-2483,5 MHz, and 5725-5850 MHz.
FCC Part 15 (Subpart C)	§15.207 Conducted Limits
FCC Part 15 (Subpart C)	§15.209 Radiated emission limits; general requirements
FCC Part 15 (Subpart C)	§15.203 Antenna Requirement
ANSI C63.4:2014	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10:2013	American National Standard for Testing Unlicensed Wireless Devices

2. Summary of testing		
§ 15.203	Antenna Requirements	PASS
§ 15.247 (b)(4)(i)		
§ 15.207 (a)	Power Line Conducted Emission	PASS
§ 15.209 (a) (f)	Radiated Emission	PASS
§ 15.247 (d)	Out-of-band emissions	PASS
§ 15.247 (d)	100 kHz Bandwidth of Frequency Band Edges	PASS
§ 15.247 (a)	Frequency Hopping Spread Spectrum Specifications	
§ 15.247(a)	20 dB Bandwidth	PASS
§ 15.247(a)(1)	Carrier frequency (Hopping Channel) Separation	PASS
§ 15.247(a)(1)(iii)	Number of Hopping Channels Used	PASS
§ 15.247(a)(1)(iii)	Time occupancy (Dwell Time) of Each Ch. within a 0,4 x Nch (sec) Period	PASS
§ 15.247(a)(2)	6dB Minimum Bandwidth	N.A. <sup>1</sup>
§ 15.247(b)	Maximum Peak Output Power	
§ 15.247(b) (1)	Peak Output Power, radiated (EIRP)	PASS
§ 15.247(b) (3)	RF power output, radiated (EIRP)	N.A. <sup>1</sup>
§ 15.247(b) (4)	Antenna gain	
§ 15.247(c)	Operation with directional antenna gains greater than 6 dBi	N.A.
§ 15.247 (e)	Power Spectral Density	N.A. <sup>1</sup>
§ 15.247 (f)	Hybrid systems	N.A.
§ 15.247 (g)	FHSS Transmission characteristics	PASS
§ 15.247 (h)	Recognition of occupied channel and multiple transmission system	N.A
§ 15.247(i) (§ 47CFR 1.1307(b)(1))	RF humane exposure	PASS

<b>Note 1</b>	Not applicable for DSS equipment
---------------	----------------------------------

**Possible test case verdicts:**

- test case does not apply to the test object ....: N/A
- test object does meet the requirement .....: PASS
- test object does not meet the requirement....: FAIL

**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.  
"(see Enclosure #)" refers to additional information appended to the report.

"(see appended table)" refers to a table appended to the report.


Throughout this report a comma is used as the decimal separator.

### 3. General product information

#### SIMATIC RF615R

RF615R reader is suitable for applications in production logistics and distribution. It is characterized by a very compact design - with reduced transmit power - an internal antenna and a POE (Power over Ethernet) power supply.

It is integrated for distribution via Ethernet with the XML protocol or OPC UA. PROFINET is available for integration in production logistics. It is equipped with an integrated antenna and has a connector for an external antenna.

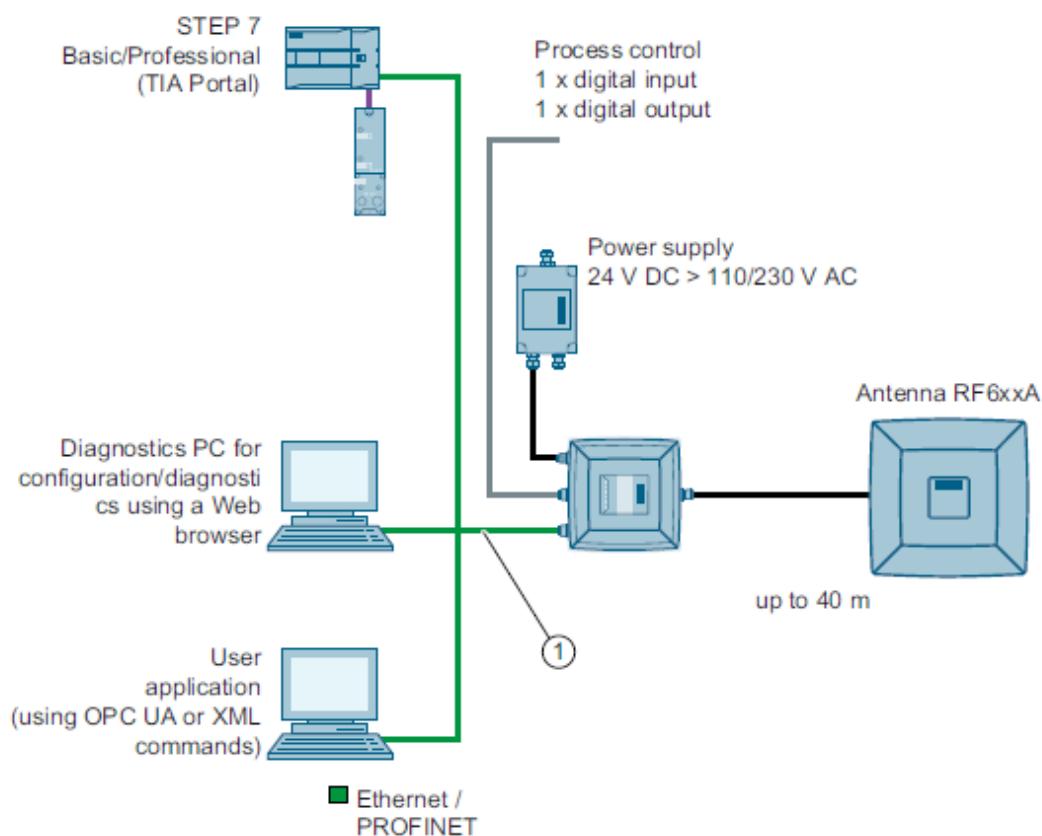

4. General Chipset information							
<b>Type of equipment</b>	Radio module						
<b>Operating frequency</b>	902 ÷ 928 MHz						
<b>Equipment Class</b>	DSS						
<b>Max radiated power</b>	127,55 dB $\mu$ V/m (QP level at 3m. distance)						
<b>Modulation</b>	GFSK						
<b>Channel Spacing</b>	500kHz						
<b>Channel bandwidth</b>	75kHz						
<b>Number of channels</b>	50						
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	<b>902.750</b>	2	903.250	3	903.750	4	904.250
5	904.750	6	905.250	7	905.750	8	906.250
9	906.750	10	907.250	11	907.750	12	908.250
13	908.750	14	909.250	15	909.750	16	910.250
17	910.750	18	911.250	19	911.750	20	912.250
21	912.750	22	913.250	23	913.750	24	914.250
25	914.750	26	<b>915.250</b>	27	915.750	28	916.250
29	916.750	30	917.250	31	917.750	32	918.250
33	918.750	34	919.250	35	919.750	36	920.250
37	920.750	38	921.250	39	921.750	40	922.250
41	922.750	42	923.250	43	923.750	44	924.250
45	924.750	46	925.250	47	925.750	48	926.250
49	926.750	50	<b>927.250</b>				

**5. General Antennas information**

Internal Antenna  
antenna gain in the frequency band 902 to 928  
MHz: 0dBi

External Antenna  
RF650A model:  
antenna Gain in the frequency band 902 to 928 MHz:  
+3.5dBi

**6. Photographic documentation**

7. Equipment Used During Test				
Use*	Product Type	Manufacturer	Model	Comments
EUT	Wireless Reader	Siemens AG Industry Sector	RF615R	---
AE	PC	Lenovo	T430	Used to set RF module
Note:				

\* Use :

EUT - Equipment Under Test,  
AE - Auxiliary/Associated Equipment, or  
SIM - Simulator (Not Subjected to Test)

No other Auxiliary/Associated Equipment was connected/installed on the EUT

8. Input/Output Ports				
CONNECTIONS				
Port		Description	Connection	Dimensions/length
1	Enclosure	Non-conductive surface	Closed by pressure	---
2	AC Power Port	AC	External power supply 100-240V 50/60Hz	<1m
3	DC Power Port	DC	--- 20-30 V Supplied by an external power supply	<3m
4	LAN	WN	Industrial Ethernet, M12	---
5	Analogue/digital data ports	I/O	RS 422 Data line	>3m
*Note: AC = AC Power Port DC = DC Power Port N/E = Non-Electrical I/O = Signal Input or Output Port (Not Involved in Process Control) WN = Wired Network				

<b>9. Power Interface</b>						
<b>Mode #</b>	<b>Voltage (V)</b>	<b>Current (A)</b>	<b>Power (W)</b>	<b>Frequency (DC/AC-Hz)</b>	<b>Phases (#)</b>	<b>Comments</b>
Rated	120V	---	---	AC-60Hz	1	---

<b>10. EUT Operation Modes</b>	
<b>Operation mode</b>	<b>Description</b>
#1	Continuous Modulated RF Transmission (at selected channel) External Antenna RF650A selected Power setting during tests: +25dBm
#2	Continuous Modulated RF Transmission (at selected channel) Internal Antenna selected Power setting during tests: +24dBm
#3	Continuous Modulated RF Transmission (at selected channel) External Antenna RF650A selected Power setting during tests: +25dBm Conducted test on antenna connector
#4	Equipment in transmission/reception mode (continuous reading to associated TAG) Radiated test

**11. EUT Configuration Modes**

Mode #	Description
#1	EUT configured to transmit on external antenna model RF650A.
#2	EUT configured to transmit on internal antenna.

**12. Test Conditions and Results**

<b>12.1 TEST: Antenna requirements</b>		<b>PASS</b>
Parameters required prior to the test	Laboratory Ambient Temperature (°C)	15 to 35 °C
	Relative Humidity (%)	30 to 60 %
Parameters recorded during the test	Laboratory Ambient Temperature (°C)	21°C
	Relative Humidity (%)	56%
	Air pressure (hPa)	1020
—	Power supply and Frequency	Application Point
Fully configured sample tested at the power line frequency	120V ~ 60Hz	AC Mains
Equipment mode:	Operation mode	----
FCC Standard	§15.203 § 15.247 (B)(4)(I)	

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.


**Antenna specifications**

Nº of authorized antenna types	2 (external antennas)
Antenna type	model RF650A (+3.5dBi)
Maximum total gain	+3.5dBi
External power amplifiers	Not present


12.2 TEST: AC Power Conducted Emission			PASS
Parameters required prior to the test	Laboratory Ambient Temperature (°C)	15 to 35 °C	
	Relative Humidity (%)	30 to 60 %	
Parameters recorded during the test	Laboratory Ambient Temperature (°C)	21°C	
	Relative Humidity (%)	56%	
	Air pressure (hPa)	1020	
—	Power supply and Frequency	Application Point	
Fully configured sample tested at the power line frequency	120V ~ 60Hz	AC Mains	
Equipment mode: #2	Operation mode	#4	
FCC Standard	§15.207		
Frequency (MHz)	Quasi-peak (dB $\mu$ V)	Average (dB $\mu$ V)	Result
0,15-0,5	66 to 56	56 to 46	PASS
0,5-5	56	46	PASS
5-30	60	50	PASS

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.


Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

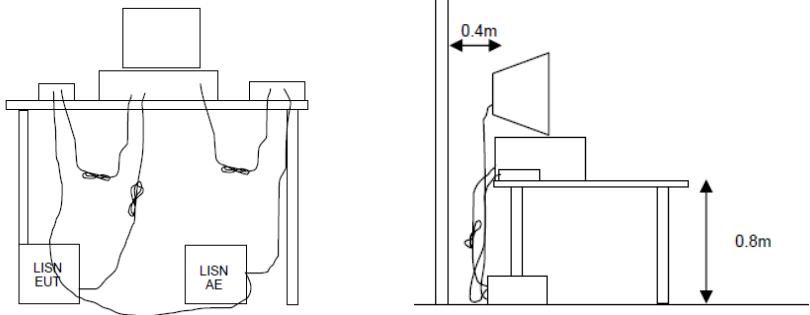Further information to test setup	
-----------------------------------	--

Test Equipment Used					
Description	Manufacturer	Model	TUV Identifier	Calibration date	Calibration due
EMI Test Receiver	R&S	ESR3	87020864	11/2017	11/2018
LISN	R&S	ENV216	87020993	01/2018	01/2020

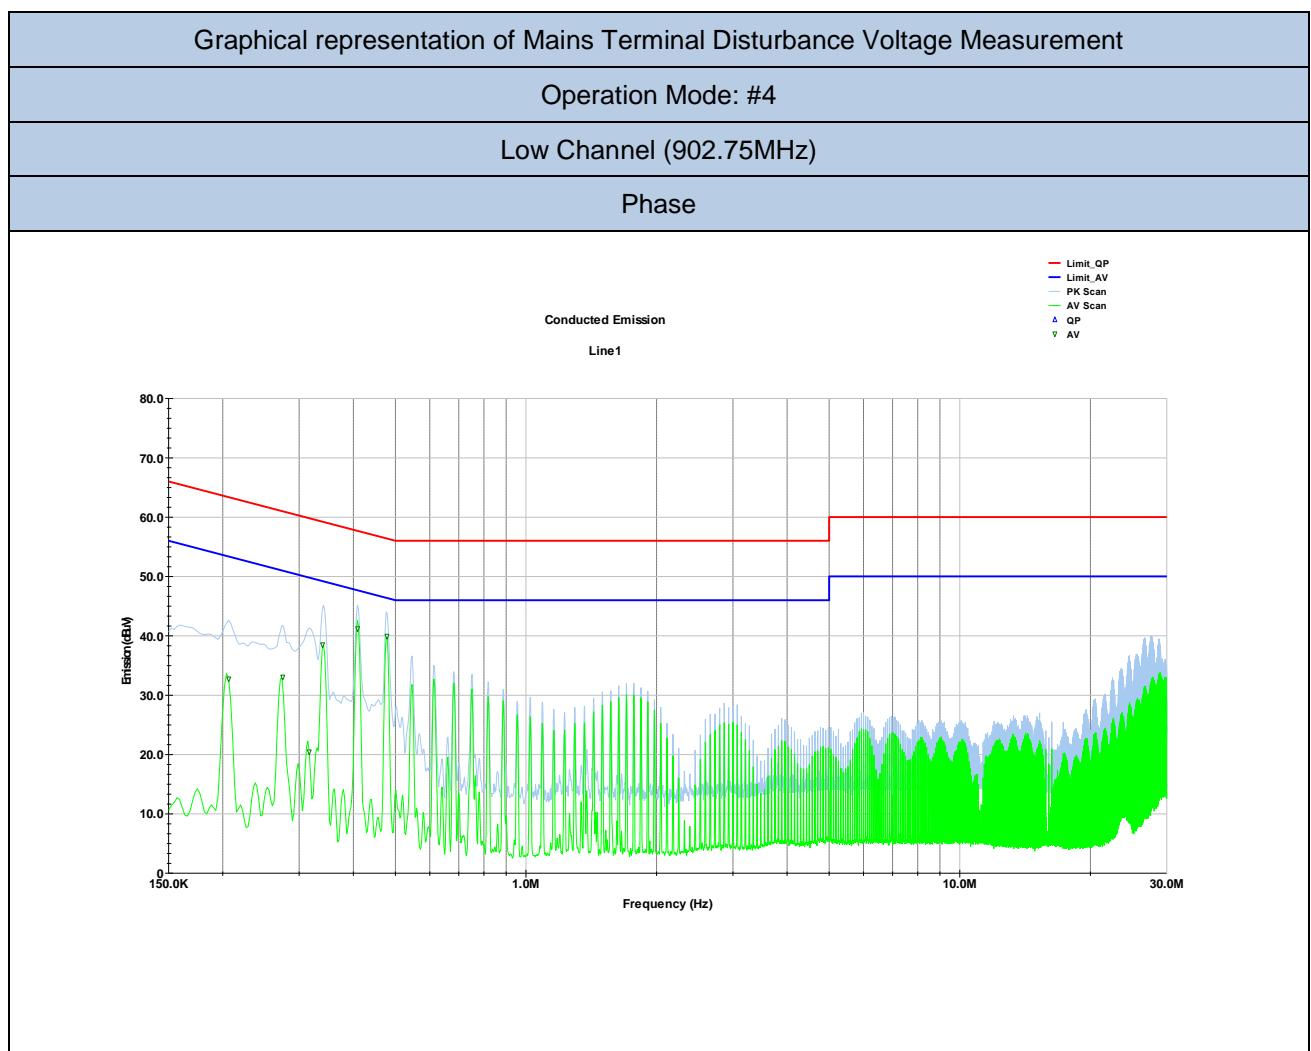

Final Measurement - Table representation of Mains Terminal Disturbance Voltage Measurement									
Operation Mode: #4									
Low Channel (902.75MHz)									
Phase									
<b>Test Results</b>									
Tested Port	Line	Frequency (MHz)	Value (dB $\mu$ V)	Quasi-Peak		Average Value			Factor total Line P (dB)
AC Mains	P	0.206	34.97	63.36	-28.38	32.67	53.36	-20.69	9.581
AC Mains	P	0.276	34.97	60.95	-25.98	32.97	50.95	-17.98	9.581
AC Mains	P	0.316	31.34	59.80	-28.46	20.42	49.80	-29.38	9.582
AC Mains	P	0.340	42.66	59.20	-16.54	38.44	49.20	-10.76	9.582
AC Mains	P	0.409	43.31	57.67	-14.35	41.17	47.67	-6.49	9.583
AC Mains	P	0.478	42.32	56.37	-14.05	39.93	46.37	-6.44	9.584
Note: Factor total = Liss factor + Cable factor									

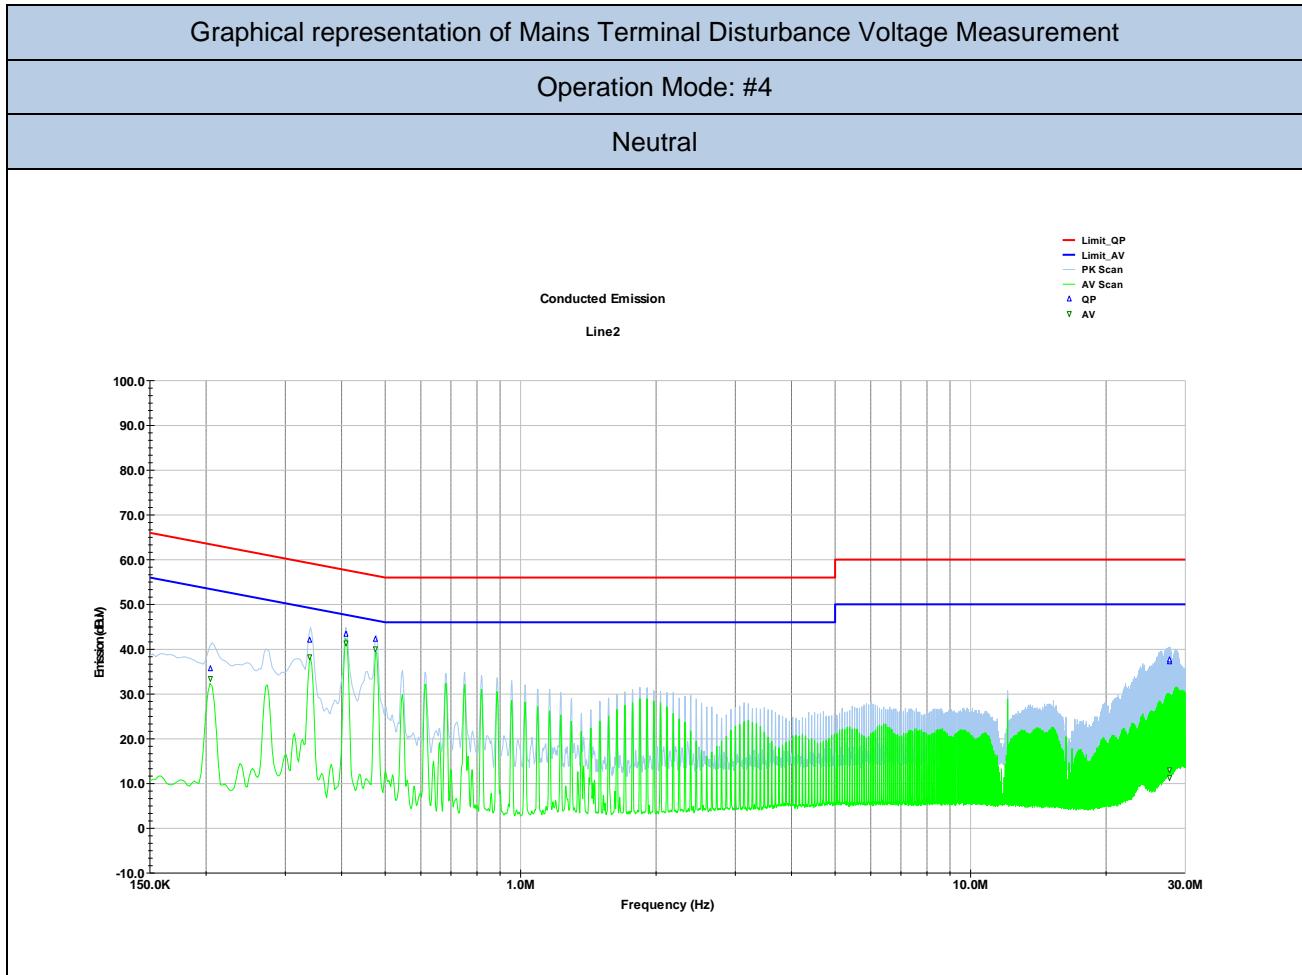

Final Measurement - Table representation of Mains Terminal Disturbance Voltage Measurement

Operation Mode: #4

Neutral

**Test Results**

Tested Port	Line	Frequency (MHz)	Quasi-Peak			Average Value			Factor total Line N (dB)
			Value (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Value (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	
AC Mains	N	0.204	35.69	63.44	-27.75	33.48	53.44	-19.96	9.571
AC Mains	N	0.340	42.00	59.20	-17.20	38.34	49.20	-10.86	9.582
AC Mains	N	0.409	43.30	57.67	-14.37	41.33	47.67	-6.34	9.583
AC Mains	N	0.476	42.27	56.41	-14.14	40.02	46.41	-6.39	9.584
AC Mains	N	27.598	37.28	60.00	-22.72	13.02	50.00	-36.98	9.845
AC Mains	N	27.736	37.65	60.00	-22.35	11.21	50.00	-38.79	9.845

Note: Factor total = Lism factor + Cable factor

<b>12.3 TEST: Radiated Emission</b>		<b>PASS</b>
Parameters required prior to the test	Laboratory Ambient Temperature (°C)	15 to 35 °C
	Relative Humidity (%)	30 to 60 %
Parameters recorded during the test	Laboratory Ambient Temperature (°C)	22°C
	Relative Humidity (%)	54%
	Air pressure (hPa)	1020
—	Power supply and Frequency	Application Point
Fully configured sample tested at the power line frequency	120V ~ 60Hz	Enclosure
Equipment mode: #1 #2	Operation mode	#1 #2
FCC Standard	§15.205; §15.209; §15.247	

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :


Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.


Remark: In accordance with part 15.31 (f) (2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance. The applied formula for limits at 3 meter is: Extrapolation (dB) = 40log (300meter / 3meter) = +80db Extrapolation (dB) = 40log (30meter / 3meter) = +40db


Further information to test setup. For frequencies above 1GHz, the anechoic material is also placed on the metallic floor between EUT and Antenna	
--	--

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Calibration date	Calibration due
CSSA	ETS Lindgren	FACT3	87020484	07/2017	07/2019
EMI Test Receiver	R&S	ESW44	87020967	06/2018	06/2019
Loop Antenna	EMCO	6512	87020465	02/2017	02/2020
Antenna BiConiLog	ETS Lindgren	3142E	87020457	04/2017	04/2020
Antenna Horn with Preamplifier	ETS Lindgren	3117-PA	87020458	04/2017	04/2020
Highpass Filter	Wainwright Instr.	WHKX10-1170-1300	87020800	05/2018	05/2019

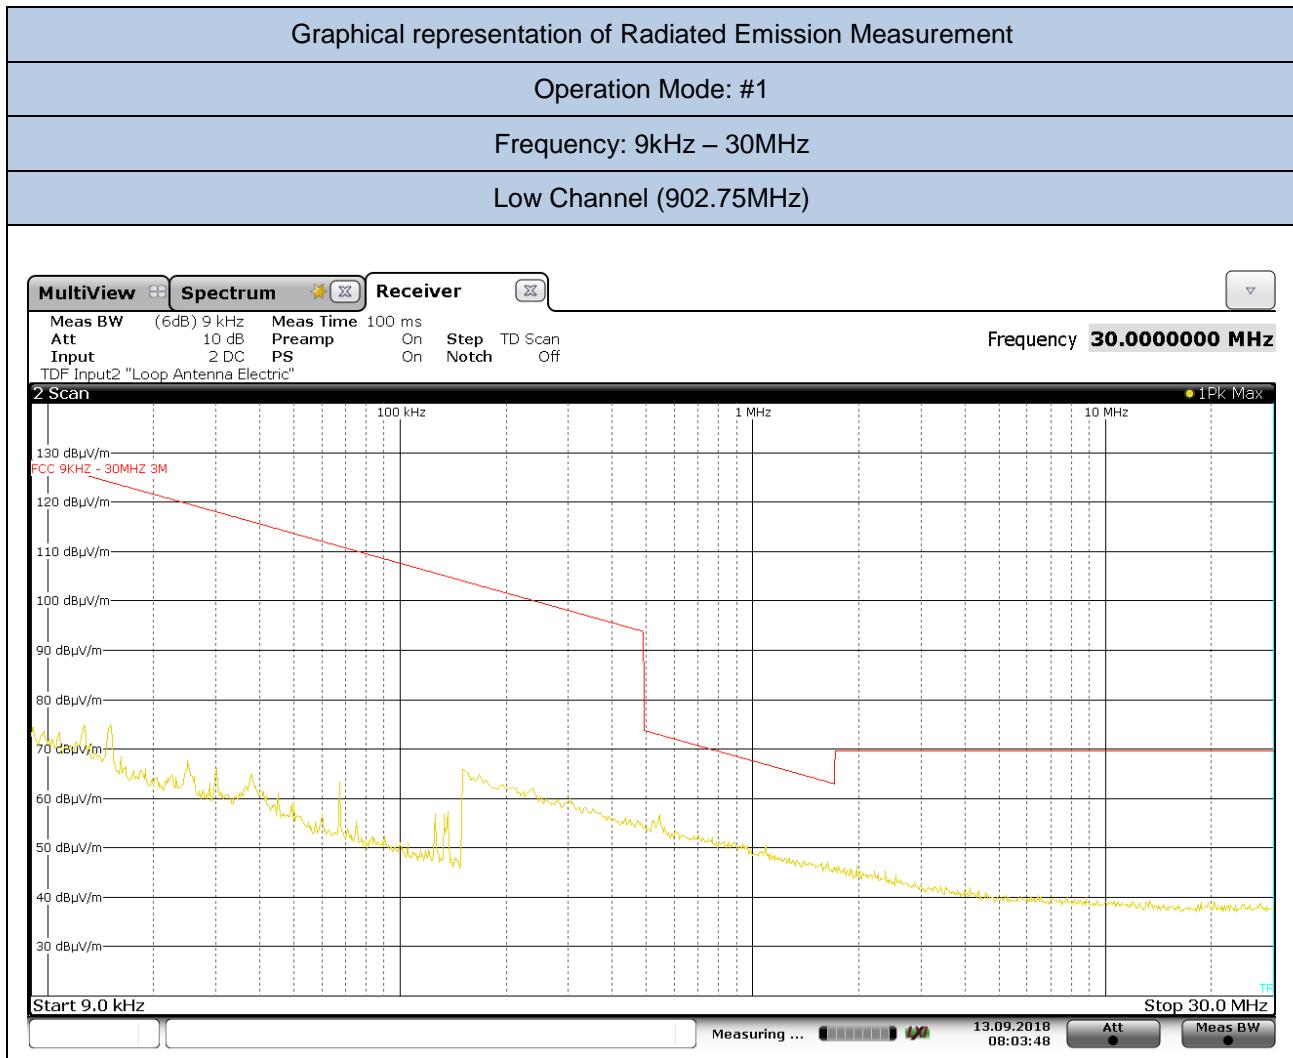


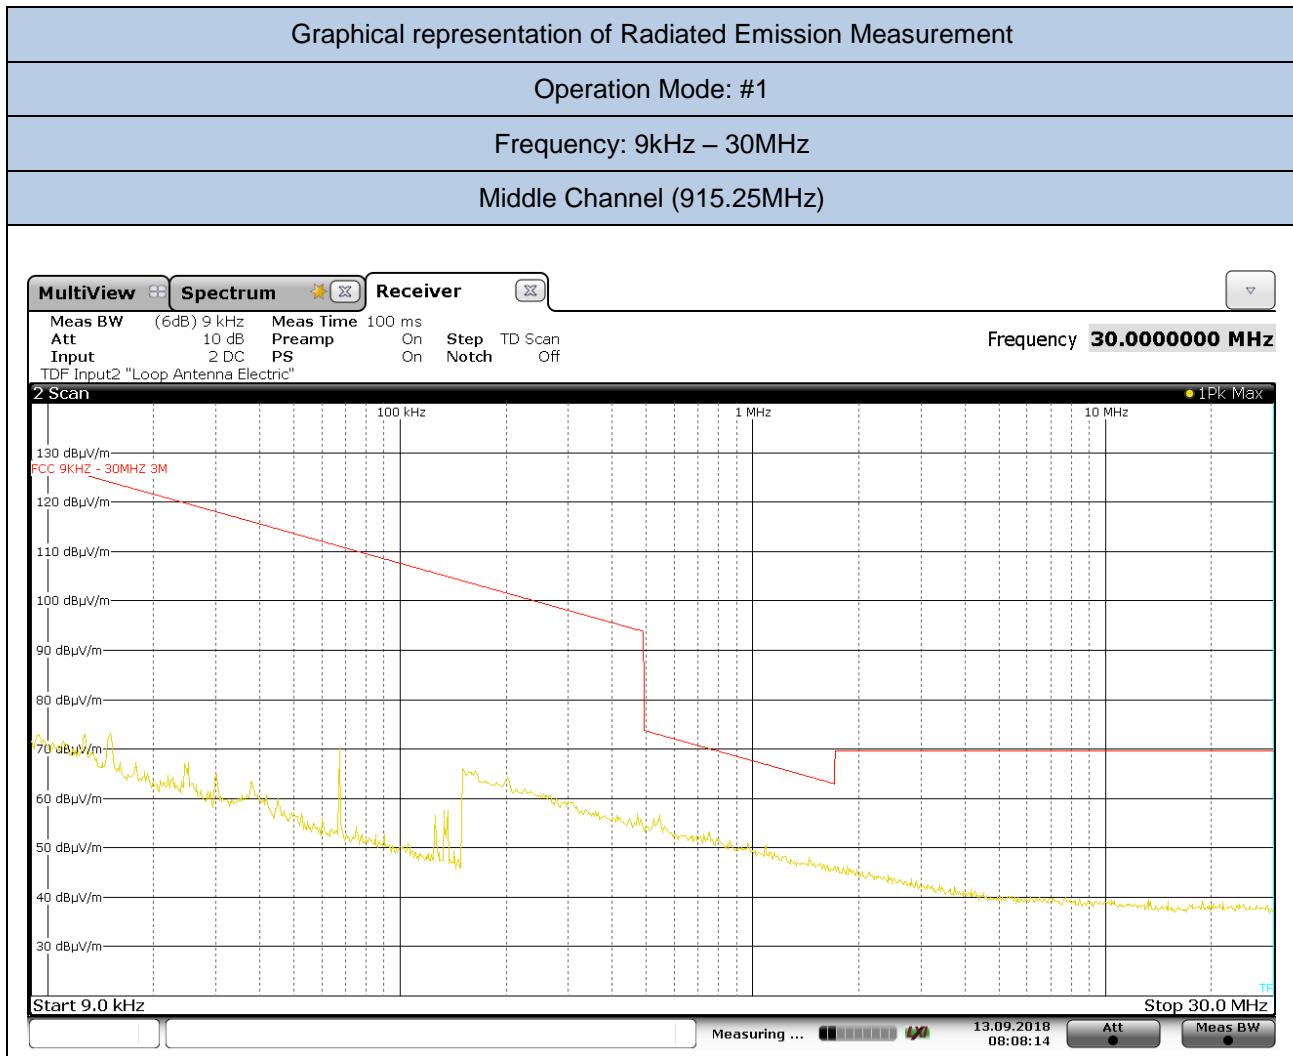

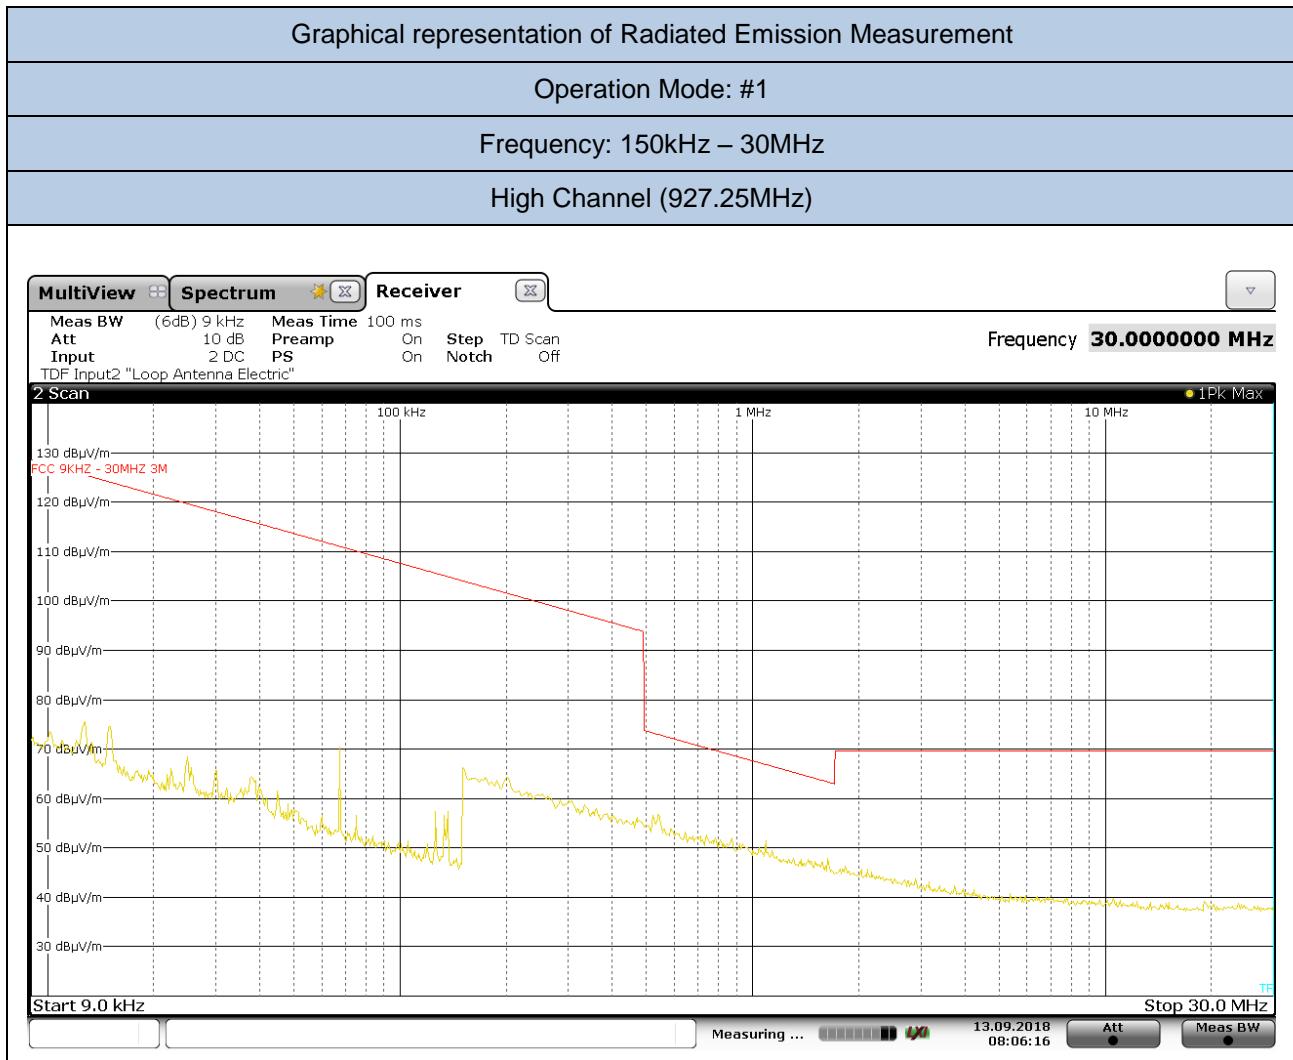


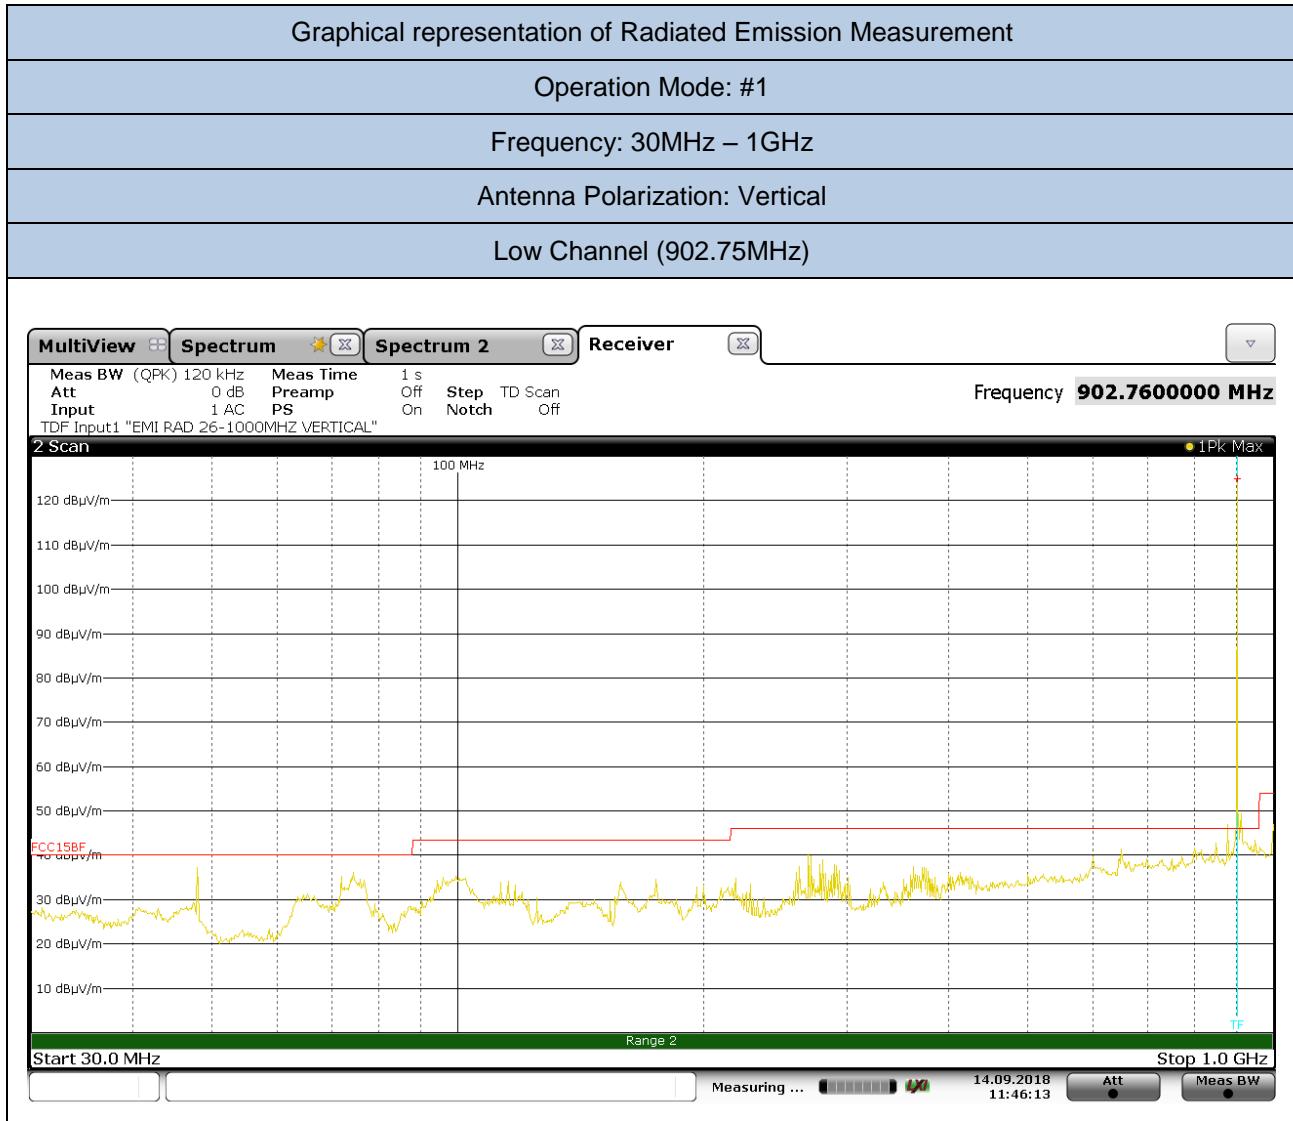

QUASI-PEAK RESULT (RBW=120kHz)					
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)
902,75 (fundamental)	95,58	25,30	4,07	Not present	<b>124,95</b>

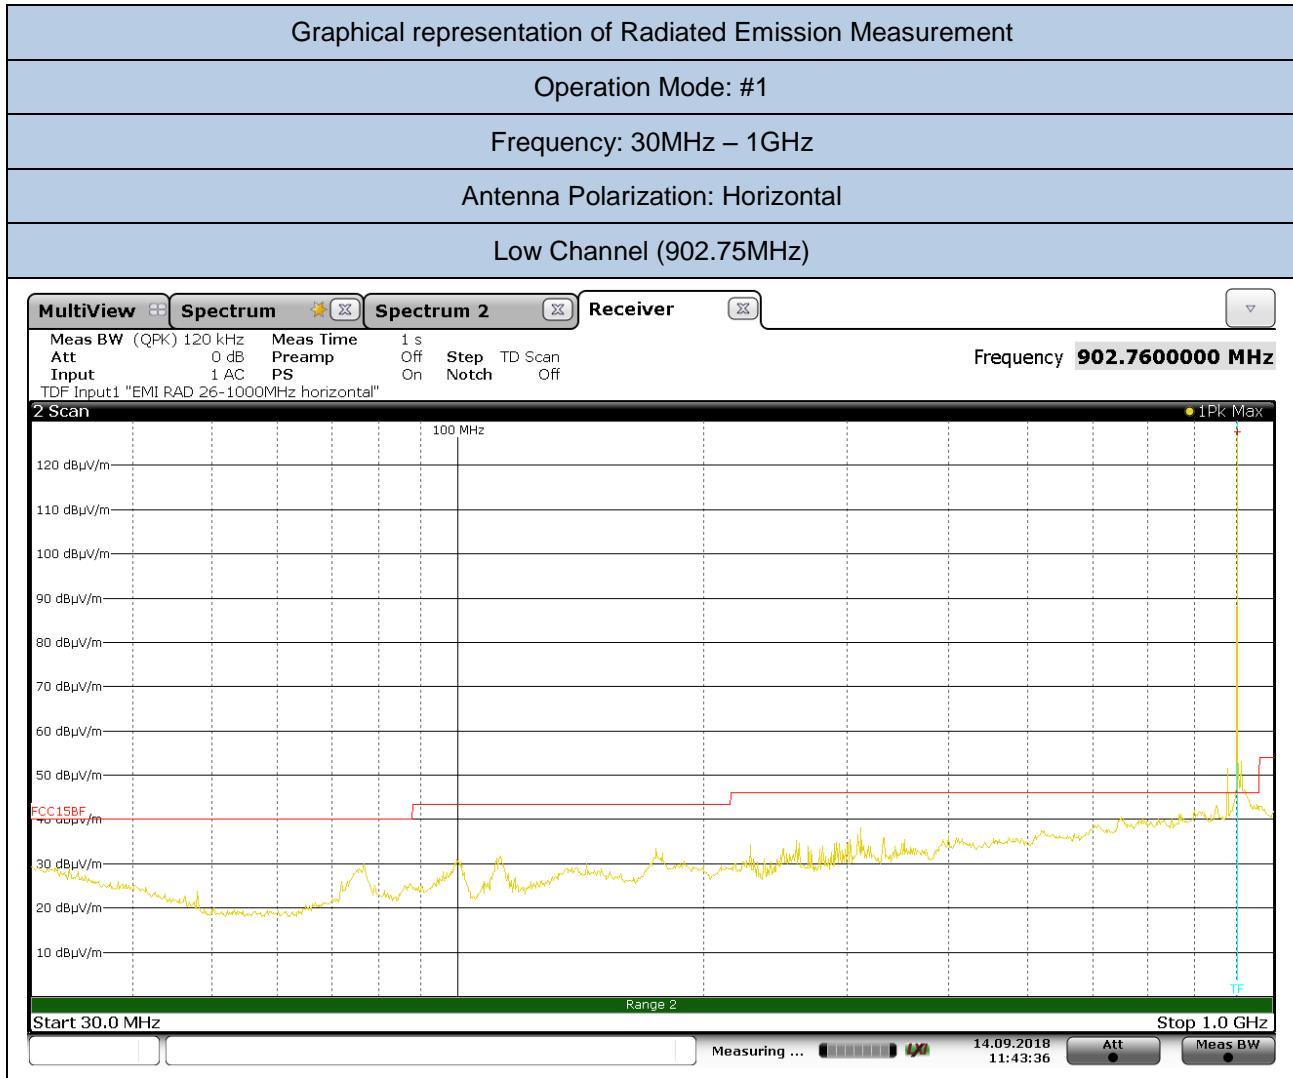

QUASI-PEAK RESULT (RBW=120kHz)					
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dBµV/m)
902,75 (fundamental)	98,01	25,30	4,07	Not present	<b>127,47</b>

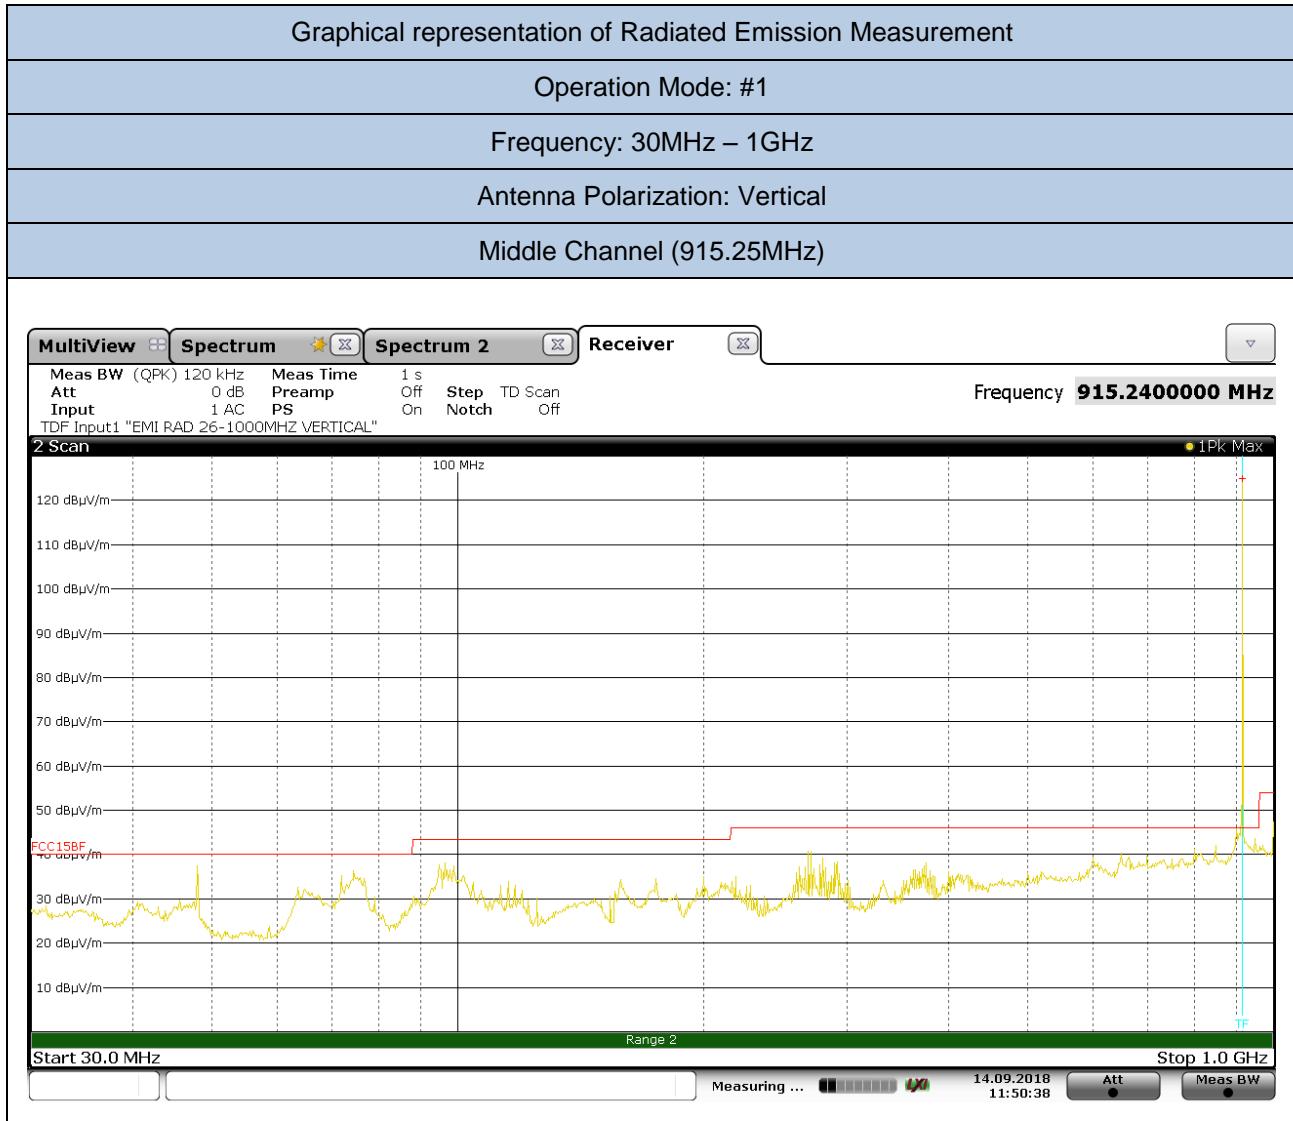

QUASI-PEAK RESULT (RBW=120kHz)					
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)
915,25 (fundamental)	95,68	25,30	4,07	Not present	<b>125,05</b>


## Graphical representation of Radiated Emission Measurement

## Operation Mode: #1

Frequency: 30MHz – 1GHz


### Antenna Polarization: Horizontal

### Middle Channel (915.25MHz)

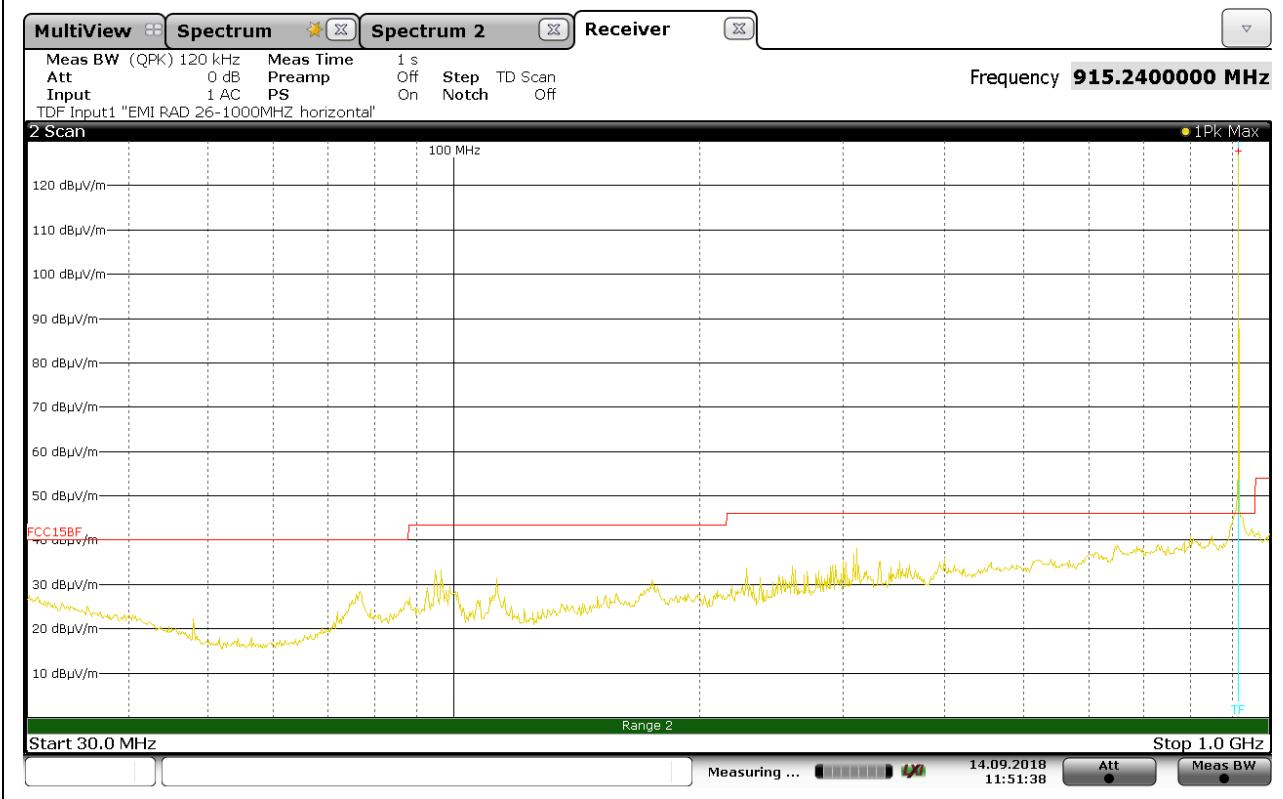


## QUASI-PEAK RESULT (RBW=120kHz)


QUASIPRIMAR RESULT (RDW=20dB)					
Frequency (MHz)	Reading value (dB $\mu$ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Correcting reading (dB $\mu$ V/m)
915,25 (fundamental)	98,18	25,30	4,07	Not present	127,55

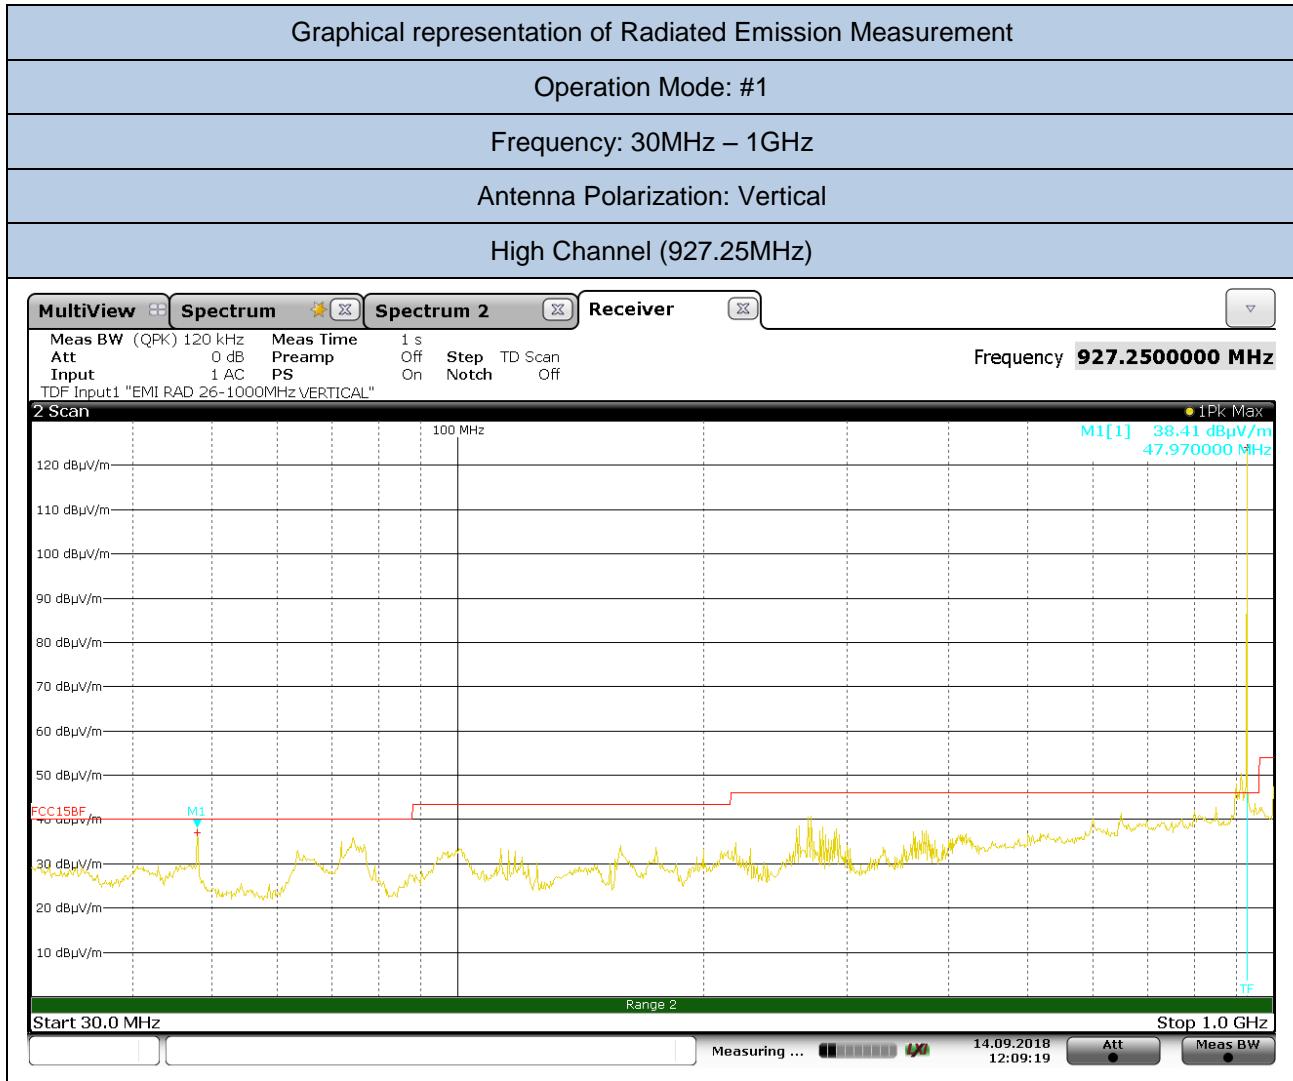

QUASI-PEAK RESULT (RBW=120kHz)					
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)
47,97	14,22	21,90	0,95	Not present	37,07
927,25 (fundamental)	94,66	25,34	4,13	Not present	124,13

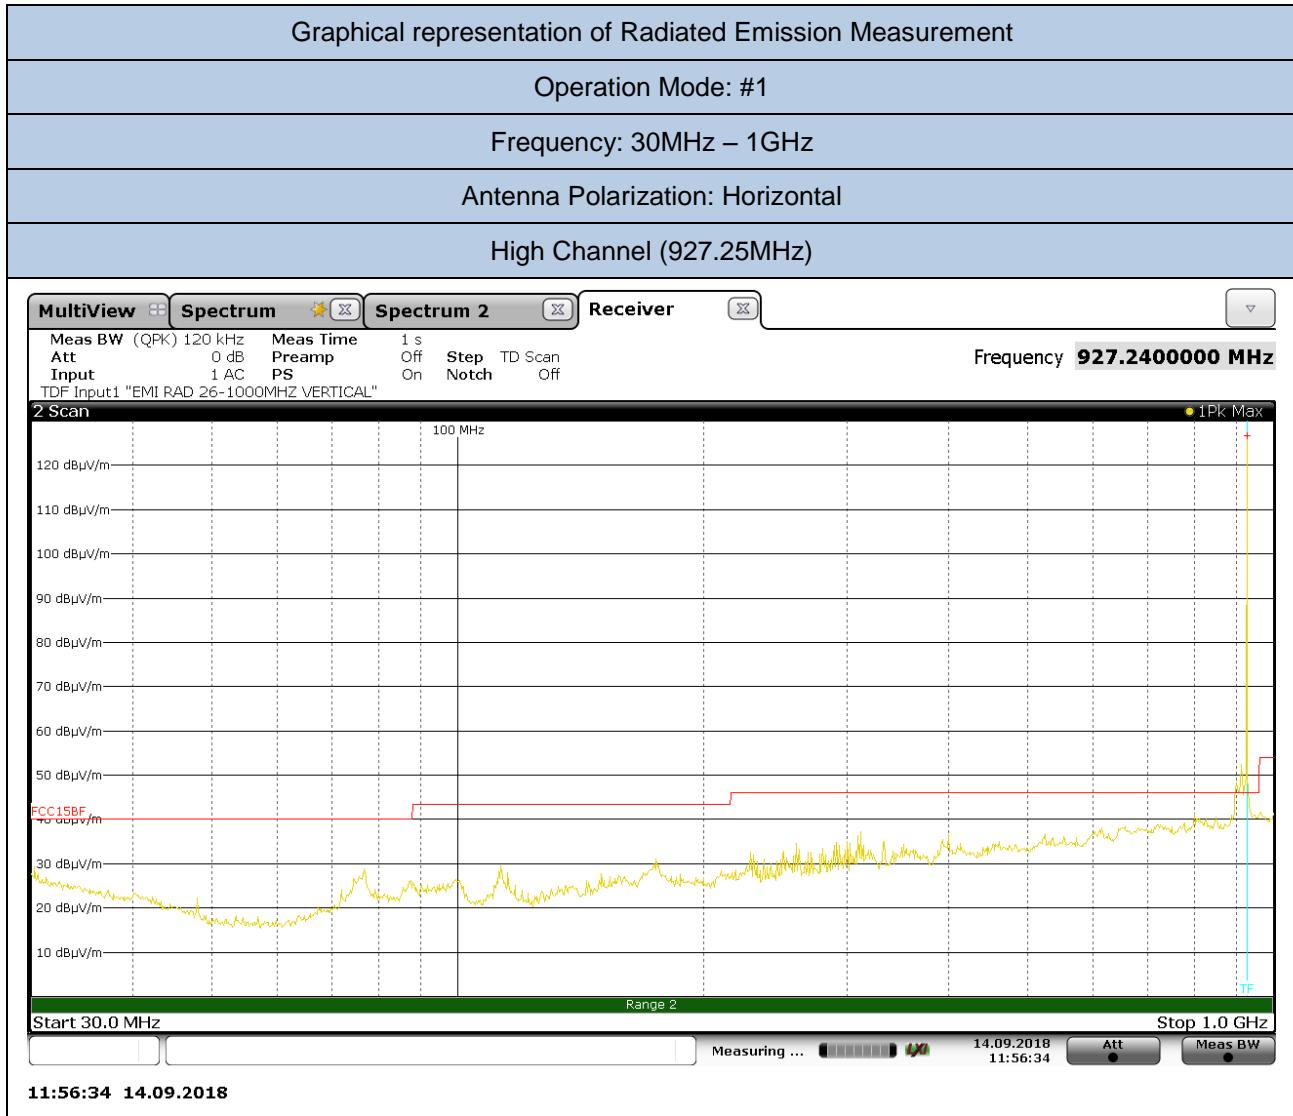

QUASI-PEAK RESULT (RBW=120kHz)					
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)
927,25 (fundamental)	96,88	25,34	4,13	Not present	126,35

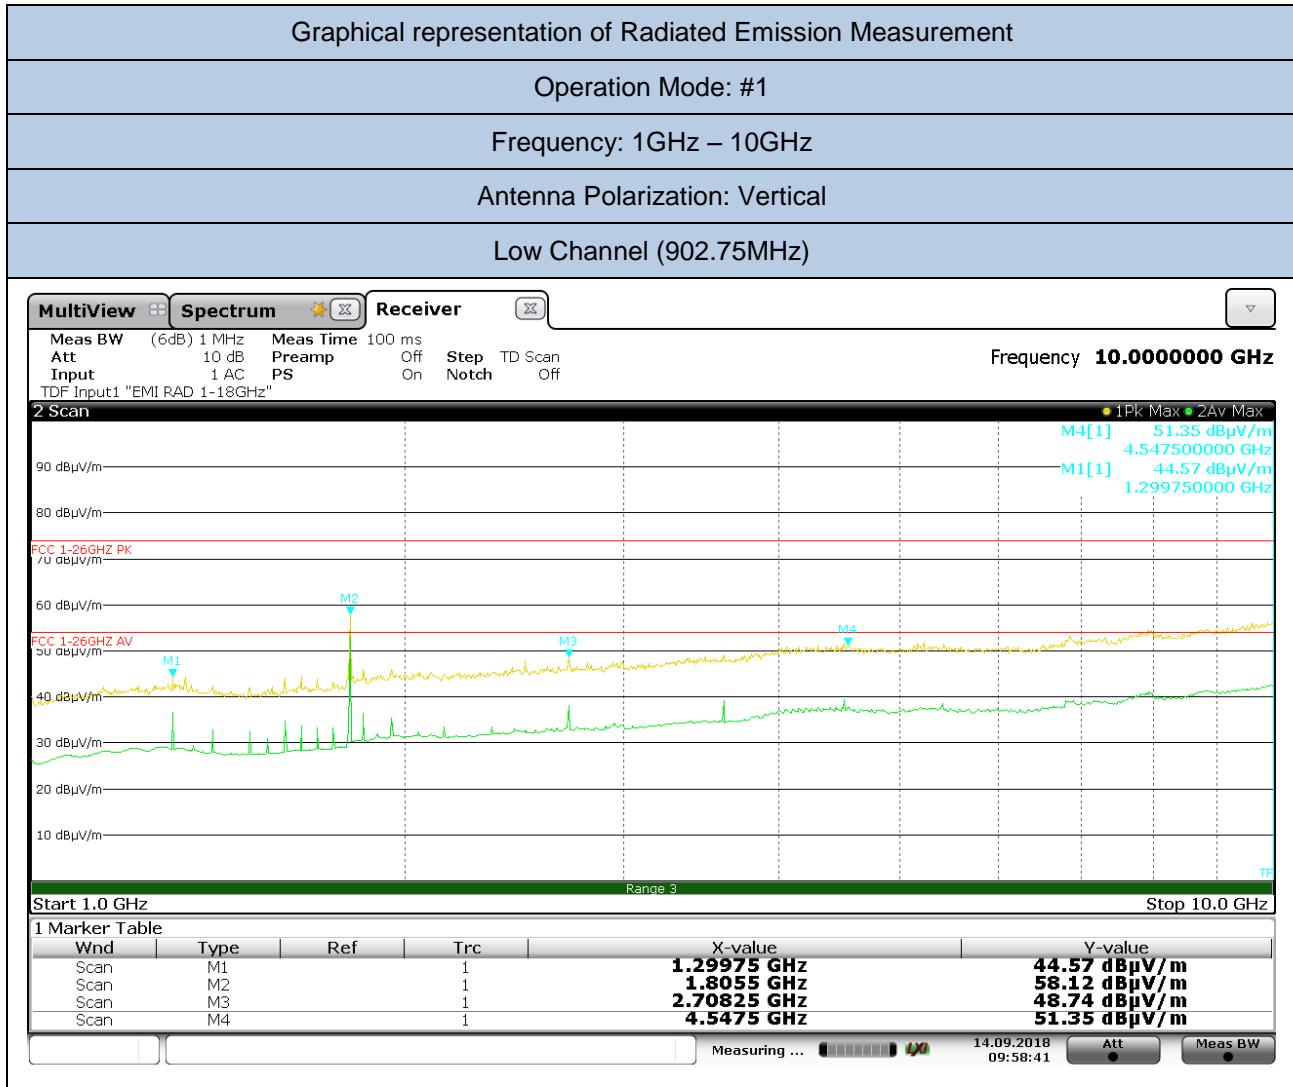


**PEAK RESULT (RBW=1MHz)**

Frequency (MHz)	Reading value (dB $\mu$ V)	Antenna Factor (dB/m)	Pre-Amp. Gain (dB)	Cable Loss (dB)	Correcting reading (dB $\mu$ V/m)	Restricted band	PK Limit (AV Limit + 20dB) (dB $\mu$ V/m)	Margin (dB)
1299,75	55,19	28,43	44,50	5,45	<b>44,57</b>	no	104,95*	60,38
1805,50	66,00	30,60	44,50	6,02	<b>58,12</b>	no	104,95*	46,83
2708,25	53,50	32,64	44,80	7,40	<b>48,74</b>	yes	74,00	25,26
4547,50	49,89	33,89	43,60	11,15	<b>51,35</b>	yes	74,00	22,65

\*=fundamental level (QP) in Vertical polarization – 20dB


AVERAGE RESULT (RBW=1MHz)								
Frequency (MHz)	Reading value (dB $\mu$ V)	Antenna Factor (dB/m)	Pre-Amp. Gain (dB)	Cable Loss (dB)	Correcting reading (dB $\mu$ V/m)	Restricted band	AV Limit (dB $\mu$ V/m)	Margin (dB)
1805,55	61,53	30,60	44,50	6,02	53,65	no	54,00	0,35

N.B. = all others peak levels measured are under par.15.209 average limit (54 dB $\mu$ V/m)

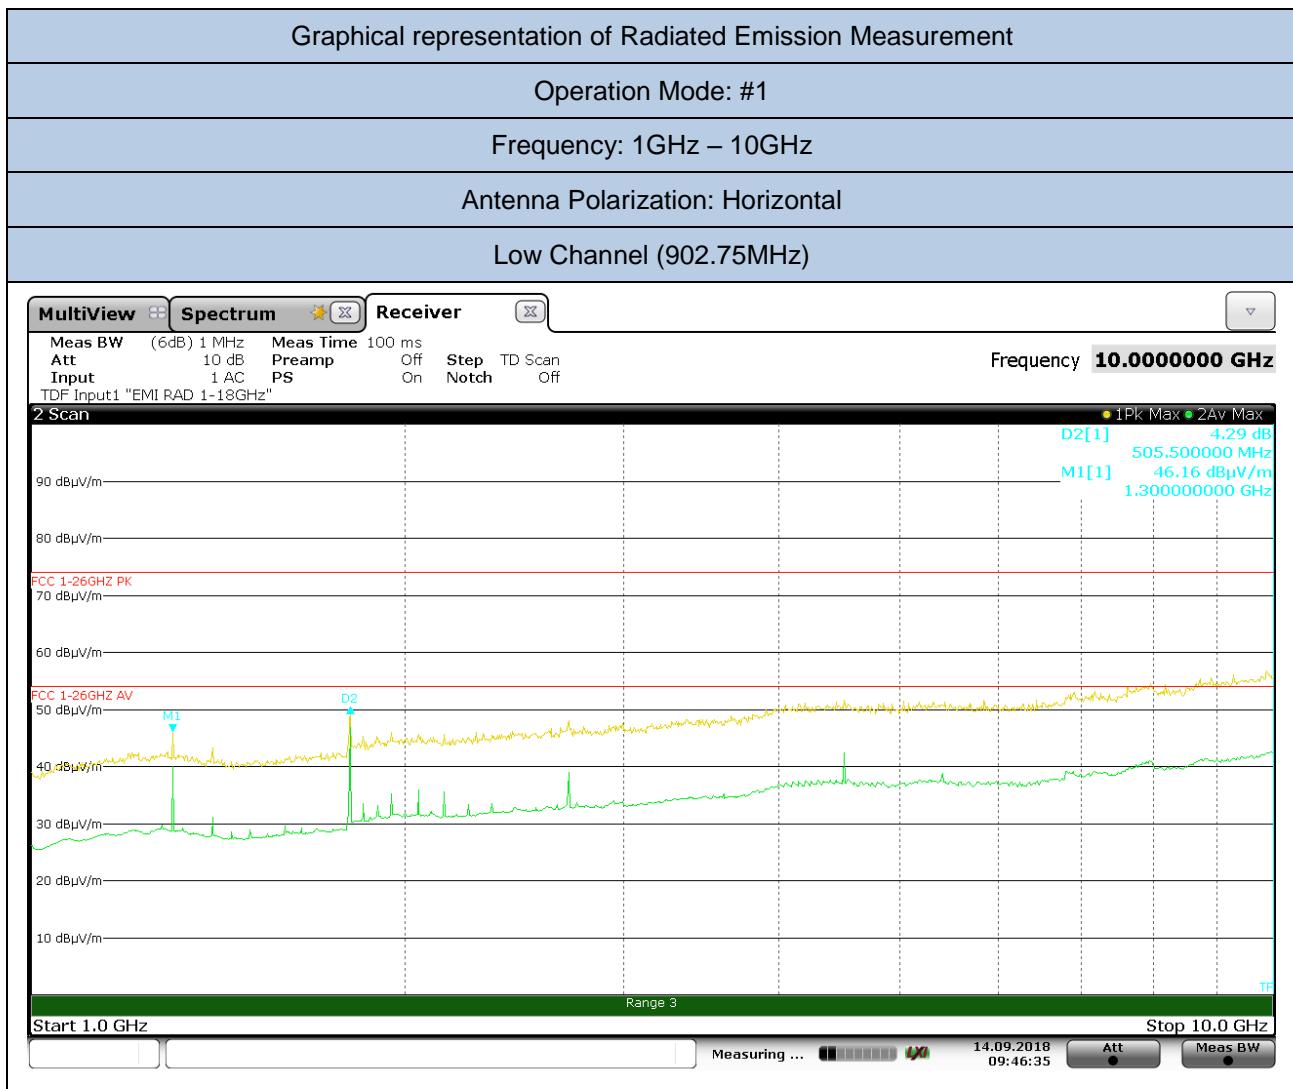


PEAK RESULT (RBW=1MHz)								
Frequency	Reading value	Antenna Factor	Pre-Amp. Gain	Cable Loss	Correcting reading	Restricted band	PK Limit (AV Limit + 20dB)	Margin
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)		(dB $\mu$ V/m)	(dB)
1300,00	56,78	28,43	44,50	5,45	46,16	yes	74,00	27,84
1805,50	58,33	30,60	44,50	6,02	50,45	no	107,47*	57,02

\*=fundamental level (QP) in Horizontal polarization – 20dB  
Note = all peak levels measured are under par.15.209 average limit (54 dB $\mu$ V/m)

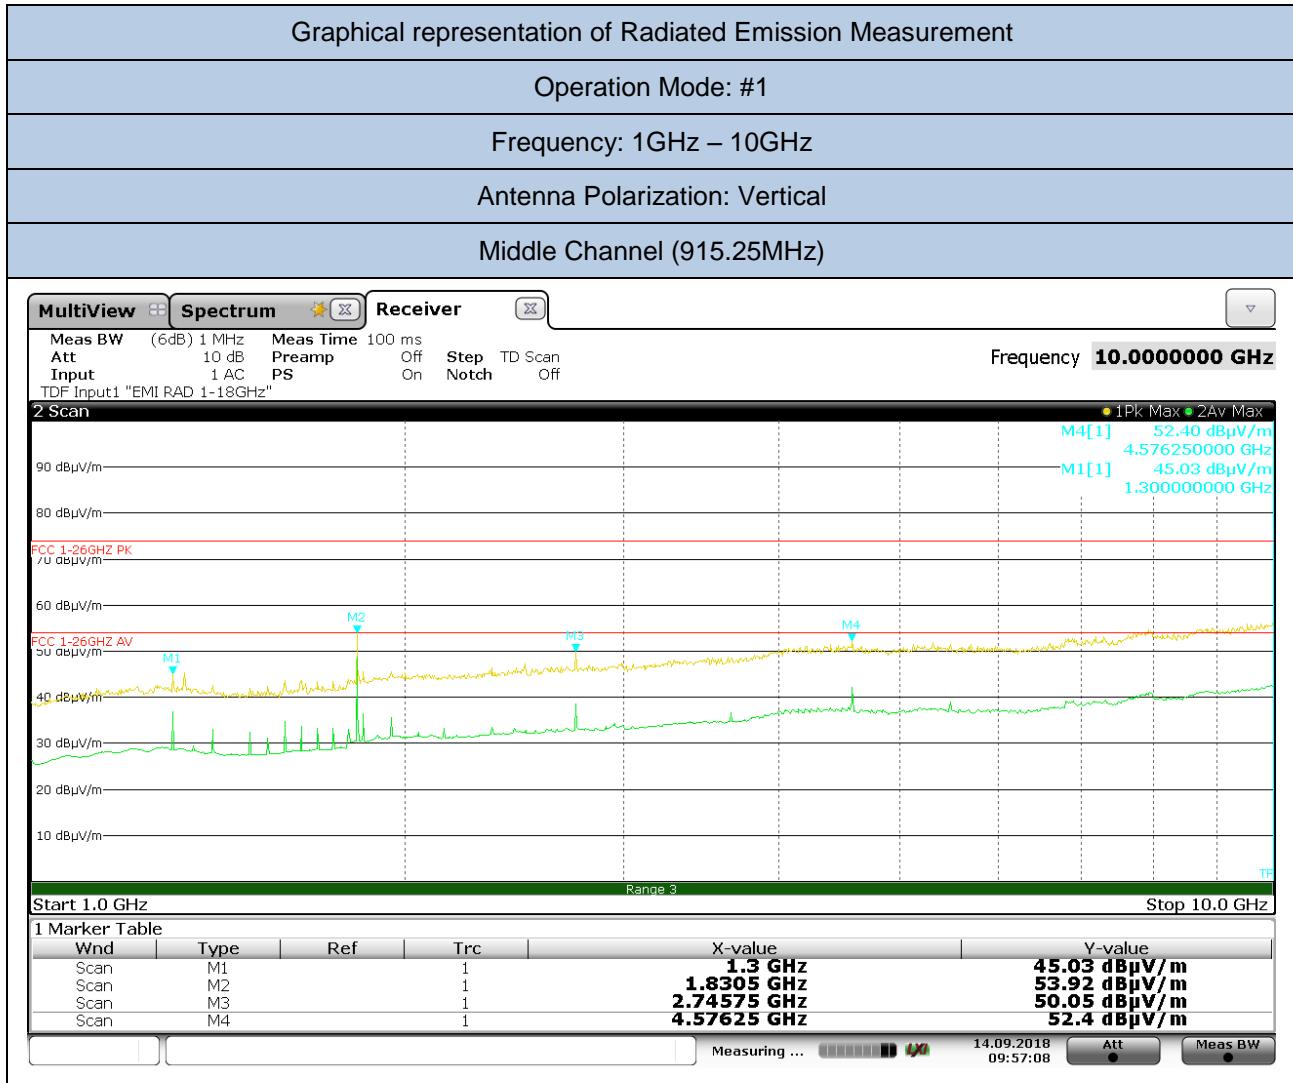


PEAK RESULT (RBW=1MHz)								
Frequency	Reading value	Antenna Factor	Pre-Amp. Gain	Cable Loss	Correcting reading	Restricted band	PK Limit (AV Limit + 20dB)	Margin
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	/	(dB $\mu$ V/m)	(dB)
1300,00	55,65	28,43	44,50	5,45	<b>45,03</b>	yes	74,00	47,77
1830,50	62,24	30,14	44,50	6,04	<b>53,92</b>	no	74,00	27,81
2745,75	54,83	32,62	44,80	7,40	<b>50,05</b>	yes	105,05*	55,00
4576,25	51,04	33,81	43,60	11,15	<b>52,40</b>	yes	74,00	28,74

\*=fundamental level (QP) in Vertical polarization – 20dB  
N.B. = all peak levels measured are under par.15.209 average limit (54 dB $\mu$ V/m)

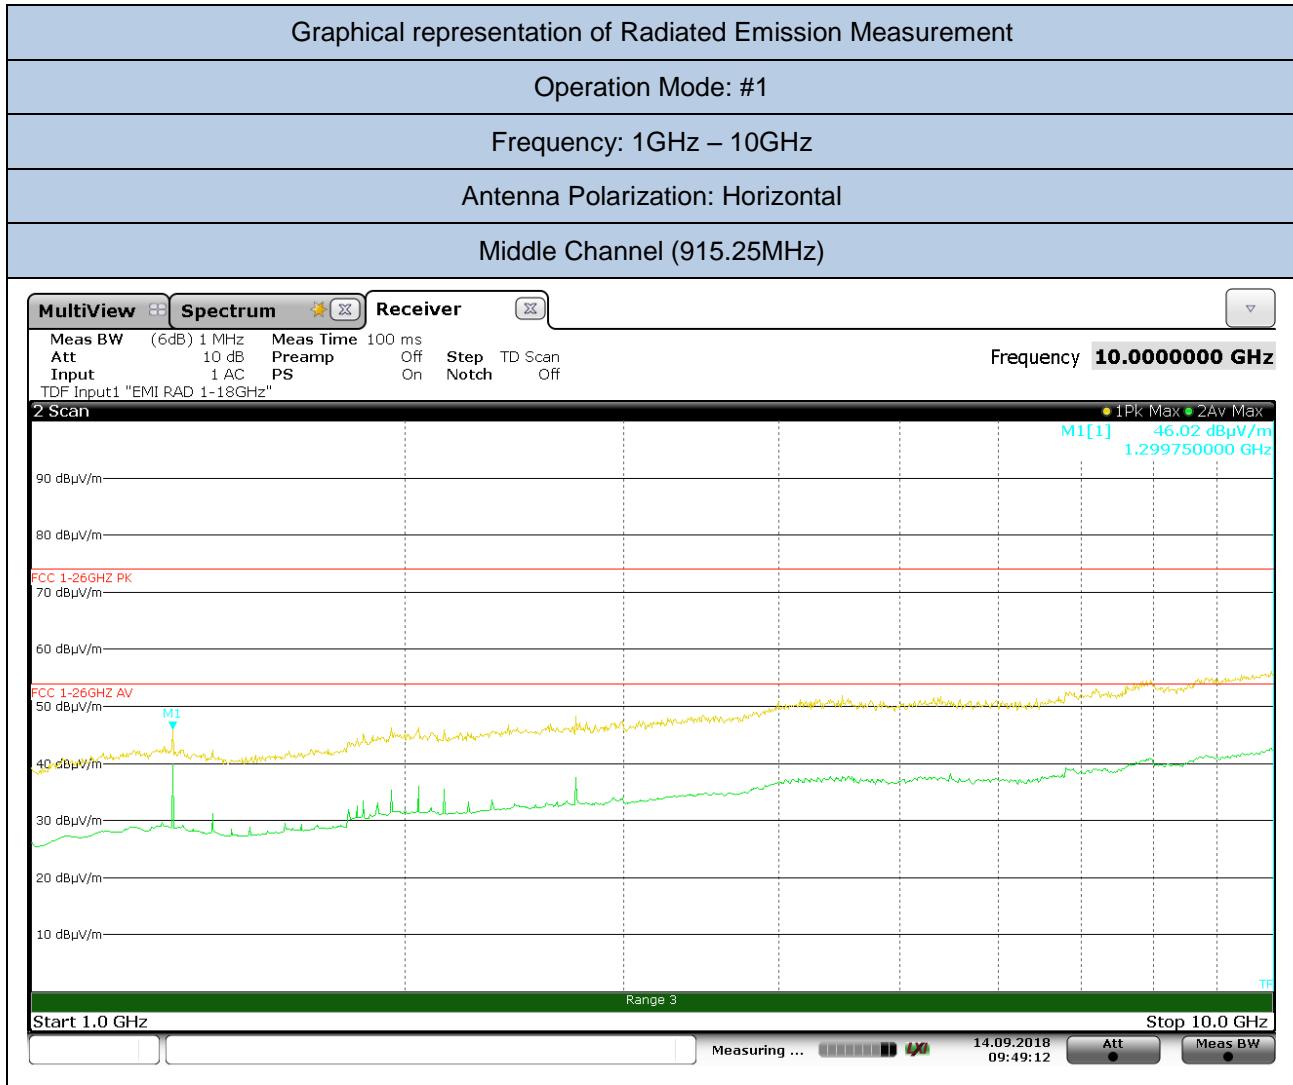


PEAK RESULT (RBW=1MHz)								
Frequency	Reading value	Antenna Factor	Pre-Amp. Gain	Cable Loss	Correcting reading	Restricted band	PK Limit (AV Limit + 20dB)	Margin
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	/	(dB $\mu$ V/m)	(dB)
1299,75	56,64	28,43	44,50	5,45	46,02	no	107,55	61,53
N.B. = all peak levels measured are under par.15.209 average limit (54 dB $\mu$ V/m)								

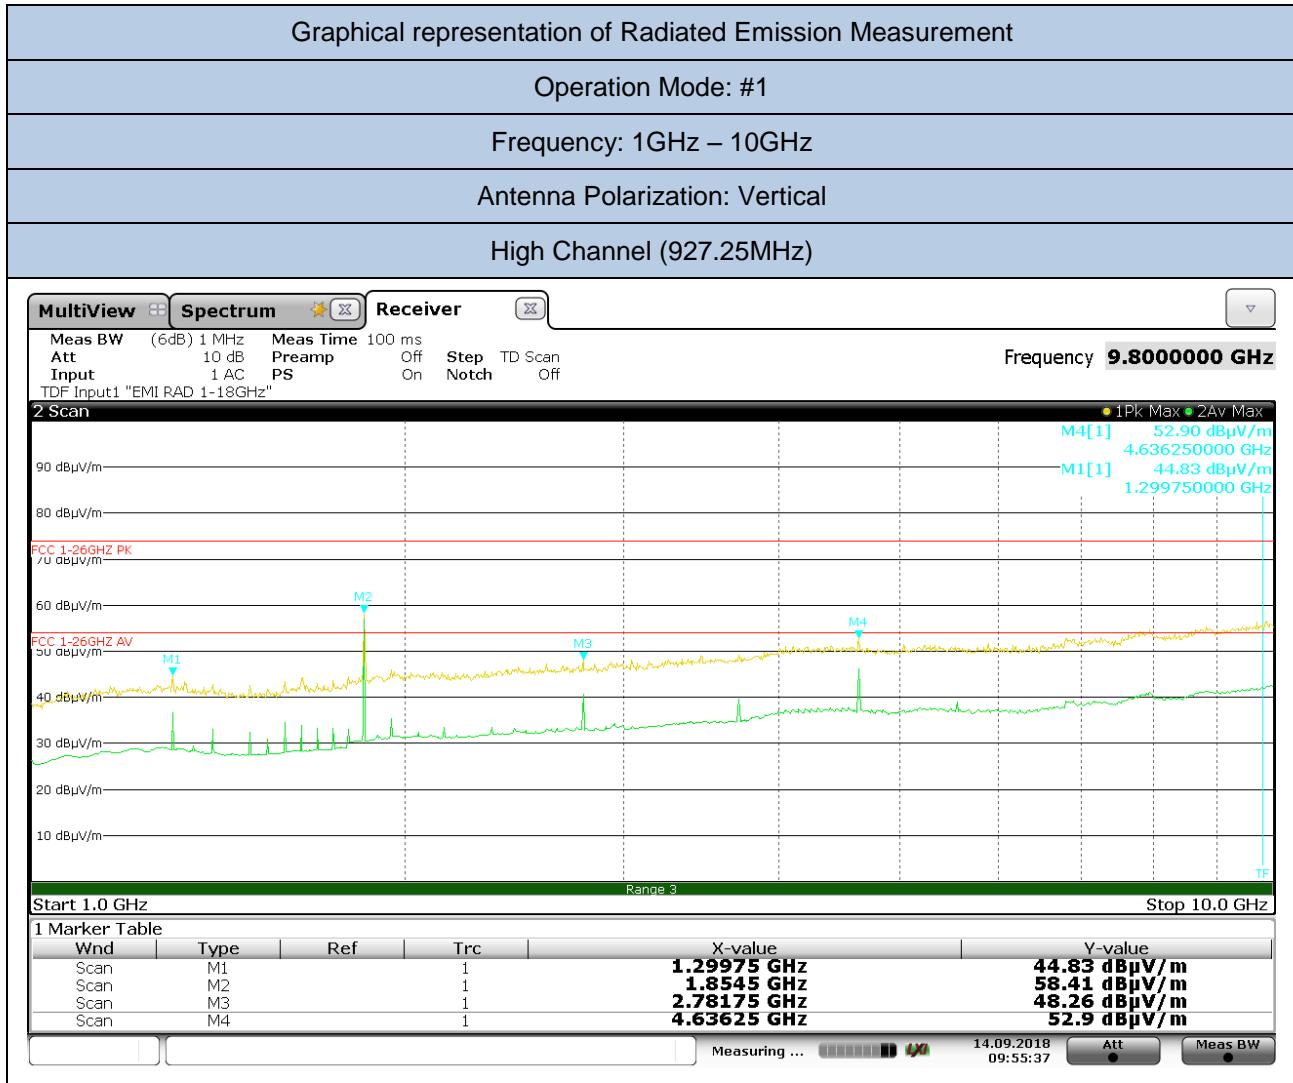


PEAK RESULT (RBW=1MHz)								
Frequency	Reading value	Antenna Factor	Pre-Amp. Gain	Cable Loss	Correcting reading	Restricted band	PK Limit (AV Limit + 20dB)	Margin
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	/	(dB $\mu$ V/m)	(dB)
1299,75	55,45	28,43	44,50	5,45	<b>44,83</b>	no	104,13*	59,30
1854,50	66,25	30,60	44,50	6,06	<b>58,41</b>	no	104,13*	45,72
2781,75	52,74	32,84	44,80	7,48	<b>48,26</b>	yes	74,00	25,74
4636,25	51,82	33,82	43,60	11,15	<b>52,90</b>	yes	74,00	21,10


\*=fundamental level (QP) in Vertical polarization – 20dB

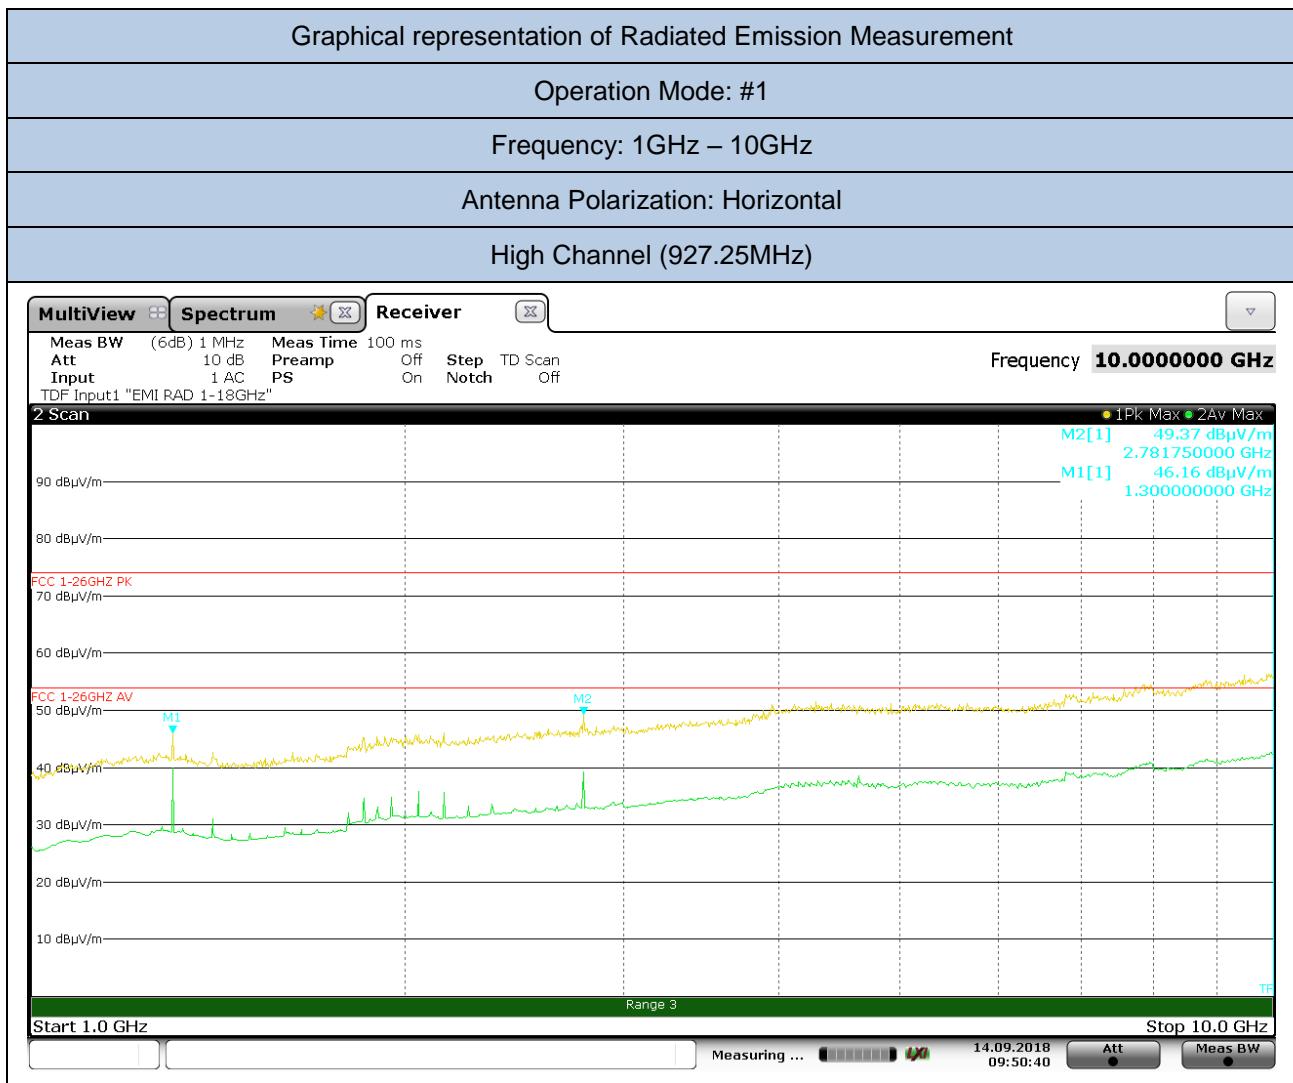



PEAK RESULT (RBW=1MHz)								
Frequency	Reading value	Antenna Factor	Pre-Amp. Gain	Cable Loss	Correcting reading	Restricted band	PK Limit (AV Limit + 20dB)	Margin
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	/	(dB $\mu$ V/m)	(dB)
1300,00	56,78	28,43	44,50	5,45	46,16	yes	74,00	27,84
2781,75	53,85	32,84	44,80	7,48	49,37	yes	74,00	24,63

N.B. = all peak levels measured are under par.15.209 average limit (54 dB $\mu$ V/m)

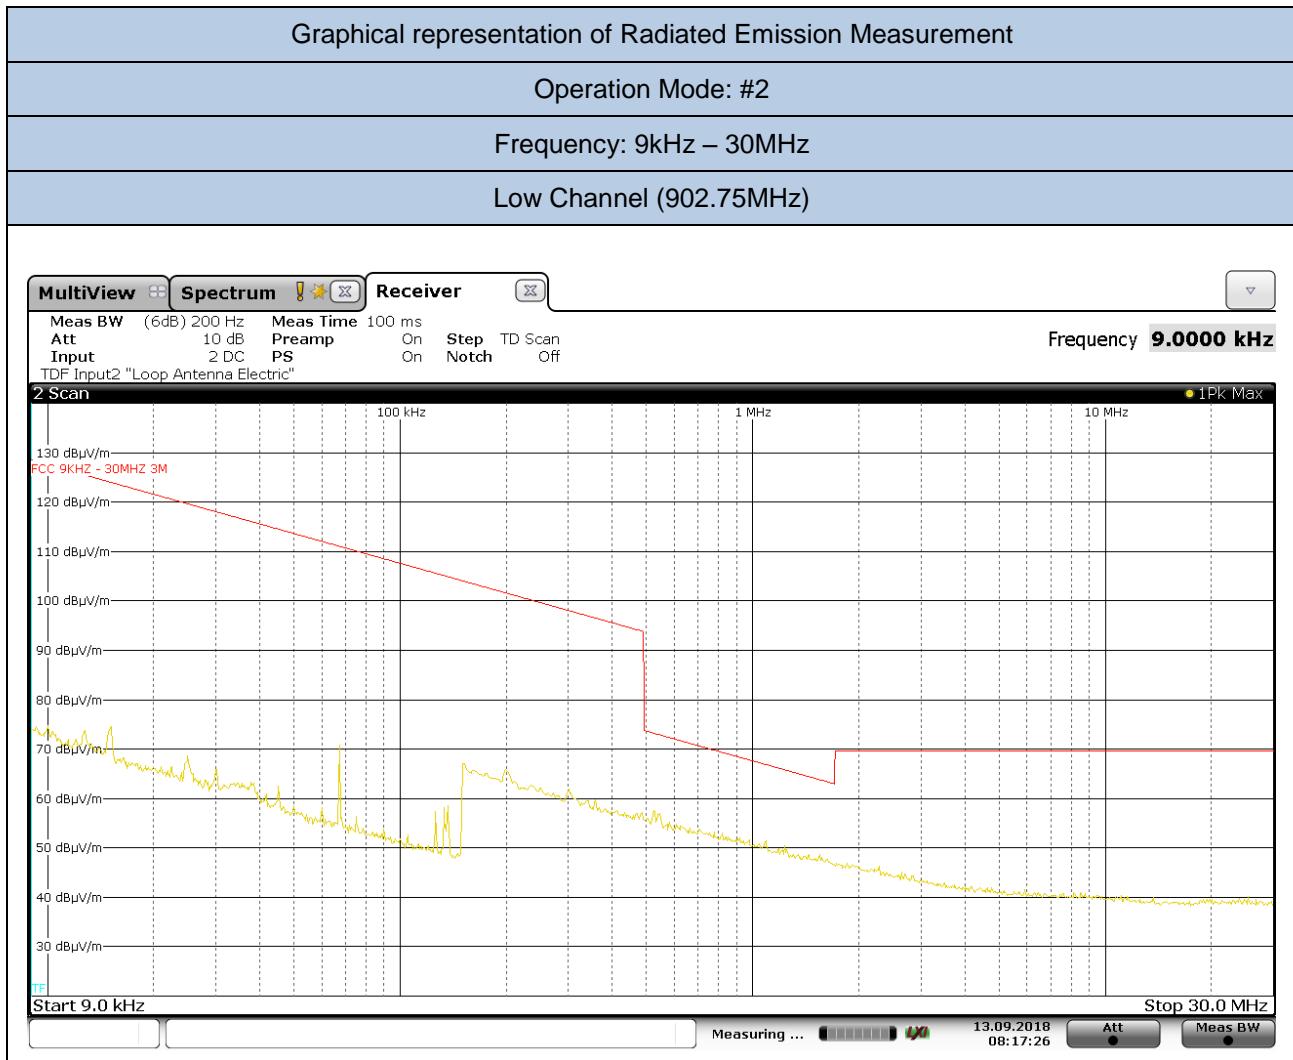


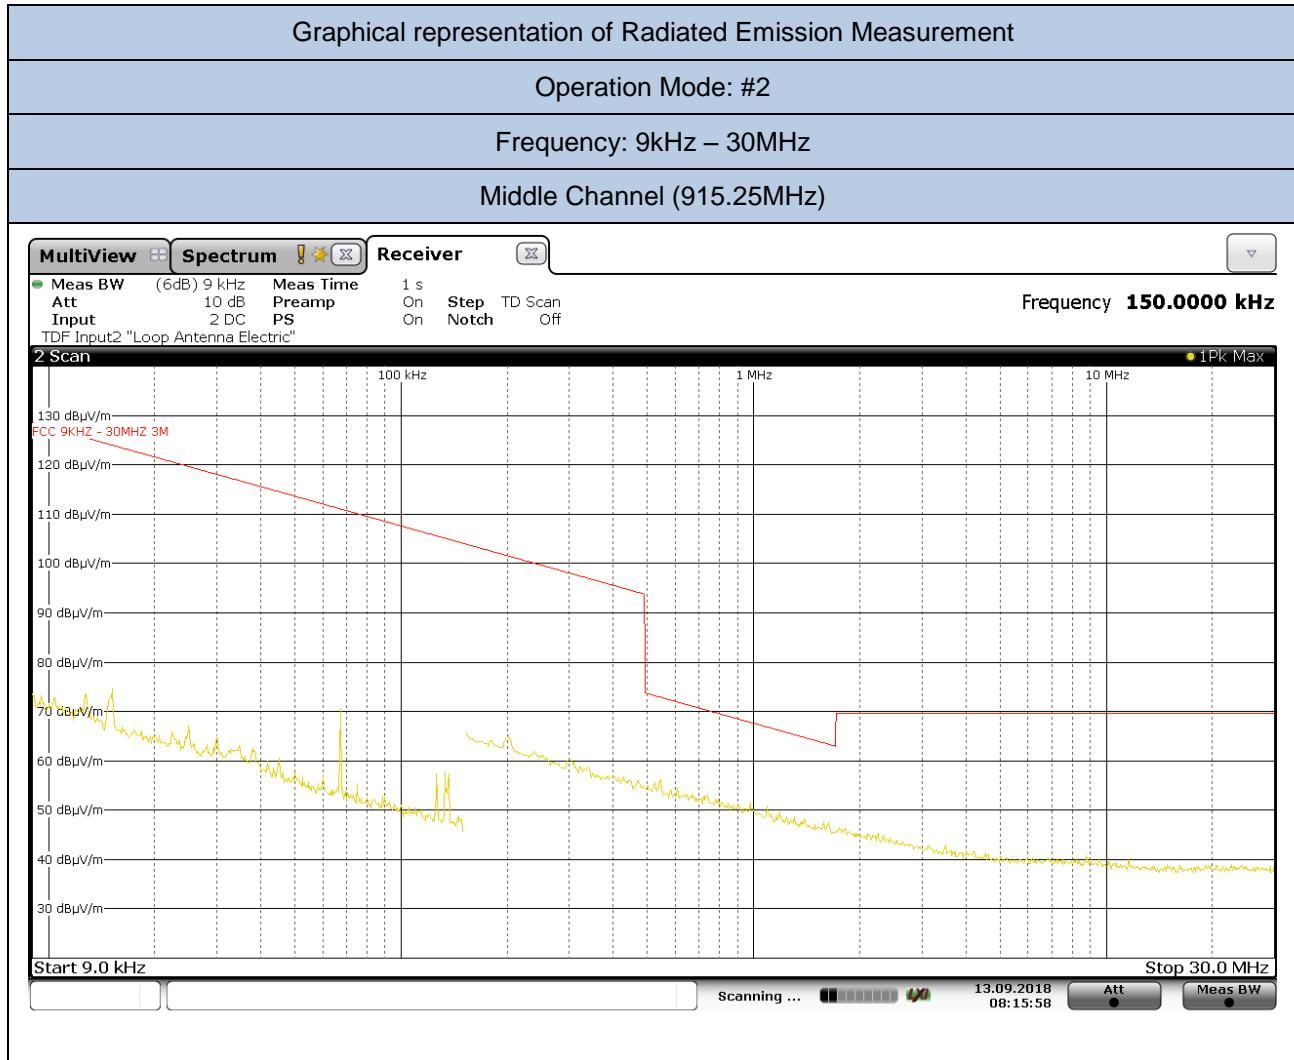

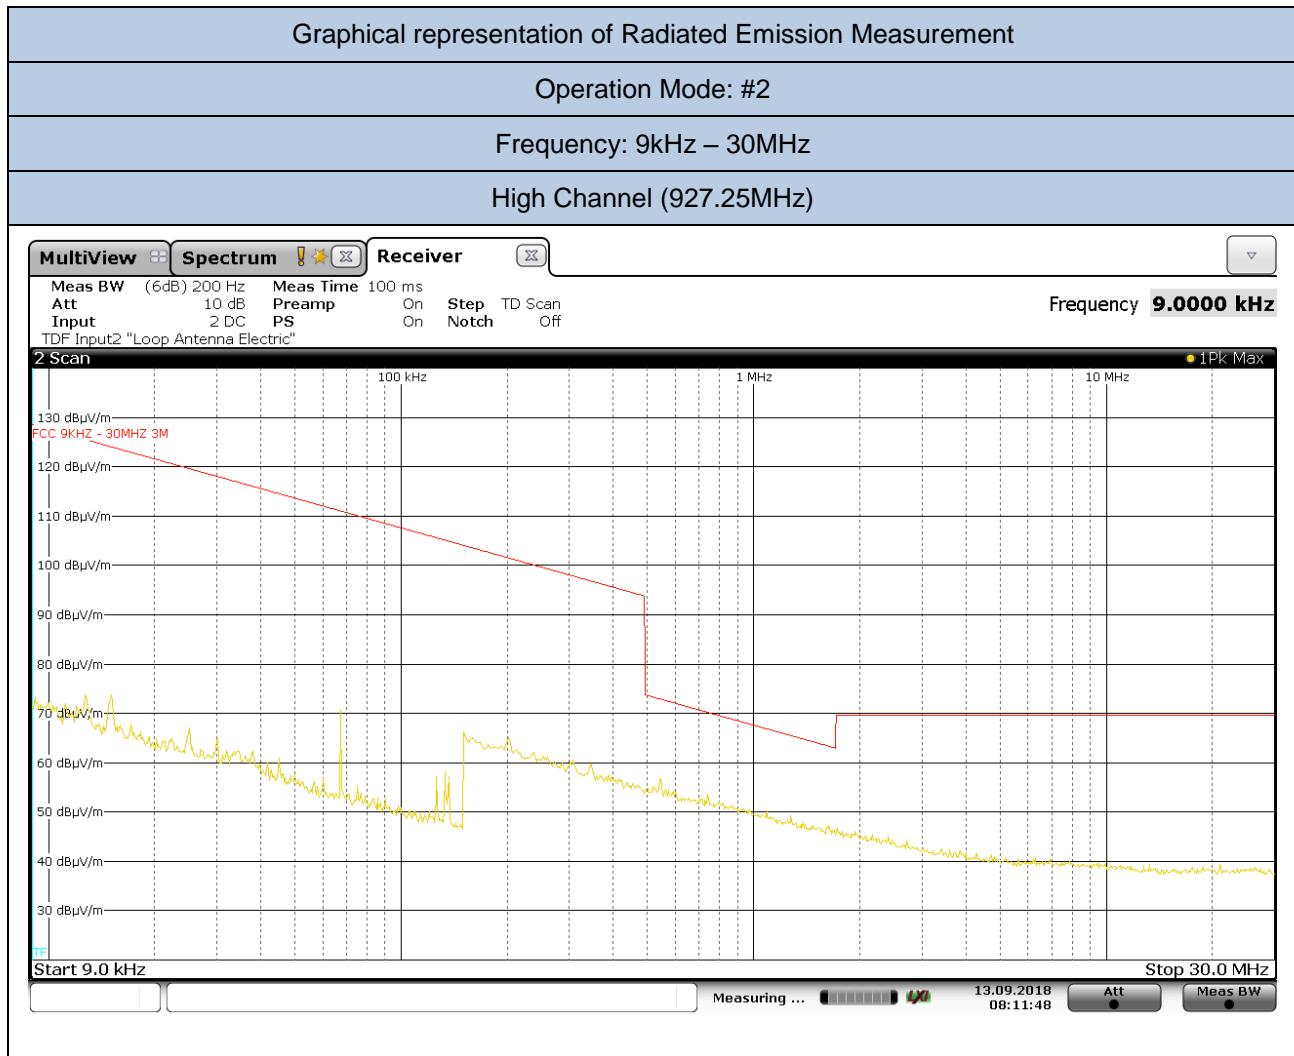


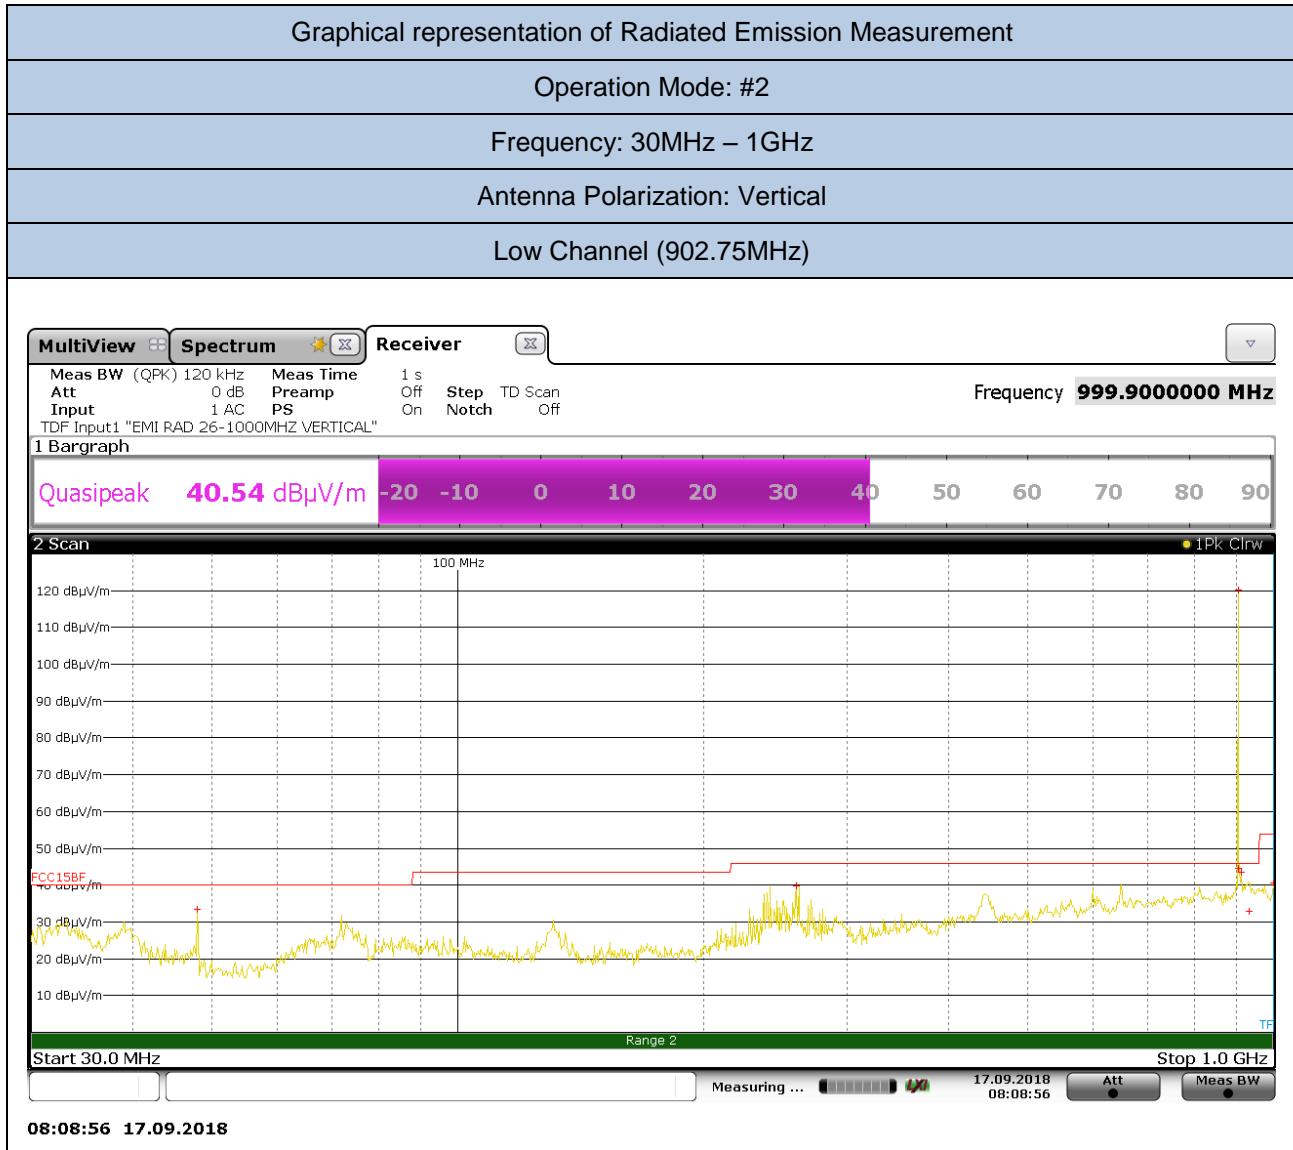


QUASI-PEAK RESULT (RBW=120kHz)					
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading
(MHz)	(dB $\mu$ V)	(dB $\mu$ V/m)	(dB)	(dB)	(dB $\mu$ V/m)
902,75 (fundamental)	90,72	25,30	4,07	Not present	<b>120,09</b>

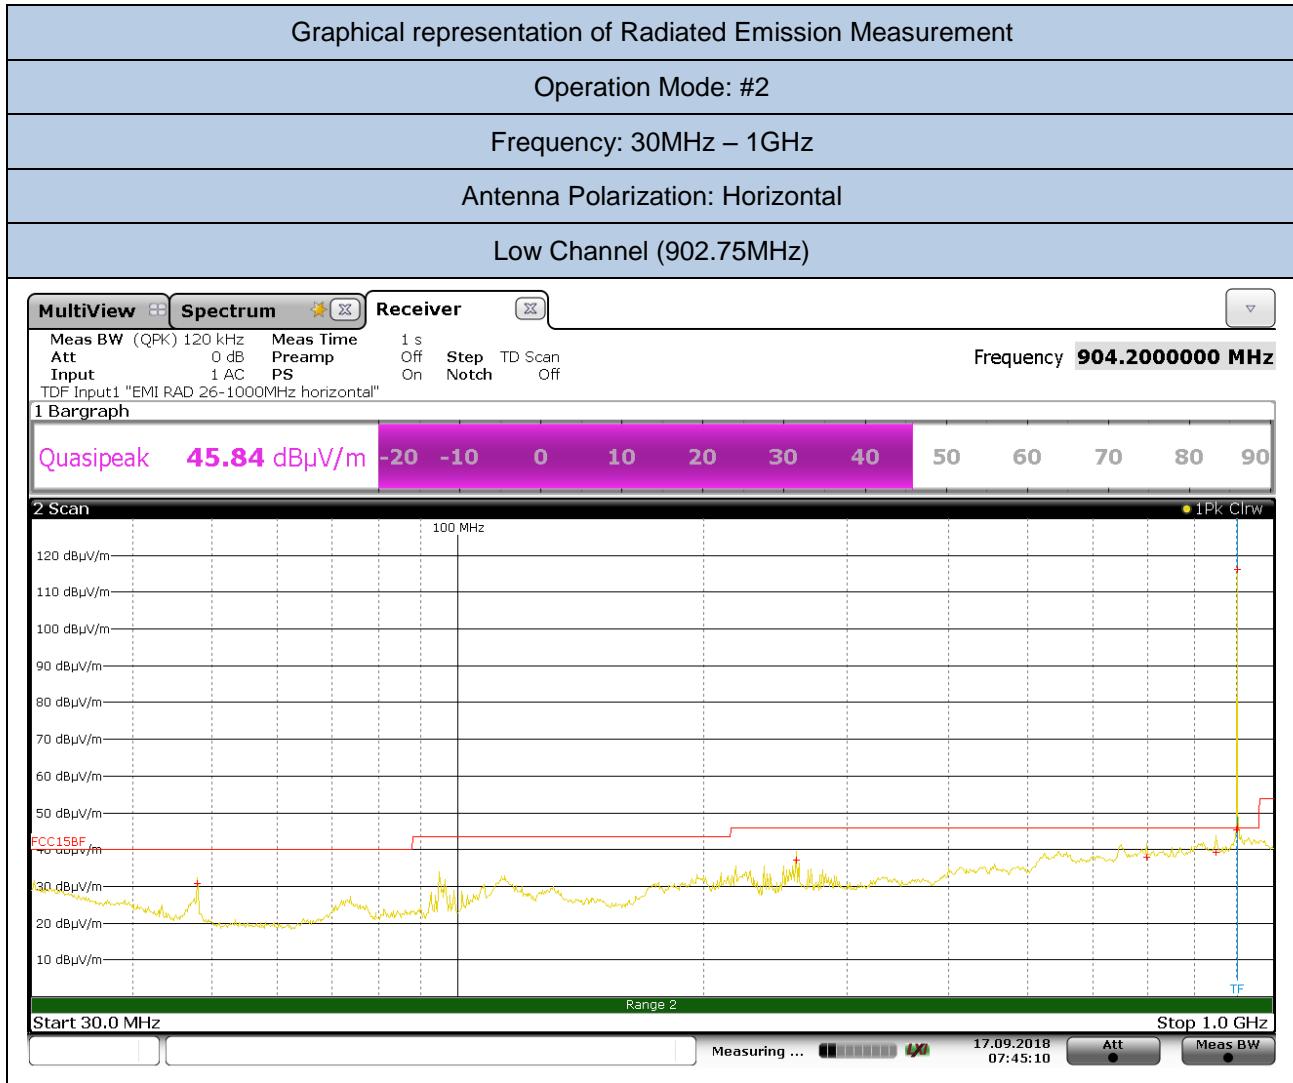
**QUASI-PEAK RESULT (RBW=120kHz)**


Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading
(MHz)	(dB $\mu$ V)	(dB3/m)	(dB)	(dB)	(dB $\mu$ V/m)
902,75 (fundamental)	86,79	25,30	4,07	Not present	<b>116,16</b>

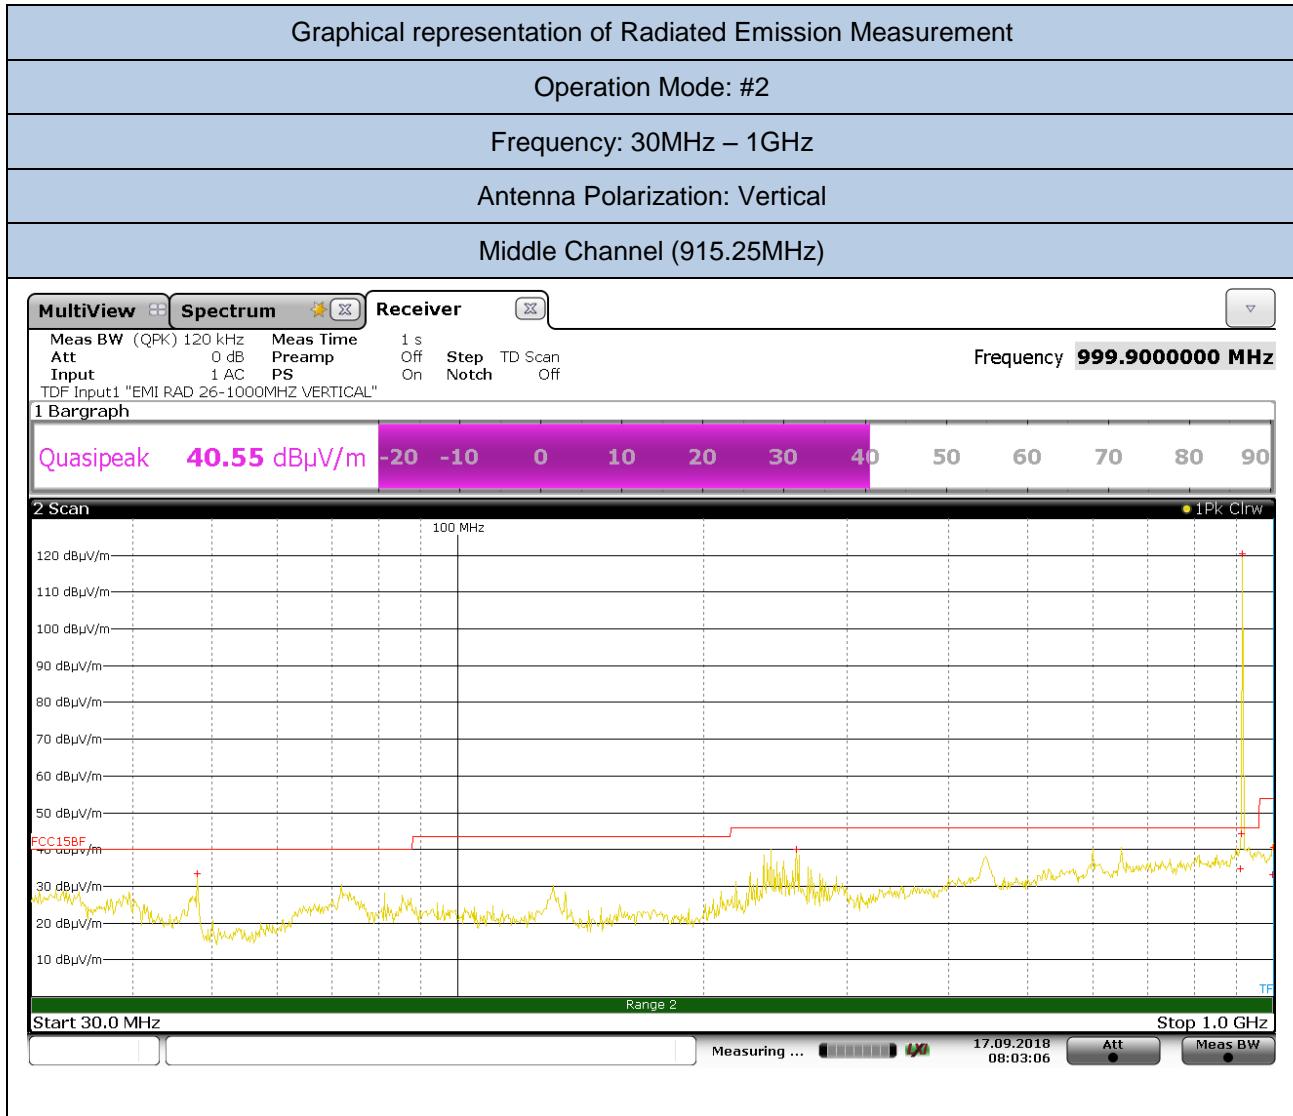


QUASI-PEAK RESULT (RBW=120kHz)					
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading
(MHz)	(dB $\mu$ V)	(dB3/m)	(dB)	(dB)	(dB $\mu$ V/m)
915,25 (fundamental)	91,17	25,30	4,07	Not present	<b>120,54</b>

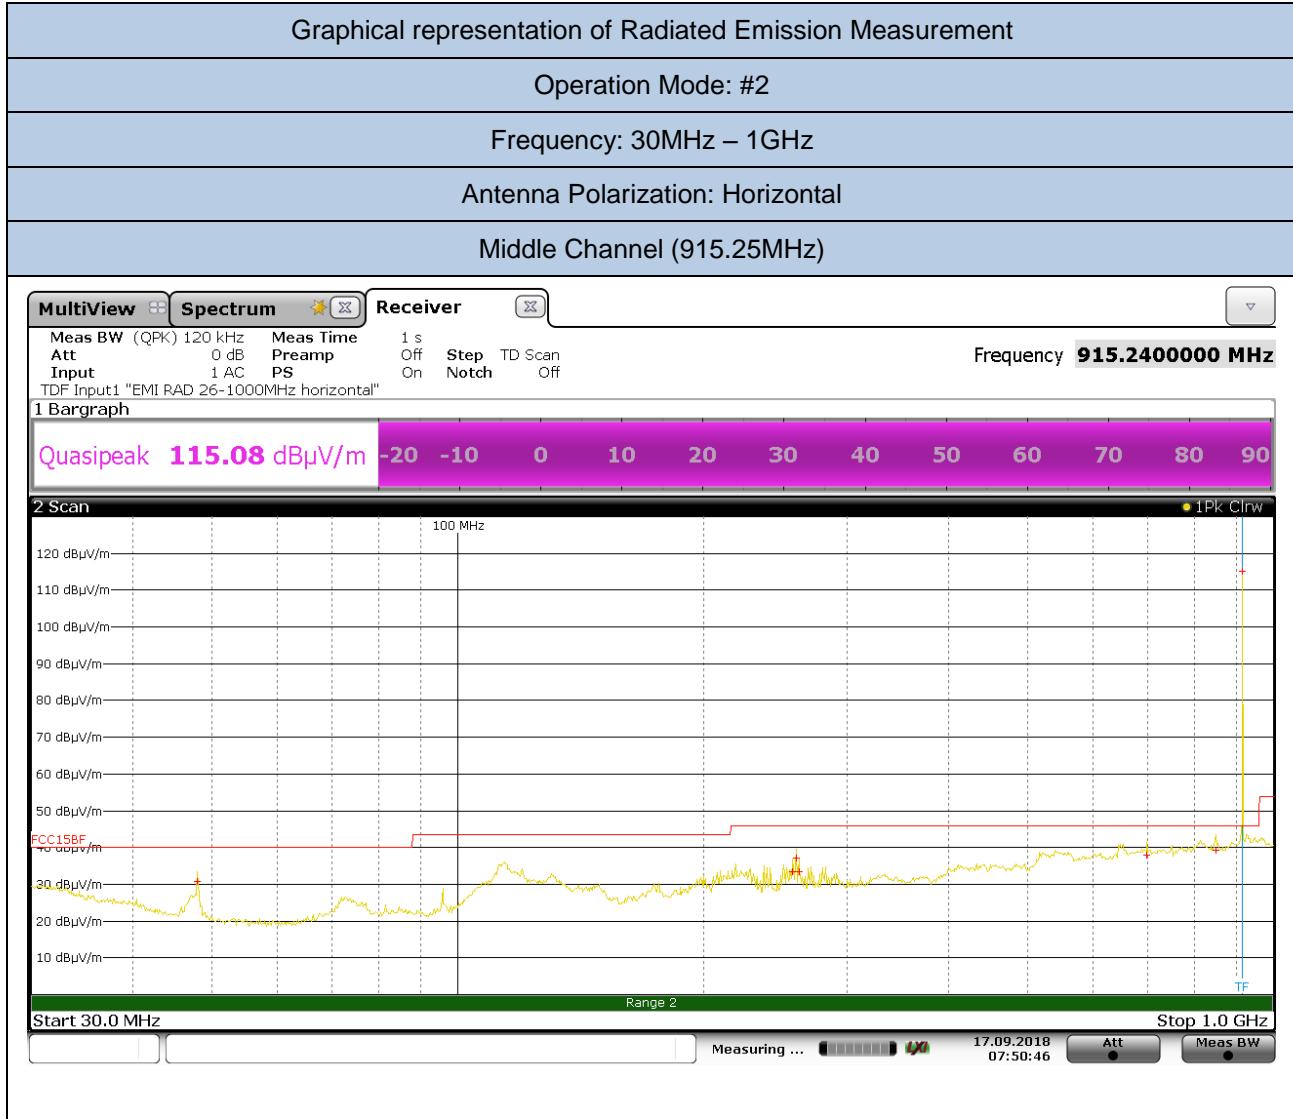


QUASI-PEAK RESULT (RBW=120kHz)					
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading
(MHz)	(dB $\mu$ V)	(dB3/m)	(dB)	(dB)	(dB $\mu$ V/m)
915,25 (fundamental)	85,64	25,30	4,07	Not present	<b>115,01</b>

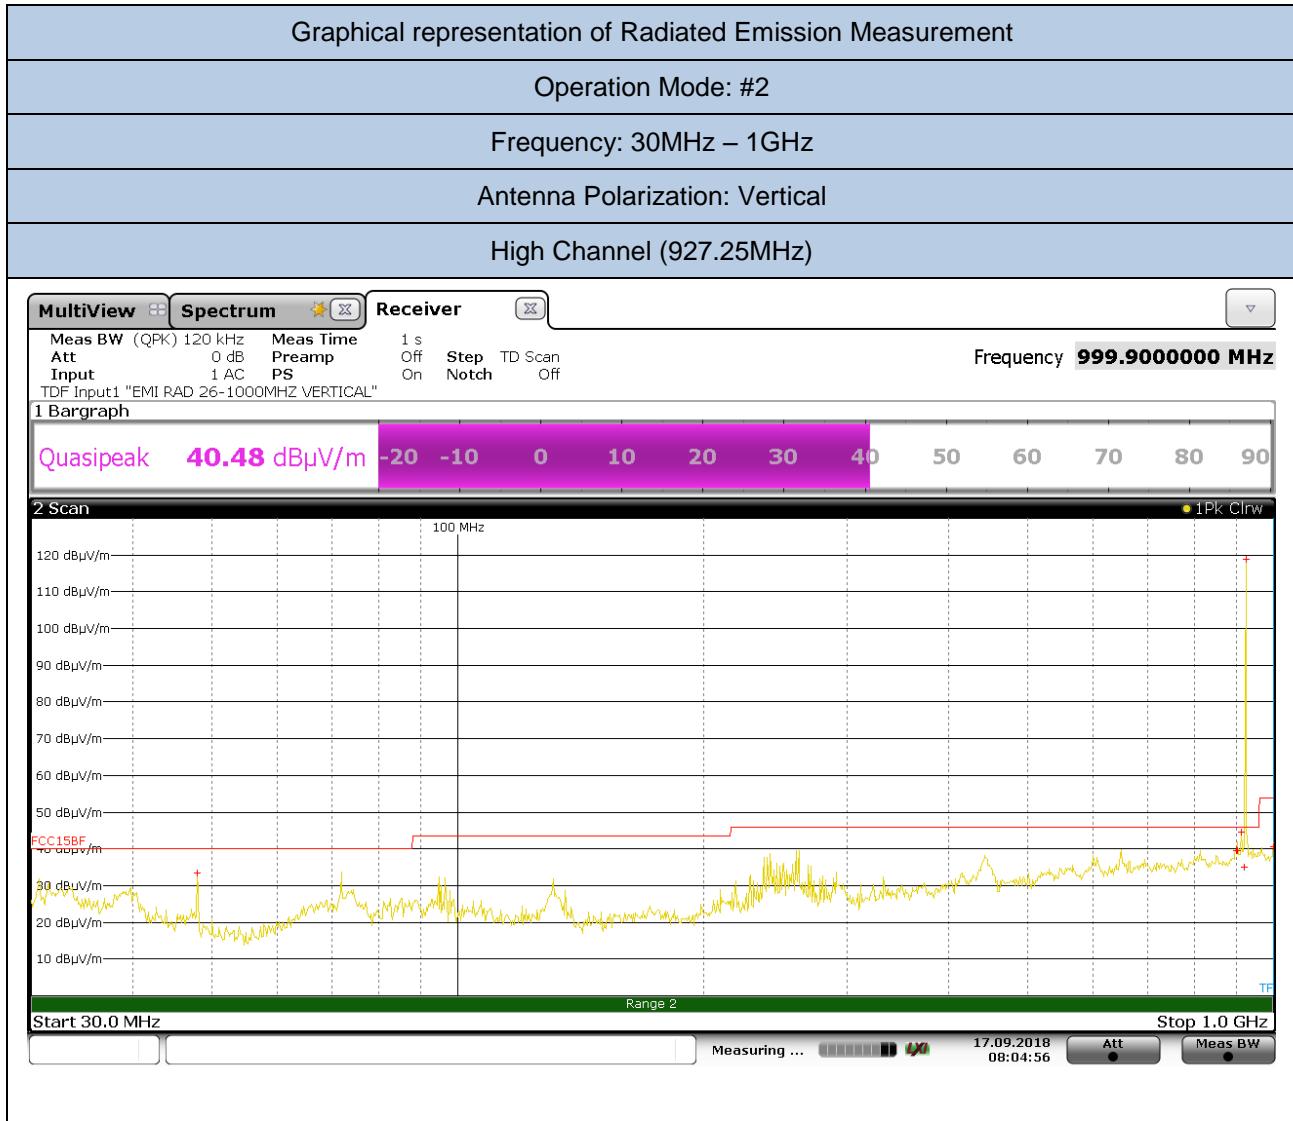

QUASI-PEAK RESULT (RBW=120kHz)					
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading
(MHz)	(dB $\mu$ V)	(dB $\mu$ V/m)	(dB)	(dB)	(dB $\mu$ V/m)
927,25 (fundamental)	89,36	25,34	4,13	Not present	<b>118,83</b>

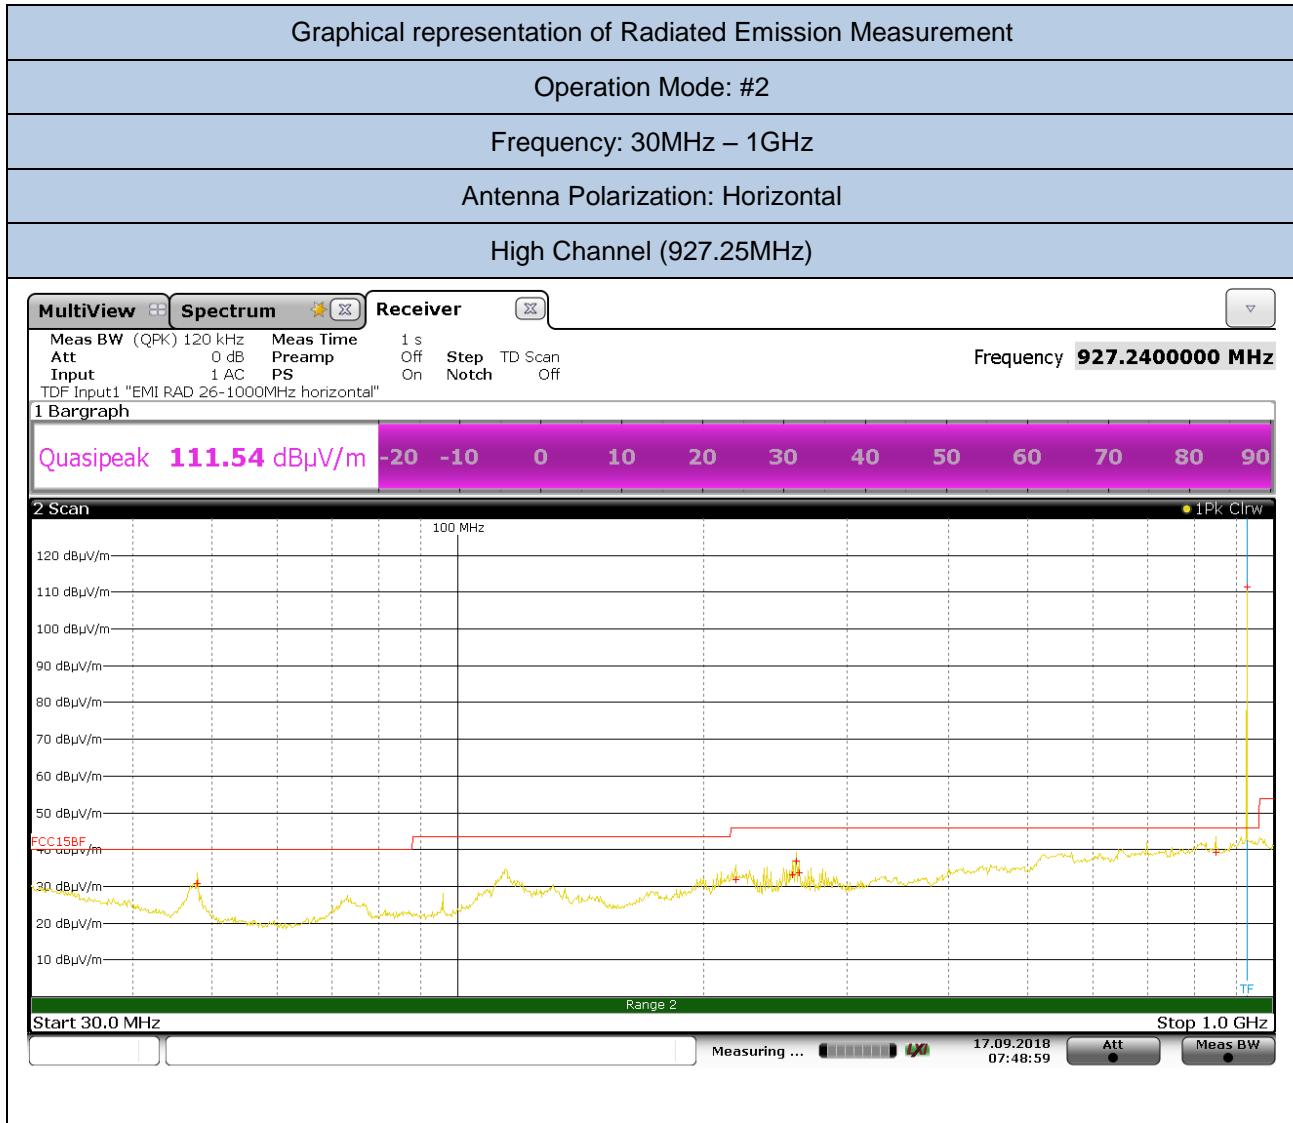


QUASI-PEAK RESULT (RBW=120kHz)					
Frequency	Reading value	Antenna Factor	Cable Loss	Pre-Amp. Gain	Correcting reading
(MHz)	(dB $\mu$ V)	(dB3/m)	(dB)	(dB)	(dB $\mu$ V/m)
927,25 (fundamental)	84,83	25,34	4,13	Not present	<b>114,30</b>

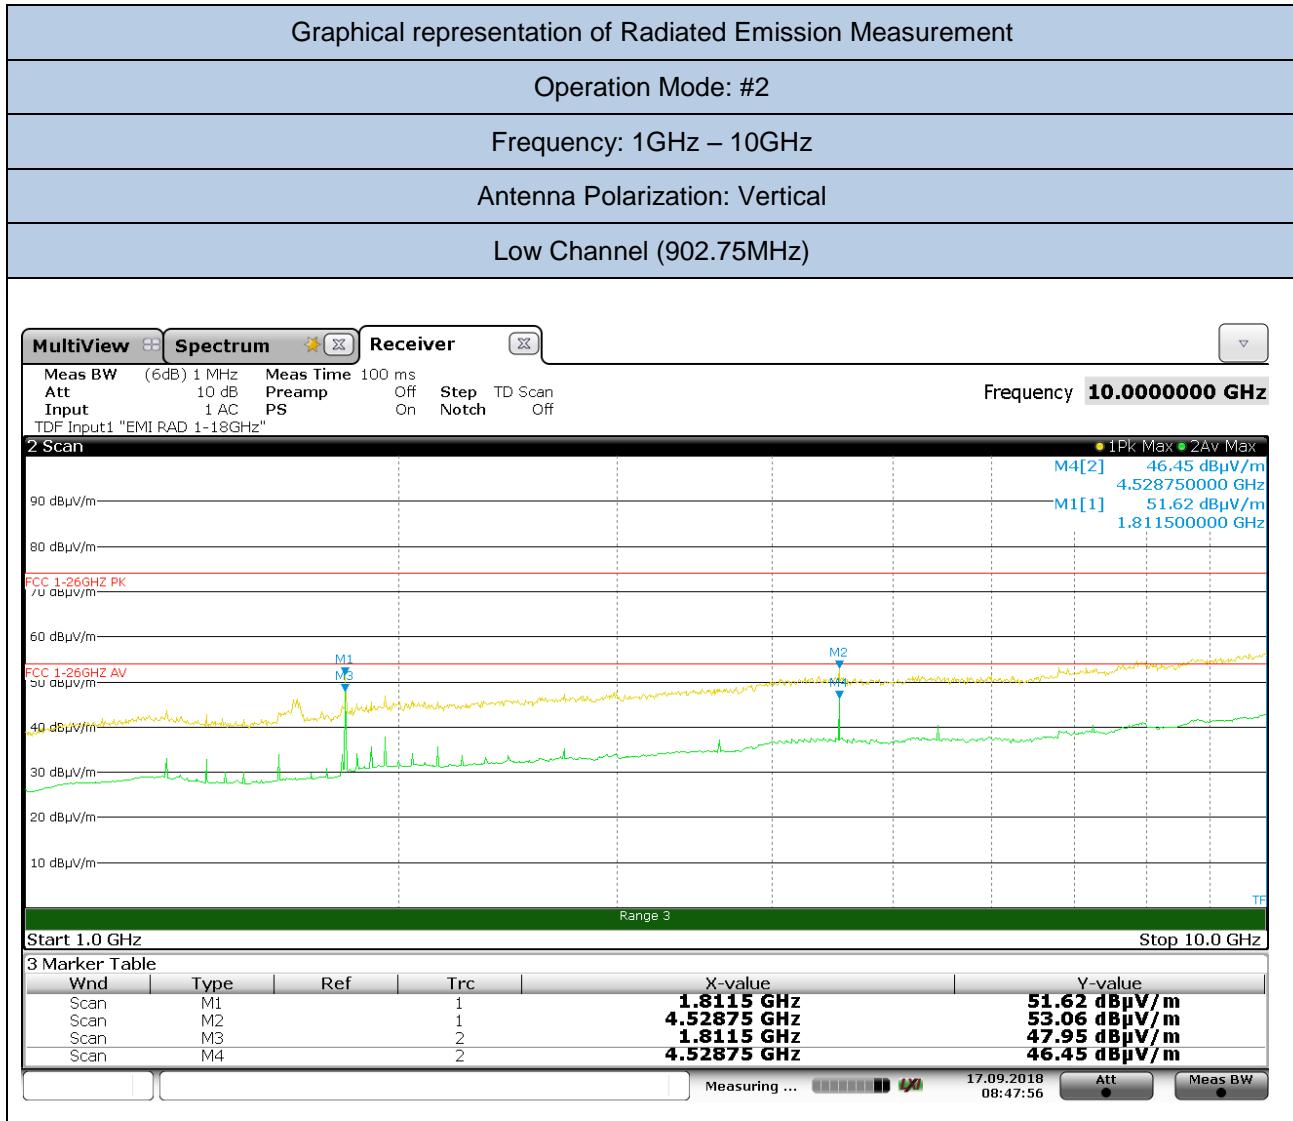


PEAK RESULT (RBW=1MHz)								
Frequency	Reading value	Antenna Factor	Pre-Amp. Gain	Cable Loss	Correcting reading	Restricted band	PK Limit (AV Limit + 20dB)	Margin
(MHz)	(dB $\mu$ V)	(dB $\mu$ V/m)	(dB)	(dB)	(dB $\mu$ V/m)	/	(dB $\mu$ V/m)	(dB)
1811,50	59,50	30,60	44,50	6,02	51,62	no	100,09*	48,47
4528,75	51,62	33,89	43,60	11,15	53,06	yes	74,00	20,74

\*=fundamental level (QP) in Vertical polarization – 20dB  
N.B. = all peak levels measured are under par.15.209 average limit (54 dB $\mu$ V/m)

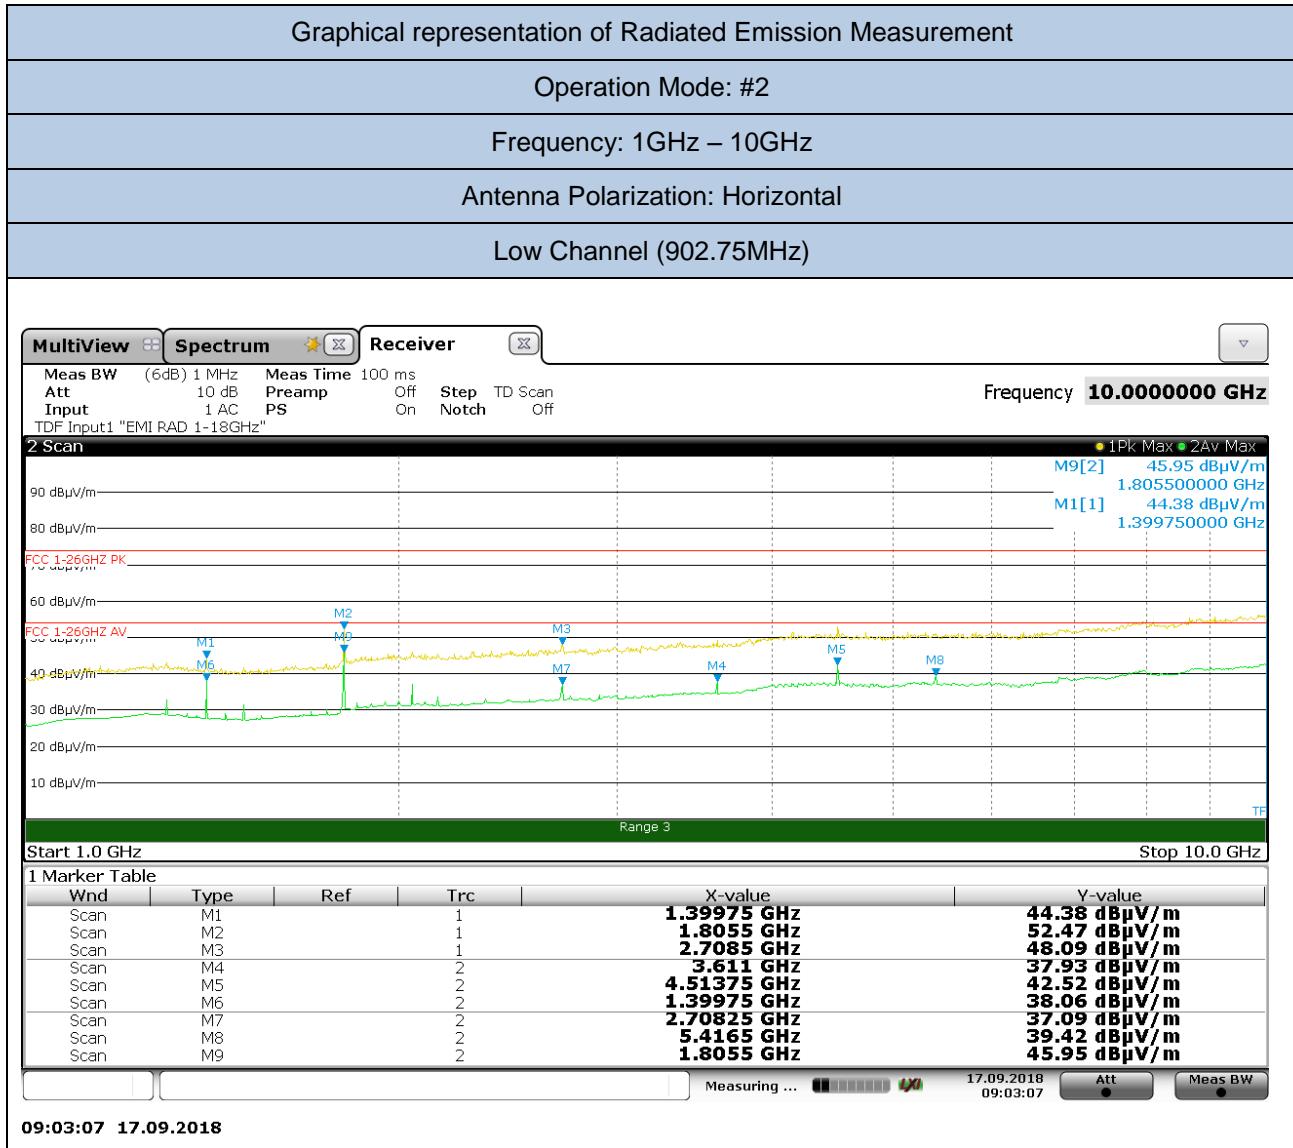

PEAK RESULT (RBW=1MHz)								
Frequency	Reading value	Antenna Factor	Pre-Amp. Gain	Cable Loss	Correcting reading	Restricted band	PK Limit (AV Limit + 20dB)	Margin
(MHz)	(dB $\mu$ V)	(dB $\mu$ V/m)	(dB)	(dB)	(dB $\mu$ V/m)		(dB $\mu$ V/m)	(dB)
1805,50	52,47	30,60	44,50	6,02	<b>52,47</b>	no	96,16*	43,69


\*=fundamental level (QP) in Horizontal polarization – 20dB  
N.B. = all peak levels measured are under par.15.209 average limit (54 dB $\mu$ V/m)

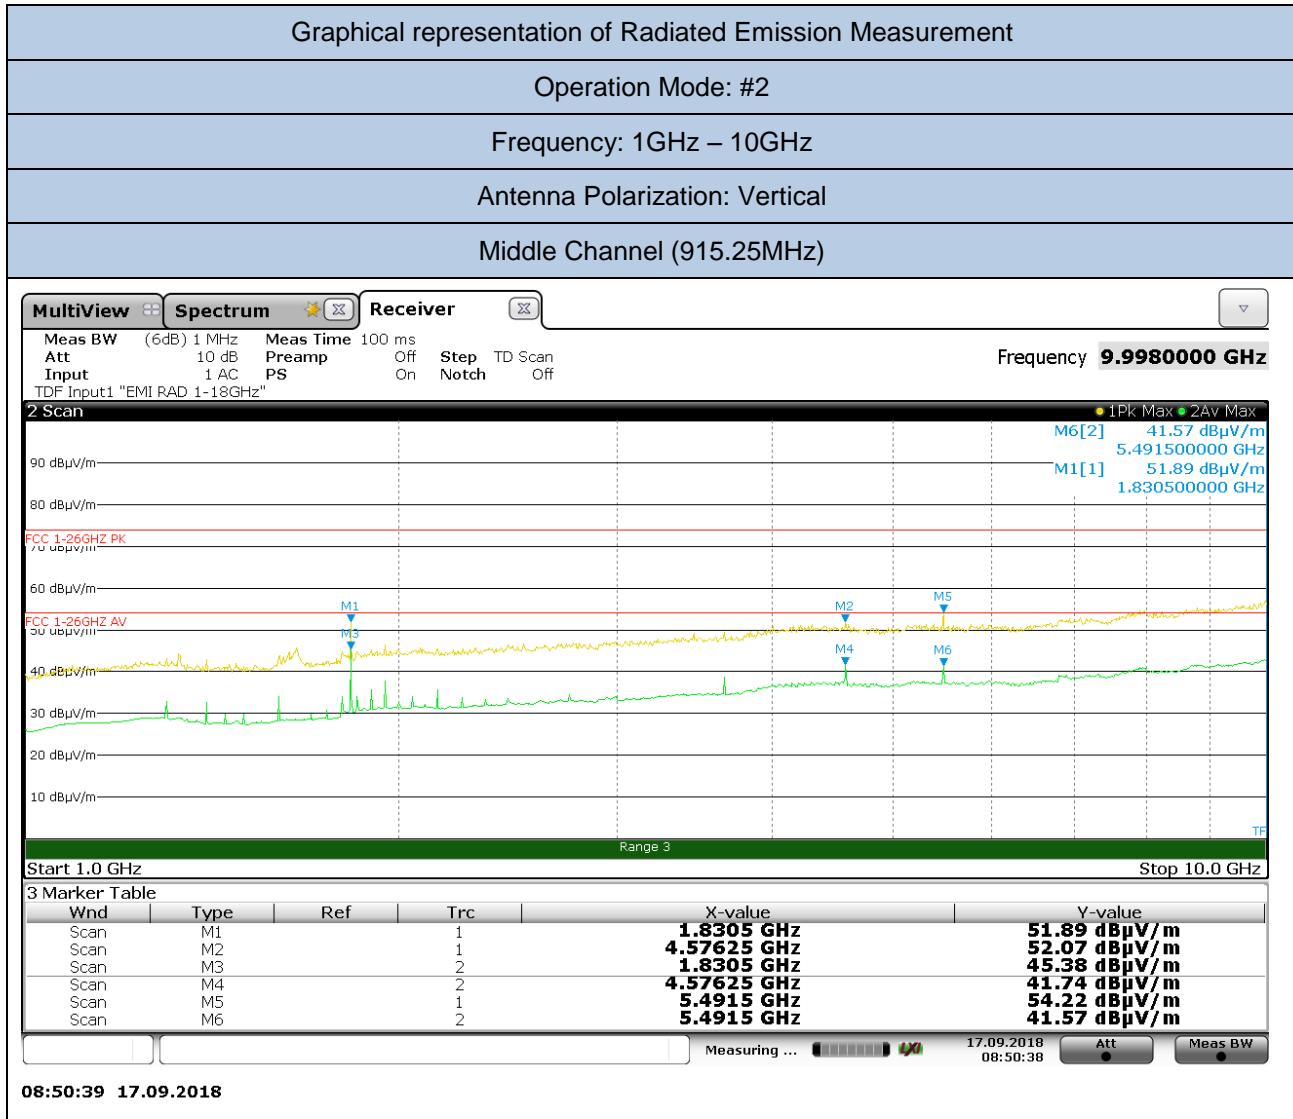

PEAK RESULT (RBW=1MHz)								
Frequency	Reading value	Antenna Factor	Pre-Amp. Gain	Cable Loss	Correcting reading	Restricted band	PK Limit (AV Limit + 20dB)	Margin
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dBµV/m)	/	(dBµV/m)	(dB)
1830,50	60,21	30,14	44,50	6,04	51,89	no	100,54*	48,65
4576,25	50,71	33,81	43,60	11,15	52,07	yes	74,00	21,93
5491,50	51,68	34,59	43,40	11,35	54,22	no	100,54*	46,47


\*=fundamental level (QP) in Vertical polarization – 20dB

AVERAGE RESULT (RBW=1MHz)								
Frequency (MHz)	Reading value (dB $\mu$ V)	Antenna Factor (dB3/m)	Pre-Amp. Gain (dB)	Cable Loss (dB)	Correcting reading (dB $\mu$ V/m)	Restricted band	AV Limit (dB $\mu$ V/m)	Margin (dB)
5491,50	39,03	34,59	43,40	11,35	<b>41,57</b>	no	54,00	12,43
N.B. = all others peak levels measured are under par.15.209 average limit (54 dB $\mu$ V/m)								

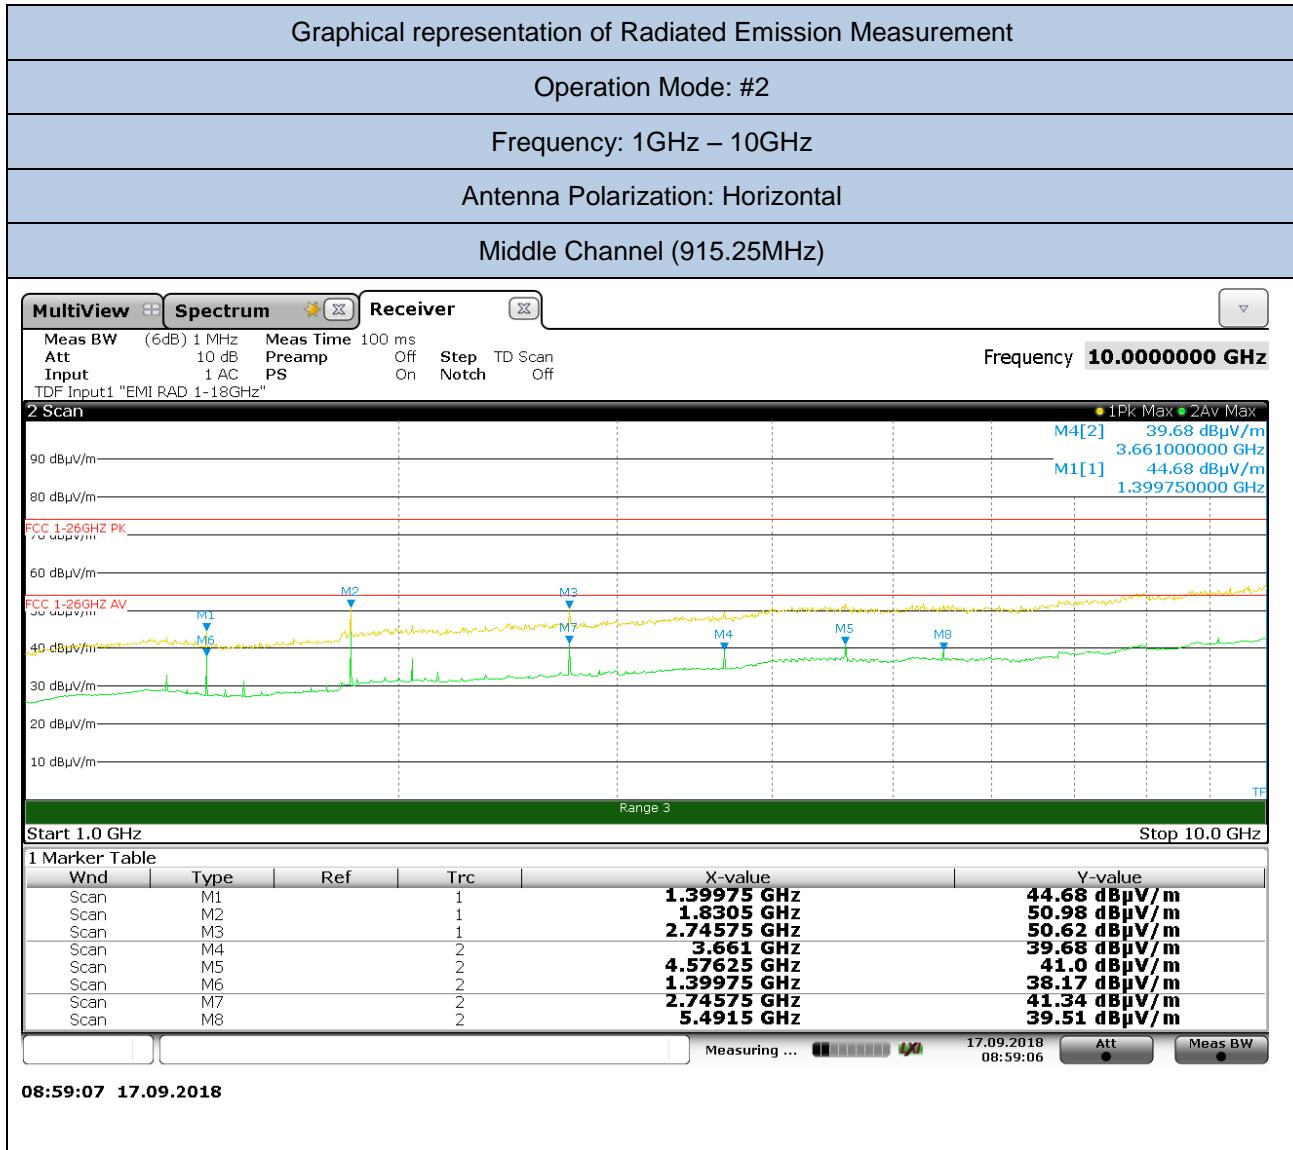


PEAK RESULT (RBW=1MHz)								
Frequency	Reading value	Antenna Factor	Pre-Amp. Gain	Cable Loss	Correcting reading	Restricted band	PK Limit (AV Limit + 20dB)	Margin
(MHz)	(dB $\mu$ V)	(dB $\mu$ V/m)	(dB)	(dB)	(dB $\mu$ V/m)	/	(dB $\mu$ V/m)	(dB)
1830,50	59,30	30,14	44,50	6,04	<b>50,98</b>	no	95,01*	44,03
2745,75	55,40	32,62	44,80	7,40	<b>50,62</b>	yes	74,00	23,38

\*=fundamental level (QP) in Horizontal polarization – 20dB

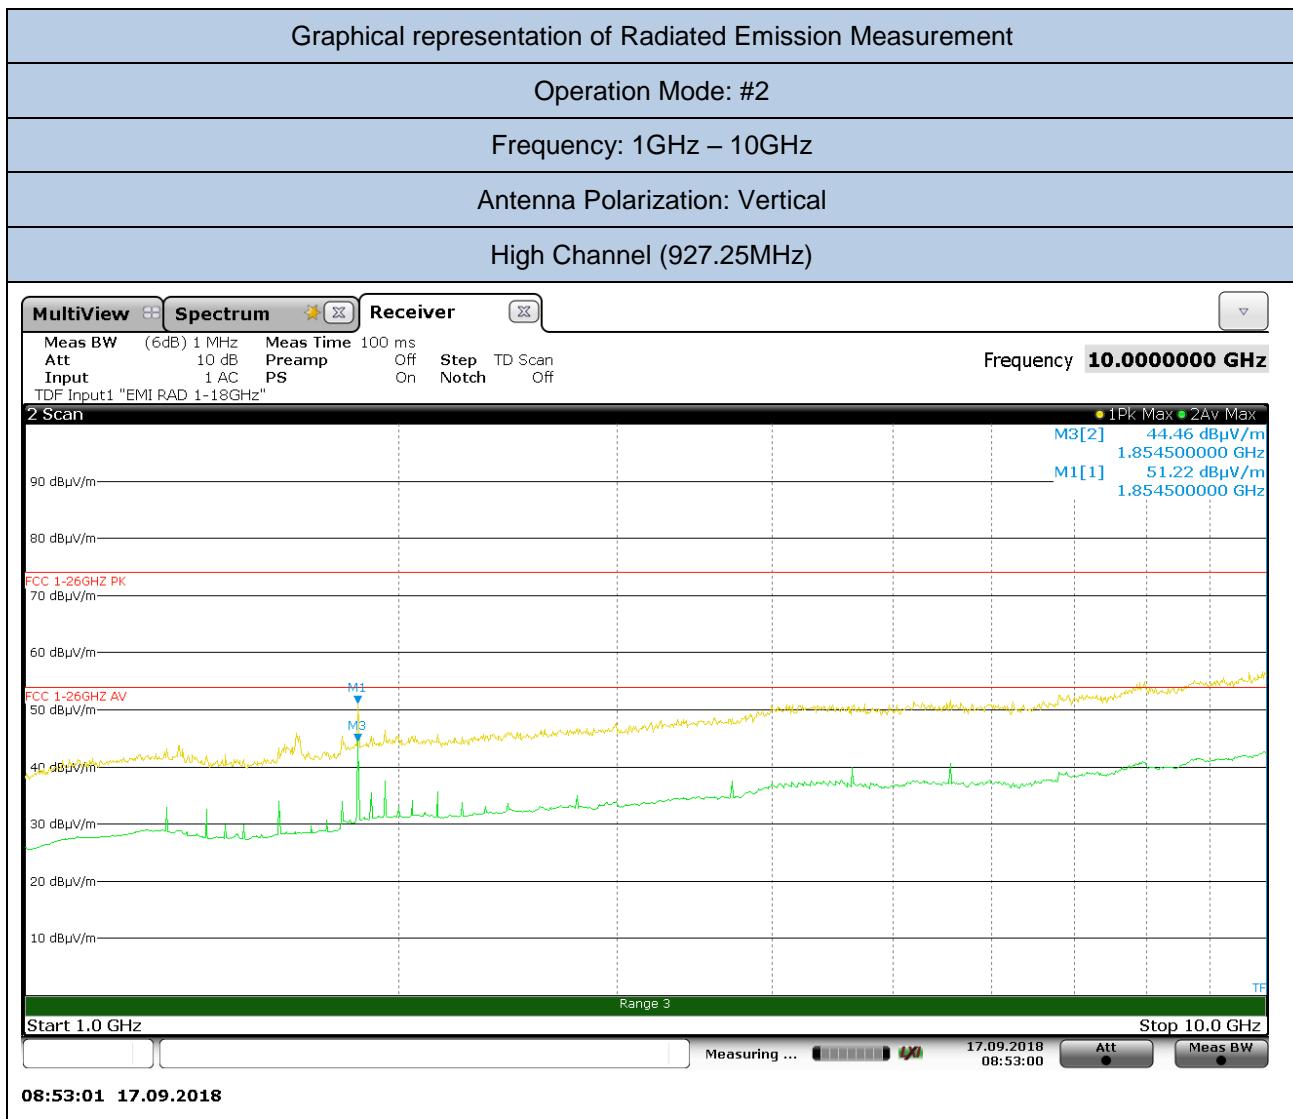

PEAK RESULT (RBW=1MHz)								
Frequency	Reading value	Antenna Factor	Pre-Amp. Gain	Cable Loss	Correcting reading	Restricted band	PK Limit (AV Limit + 20dB)	Margin
(MHz)	(dBµV)	(dB3/m)	(dB)	(dB)	(dBµV/m)	/	(dBµV/m)	(dB)
1854,50	59,06	30,60	44,50	6,06	51,22	no	98,83*	47,61

\*=fundamental level (QP) in Vertical polarization – 20dB

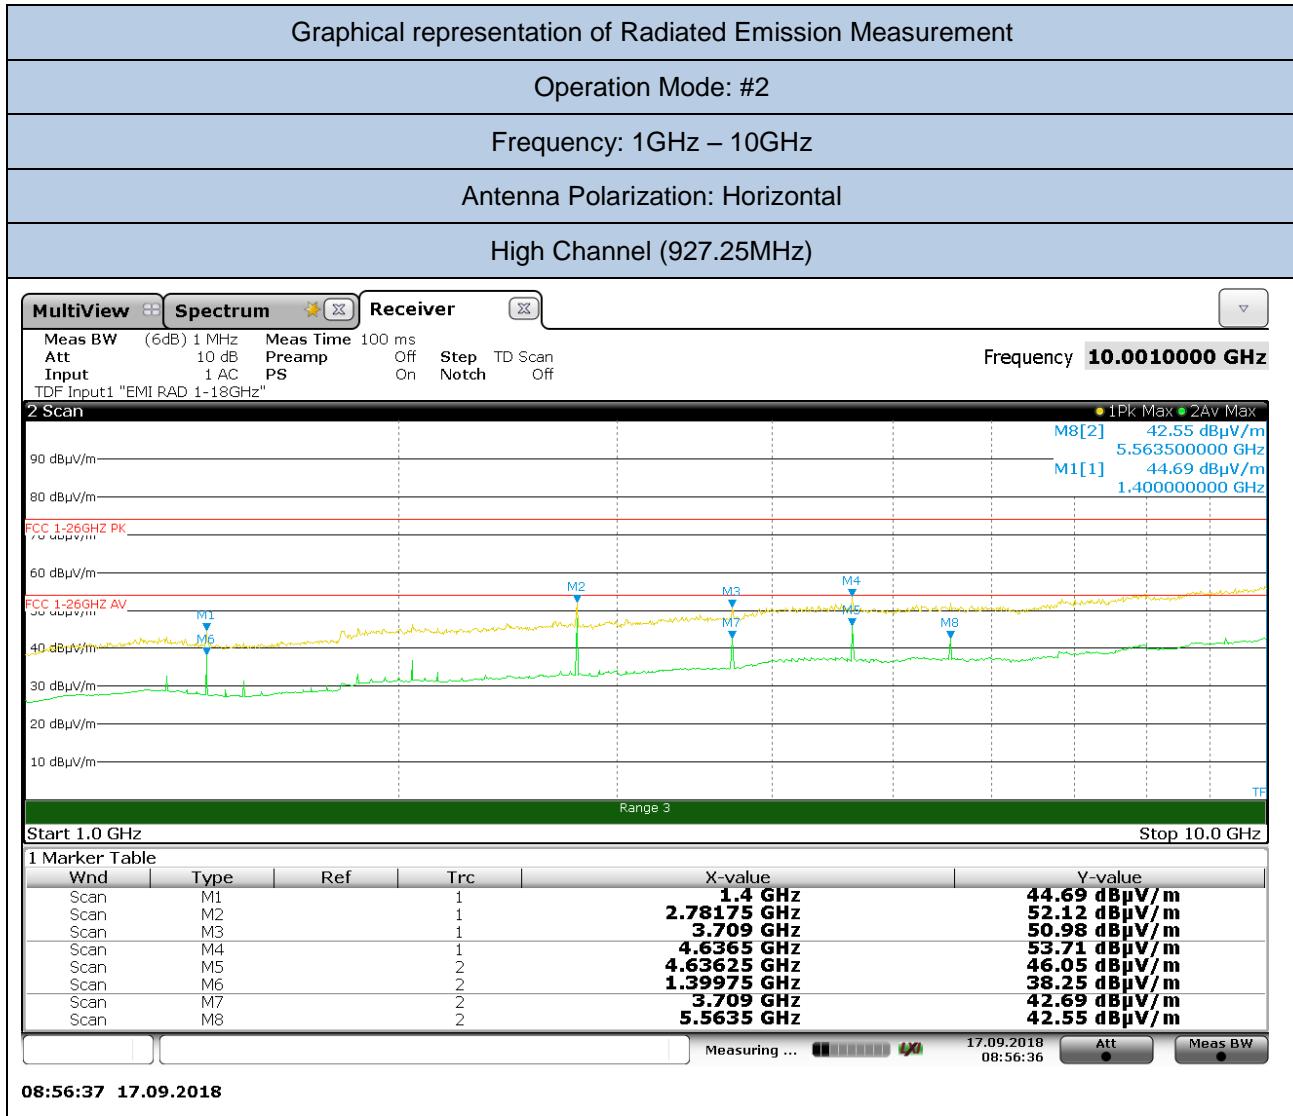


PEAK RESULT (RBW=1MHz)									
Frequency	Reading value	Antenna Factor	Pre-Amp. Gain	Cable Loss	Correcting reading	Restricted band	PK Limit (AV Limit + 20dB)	Margin	
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	/	(dB $\mu$ V/m)	(dB)	
2781,75	56,60	32,84	44,80	7,48	<b>52,12</b>	yes	74,00	21,88	
3709,00	52,16	33,10	43,50	9,22	<b>50,98</b>	yes	74,00	23,02	
4636,25	33,82	33,82	43,60	11,15	<b>53,71</b>	yes	74,00	20,29	


\*=fundamental level (QP) in Horizontal polarization – 20dB

AVERAGE RESULT (RBW=1MHz)								
Frequency (MHz)	Reading value (dB $\mu$ V)	Antenna Factor (dB/m)	Pre-Amp. Gain (dB)	Cable Loss (dB)	Correcting reading (dB $\mu$ V/m)	Restricted band /	AV Limit (dB $\mu$ V/m)	Margin (dB)
---	---	---	---	---	---	---	---	---


N.B. = all peak levels measured are under par.15.209 average limit (54 dB $\mu$ V/m)
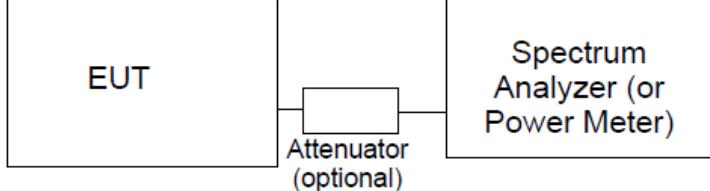
<b>12.4 TEST: 20dB Bandwidth</b>		<b>PASS</b>
Parameters required prior to the test	Laboratory Ambient Temperature (°C)	15 to 35 °C
	Relative Humidity (%)	30 to 60 %
Parameters recorded during the test	Laboratory Ambient Temperature (°C)	24°C
	Relative Humidity (%)	48%
	Air pressure (hPa)	1020
—	Power Supply & Frequency	Application Point
Fully configured sample tested at the power line frequency	120V ~ 60Hz	RF Connector
Equipment mode: #1	Operation mode	#3
FCC Standard	§15.247 (A)	
Limit: None; for reporting purpose only		
Further information to test setup		


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Calibration date	Calibration due
EMI Test Receiver	R&S	ESU40	87020455	04/2018	04/2019

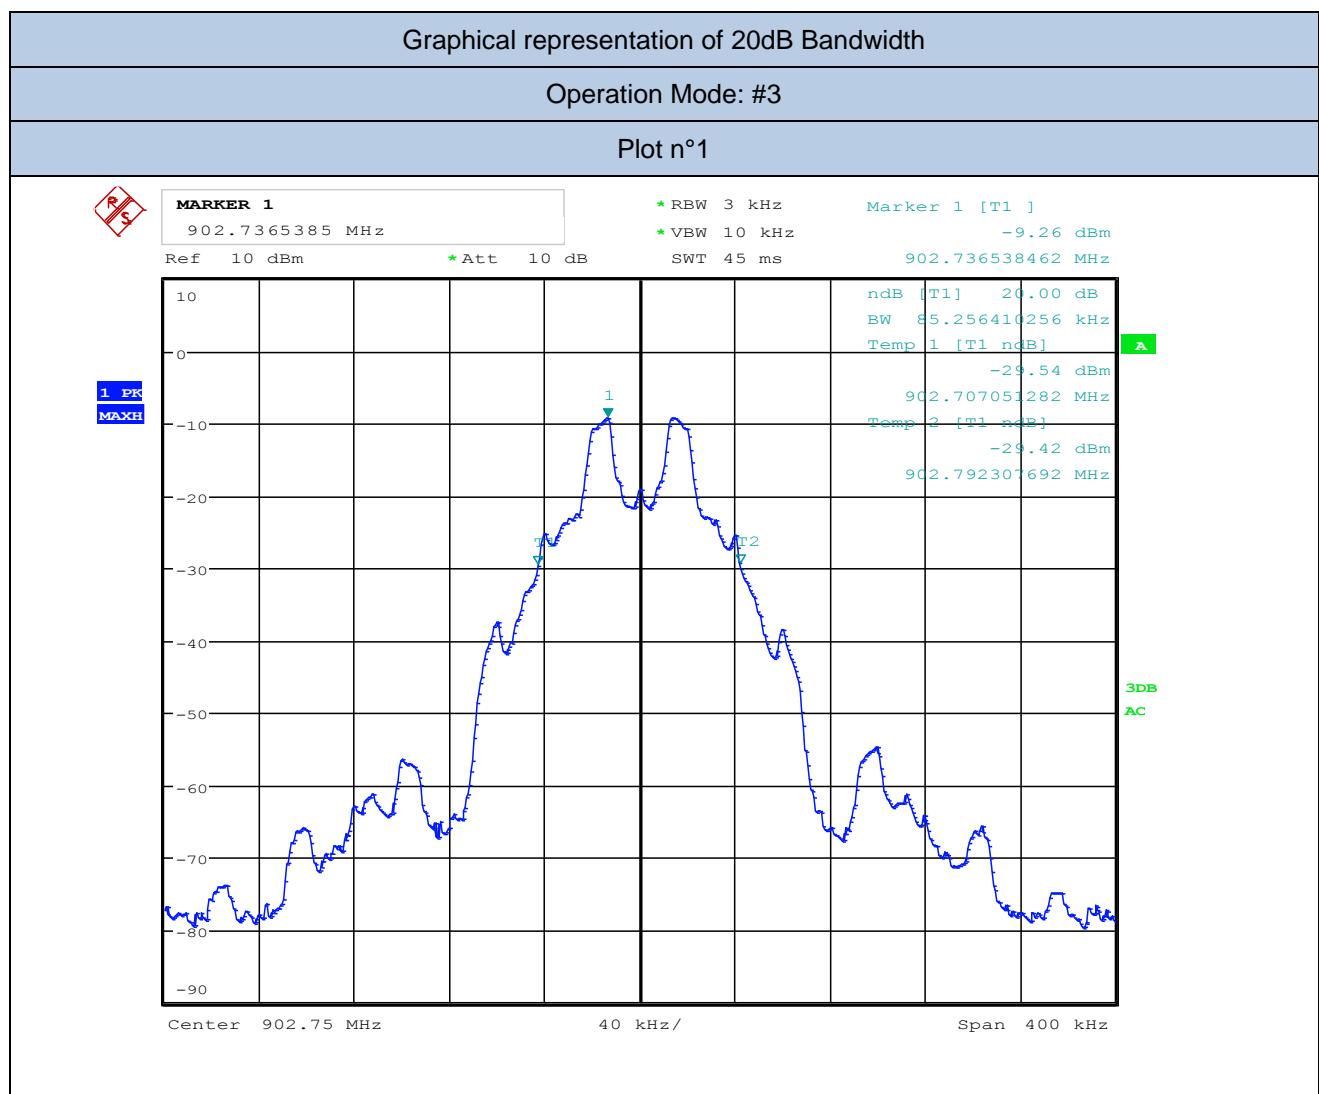


Channel (No.)	Frequency (MHz)	Channel Bandwidth at -20dB (kHz)	Limit (kHz)	Plot (No.)
1 (Low)	902,75	85,25	-----	1

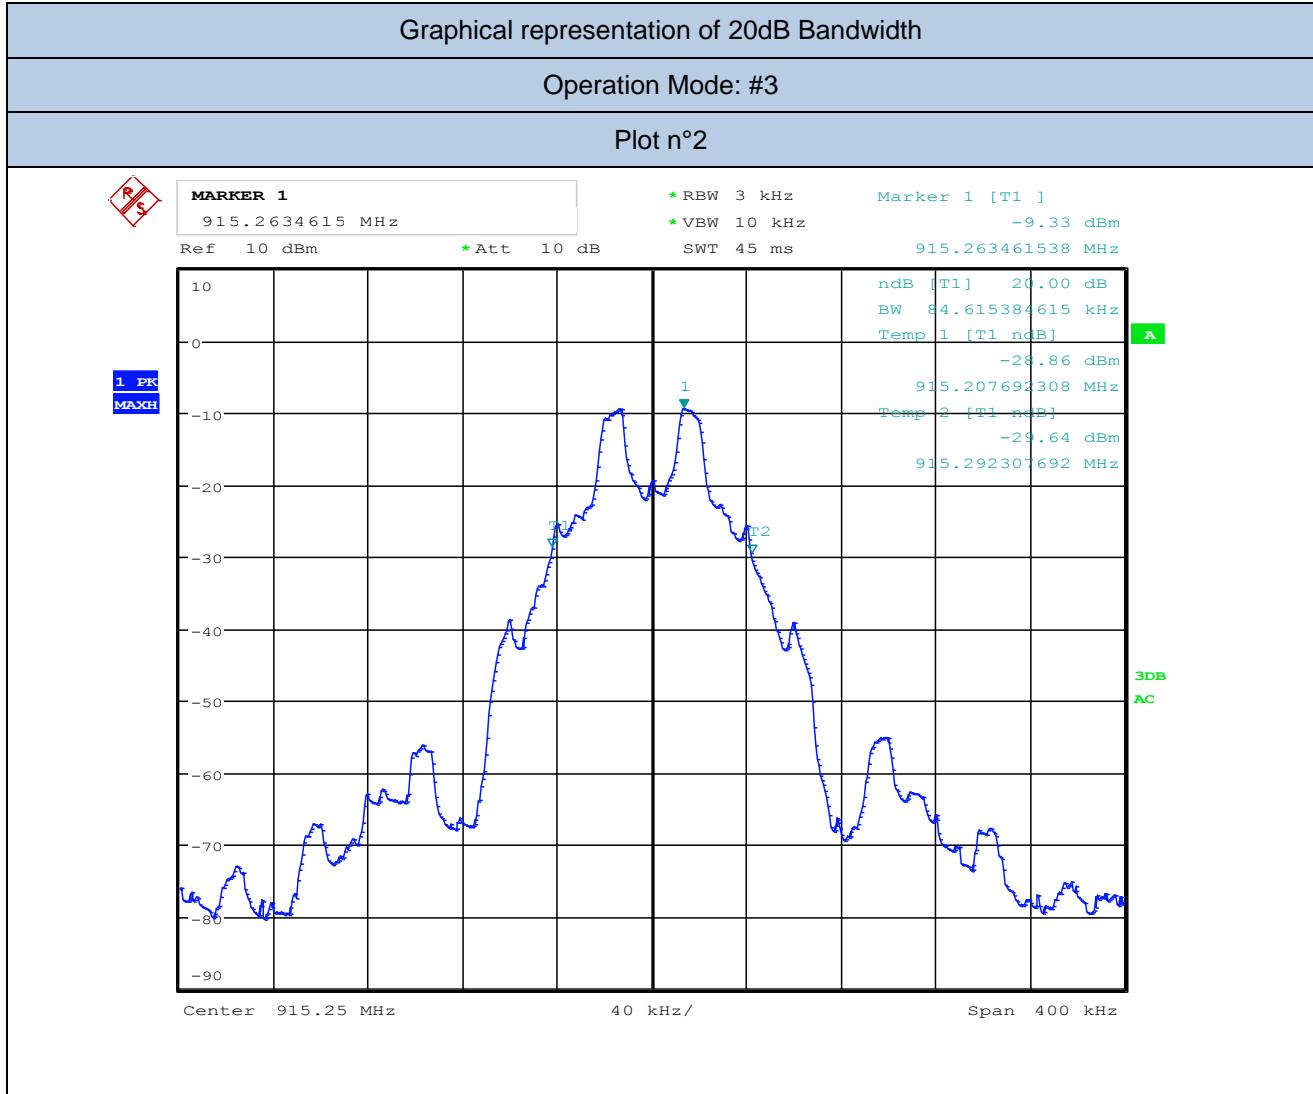


Channel (No.)	Frequency (MHz)	Channel Bandwidth at -20dB (kHz)	Limit (kHz)	Plot (No.)
25 (Middle)	915,25	84,61	-----	2

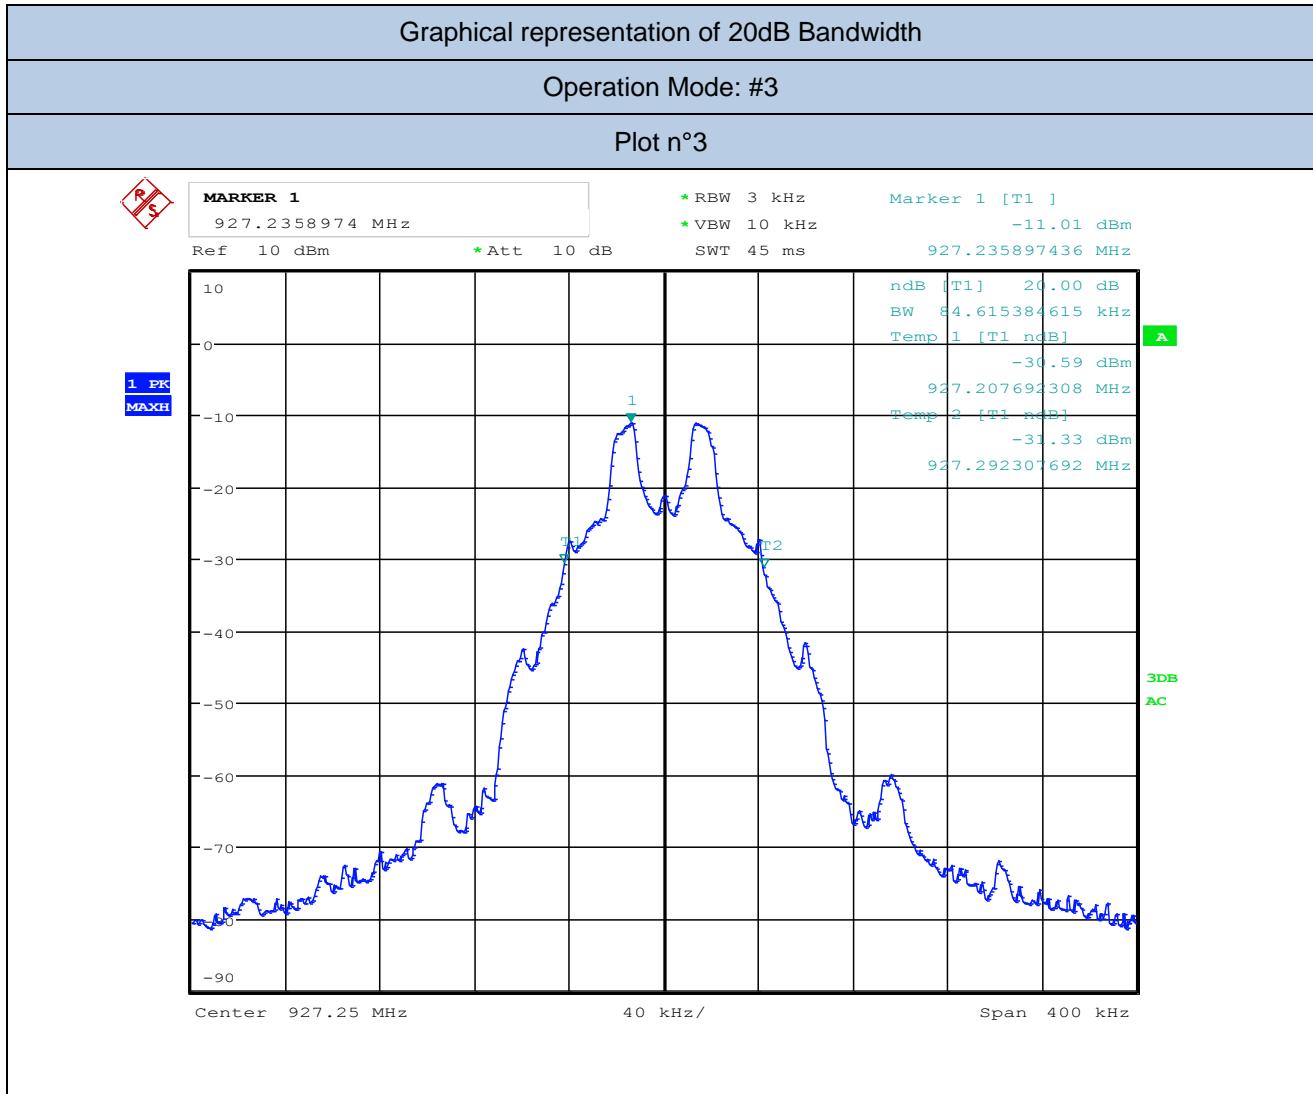

Channel (No.)	Frequency (MHz)	Channel Bandwidth at -20dB (kHz)	Limit (kHz)	Plot (No.)
50 (High)	927,25	84,61	-----	3

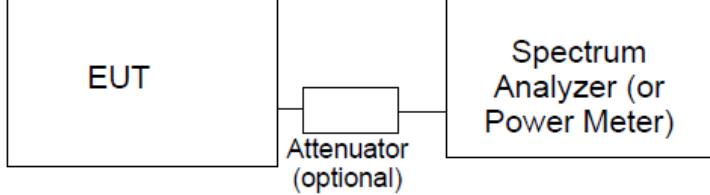
<b>12.5 TEST: RF power output</b>		<b>PASS</b>
Parameters required prior to the test	Laboratory Ambient Temperature (°C)	15 to 35 °C
	Relative Humidity (%)	30 to 60 %
Parameters recorded during the test	Laboratory Ambient Temperature (°C)	22,5°C
	Relative Humidity (%)	51%
	Air pressure (hPa)	1020
—	Power Supply & Frequency	Application Point
Fully configured sample tested at the power line frequency	120V ~ 60Hz	RF Connector
Equipment mode: #1	Operation mode	#1,#3
FCC Standard	§15.247 (B) (2)	
<p>(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:</p> <p>(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.</p> <p>(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.</p> <p>(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.</p> <p>(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>		
Further information to test setup		

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Calibration date	Calibration due
EMI Test Receiver	R&S	ESU40	87020455	04/2018	04/2019

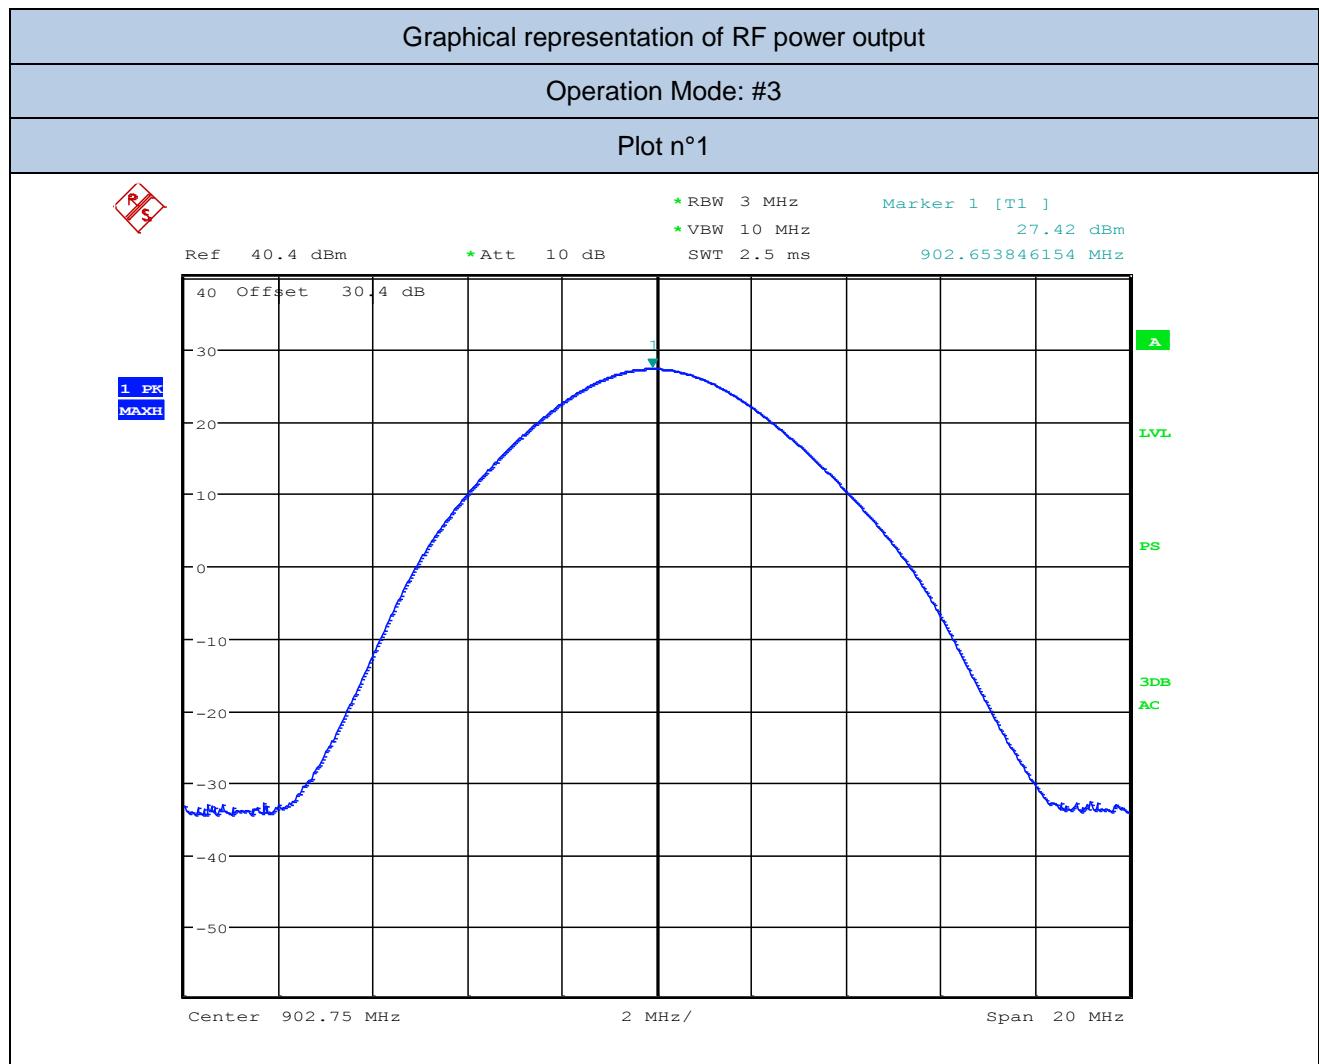


Channel (No.)	Frequency (MHz)	Conducted Output Power		Limit (W)
		(dBm)	(mW)	
1 (Low)	902,75	27,42	552,07	1

Measured Radiated ERP					
Channel (No.)	Frequency (MHz)	Max. Radiated Output Power (at 3m. distance)	ERP		Limit (W)
		(dB $\mu$ V/m)	(dBm)	(mW)	
1 (Low)	902,75	127,47	30,09	1021,59	4

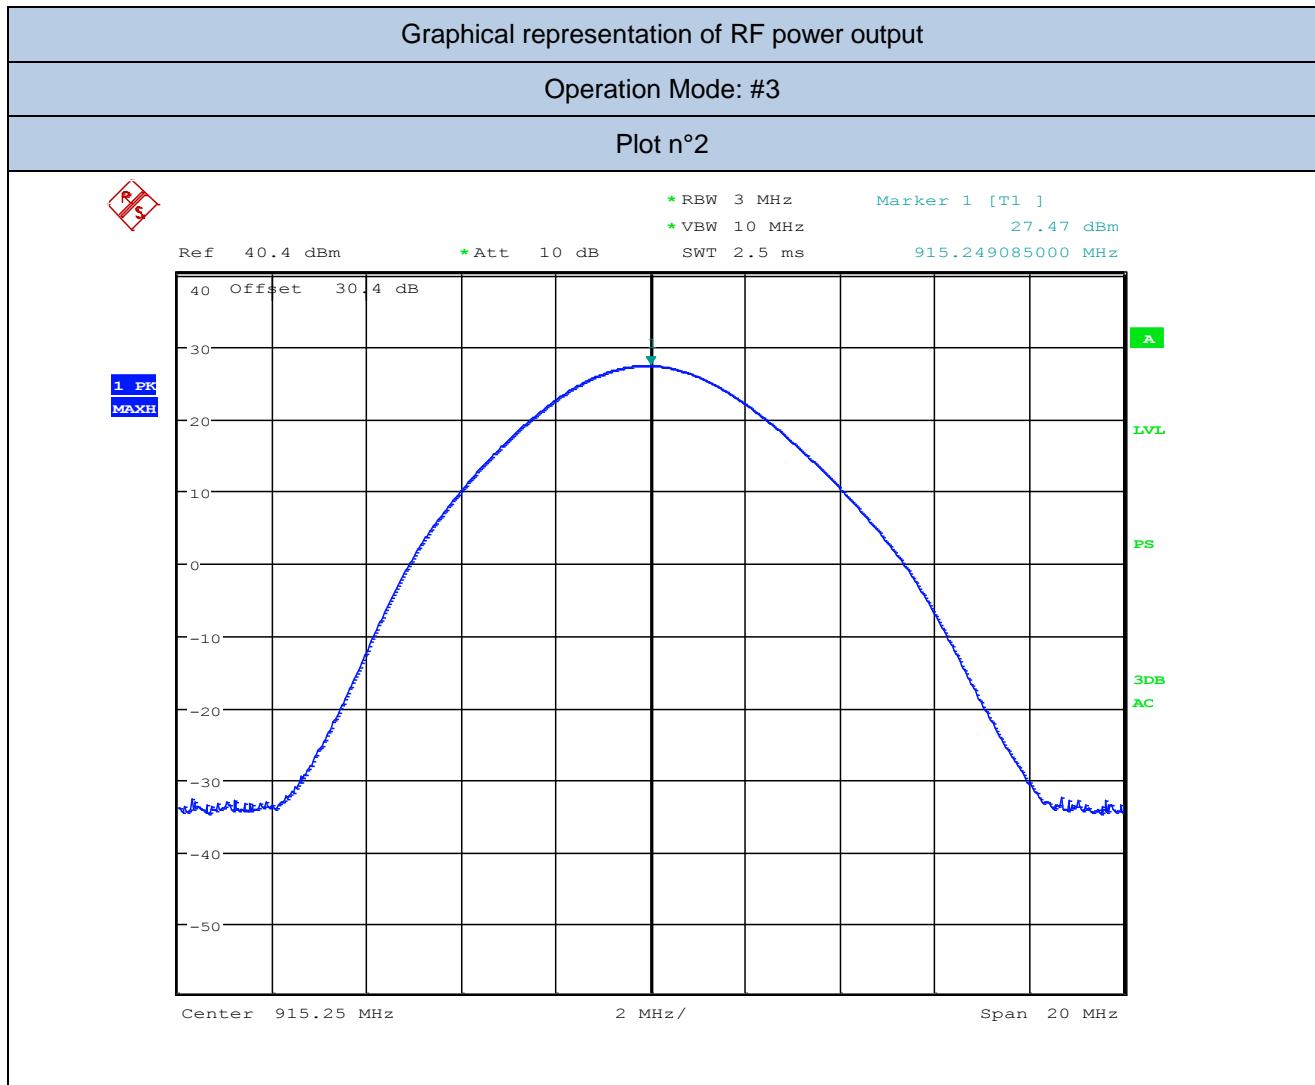

Channel (No.)	Frequency (MHz)	Conducted Output Power		Limit (W)
		(dBm)	(mW)	
25 (Middle)	915,25	27,47	558,47	1


Measured Radiated ERP					
hannel (No.)	Frequency (MHz)	Max. Radiated Output Power (at 3m. distance)	ERP		Limit (W)
			(dB $\mu$ V/m)	(dBm)	
25 (Middle)	915,25	127,55	30,17	1040,58	4

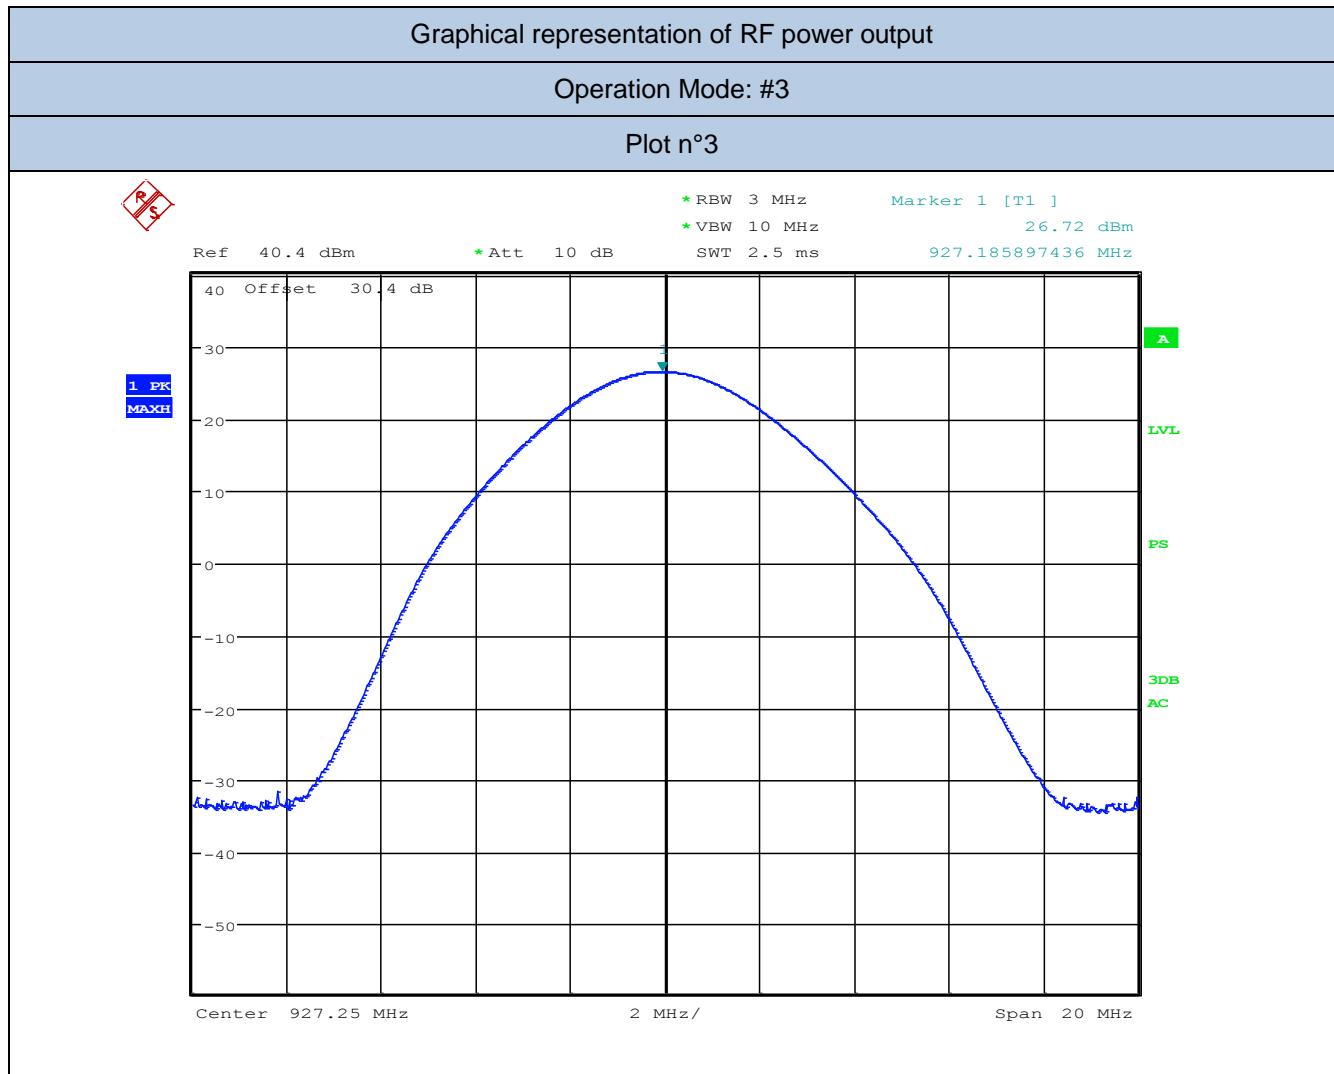


Channel (No.)	Frequency (MHz)	Conducted Output Power		Limit (W)
		(dBm)	(mW)	
50 (High)	927,25	26,72	469,89	1

#### Measured Radiated ERP

Channel (No.)	Frequency (MHz)	Max. Radiated Output Power (at 3m. distance)	ERP		Limit (W)
			(dB $\mu$ V/m)	(dBm)	
50 (High)	927,25	126,35	28,97	789,36	4

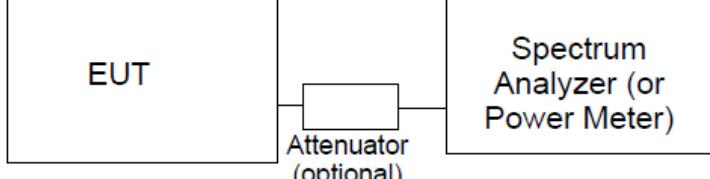
<b>12.6 TEST: Out-of-band emissions</b>		<b>PASS</b>
Parameters required prior to the test	Laboratory Ambient Temperature (°C)	15 to 35 °C
	Relative Humidity (%)	30 to 60 %
Parameters recorded during the test	Laboratory Ambient Temperature (°C)	22°C
	Relative Humidity (%)	50%
	Air pressure (hPa)	1020
—	Power Supply & Frequency	Application Point
Fully configured sample tested at the power line frequency	120V ~ 60Hz	RF Connector
Equipment mode: #1	Operation mode	#1, #3
FCC Standard	§15.247 (D)	
<p>(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>		
Further information to test setup		

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Calibration date	Calibration due
EMI Test Receiver	R&S	ESU40	87020455	04/2018	04/2019
Highpass Filter	Wainwright Instr.	WHKX10-1170-1300	87020800	05/2018	05/2019

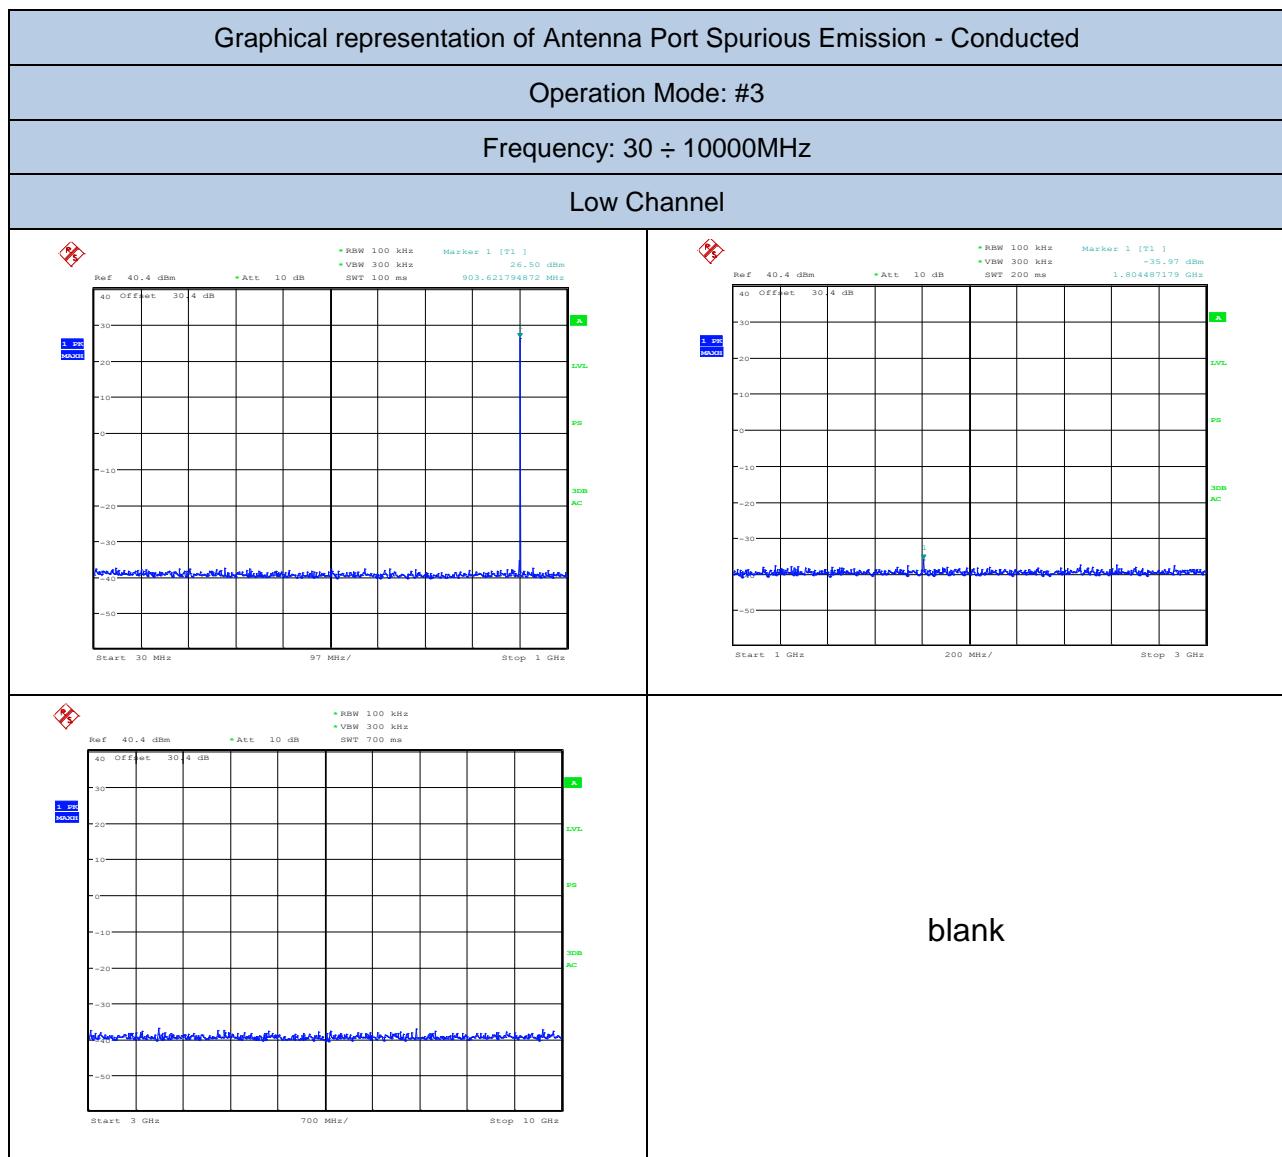


Report No. 28111932\_005


Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
<b>1804,48</b>	<b>-35,97</b>	<b>+26,50</b>	<b>62,47</b>	<b>+6,50</b>	<b>42,47</b>

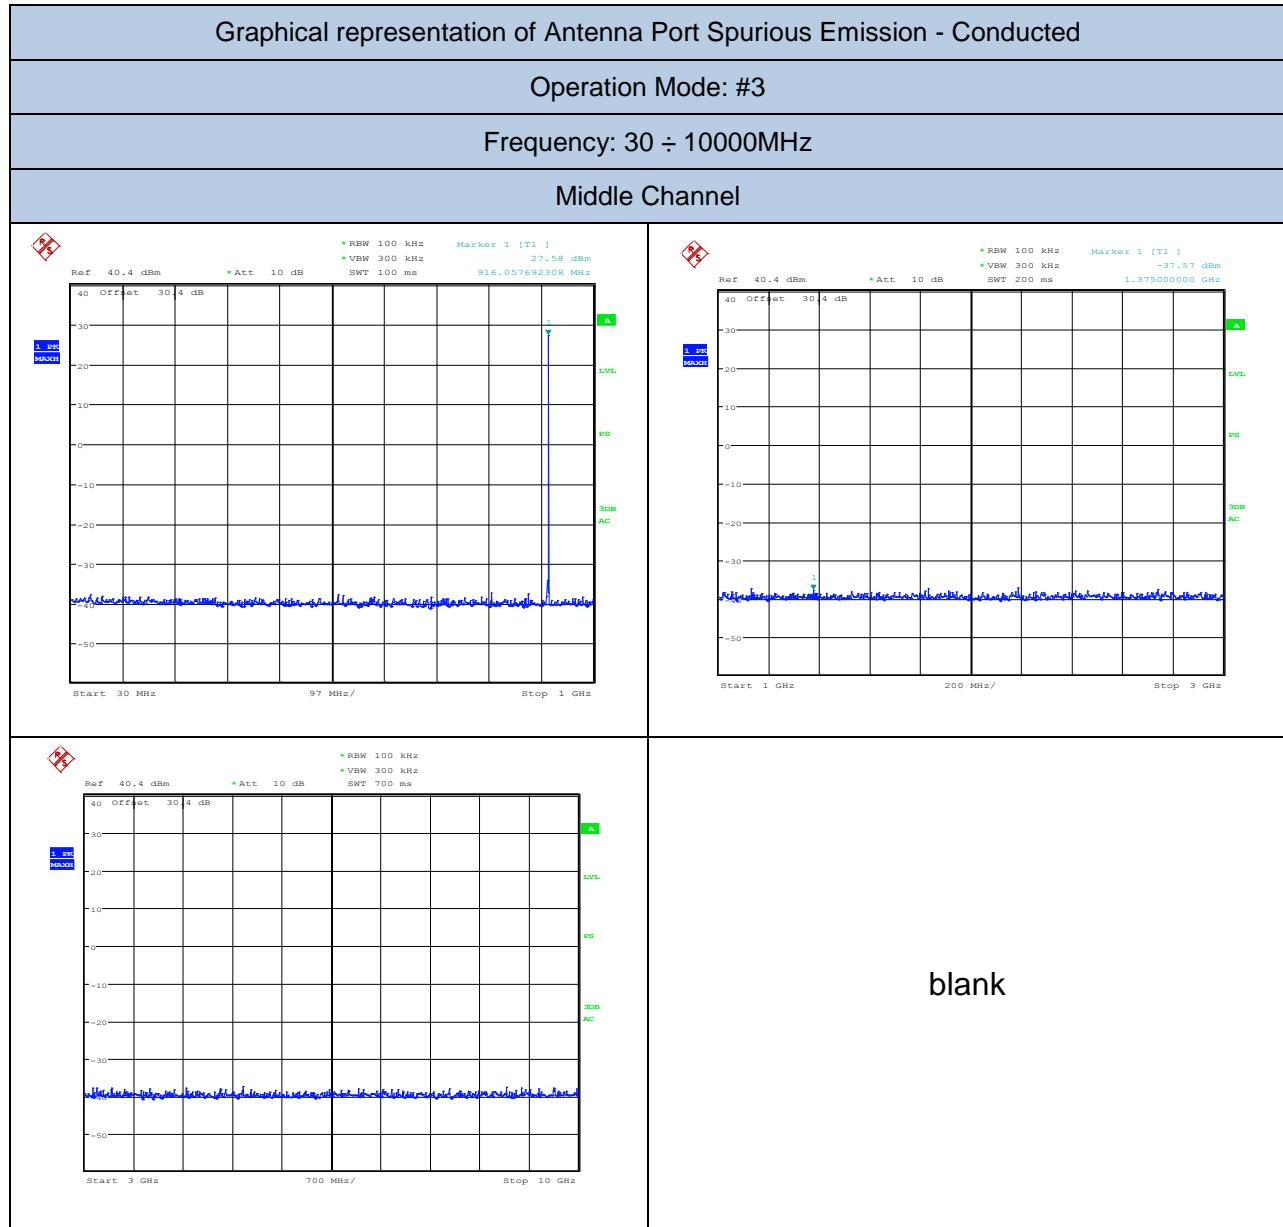


Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
1375,00	-37,57	+27,58	65,15	+7,58	45,15

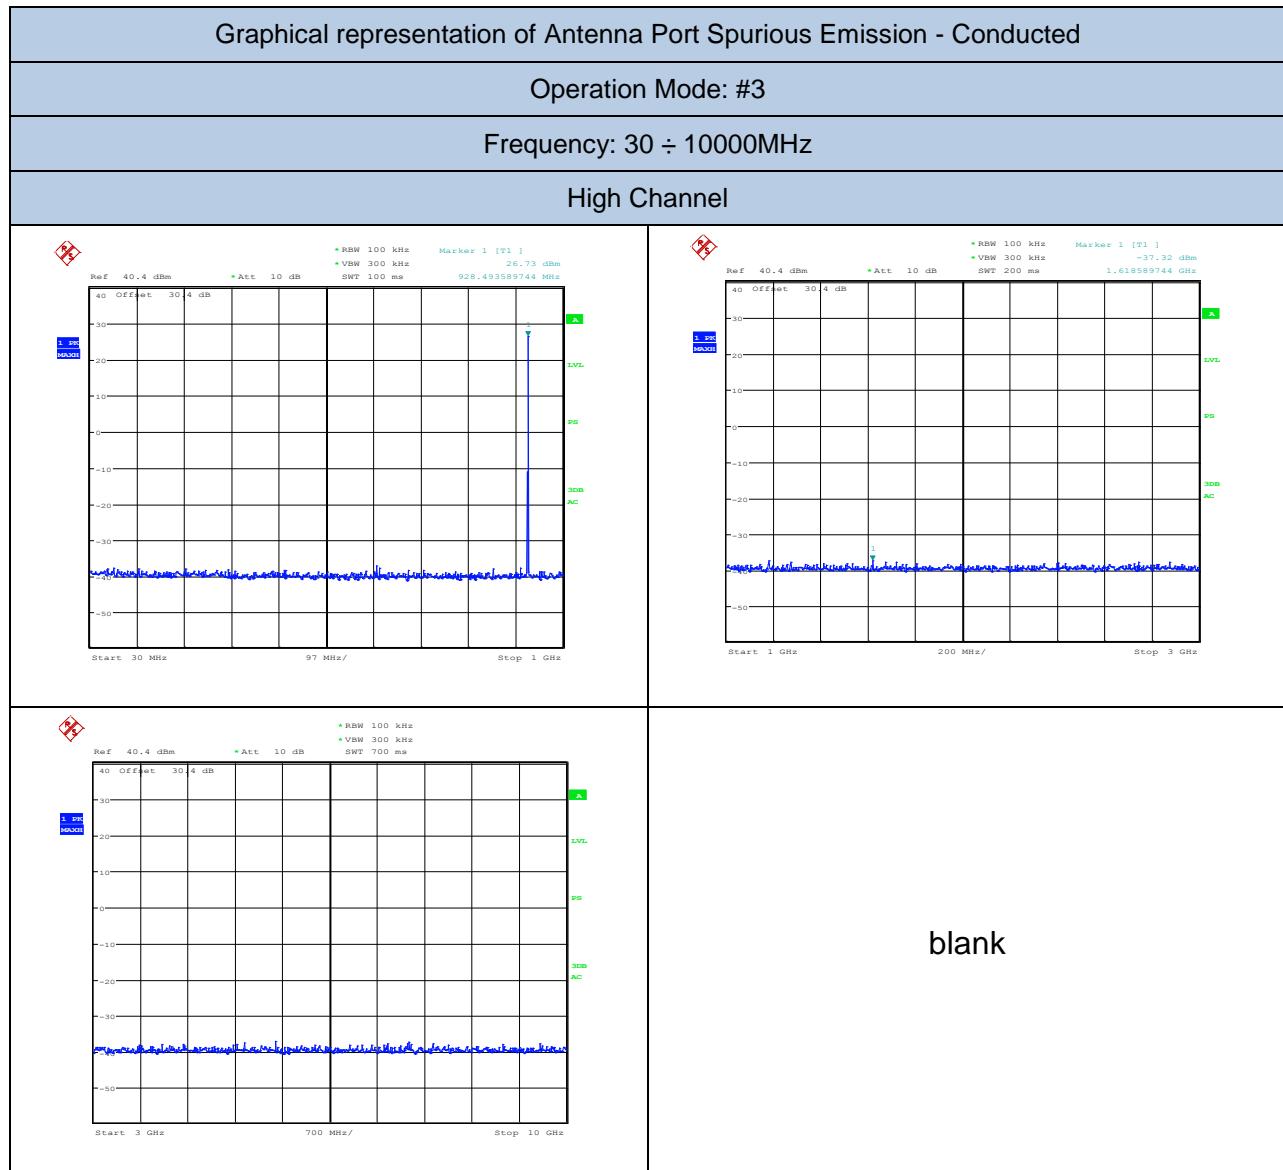


Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
<b>1618,58</b>	<b>-37,32</b>	<b>+26,73</b>	<b>64,05</b>	<b>+6,73</b>	<b>44,05</b>
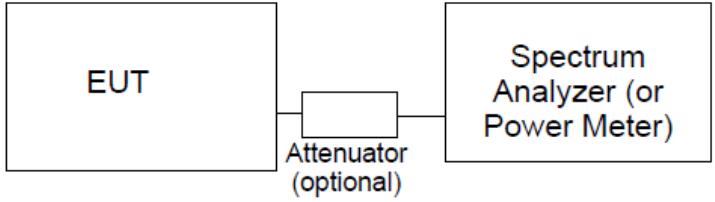
<b>12.7 TEST: 100 kHz Bandwidth of Frequency Band Edges</b>		<b>PASS</b>
Parameters required prior to the test	Laboratory Ambient Temperature (°C)	15 to 35 °C
	Relative Humidity (%)	30 to 60 %
Parameters recorded during the test	Laboratory Ambient Temperature (°C)	21°C
	Relative Humidity (%)	52%
	Air pressure (hPa)	1020
—	Power Supply & Frequency	Application Point
Fully configured sample tested at the power line frequency	120V ~ 60Hz	RF Connector
Equipment mode: #1	Operation mode	#3, #4
FCC Standard	§15.247 (D)	
<p>(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>		
Further information to test setup (conducted)	 <pre> graph LR     EUT[EUT] --- Att[Attenuator&lt;br&gt;(optional)]     Att --- SA[Spectrum Analyzer&lt;br&gt;(or&lt;br&gt;Power Meter)]   </pre>	


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Calibration date	Calibration due
EMI Test Receiver	R&S	ESU40	87020455	04/2018	04/2019

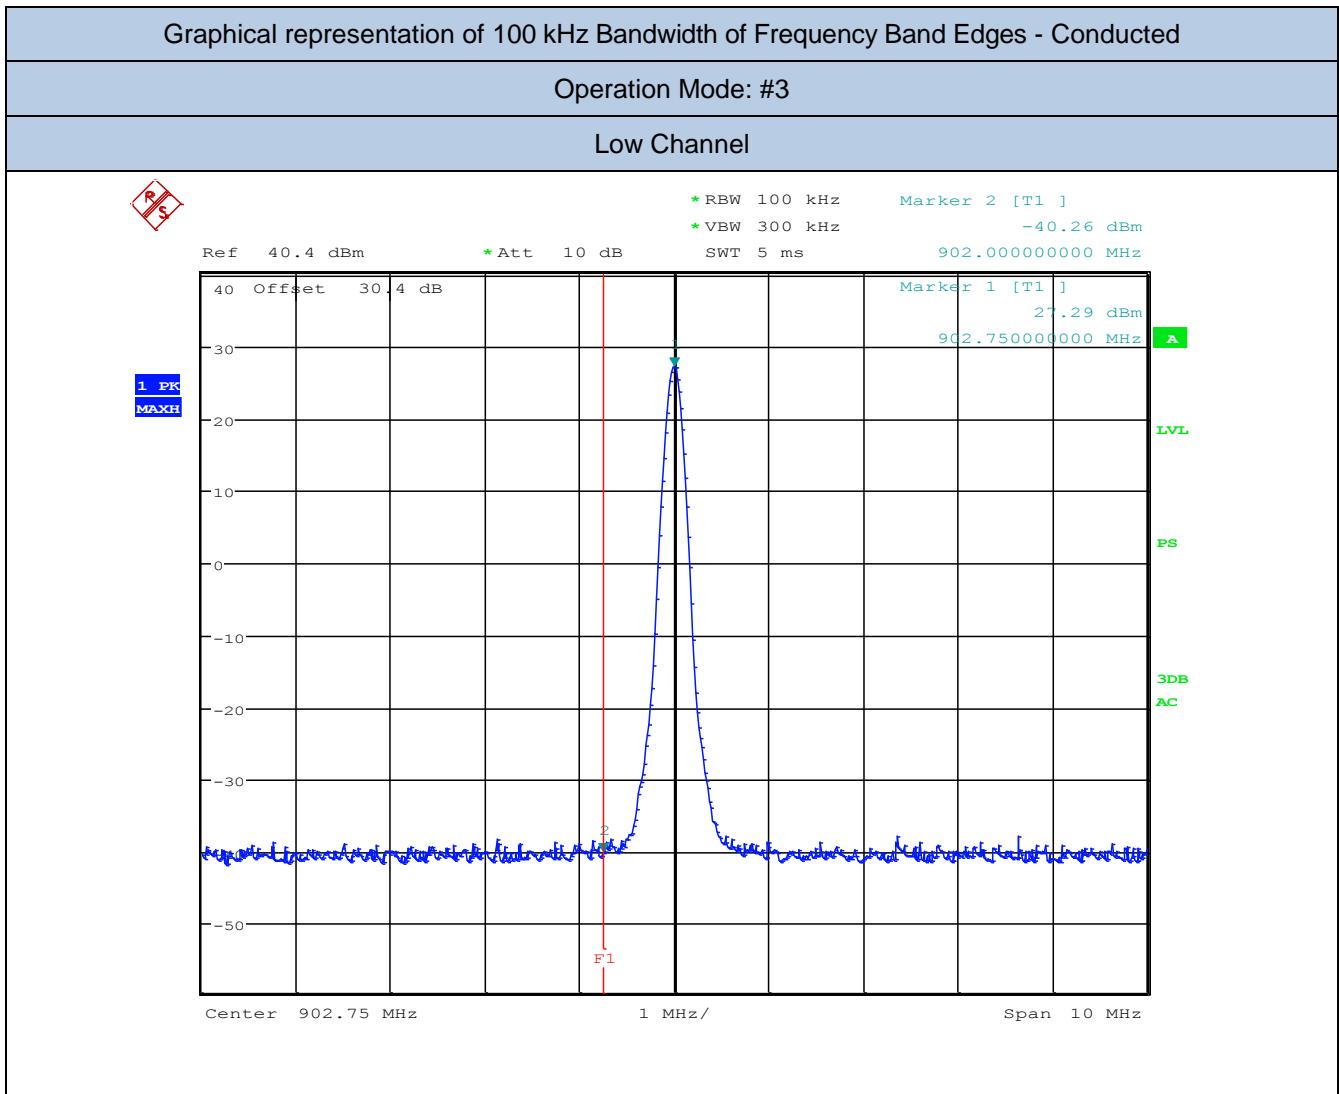


Measured power (dBm)	Measured power at the band edge (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
+27,29	-40,26	67,55	+7,29	47,55

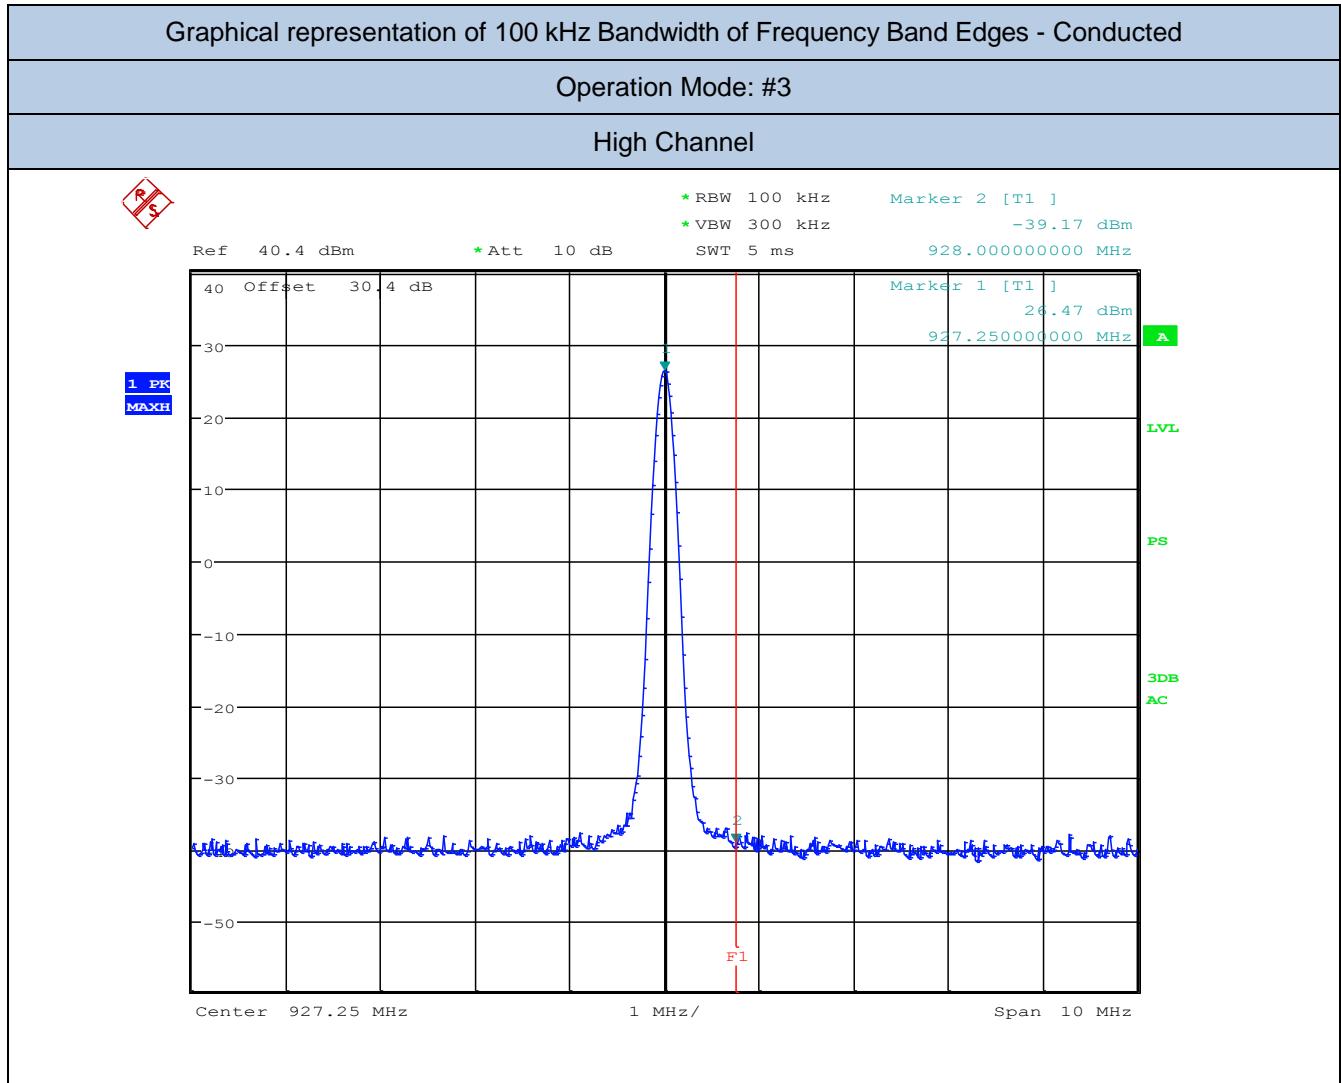


Measured power (dBm)	Measured power at the band edge (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
<b>+26,47</b>	<b>-39,17</b>	<b>65,64</b>	<b>+6,47</b>	<b>45,64</b>

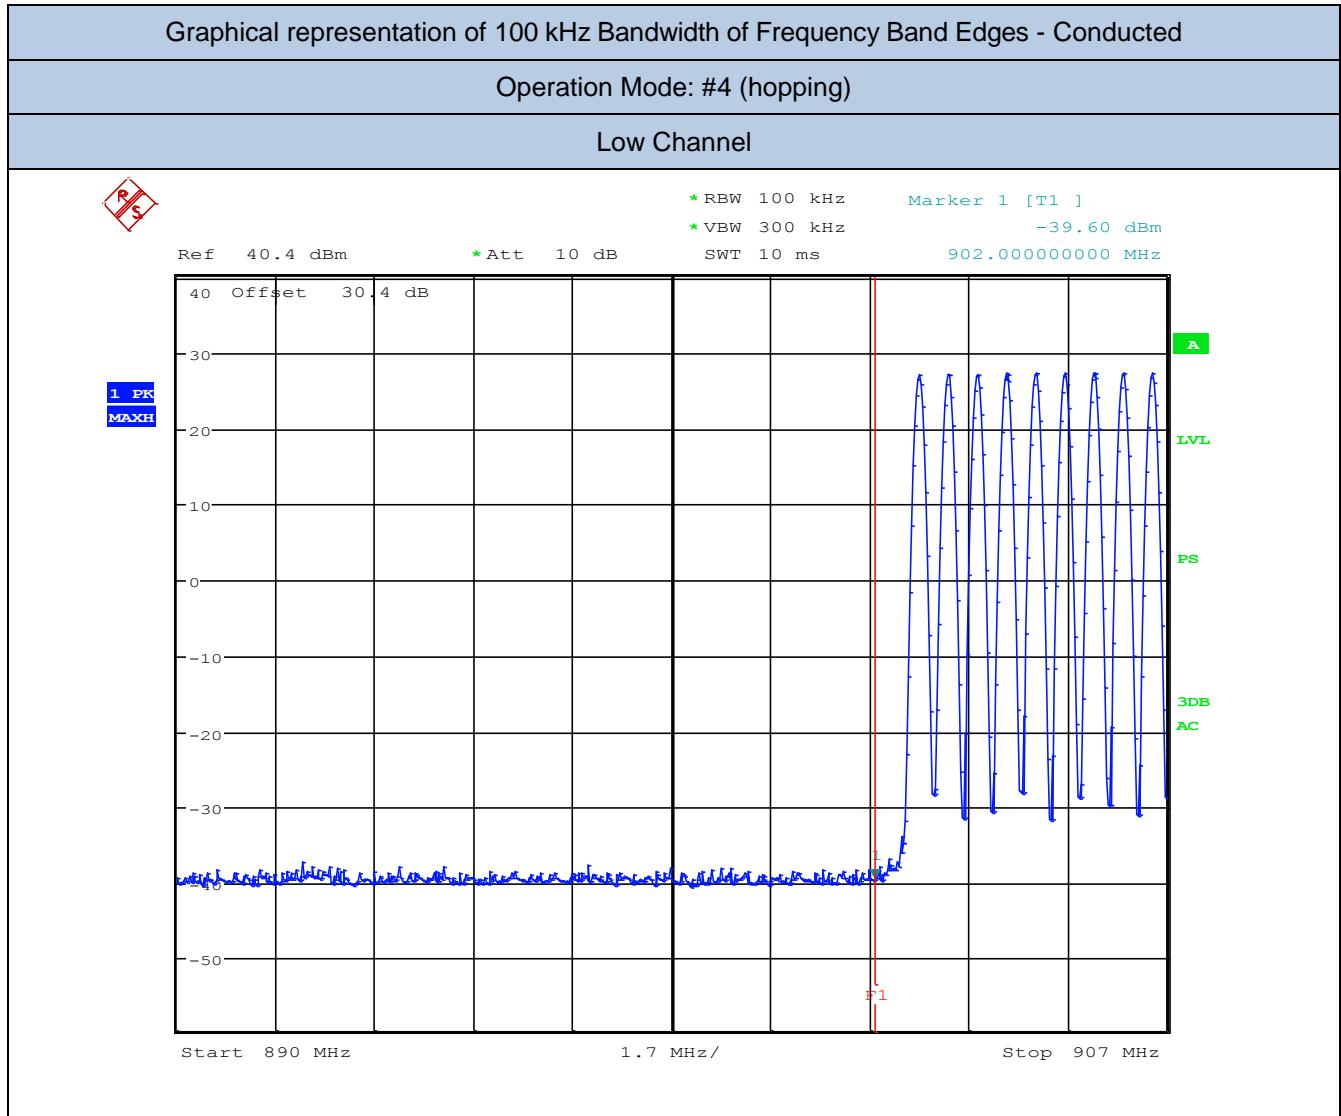


Measured power (dBm)	Measured power at the band edge (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
<b>+27,29</b>	<b>-39,60</b>	<b>66,89</b>	<b>+7,29</b>	<b>46,89</b>

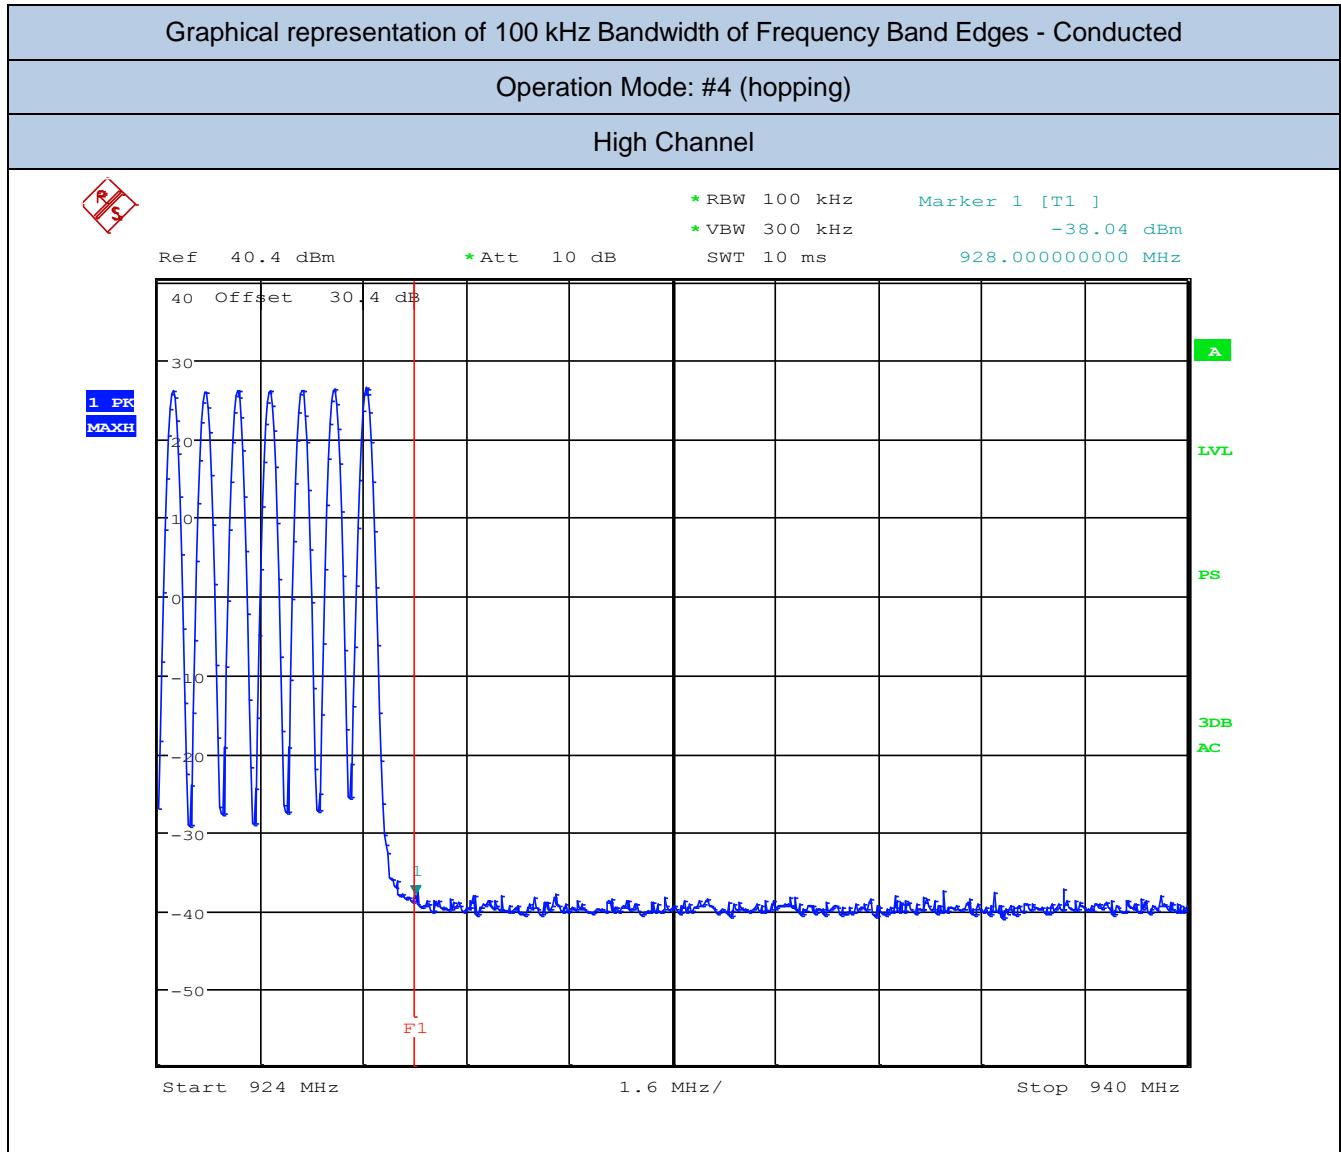


Measured power (dBm)	Measured power at the band edge (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
<b>+26,47</b>	<b>-38,04</b>	<b>64,51</b>	<b>+6,47</b>	<b>44,51</b>

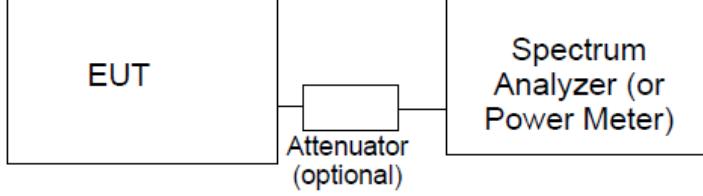
<b>12.8 TEST: Number of Hopping frequencies</b>		<b>PASS</b>
Parameters required prior to the test	Laboratory Ambient Temperature (°C)	15 to 35 °C
	Relative Humidity (%)	30 to 60 %
Parameters recorded during the test	Laboratory Ambient Temperature (°C)	22°C
	Relative Humidity (%)	36%
	Air pressure (hPa)	1033
—	Power Supply & Frequency	Application Point
Fully configured sample tested at the power line frequency	120V ~ 60Hz	RF connector
Equipment mode: #1	Operation mode	#4
FCC Standard	§15.247 (A) (1) (III)	
For FHSs in the band 902-928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20-second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10-second period. The maximum 20 dB bandwidth of the hopping channel shall be 500 kHz.		
Further information to test setup		

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Calibration date	Calibration due
EMI Test Receiver	R&S	ESR3	87020864	11/2017	11/2018

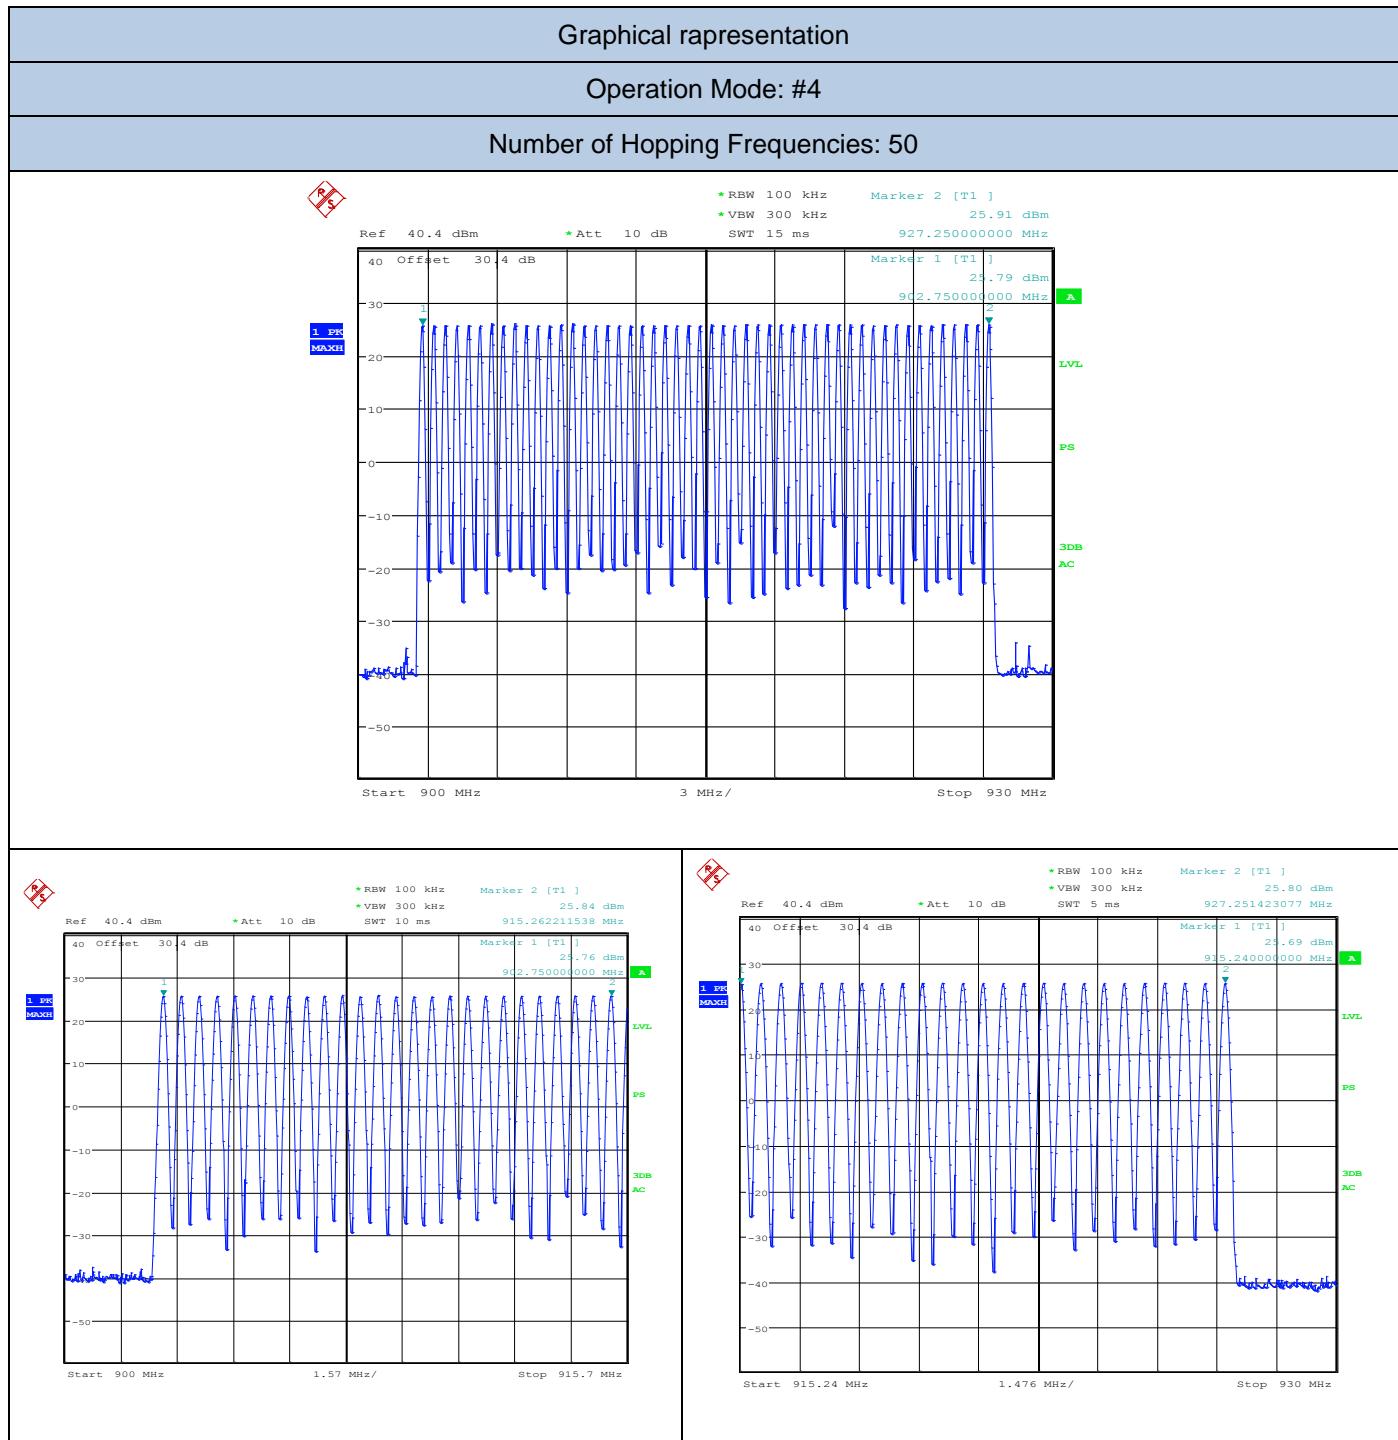

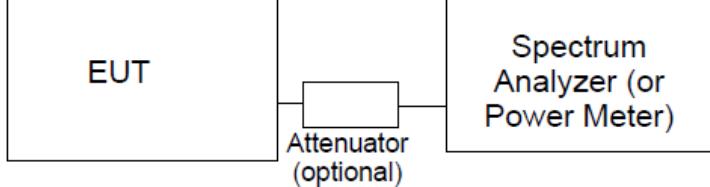
<b>12.9 TEST: Carrier frequency separation</b>		<b>PASS</b>
Parameters required prior to the test	Laboratory Ambient Temperature (°C)	15 to 35 °C
	Relative Humidity (%)	30 to 60 %
Parameters recorded during the test	Laboratory Ambient Temperature (°C)	23°C
	Relative Humidity (%)	36%
	Air pressure (hPa)	1033
—	Power Supply & Frequency	Application Point
Fully configured sample tested at the power line frequency	120V ~ 60Hz	RF connector
Equipment mode: #1	Operation mode	#4
FCC Standard	§15.247 (A) (1)	
FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.		
Further information to test setup		


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Calibration date	Calibration due
EMI Test Receiver	R&S	ESR3	87020864	11/2017	11/2018

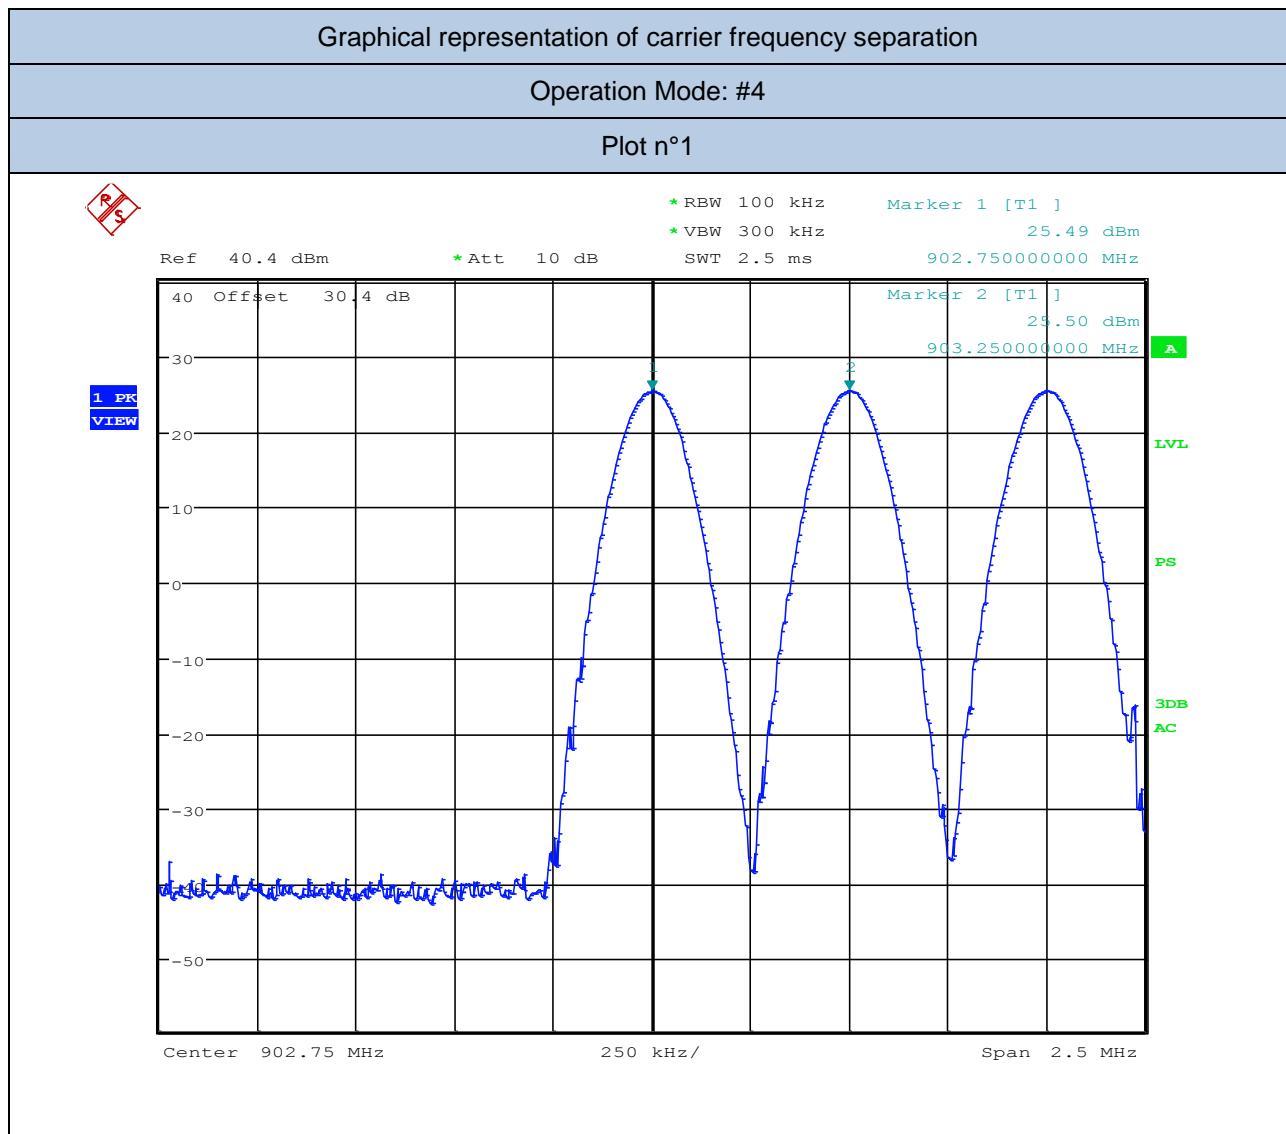


Channel (No.)	Carrier frequency separation (kHz)	Limit (kHz)	Plot (No.)
1 (Low)	500,00	≥20dB bandwidth: 85,25 kHz	1

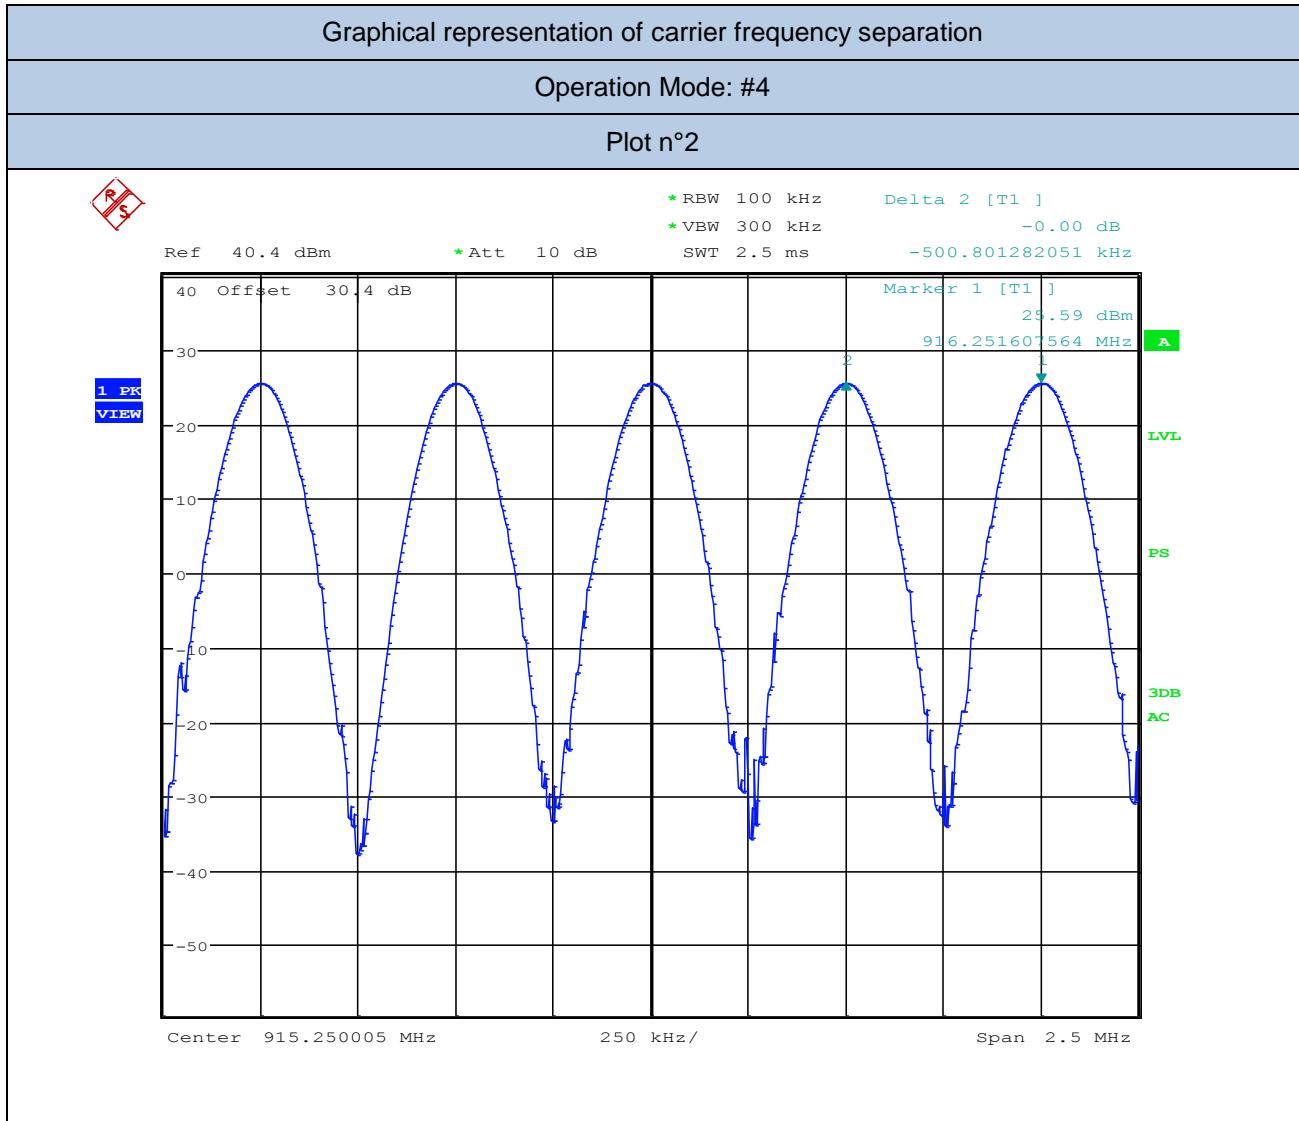

Channel (No.)	Carrier frequency separation (kHz)	Limit (kHz)	Plot (No.)
25 (Middle)	500,80	≥20dB bandwidth: 84,61 kHz	2

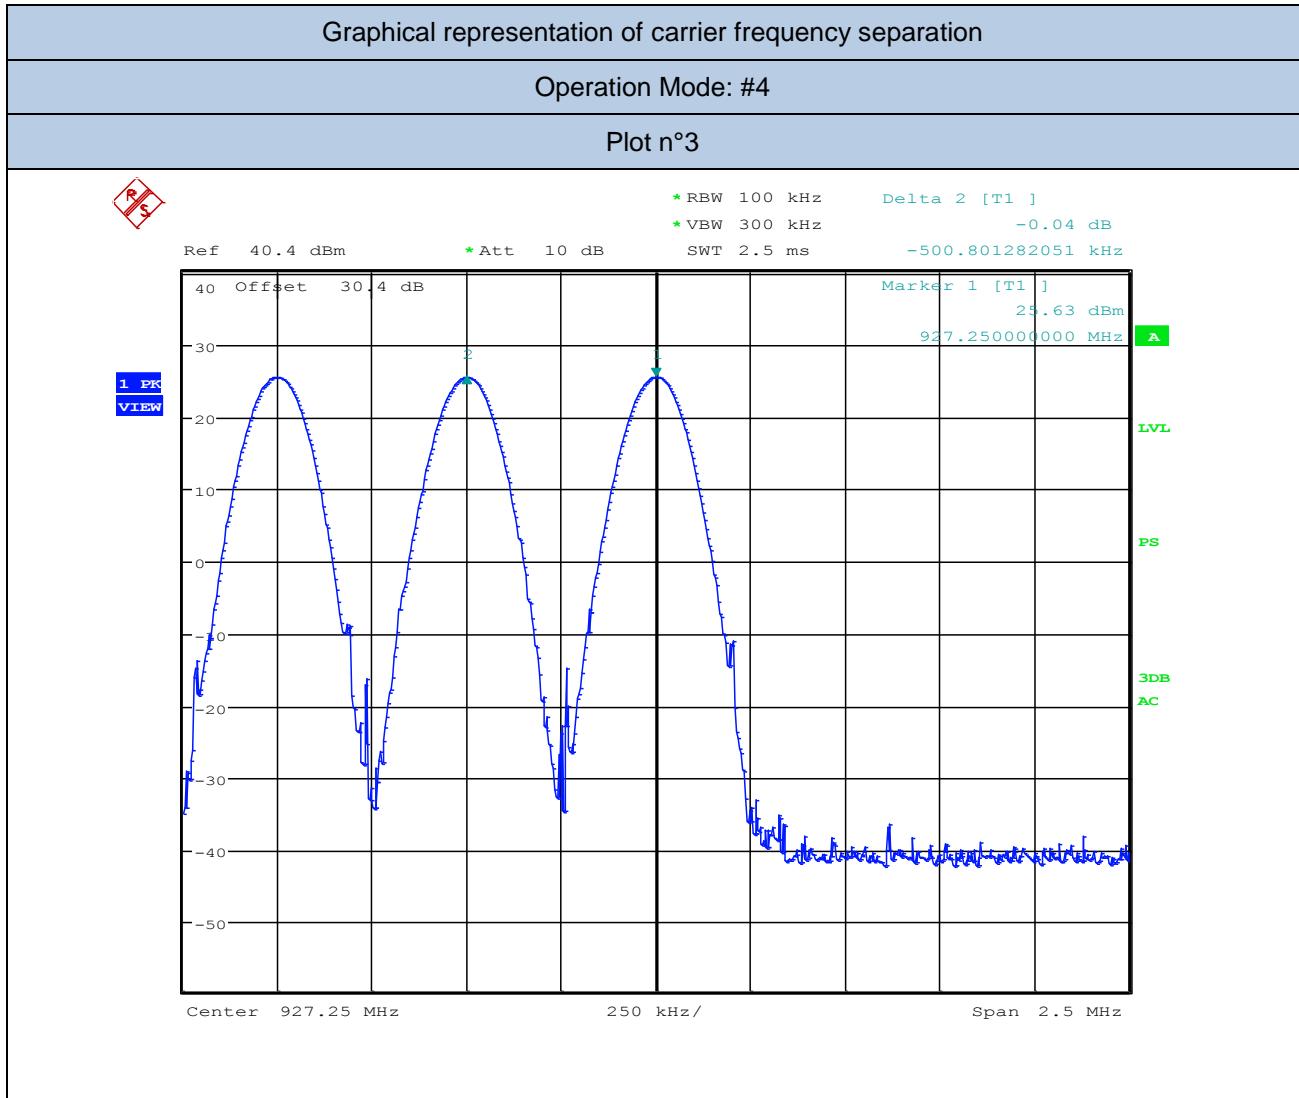


Channel (No.)	Carrier frequency separation (kHz)	Limit (kHz)	Plot (No.)
50 (High)	500,80	≥20dB bandwidth: 84,61 kHz	3
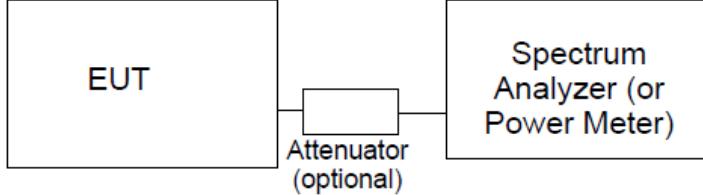
<b>12.10 TEST: Average time of occupancy</b>		<b>PASS</b>
Parameters required prior to the test	Laboratory Ambient Temperature (°C)	15 to 35 °C
	Relative Humidity (%)	30 to 60 %
Parameters recorded during the test	Laboratory Ambient Temperature (°C)	23°C
	Relative Humidity (%)	36%
	Air pressure (hPa)	1033
—	Power Supply & Frequency	Application Point
Fully configured sample tested at the power line frequency	120V ~ 60Hz	RF connector
Equipment mode: #1	Operation mode	#4
FCC Standard	§15.247 (A) (1) (III)	
For FHSs in the band 902-928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20-second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10-second period. The maximum 20 dB bandwidth of the hopping channel shall be 500 kHz.		
Further information to test setup		

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Calibration date	Calibration due
EMI Test Receiver	R&S	ESR3	87020864	11/2017	11/2018

Average time of occupancy (ms)	Time between next hop (s)	Limit of hopping period (s)	Limit of Average time of occupancy (ms) in a period of 20s	Plot (No.)
281,08	39,34	20	400	1÷2

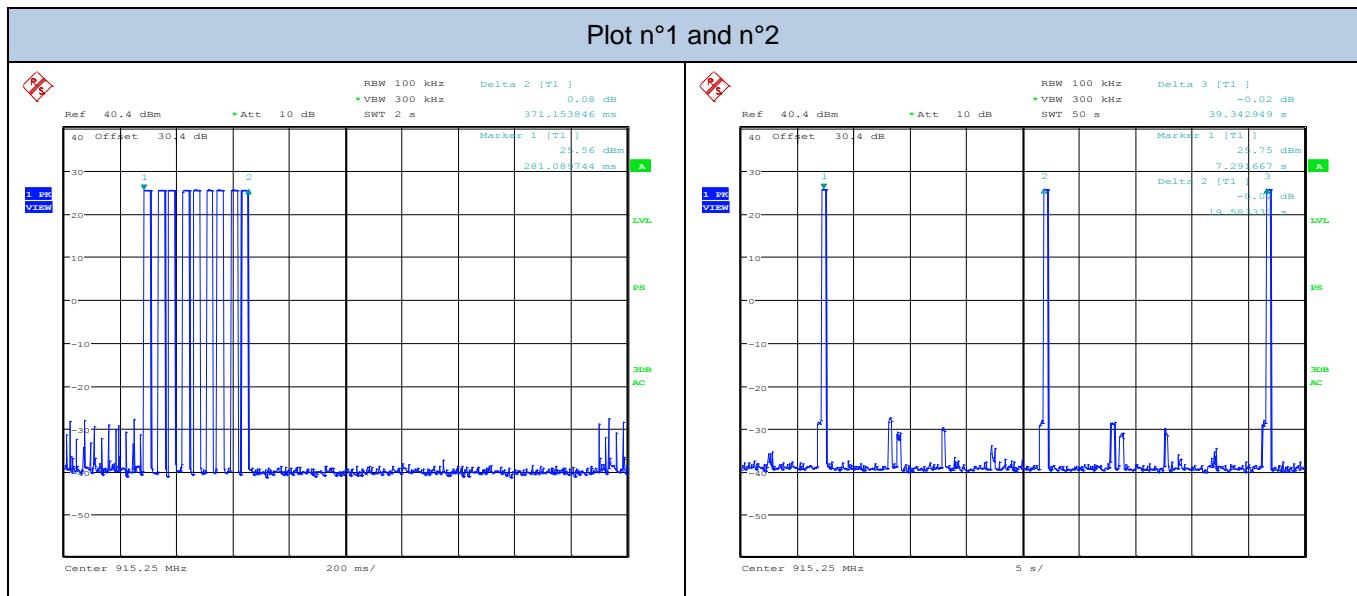

<b>12.11 TEST: RF Exposure Requirements</b>		<b>PASS</b>
Parameters required prior to the test	Laboratory Ambient Temperature (°C)	15 to 35 °C
	Relative Humidity (%)	30 to 60 %
Parameters recorded during the test	Laboratory Ambient Temperature (°C)	---
	Relative Humidity (%)	---
	Air pressure (hPa)	1020
—	Power Supply & Frequency	Application Point
Fully configured sample tested at the power line frequency	120V ~ 60Hz	Enclosure
Equipment mode: #1	Operation mode	#1
FCC Standard	§ 1.1310 (1) (B)	
Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines § 1.1310, table (1) (b)		
EUT classification (fixed, mobile or portable devices)	Fixed equipment used in Uncontrolled Exposure environment	
Limits Freq. Range 300÷1500MHz	f/1500 (Power Density (mW/cm <sup>2</sup> ))	
Power Density (mW/cm <sup>2</sup> )	$S = P * G / 4\pi r^2$	

**Note:**

P = Conducted Power (mW); G = Numeric Gain ( $10^{(dB/10)}$ ); r = distance (cm)

CH	Frequency	Conducter output power	Conducter output power (P)	Numeric gain (G)	Distance (r)	Power Density (S) (mW/cm <sup>2</sup> )	Limits (f/1500)
	(MHz)	(dBm)	(mW)	dB	(cm)		
Low	902,75	27,42	552,07	2,239	20	0,2458	0,602
Middle	915,25	27,47	558,47	2,239	20	0,2487	0,610
High	927,25	26,72	469,89	2,239	20	0,248	0,618
	<b>VERDICT</b>						
	<p><b>The EUT Radiated Power density at evaluation distance is WHITIN THE LIMIT at the distance of 20cm.</b></p> <p><b>The EUT Radiated Power density is OUT OF THE LIMIT if the distance is &lt; 13,53cm</b></p>						

## END OF TEST REPORT