

TEST REPORT FROM RADIO FREQUENCY INVESTIGATION LTD.

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2001
(Intentional Radiators)
Section 15.247

Test Report Serial No:
RFI/EMCB1/RP44012JD09A

This Test Report Is Issued Under The Authority Of Richard Jacklin, Operations Director: 	Checked By: 
Tested By: 	Release Version No: PDF01
Issue Date: 06 December 2002	Test Dates: 14 October to 22 October 2002

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields. Furthermore, the date of creation must match the issue date stated above.
This report may be copied in full. The results in this report apply only to the sample(s) tested.

RADIO FREQUENCY INVESTIGATION LTD.

Operations Department

Test Of: Brain Boxes Ltd.

BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

TEST REPORT

S.No: RFI/EMCB1/RP44012JD09A

Page 2 of 110

Issue Date: 06 December 2002

This page has been left intentionally blank.

**Test Of: Brain Boxes Ltd.
BL-510**

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Table of Contents

1. Client Information.....	4
2. Equipment Under Test (EUT)	5
3. Test Specification, Methods And Procedures	9
4. Deviations From The Test Specification	11
5. Operation Of The EUT During Testing	12
6. Summary Of Test Results.....	13
7. Measurements, Examinations And Derived Results.....	14
8. Measurement Uncertainty	35
Appendix 1. Test Equipment Used	36
Appendix 2. Measurement Methods	38
Appendix 3. Test Configuration Drawings.....	48
Appendix 4. Graphical Test Results	52
Appendix 5. Photographs of EUT	109

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

1. Client Information

Company Name:	Brain Boxes Limited
Address:	Unit 3C Wavertree Boulevard South Wavertree Technology Park Liverpool L7 9PF
Contact Name:	Mr Peter Gray

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

2. Equipment Under Test (EUT)

The following information (with the exception of the Date of Receipt) has been supplied by the client:

2.1. Identification Of Equipment Under Test (EUT)

Sample 1:

Brand Name:	Bluetooth RS232 Adapter
Model Name or Number:	Bluetooth Class 2 Module with Antenna Port
Unique Type Identification:	BL-510
Serial Number:	None
Country of Manufacture:	UK
FCC ID Number:	Not applicable
Date of Receipt:	10 October 2002

Sample 2:

Brand Name:	Bluetooth RS232 Adapter
Model Name or Number:	Bluetooth Class 2 Module with Antenna
Unique Type Identification:	BL-510
Serial Number:	None
Country of Manufacture:	UK
FCC ID Number:	Not applicable
Date of Receipt:	10 October 2002

Sample 3:

Brand Name:	Bluetooth RS232 Adapter
Model Name or Number:	Bluetooth Class 2 Module with Antenna
Unique Type Identification:	BL-510
Serial Number:	None
Country of Manufacture:	UK
FCC ID Number:	Not applicable
Date of Receipt:	10 October 2002

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

2.2. Description Of EUT

The equipment under test is a RS232 Bluetooth Adaptor.

2.3. Modifications Incorporated In EUT

Prior to testing the samples were modified by moving the resistor 0402 so that the receiver was powered from the AUX_DAC pin. This modification was necessary to make the sample representative of the latest manufactured design.

Sample 1 was modified by the manufacturer to include a 50 Ohm connector at the antenna ports.

Sample 3 was an unmodified unit with the resistor 0402 in place.

2.4. Additional Information Related To Testing

Power Supply Requirement:	Nominal 115 V, 60 Hz AC Mains Supply 13 Amp (max)
Intended Operating Environment:	Commercial, Light Industry
Weight:	46 g
Dimensions:	90 x 50 x 20 mm
Interface Ports:	RS232 USB (programmable)

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

2.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Laptop PC
Brand Name:	Digital
Model Name or Number:	Hi Note Ultra II
Serial Number:	SR61600226
Cable Length And Type:	3 Meters
Connected to Port:	DC

Description:	Mains Power Adapter
Brand Name:	Digital
Model Name or Number:	FR-PCP8H-AD
Serial Number:	02101724
Cable Length And Type:	2m Mains, 1.5m Mains
Connected to Port:	AC

Description:	Laptop PC
Brand Name:	Toshiba
Model Name or Number:	Tegra 8100
Serial Number:	60237337G ST810-0
Cable Length And Type:	3 Meters
Connected to Port:	DC

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Support Equipment (continued)

Description:	Mains Power Adaptor
Brand Name:	Toshiba
Model Name or Number:	PA2444V
Serial Number:	0005A 0441198
Cable Length And Type:	2m Mains, 1.5m 2 Core
Connected to Port:	AC

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

3. Test Specification, Methods And Procedures

3.1. Test Specification

Reference:	FCC Part 15 Subpart C: 2001 (Section 15.247)
Title:	Code of Federal Regulations, Part 15 (47CFR15) Radio Frequency Devices: Digital Devices.
Comments:	A description of the test facility used for this test is on file with, and has been accepted by, the Federal Communications Commission as required by Section 2.948 of Federal Rules.
Purpose of Test:	To determine whether the equipment complied with the requirements of the specification for the purposes of certification.

Reference:	FCC Part 15 Subpart B: 2001 (Section 15.107 and 15.109)
Title:	Code of Federal Regulations, Part 15 (47CFR15) Radio Frequency Devices: Radio Frequency Devices.
Comments:	A description of the test facility used for this test is on file with, and has been accepted by, the Federal Communications Commission as required by Section 2.948 of Federal Rules.
Purpose of Test:	To determine whether the equipment complied with the requirements of the specification for the purposes of certification.

**Test Of: Brain Boxes Ltd.
BL-510**

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

3.2. Methods And Procedures

The methods and procedures used were as detailed in:

FCC Code of Federal Regulations 47.
Telecommunication. Parts 0 to 19, October 2001.

ANSI C63.2 (1987)

Title: American National Standard for Instrumentation - Electromagnetic noise and field strength.

ANSI C63.4 (2001)

Title: American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.5 (1988)

Title: American National Standard for the Calibration of antennas used for Radiated Emission measurements in Electromagnetic Interference (EMI) control.

ANSI C63.7 (1988)

Title: American National Standard Guide for Construction of Open Area Test Sites for performing Radiated Emission Measurements.

CISPR 16-1: (1999)

Title: Specification For Radio Disturbance and Immunity Measuring Apparatus and Methods. Part 1: Radio Disturbance and Immunity Measuring Apparatus.

3.3. Definition Of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the Methods & Procedures section above. Appendix 1 contains a list of the test equipment used.

Test Of: Brain Boxes Ltd.

BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

4. Deviations From The Test Specification

None.

**Test Of: Brain Boxes Ltd.
BL-510**

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

5. Operation Of The EUT During Testing

5.1. Operating Conditions

The EUT was tested in a normal laboratory environment.

During testing, the EUT was powered by a 110 V, 60 Hz AC Mains supply.

5.2. Operating Modes

The EUT was tested in the following operating modes:

Transmitting on Top, Middle or Bottom channels, hopping over the full operating frequency range or in receive mode.

The reason for choosing these modes was that the client defined it as being likely to be the worst case with regards EMC.

5.3. Configuration And Peripherals

The EUT was tested in the following configuration:

During all tests the EUT was connected to and controlled by a laptop personal computer, containing the appropriate software.

NB Section 2 of this report contains a full list of support equipment used and Appendix 3 contains a schematic diagram of the test configuration.

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

6. Summary Of Test Results

Range Of Measurements	Specification Reference	Port Type	Compliance Status
Receiver Conducted Emissions (AC Mains)	C.F.R. 47 FCC Part 15: 2001 Section 15.107	AC Mains	Complied
Receiver Radiated Emissions	C.F.R. 47 FCC Part 15: 2001 Section 15.109	Antenna	Complied
Transmitter Conducted Emissions (AC Mains)	C.F.R. 47 FCC Part 15: 2001 Section 15.207	AC Mains Terminals	Complied
Transmitter Carrier Frequency Separation	C.F.R. 47 FCC Part 15: 2001 Section 15.247(a)(1)	Antenna Terminals	Complied
Transmitter 20dB Bandwidth	C.F.R. 47 FCC Part 15: 2001 Section 15.247(a)(1)	Antenna Terminals	Complied
Transmitter Average Time of Occupancy	C.F.R. 47 FCC Part 15: 2001 Section 15.247(a)(1)(iii)	Antenna Terminals	Complied
Transmitter Maximum Peak Output Power	C.F.R. 47 FCC Part 15: 2001 Section 15.247(b)(1)	Antenna Terminals	Complied
Transmitter Maximum Peak Output Power EIRP	C.F.R. 47 FCC Part 15: 2001 Section 15.247(b)(1)	Antenna Terminals	Complied
Transmitter Conducted Emissions	C.F.R. 47 FCC Part 15: 2001 Section 15.247 (c)	Antenna Terminals	Complied
Transmitter Radiated Emissions	C.F.R. 47 FCC Part 15: 2001 Section 15.247(c) Section 15.209(a)	Antenna	Complied
Transmitter Band Edge Conducted Emissions	CFR 47: 2001, Section 15.247(c)	Antenna Terminals	Complied
Transmitter Band Edge Radiated Emission	CFR 47: 2001, Section 15.247(c) Section 15.209(a)	Antenna	Complied

6.1. Location Of Tests

All the measurements described in this report were performed at the premises of Radio Frequency Investigation Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, England.

**Test Of: Brain Boxes Ltd.
BL-510**

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

7. Measurements, Examinations And Derived Results

7.1. General Comments

7.1.1. This section contains test results only. Details of the test methods and procedures can be found in Appendix 2 of this report.

7.1.2. Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 8 for details of measurement uncertainties.

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

7.2. Receiver Conducted Emissions: AC Mains - Section 15.107

7.2.1. Quasi-Peak Detector Measurements On Live And Neutral Lines

7.2.1.1. The following table lists results for AC conducted emissions.

7.2.1.2. Preliminary AC conducted spurious scans were performed with the EUT set to receive mode.

7.2.1.3. Final measurements were performed on the worst-case configuration as described in Part 15.31(i).

7.2.1.4. Plots of all the initial scans can be found in Appendix 4.

7.2.1.5. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector:

Results

Frequency (MHz)	Line	Q-P Level (dB μ V)	Q-P Limit (dB μ V)	Margin (dB)	Result
0.51709	Live/Neutral	55.17	48.0	-7.17	*See Note
0.77209	Live/Neutral	49.61	48.0	-1.61	*See Note
1.03038	Live/Neutral	45.70	48.0	2.3	Complied
4.54936	Live/Neutral	49.00	48.0	-1.0	*See Note
6.62487	Live/Neutral	56.67	48.0	4.33	*See Note
6.92233	Live/Neutral	55.48	48.0	5.72	*See Note

***Note:** These measurements were made and found to be over the specified limit. As a result, measurements were made in line with FCC Part 15.207 (b) which states that if an emission exceeds the limit specified in FCC Part 15.207 (a) then the measurement procedure specified in part (b) may be applied. Using this method, the emissions in question were measured and were found to be more than 6 dB below the QP measured value. They were thus deemed wideband. The QP measurements can thus be reduced by 13 dB as specified in FCC Part 15.207 (b). The following table shows the above noted levels measured using an average detector and the corresponding corrected level after subtracting 13 dB. The levels measured can now be seen to show compliance.

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

7.2.2. Quasi-Peak Detector Measurements On Live And Neutral Lines (continued)

Freq (MHz)	Line	Q-P Level (dB μ V)	Av. Level (dB μ V)	Q-P – Av. Margin (dB)	Q-P Level –13 (dB μ V)	Q-P Limit (dB μ V)	Margin (dB)	Result
0.51709	Live/ Neutral	55.17	40.29	14.88	42.17	48.0	5.83	Complied
0.77209	Live/ Neutral	49.61	32.34	17.27	36.61	48.0	11.39	Complied
4.54936	Live/ Neutral	49.00	36.89	12.11	36.00	48.0	12.00	Complied
6.62487	Live/ Neutral	56.67	40.77	15.90	43.67	48.0	4.33	Complied
6.92233	Live/ Neutral	55.48	39.35	16.13	42.48	48.0	5.52	Complied

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

7.3. Receiver Radiated Emissions: Section 15.109

7.3.1. Electric Field Strength Measurements (Frequency Range: 30 to 1000 MHz)

7.3.1.1. The following table indicates measured results with the EUT operated in receive mode to the limits specified in Part 15.109.

7.3.1.2. Plots of the initial scans can be found in Appendix 4.

7.3.1.3. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector at a test distance of 3m (results incorporate antenna factors and cable losses):

Frequency (MHz)	Ant. Pol.	Q-P Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
47.604	Vert.	21.4	40.0	18.5	Complied
54.993	Vert.	19.7	40.0	20.3	Complied
61.104	Vert.	22.8	40.0	17.2	Complied
100.861	Vert.	26.8	43.5	16.7	Complied
120.003	Vert.	32.7	43.5	10.8	Complied
128.109	Vert.	26.5	43.5	17.0	Complied
280.009	Vert.	15.5	46.0	30.5	Complied
400.028	Horiz.	21.8	46.0	24.2	Complied
533.164	Horiz.	29.1	46.0	16.9	Complied
600.061	Horiz.	27.4	46.0	18.6	Complied
734.817	Vert.	23.1	46.0	22.9	Complied
807.570	Vert.	26.4	46.0	19.6	Complied
866.724	Vert.	25.7	46.0	20.3	Complied

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

7.4. Receiver Radiated Emissions: Section 15.109

7.4.1. Electric Field Strength Measurements (Frequency Range: 1.0 to 12.5 GHz)

7.4.1.1. The following table indicates results measured in the receive mode to the limits specified in Part 15.109.

7.4.1.2. The client has stated that the highest clock frequency for the EUT was 2.480 GHz. Therefore tests were performed up to 12.5 GHz.

7.4.1.3. Preliminary Radiated spurious scans were performed with final measurements being taken for any emission within 20dB of the limit.

7.4.1.4. Due to dynamic range limitations of the measuring receiver, scans at high frequencies above 12 GHz were performed at 1 metre measurement distances, with an corrected limit line for the reduced test distances.

7.4.1.5. Plots of all the initial scans can be found in Appendix 4.

7.4.1.6. The following results are for the EUT configured with an internal antenna connected and operating.

Highest Average Level:

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dB μ V)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Average Margin (dB)	Result
1.23444	Vert.	2.7	21.6	0.9	25.20	54.0	28.80	Complied

Highest Peak Level:

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dB μ V)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Peak Margin (dB)	Result
1.23444	Vert.	15.26	21.6	0.9	37.76	74.0	36.24	Complied

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

7.5. Transmitter Conducted Emissions: AC Mains - Section 15.207

7.5.1. Quasi-Peak Detector Measurements On Live And Neutral Lines

7.5.1.1. The following table lists results for AC conducted emissions.

7.5.1.2. Preliminary AC conducted spurious scans were performed with the EUT set to the Top, Middle, Bottom channels as requested in FCC Part 15.31(m).

7.5.1.3. Final measurements were then performed on the worst-case configuration as described in Part 15.31(i).

7.5.1.4. Plots of all the initial scans can be found in Appendix 4.

7.5.1.5. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector:

Results

Frequency (MHz)	Line	Q-P Level (dB μ V)	Q-P Limit (dB μ V)	Margin (dB)	Result
0.51709	Live/Neutral	55.17	48.0	-7.17	*See Note
0.77209	Live/Neutral	49.61	48.0	-1.61	*See Note
1.03038	Live/Neutral	45.70	48.0	2.3	Complied
4.54936	Live/Neutral	49.00	48.0	-1.0	*See Note
6.62487	Live/Neutral	56.67	48.0	4.33	*See Note
6.92233	Live/Neutral	55.48	48.0	5.72	*See Note

***Note:** These measurements were made and found to be over the specified limit. As a result, measurements were made in line with FCC Part 15.207 (b) which states that if an emission exceeds the limit specified in FCC Part 15.207 (a) then the measurement procedure specified in part (b) may be applied. Using this method, the emissions in question were measured and were found to be more than 6 dB below the QP measured value. They were thus deemed wideband. The QP measurements can thus be reduced by 13 dB as specified in FCC Part 15.207 (b). The following table shows the above noted levels measured using an average detector and the corresponding corrected level after subtracting 13 dB. The levels measured can now be seen to show compliance.

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

7.5.2. Quasi-Peak Detector Measurements On Live And Neutral Lines (continued)

Freq (MHz)	Line	Q-P Level (dB μ V)	Av. Level (dB μ V)	Q-P – Av. Margin (dB)	Q-P Level –13 (dB μ V)	Q-P Limit (dB μ V)	Margin (dB)	Result
0.51709	Live/ Neutral	55.17	40.29	14.88	42.17	48.0	5.83	Complied
0.77209	Live/ Neutral	49.61	32.34	17.27	36.61	48.0	11.39	Complied
4.54936	Live/ Neutral	49.00	36.89	12.11	36.00	48.0	12.00	Complied
6.62487	Live/ Neutral	56.67	40.77	15.90	43.67	48.0	4.33	Complied
6.92233	Live/ Neutral	55.48	39.35	16.13	42.48	48.0	5.52	Complied

**Test Of: Brain Boxes Ltd.
BL-510**

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

7.6. Transmitter Carrier Frequency Separation: Section 15.247(a)(1)

7.6.1. Tests were performed to identify the carrier frequency separation as per FCC Part 15.247(a)(1).

7.6.2. Section 15.247 (a)(1) specifies that the channels should be separated by at least 25kHz or the 20dB bandwidth of the channel.

7.6.3. A graphical plot of the characteristics of two adjacent channels was obtained. The following results were noted:

Result:

Transmitter Carrier Frequency Separation (kHz)	Graph
1006	GPH/44012JD09/CE012 Appendix 4

**Test Of: Brain Boxes Ltd.
BL-510****To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247**

7.7.Transmitter 20dB Bandwidth: Section 15.247(a)(1)

7.7.1. Tests were performed to identify the 20dB bandwidth as per FCC Part 15.247(a)(1).

7.7.2. A graphical plot of the 20dB was obtained. The following results were noted:

Result:

Transmitter 20dB Bandwidth (kHz)	Graph
826	GPH/44012JD09/CE011 Appendix 4

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

7.8.Transmitter Average Time of Occupancy: Section 15.247(a)(1)(iii)

7.8.1. Tests were performed to identify the average time occupancy as per FCC Part 15.247(a)(1)(iii).

7.8.2. Section 15.247 (a)(1)(iii) specifies that the average time occupancy shall not be greater than 0.4 seconds.

7.8.3. The time occupancy of the system was tested on a single carrier. The maximum packet length was measured and multiplied by the number of transmissions within a 30 second period. The result was noted as being the average time of occupancy.

Result:

Packet Width (μ s)	Number of Transmissions in 30 Seconds	Average Time of Occupancy (s)	Graph
527	200	0.105	GPH/44012JD09/CE014 Appendix 4

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

7.9. Transmitter Peak Output Power: Section 15.247(b)(1)

7.9.1. Tests were performed to identify the maximum transmit power in accordance with FCC Part 15.247(b)(1).

7.9.2. The client has provided a temporary antenna port to allow a direct connection to be made.

7.9.3. The client has specified that the EUT employs frequency hopping with 79 hopping channels. Therefore the maximum transmitter power level under FCC Part 15.247(b)(1) is 1 Watt.

7.9.4. Results are shown for the EUT set to Top, Middle and Bottom channels as stated in FCC Part 15.31 (m) and section 5.2 of this report. Graphical measurements are shown for the transmit power levels within Appendix 4.

7.9.5. Measurements were performed on the Top, Middle and Bottom channels for the specified extremes of input voltages:

Results:

Number of Hopping Channels Employed	Graph
79	GPH/44012JD09/CE010 Appendix 4

Channel	Input Voltage (AC)	Maximum Transmitter Output Level (Watts)	Limit (Watts)	Margin	Result
Bottom	93	0.018246	1.0	0.981754	Complied
Bottom	110	0.018246	1.0	0.981754	Complied
Bottom	126.5	0.018059	1.0	0.981941	Complied
Middle	93	0.016993	1.0	0.983007	Complied
Middle	110	0.017153	1.0	0.982847	Complied
Middle	126.5	0.016993	1.0	0.983007	Complied
Top	93	0.015279	1.0	0.984721	Complied
Top	110	0.015265	1.0	0.984735	Complied
Top	126.5	0.015279	1.0	0.984721	Complied

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

7.10. Radiated Transmitter Peak Output Power: Transmit Mode

7.10.1.Effective Isotropic Radiated Power

Tests were performed to identify the maximum transmit power in accordance with FCC Part 15.247(b)(1).7.10.1.1. and with Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

7.10.1.2. The client has specified that the EUT employs frequency hopping with 79 hopping channels. Therefore the maximum transmitter power level under FCC Part 15.247(b)(1) is 1 Watt.

7.10.1.3. Results are shown for the EUT set to Top, Middle and Bottom channels as stated in FCC Part 15.31 (m) and section 5.2 of this report. Graphical measurements are shown for the transmit power levels within Appendix 4.

Results:

Channel	Input Voltage (AC)	Maximum Transmitter Output Level (Watts)	Limit (Watts)	Margin	Result
Bottom	110	0.0027	1.0	0.9973	Complied
Middle	110	0.0017	1.0	0.9983	Complied
Top	110	0.0013	1.0	0.9987	Complied

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

7.11. Transmitter Conducted Emissions: Section 15.247(c)

7.11.1. Spurious emissions tests on the antenna port were performed in accordance with FCC Part 15.247(c).

7.11.2. Section 15.247(c) specifies that all spurious emissions measured within a 100 kHz bandwidth shall be attenuated by at least 20 dB below the level of the highest fundamental level measured in a 100 kHz bandwidth.

7.11.3. Conducted spurious emission scans were performed between 30 to 26500MHz with the EUT operating at the Top, Middle, Bottom channels as specified within clause 15.31(m). All channels were active and transmitting data.

7.11.4. Plots of the initial scans can be found in Appendix 4.

Results:

Frequency (MHz)	Ant. Pol.	Q-P Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
30 to 26500	Horiz/Vert	< 20.0	40.0	> 20.0	Complied

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

7.12. Transmitter Radiated Emissions: Section 15.247(c) and 15.209(a)

7.12.1. Electric Field Strength Measurements: 30 to 1000 MHz.

7.12.1.1. The following table specifies frequencies, which fall close to the restricted bands as specified in section 15.205(a).

7.12.1.2. The client has stated that the highest clock frequency for the EUT was 2.480GHz. Therefore measurements were performed up to 26 GHz.

7.12.1.3. Preliminary Radiated spurious scans were performed with the EUT set to Top, Middle and Bottom channels and with all channels active (transmitting data on pseudo random hopping channels) as stated in section 5.2.

7.12.1.4. Due to dynamic range limitations of the measuring receiver, scans at high frequencies above 12 GHz were performed at a 1 metre measurement distance. The measured value was then corrected by 9.5 dB using the formula $20\log(D1/D2)$ Where D1 was 3 meters and D2 was 1 meter.

7.12.1.5. Plots of the initial scans can be found in Appendix 4.

7.12.1.6. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector at a test distance of 3m (results incorporate antenna factors and cable losses):

7.12.1.7. The following results are for the EUT configured with an internal antenna connected and operating.

Bottom Channel

Frequency (MHz)	Ant. Pol.	Q-P Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
47.397	Vert.	17.9	40.0	22.1	Complied
57.736	Vert.	22.8	40.0	17.2	Complied
74.391	Vert.	20.2	40.0	19.8	Complied
80.003	Vert.	27.1	40.0	12.9	Complied
100.861	Vert.	26.8	43.5	16.7	Complied
109.602	Vert.	33.2	43.5	10.3	Complied
117.748	Vert.	34.4	43.5	9.1	Complied
279.993	Vert.	15.7	46.0	30.3	Complied
300.011	Horiz.	27.8	46.0	18.2	Complied
400.031	Horiz.	20.8	46.0	25.2	Complied
503.773	Horiz.	29.8	46.0	16.2	Complied

Test Of: Brain Boxes Ltd.

BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Transmitter Radiated Emissions: Section 15.247(c) and 15.209(a) (continued)

Frequency (MHz)	Ant. Pol.	Q-P Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
532.471	Horiz.	25.3	46.0	20.7	Complied
603.031	Horiz.	21.6	46.0	24.4	Complied
733.515	Horiz.	26.7	46.0	19.3	Complied
867.310	Vert.	25.6	46.0	20.4	Complied

***Note:** The preliminary scans showed similar emission levels for each mode below 1 GHz, therefore final radiated emissions measurements were performed with the EUT set to the Bottom channel only.

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Transmitter Radiated Emissions: Section 15.247(c) and 15.209(a) (continued)

7.12.2. Electric Field Strength Measurements: 1.0 to 26.0 GHz

Highest Average Level: Bottom Channel

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dB μ V)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Average Margin (dB)	Result
1.48024	Vert.	8.01	21.8	1.0	30.81	54.0	23.19	Complied
2.55174	Vert.	11.87	20.5	1.3	33.67	54.0	20.33	Complied
4.80222	Vert.	15.11	22.6	1.8	39.51	54.0	14.49	Complied
7.20524	Vert.	15.33	24.8	2.0	42.13	54.0	11.87	Complied
9.60986	Vert.	4.27	28.4	2.1	34.77	54.0	19.23	Complied

Highest Peak Level: Bottom Channel

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dB μ V)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Peak Margin (dB)	Result
1.48024	Vert.	39.71	21.8	1.0	62.51	74.0	11.49	Complied
2.55174	Vert.	26.11	20.5	1.3	47.91	74.0	26.09	Complied
4.80222	Vert.	30.67	22.6	1.8	55.07	74.0	18.93	Complied
7.20524	Vert.	30.19	24.8	2.0	56.99	74.0	17.01	Complied
9.60986	Vert.	20.85	28.4	2.1	51.35	74.0	22.65	Complied

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Transmitter Radiated Emissions: Section 15.247(c) and 15.209(a) (continued)

Highest Average Level: Middle Channel

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dB μ V)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Average Margin (dB)	Result
1.48014	Vert.	10.67	21.8	1.0	33.47	54.0	20.53	Complied
2.21283	Vert.	1.98	20.5	1.2	23.68	54.0	30.32	Complied
4.88308	Vert.	12.65	22.6	1.8	37.05	54.0	16.95	Complied
7.32478	Vert.	8.66	24.8	2.0	35.46	54.0	18.54	Complied
11.68664	Vert.	1.91	28.4	2.3	32.61	54.0	21.39	Complied

Highest Peak Level: Middle Channel

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dB μ V)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Peak Margin (dB)	Result
1.48014	Vert.	36.87	21.8	1.0	59.67	74.0	14.33	Complied
2.21283	Vert.	18.96	20.5	1.2	40.66	74.0	33.34	Complied
4.88308	Vert.	27.52	22.6	1.8	51.92	74.0	22.08	Complied
7.32478	Vert.	25.07	24.8	2.0	51.87	74.0	22.13	Complied
11.68664	Vert.	21.07	28.4	2.3	51.77	74.0	12.23	Complied

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Transmitter Radiated Emissions: Section 15.247(c) and 15.209(a) (continued)

Highest Average Level: Top Channel

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dB μ V)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Average Margin (dB)	Result
1.24007	Vert.	11.19	21.8	1.0	33.99	54.0	20.01	Complied
2.24729	Vert.	-1.25	20.5	1.2	20.45	54.0	33.55	Complied
4.96118	Vert.	13.15	22.6	1.8	37.55	54.0	16.45	Complied
7.43929	Vert.	3.7	24.8	2.0	30.50	54.0	23.50	Complied
10.56061	Vert.	2.10	28.4	2.2	32.70	54.0	21.30	Complied

Highest Peak Level: Top Channel

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dB μ V)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Peak Margin (dB)	Result
1.24007	Vert.	19.59	21.8	1.0	42.39	74.0	31.61	Complied
2.24729	Vert.	14.29	20.5	1.2	35.99	74.0	38.01	Complied
4.96118	Vert.	27.76	22.6	1.8	52.16	74.0	21.84	Complied
7.43929	Vert.	17.21	24.8	2.0	44.01	74.0	29.99	Complied
10.56061	Vert.	25.99	28.4	2.2	56.59	74.0	7.41	Complied

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Transmitter Radiated Emissions: Section 15.247(c) and 15.209(a) (continued)

Highest Average Level: Hopping Mode

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dB μ V)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Average Margin (dB)	Result
1.48044	Vert.	8.08	21.8	1.0	30.88	54.0	23.12	Complied
2.23349	Vert.	-5.23	20.5	1.2	16.47	54.0	37.53	Complied
4.80691	Vert.	9.07	22.6	1.8	33.47	54.0	20.53	Complied
7.21139	Vert.	2.71	24.8	2.0	29.51	54.0	24.49	Complied
9.61500	Vert.	0.17	28.4	2.1	30.67	54.0	23.33	Complied

Highest Peak Level: Hopping Mode

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dB μ V)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Peak Margin (dB)	Result
1.48044	Vert.	42.32	21.8	1.0	65.12	74.0	8.88	Complied
2.23349	Vert.	10.08	20.5	1.2	31.78	74.0	42.22	Complied
4.80691	Vert.	29.81	22.6	1.8	54.21	74.0	19.79	Complied
7.21139	Vert.	29.30	24.8	2.0	56.10	74.0	17.90	Complied
9.61500	Vert.	18.65	28.4	2.1	49.15	74.0	24.85	Complied

**Test Of: Brain Boxes Ltd.
BL-510**

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

7.13. Transmitter Band Edge Conducted Emissions FCC 15.247(c)

7.13.1. The EUT and spectrum analyser were configured as for conducted antenna port measurements, and as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

7.13.2. The applicant to allow for conducted measurements provided a temporary antenna port.

7.13.3. A plot of the upper channel and the protected band closest to the upper channel was produced. A marker was set to the peak of the highest channel and a delta marker set to the highest out of band peak. (The specification states that either the band edge level must be measured or the highest out of band emission, whichever is greater). The plots show that the emission complies with the 20dBc limit.

7.13.4. A plot of the lower channel and the protected band closest to the lower channel was produced. A marker was set to the peak of the lowest channel and a delta marker set to the highest out of band peak. (The specification states that either the band edge level must be measured or the highest out of band emission, whichever is greater). The plots show that the emission complies with the 20dBc limit.

7.13.5. Two graphs in total were produced, with the device set to top and bottom channels. The plots can be seen in appendix 4 of this report.

**Test Of: Brain Boxes Ltd.
BL-510**

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

7.14. Transmitter Band Edge Radiated Emissions

7.14.1. Electric Field Strength Measurements

7.14.1.1. The EUT and spectrum analyser were configured for radiated measurements as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

7.14.1.2. A plot of the protected band closest to the upper channel was produced with frequency hopping mode turned off and the device set to transmit on the top channel. A marker was set to the peak of the highest out of band emission. (The specification states that either the band edge level must be measured or the highest out of band emission, which ever is greater).

7.14.1.3. The highest noted emission was then measured as per the requirements of FCC Part 15.209 for electric field strength measurements.

7.14.1.4. A plot of the protected band closest to the lower channel was then produced with frequency hopping turned off and the device set to transmit on the bottom channel. A marker was set to the peak of the highest out of band emission. (The specification states that either the band edge level must be measured or the highest out of band emission, which ever is greater).

7.14.1.5. The highest noted emission was then measured as per the requirements of FCC Part 15.209 for electric field strength measurements.

7.14.1.6. Two graphs were produced showing the responses in the limited frequency bands. The plots can be seen in appendix 4 of this report.

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

8. Measurement Uncertainty

8.1. No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

8.2. The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

8.3. The uncertainty of the result may need to be taken into account when interpreting the measurement results.

8.4. The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Conducted Emissions AC Mains	0.15 MHz to 30 MHz	95%	+/- 3.25 dB
Time Occupancy	Not applicable	95%	+/- 10 %
Channel Separation	Not applicable	95%	+/- 10 %
Occupied Bandwidth	1850 to 1910 MHz	95%	+/- 0.12 %
Effective Isotropic Radiated Power	1.0 GHz to 26 GHz	95%	+/- 1.78 dB
Radiated Emissions at 3.0 metres	30 MHz to 1000 MHz	95%	+/- 5.26 dB
Conducted Emissions Antenna Port	0.009 kHz to 26 GHz	95%	+/- 1.2 dB
Radiated Emissions at 3.0 metres	1 GHz to 26 GHz	95%	+/- 1.78 dB

8.5. The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.
A019	1050 Controller	EMCO	1050	1191
A027	Horn Antenna	Eaton	9188-2	301
A031	2 to 4 GHz Eaton Horn Antenna	Eaton	91889-2	557
A1069	ESH3-Z5	Rohde & Schwarz	ESH3-Z5	837469/012
A145	10 dB Attenuator	Narda	None	None
A197	Site 2 Controller SC144	Unknown	SC144	150720
A200	Weinschel 100 W 20 dB Attenuator	Weinschel	WA48-20	385
A217	10 dB attenuator	Narda	769-10	3637
A259	Bilog Antenna	Chase	CBL6111	1513
A276	OATS Positioning Controller	Rohde & Schwarz	HCC	
A427	WG 14 horn	Flann	14240-20	150
A428	WG 12 horn	Flann	12240-20	134
A429	WG 16 horn	Flann	16240-20	561
A430	WG 18 horn	Flann	18240-20	425
A436	WG 20 horn	Flann	20240-20	330
A559	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	357881052
C1065	Rosenberger	Rosenberger	UFA210-1-7872	0985
C160	Cables	Rosenberger	UFA210A-1-1181-70x70	None
C341	Cable	Andrews	None	None
C362	Cable	Rosenberger	UFA210A-1-1181-70x70	1925
C453	Cable	Rosenberger	RG142XX-001-RFIB	C453-10081998
C468	N-Type Coaxial Cable	Rosenberger	UFA210A-1-3937-504504	98L0440
E013	PCN Environmental Chamber	Sanyo	ATMOS chamber	None
M003	Spectrum Monitor	Rohde & Schwarz	EZM	883 580/008

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Test Equipment Used (continued)

RFI No.	Instrument	Manufacturer	Type No.	Serial No.
M023	ESVP Receiver	Rohde & Schwarz	ESVP	872 991/027
M069	ESMI Spectrum Analyser / Receiver	Rohde & Schwarz	ESMI	829 808/007 (DU) / 827 063/008 (RU)
M072	FSM Spectrum Analyser	Rohde & Schwarz	FSM	862 967/010 (RF) & 863 912/048 (Display)
M088	Receiver / Spectrum Analyser System	Rohde & Schwarz	ESBI	DU:835862/018 RU:835387/006
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016
M173	Turntable Controller	R.H.Electrical Services	RH351	3510020
M198	Thermal Power Sensor	Rohde & Schwarz	NRV-Z52	827 191/003
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075
S003	Power Control	Zen	E08	736699
S201	Site 1	RFI	1	-
S202	Site 2	RFI	2	-
S207	Site 7	RFI	7	98L0440
S212	Site 12	RFI	12	-

NB In accordance with UKAS requirements, all the measurement equipment is on a calibration schedule.

Test Of: Brain Boxes Ltd.

BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Appendix 2. Measurement Methods

AC Mains Conducted Emissions

AC mains conducted emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

The test was performed in a shielded enclosure with the equipment arranged as detailed in the standard on a wooden bench using the floor of the screened enclosure as the ground reference plane and with the EUT powered via a 60 Hz AC mains supply.

Initial measurements in the form of swept scans covering the entire measurement band were performed in order to identify frequencies on which the EUT was generating interference. In order to minimise the time taken for these swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidths (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

Following the initial scans, a graph was produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested (at individual frequencies) using the appropriate detector function.

The test equipment settings for conducted emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements
Detector Type:	Peak	Quasi-Peak (CISPR)*
Mode:	Max Hold	Not applicable
Bandwidth:	9 kHz	9 kHz
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	> 1 s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

* In some instances an Average detector function may also have been used.

Test Of: Brain Boxes Ltd.**BL-510****To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247**

Radiated Field Strength Emissions

Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

Initial measurements covering the entire measurement band in the form of swept scans in a shielded enclosure were performed in order to identify frequencies on which the EUT was generating interference. This determined the frequencies on which the EUT should be re-measured in full on the open area test site. In order to minimise the time taken for the swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. Following the initial scans, graphs were produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested on the open area test site, at the appropriate distance, using a measuring receiver with a Quasi-Peak (below 1000 MHz), Average and Peak (above 1000 MHz) detector, where applicable.

For the main (final) measurements the EUT was arranged on a non-conducting table on an open area test site, as detailed in the specification.

All measurements on the open area test site were performed using broadband antennas.

On the open area test site, at each frequency where a signal was found, the levels were maximised by initially rotating the turntable through 360°. For frequencies below 1000 MHz, the antenna was varied in height between 1 m and 4 m. For frequencies above 1000 MHz, the antenna was fixed at a height of 1.5m. At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT.

Once the signal amplitude is determined the EUT is replaced with a substitution antenna. A signal generator is connected to the antenna and its level adjusted in order to obtain the same indicated level as that which was observed from the EUT. The receive antenna is then adjusted in height until the signal measured has peaked. The signal generator level is then re-adjusted to regain the original reading. The level on the signal generator – cable losses plus the antenna gain is the recorded ERP.

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

The test equipment settings for radiated emissions measurements were as follows:

Receiver Function	Initial Scan Below 1000 MHz	Final Measurements Below 1000 MHz
Detector Type:	Peak	Quasi-Peak (CISPR)
Mode:	Max Hold	Not applicable
Bandwidth:	100 kHz	120 kHz
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	> 1 s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

Receiver Function	Initial Scan Above 1000 MHz	Final Measurements Above 1000 MHz
Detector Type:	Peak	Peak/Average
Mode:	Max Hold	Not applicable
Bandwidth:	1 MHz	1 MHz
Amplitude Range:	60 dB	20 dB (typical)
Measurement Time:	Not applicable	> 1 s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

Test Of: Brain Boxes Ltd.**BL-510****To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247**

Conducted Antenna Port Emissions

Conducted Antenna Port Emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

Prior to testing being performed a suitable RF attenuator and cable were calibrated for the required frequency range. For each measurement range performed, the calibrated level of the attenuator and cable were entered as an offset into the spectrum analyser to compensate for the measurement setup.

Initial measurements covering the entire measurement band in the form of swept scans were performed in order to identify frequencies on which the EUT was generating interference. This determined the frequencies on which measurements were performed. In order to minimise the time taken for the swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

Due to the design of the EUT, conducted antenna port measurements were common for both the internal and external antenna connection.

To determine the transmitter output power, the EUT was operated as intended with the spectrum analyser operated in a maximum hold mode over the full operating frequency range of the EUT to identify the highest emission within the band.

To determine spurious emissions levels, the EUT was operated as intended with the spectrum analyser operated in a maximum hold mode over selected frequency ranges between 30 MHz and 26 GHz. A reference limit line of 20dB below the maximum output of the transmitter was noted. Levels within 20dB of this limit line were then recorded.

**Test Of: Brain Boxes Ltd.
BL-510**

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Channel Separation FCC 15.247(1)

The EUT and spectrum analyser was configured as for conducted antenna port measurements, And as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

To determine the bandwidth and separation of each transmission channel the analyser was configured to measure two adjacent channels.

To determine the occupied bandwidth, A resolution bandwidth of 10 kHz was used, which is greater than 1% of the 20 dB bandwidth. A video bandwidth of a least the same value was used. The analyser was set for a maximum hold scan to capture the profile of the signal. The peak level was then determined, and a reference line was drawn 20dB below the peak level. The bandwidth was determined at the points where the 20dB reference crossed the profile of the emission.

**Test Of: Brain Boxes Ltd.
BL-510**

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Occupied Bandwidth FCC 15.247(1)

For channel separation, the analyser was configured with a resolution bandwidth and video bandwidth of at least 1% of the frequency span set on the analyser. The EUT was operated as intended and the analyser set to a maximum hold mode scan to capture the profile of the signals.

The peak points on the two adjacent channels were noted and the separation between them recorded.

The channel separation was then determined as the greater of 25kHz or the 20dB bandwidth.

**Test Of: Brain Boxes Ltd.
BL-510**

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Average Time of Occupancy FCC 15.247(1)(ii)

The EUT and spectrum analyser was configured as for conducted antenna port measurements

To determine the maximum packet length on any given channel, the analyser was configured in the time domain mode and the EUT was configured to operate as intended.

To determine the average occupancy time on any given channel the analyser was configured in the time domain and a 30 second sweep carried out. The number of times the channel was occupied in any 30 second period multiplied by the maximum packet length will give the total time on the given channel.

**Test Of: Brain Boxes Ltd.
BL-510**

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Number Of Hopping Frequencies FCC 15.247(a)(1)(ii)

The EUT and spectrum analyser was configured as for conducted antenna port measurements, And as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

To determine the number of hopping frequencies the EUT was set to operate in its normal mode of operation, hopping over all channels that it is intended to operate on.

The spectrum analyser had a span set to cover the frequency band of operation. The resolution bandwidth was set to $\geq 1\%$ of the span. The video bandwidth was set to be no less than the resolution bandwidth. The sweep was set to auto, the detector function to peak and trace to max hold. This test was also performed with the span set to the lower half the operating frequency range and then to the upper half of the operating frequency range for better resolution.

**Test Of: Brain Boxes Ltd.
BL-510**

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Peak Output Power FCC 15.247(b)

The EUT and spectrum analyser was configured as for conducted antenna port measurements, And as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

The applicant to allow for conducted measurements provided a temporary antenna port.

As the frequency range of operation was greater than 10 MHz, The test was performed on the BOTTOM, MIDDLE and TOP channels as per FCC 15.31(m).

The tests were performed at extremes of voltage of +/- 15%. The test was also performed at 240 Volts + 15% at the applicants request.

The analyser was setup as per FCC Public Notice DA 00-705.

**Test Of: Brain Boxes Ltd.
BL-510**

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Band Edge Compliance of RF Conducted Emissions FCC 15.247(c)

The EUT and spectrum analyser was configured as for conducted antenna port measurements, And as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

A temporary antenna port was provided by the applicant to allow for conducted measurements.

To determine band-edge compliance, the analyser bandwidth resolution bandwidth was set to $\geq$ the analyser span. The video bandwidth was set to be no less than the resolution bandwidth. The sweep was set to auto and the detector to peak. The trace was set to max hold and a trace was produced.

A Plot of the upper channel and the protected band closest to the upper channel was produced. A marker was set to the peak of the highest channel and a delta marker set to the highest out of band peak. (The specification states that either the band edge level must be measured or the highest out of band emission. Which ever is greater). The plots show that the emission complies with the 20 dBc limit.

A Plot of the lower channel and the protected band closest to the lower channel was produced. A marker was set to the peak of the lowest channel and a delta marker set to the highest out of band peak. (The specification states that either the band edge level must be measured or the highest out of band emission. Which ever is greater). The plots show that the emission complies with the 20 dBc limit.

Four plots were produced, Two times top and bottom channels with hopping on and two time top and bottom channels with hopping off.

**Test Of: Brain Boxes Ltd.
BL-510****To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247**

Appendix 3. Test Configuration Drawings


This appendix contains the following drawings:

Drawing Reference Number	Title
DRG\44012JD09\EMICON	Test configuration for measurement of conducted emissions
DRG\44012JD09\EMIRAD	Test configuration for measurement of radiated emissions
DRG\44012JD09\001	Schematic diagram of the EUT, support equipment and interconnecting cables used for the test

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


DRG\44012JD09\EMICON

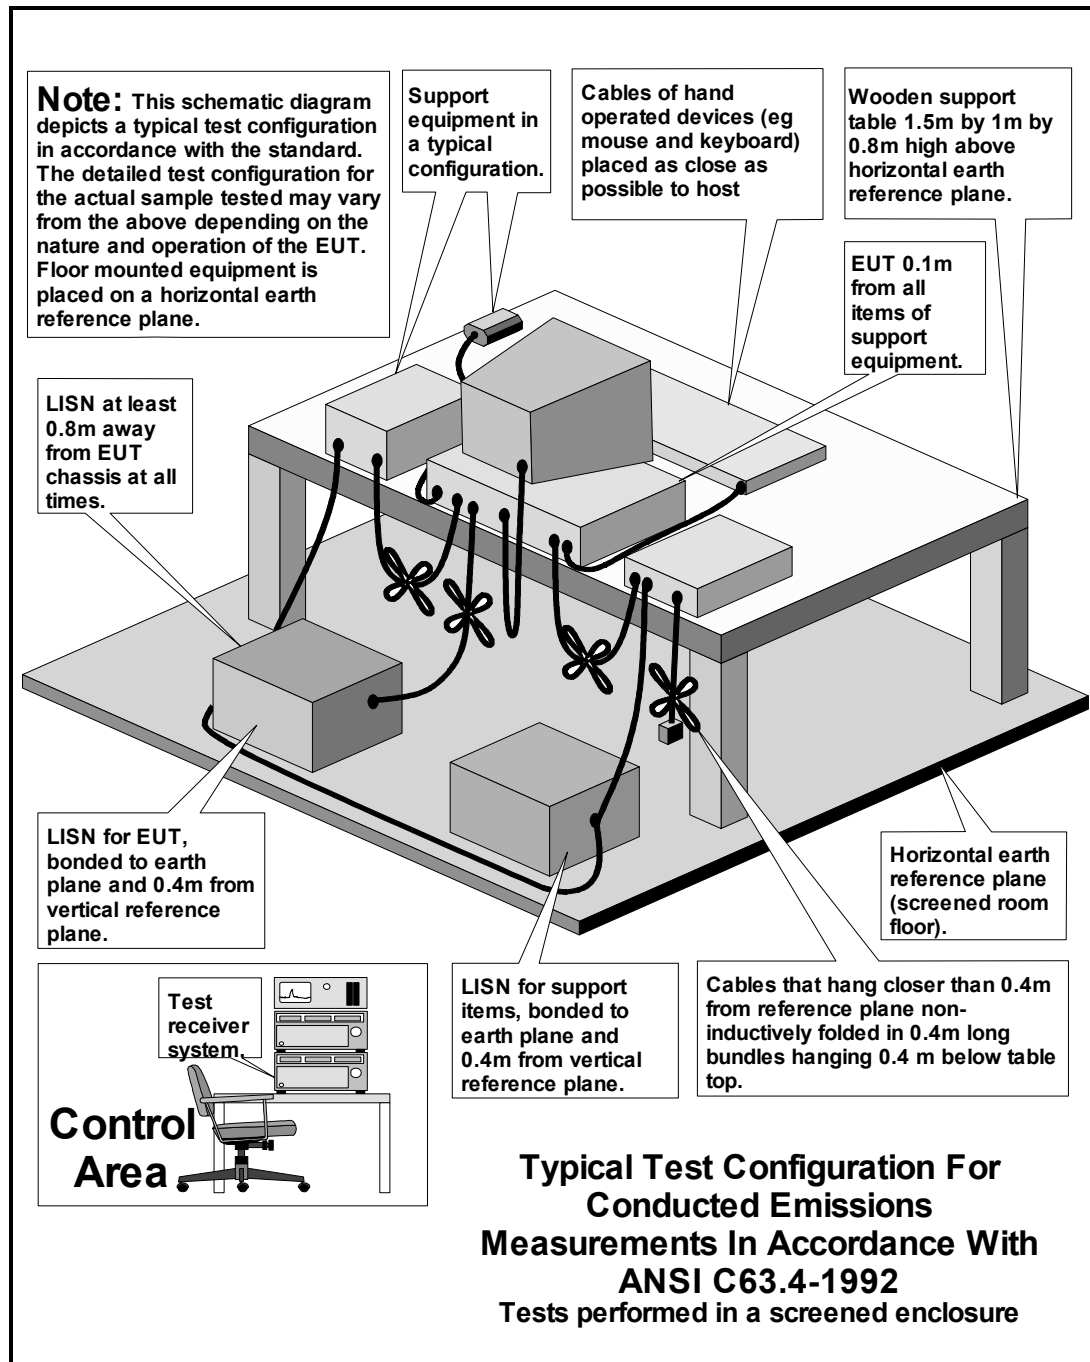

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

DRG\44012JD09\EMIRAD

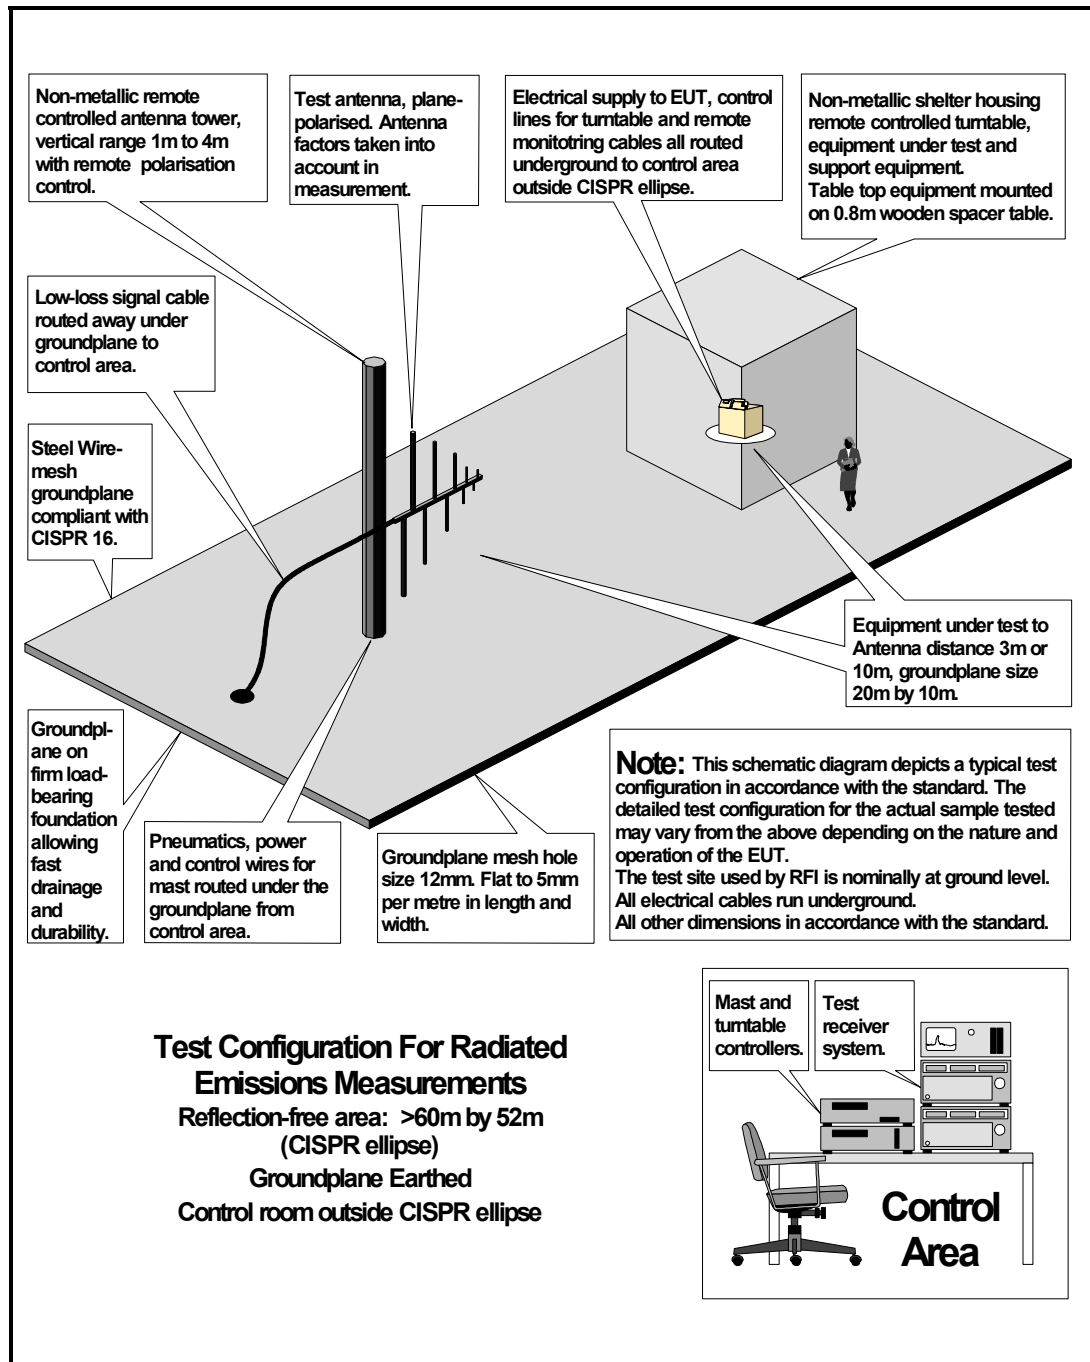

[illegible]

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Appendix 4. Graphical Test Results

This appendix contains the following graphs:

Graph Reference Number	Title
GPH\44012JD09\002	Scan of conducted emissions, receive mode
GPH\44012JD09\003	Scan of conducted emissions, hopping mode
GPH\44012JD09\004	Scan of conducted emissions, bottom channel
GPH\44012JD09\005	Scan of conducted emissions, middle channel
GPH\44012JD09\006	Scan of conducted emissions, top channel
GPH\44012JD09\007	Scan of conducted emissions, receive mode (laptop supply test point)
GPH\44012JD09\008	Scan of conducted emissions, hopping mode (laptop supply test point)
GPH\44012JD09\009	Scan of conducted emissions, bottom channel (laptop supply test point)
GPH\44012JD09\011	Scan of conducted emissions, top channel (laptop supply test point)
GPH\44012JD09\012	Scan of conducted emissions, middle channel (laptop supply test point)
GPH\44012JD09\023	Scan of conducted emissions, receive mode (EUT power lead)
GPH\44012JD09\024	Scan of conducted emissions, bottom channel (EUT power lead)
GPH\44012JD09\025	Scan of conducted emissions, middle channel (EUT power lead)
GPH\44012JD09\026	Scan of conducted emissions, top channel (EUT power lead)
GPH\44012JD09\027	Scan of conducted emissions, hopping mode (EUT power lead)
GPH\44012JD09\028	Scan of conducted emissions, receive mode (laptop power lead)
GPH\44012JD09\029	Scan of conducted emissions, bottom channel (laptop power lead)
GPH\44012JD09\030	Scan of conducted emissions, middle channel (laptop power lead)
GPH\44012JD09\031	Scan of conducted emissions, top channel (laptop power lead)
GPH\44012JD09\032	Scan of conducted emissions, hopping mode (laptop power lead)

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\44012JD09\CE001	Peak output power, bottom channel 93.5 V AC
GPH\44012JD09\CE002	Peak output power, bottom channel 110 V AC
GPH\44012JD09\CE003	Peak output power, bottom channel 126.5 V AC
GPH\44012JD09\CE004	Peak output power, middle channel 93.5 V AC
GPH\44012JD09\CE005	Peak output power, middle channel 110 V AC
GPH\44012JD09\CE006	Peak output power, middle channel 126.5 V AC
GPH\44012JD09\CE007	Peak output power, top channel 93.5 V AC
GPH\44012JD09\CE008	Peak output power, top channel 110 V AC
GPH\44012JD09\CE009	Peak output power, top channel 126.5 V AC
GPH\44012JD09\CE010	Number of hopping frequencies, hopping all channels
GPH\44012JD09\CE011	20 dB Bandwidth, hopping all channels
GPH\44012JD09\CE012	Carrier frequency separation, hopping all channels
GPH\44012JD09\CE013	Time of occupancy (dwell time), hopping all channels
GPH\44012JD09\CE014	Time of occupancy (30 second period), hopping all channels
GPH\44012JD09\CE015	Band edge, bottom channel
GPH\44012JD09\CE016	Band edge, top channel
GPH\44012JD09a\001	Conducted spurious emissions, bottom channel (2.4 GHz to 2.4835 GHz)
GPH\44012JD09a\002	Conducted spurious emissions, bottom channel (30 MHz to 2.4 GHz)
GPH\44012JD09a\003	Conducted spurious emissions, middle channel (30 MHz to 2.4 GHz)
GPH\44012JD09a\004	Conducted spurious emissions, top channel (30 MHz to 2.4 GHz)
GPH\44012JD09a\005	Conducted spurious emissions, hopping all channels (30 MHz to 2.4 GHz)
GPH\44012JD09a\006	Conducted spurious emissions, receive mode (30 MHz to 2.4 GHz)
GPH\44012JD09a\007	Conducted spurious emissions, receive mode (2.4835 GHz to 12.5 GHz)

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\44012JD09a\008	Conducted spurious emissions, hopping all channels (2.4835 GHz to 12.5 GHz)
GPH\44012JD09a\009	Conducted spurious emissions, bottom channel (2.4835 GHz to 12.5 GHz)
GPH\44012JD09a\010	Conducted spurious emissions, middle channel (2.4835 GHz to 12.5 GHz)
GPH\44012JD09a\011	Conducted spurious emissions, top channel (2.4835 GHz to 12.5 GHz)
GPH\44012JD09a\012	Conducted spurious emissions, top channel (12.5 GHz to 26.5 GHz)
GPH\44012JD09a\013	Conducted spurious emissions, middle channel (12.5 GHz to 26.5 GHz)
GPH\44012JD09a\014	Conducted spurious emissions, bottom channel (12.5 GHz to 26.5 GHz)
GPH\44012JD09a\015	Conducted spurious emissions, hopping all channels (12.5 GHz to 26.5 GHz)
GPH\44012JD09a\016	Conducted spurious emissions, receive mode (12.5 GHz to 26.5 GHz)
GPH\44012JD09\032	Scan of radiated emissions, Tx hopping, bottom channel, band edge
GPH\44012JD09\033	Scan of radiated emissions, Tx hopping, top channel, band edge


Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\002

AC Conducted Emissions. FCC Part 15. Test for Brain Boxes of BL510\642.
Operating condition:- Receive Mode.

44012JD09 002

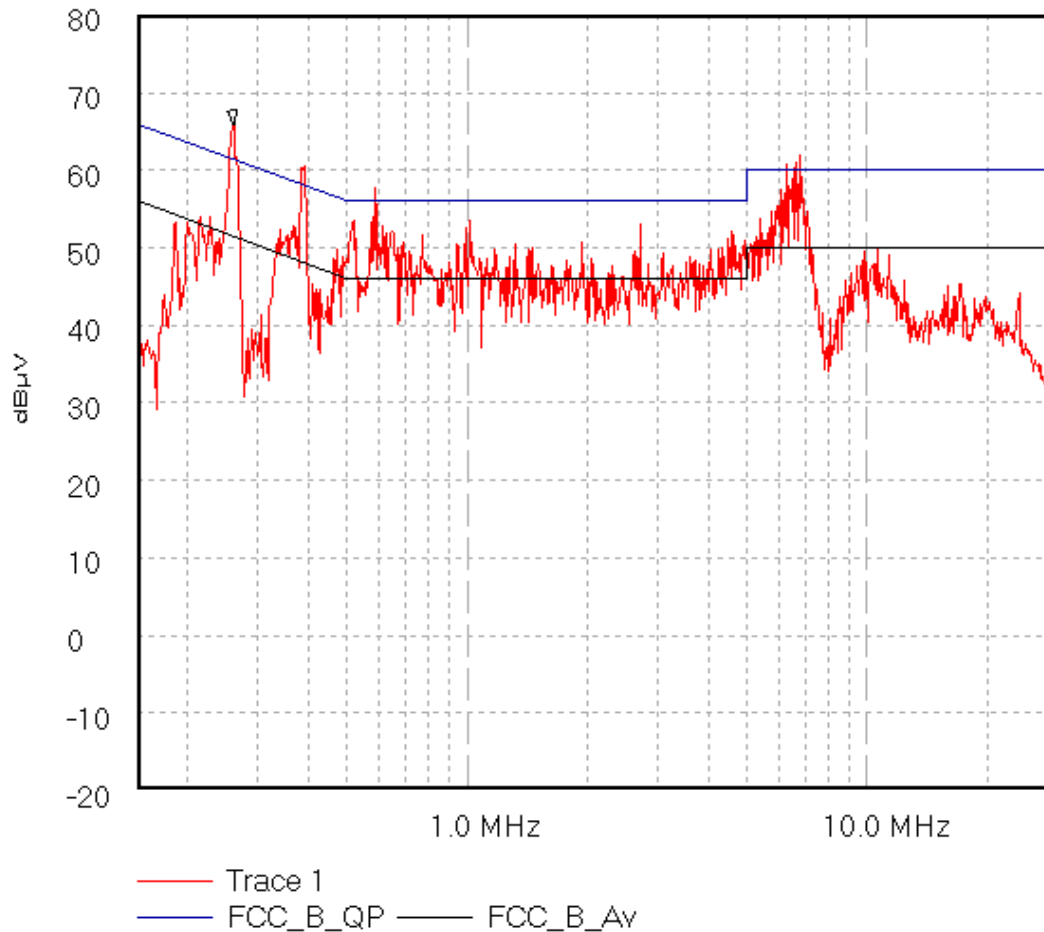

Start 150.0 kHz; Stop 30.0 MHz - Log Scale

Ref 80 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 1.94 S

Peak 260.868 kHz, 65.84 dBμV

Limit/Mask: FCC_B_QP; FCC_B_Av; ; Limit Test Failed

16/10/2002 2:17:58 PM


Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\003

AC Conducted Emissions. FCC Part 15. Test for Brain Boxes of BL510\642.
Operating Condition:- Hopping Mode.

44012JD09 003

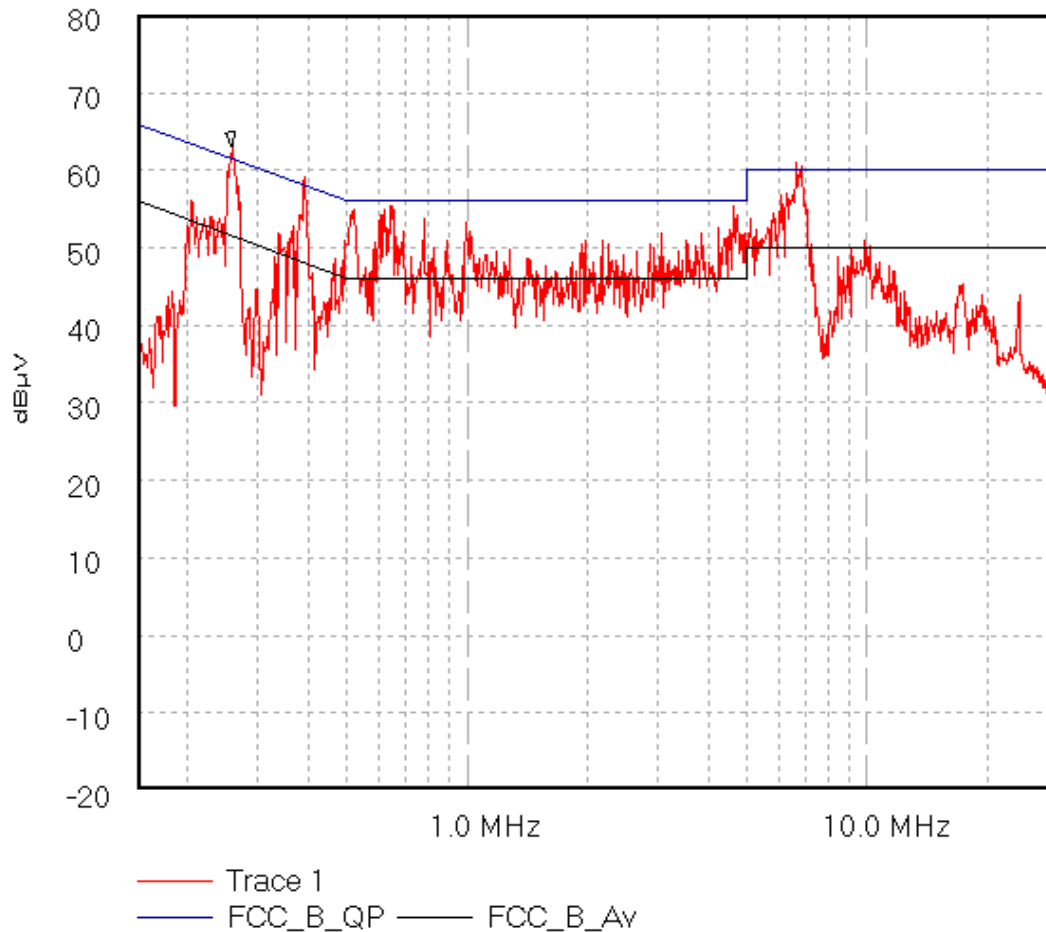

Start 150.0 kHz; Stop 30.0 MHz - Log Scale

Ref 80 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 340.0 mS

Peak 257.814 kHz, 62.94 dBμV

Limit/Mask: FCC_B_QP; FCC_B_Av; ; Limit Test Failed

16/10/2002 2:21:38 PM


Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\004

AC Conducted Emissions. FCC Part 15. Test for Brain Boxes of BL510\642.
Operating Condition:- Bottom Channel.

44012JD09 004

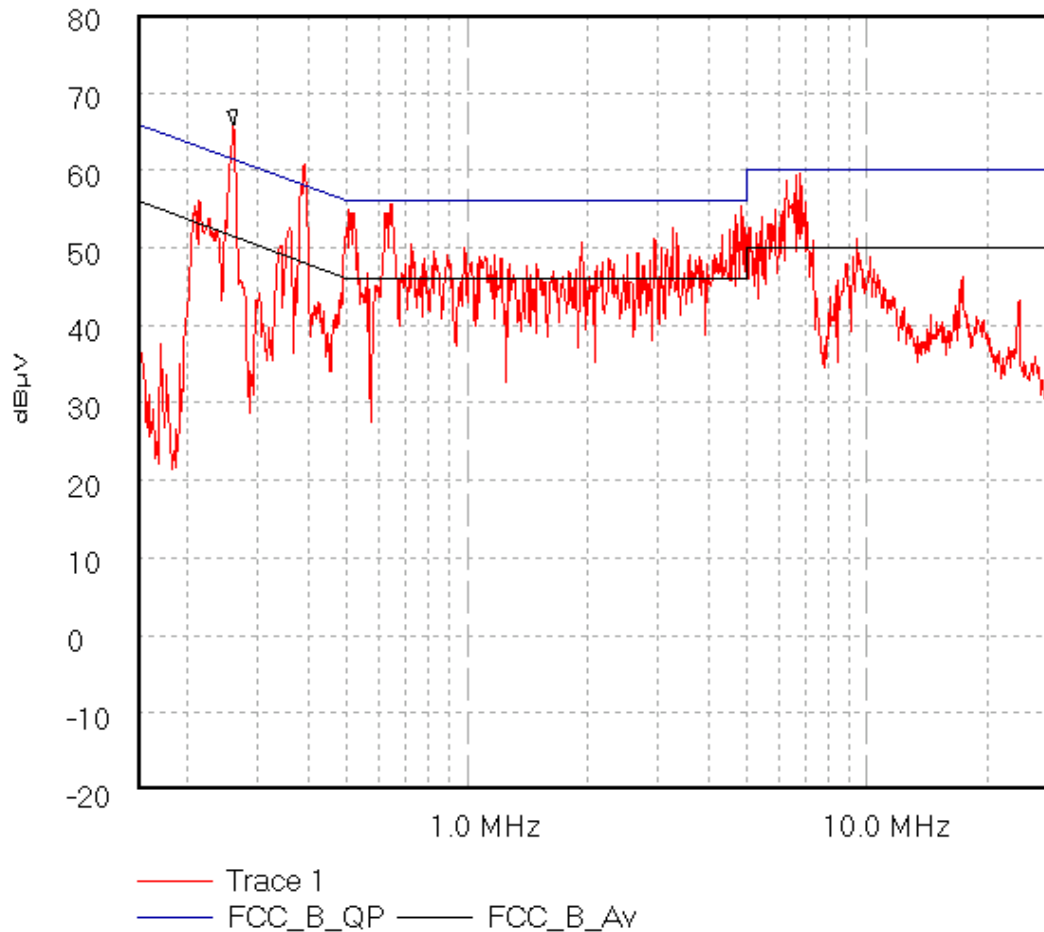

Start 150.0 kHz; Stop 30.0 MHz - Log Scale

Ref 80 dB μ V; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 1.94 S

Peak 259.336 kHz, 65.86 dB μ V

Limit/Mask: FCC_B_QP; FCC_B_Av; ; Limit Test Failed

16/10/2002 2:25:51 PM

Test Of: Brain Boxes Ltd.

BL-510


To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\005

AC Conducted Emissions. FCC Part 15. Test for Brain Boxes of BL510\642.

Operating Condition:- Middle Channel

44012JD09 005

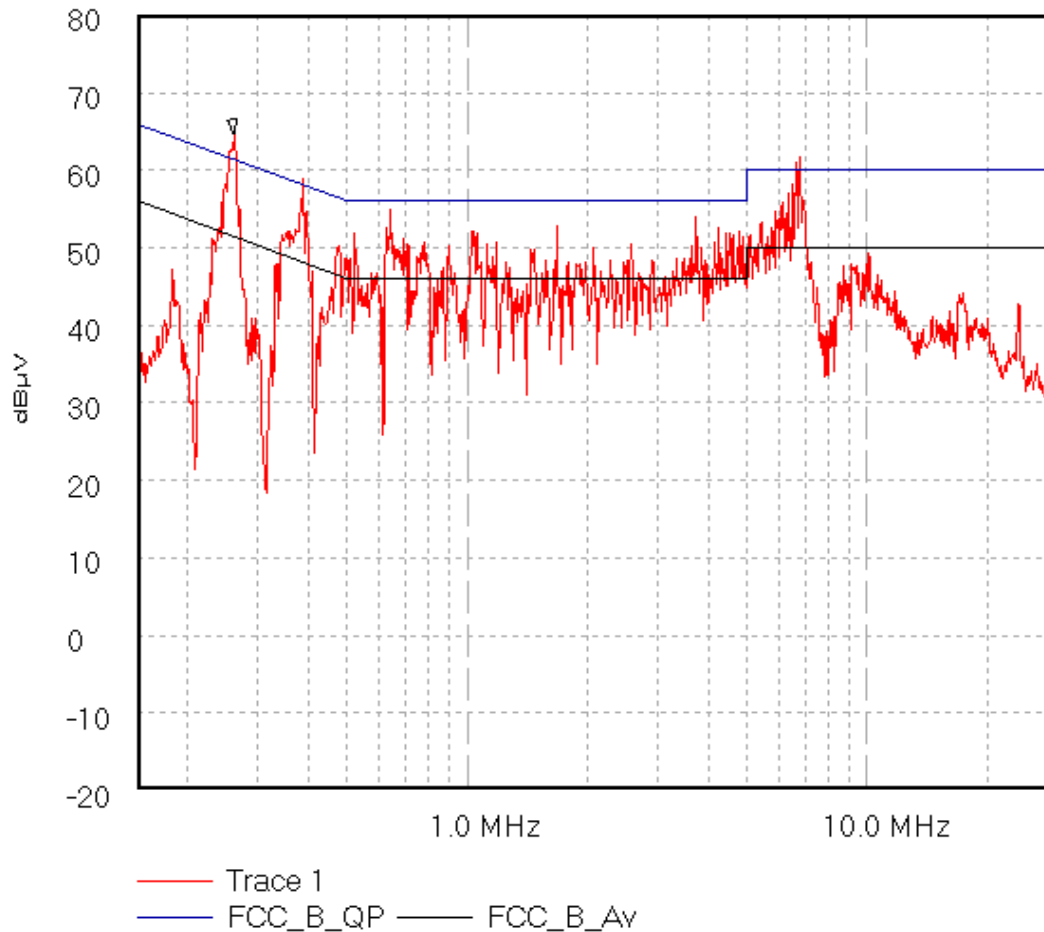

Start 150.0 kHz; Stop 30.0 MHz - Log Scale

Ref 80 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 60.0 mS

Peak 260.868 kHz, 64.69 dBμV

Limit/Mask: FCC_B_QP; FCC_B_Av; ; Limit Test Failed

16/10/2002 2:28:27 PM


Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\006

AC Conducted Emissions. FCC Part 15. Test for Brain Boxes of BL510\642.
Operating condition: Top Channel

44012JD09 005

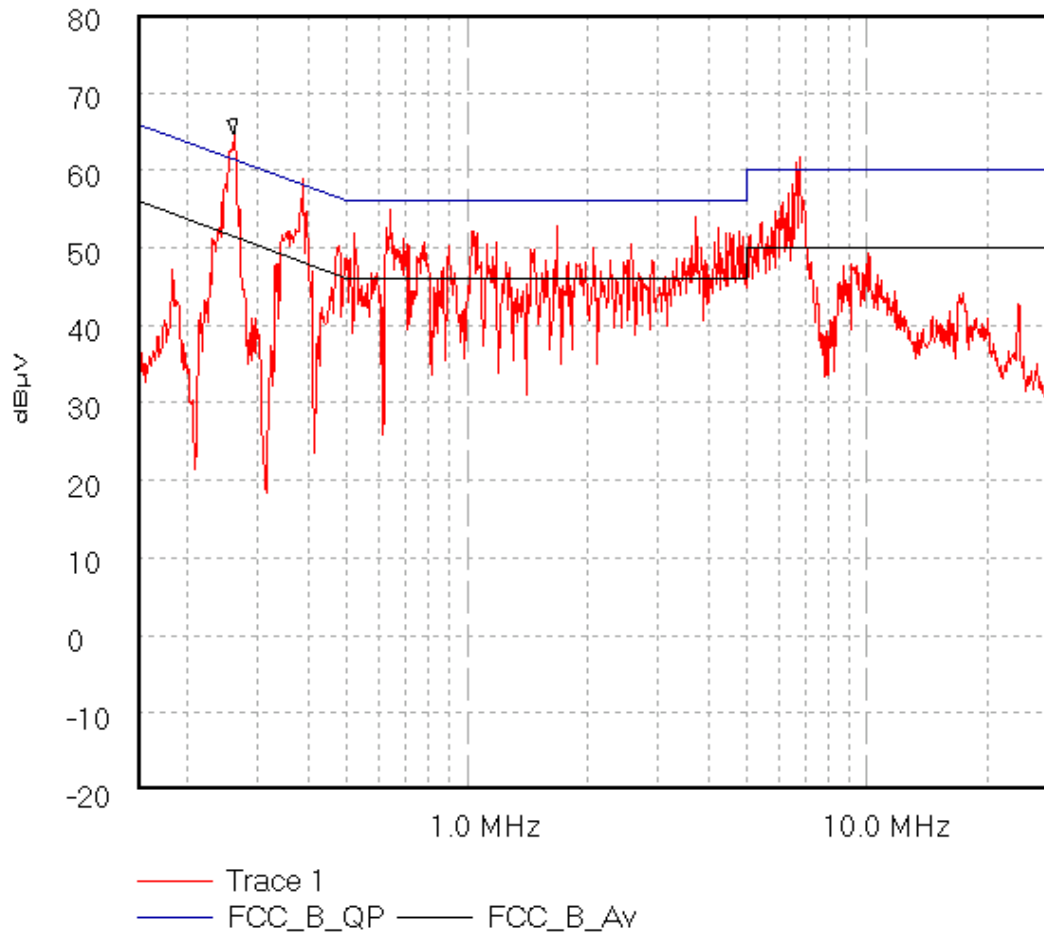

Start 150.0 kHz; Stop 30.0 MHz - Log Scale

Ref 80 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 60.0 mS

Peak 260.868 kHz, 64.69 dBμV

Limit/Mask: FCC_B_QP; FCC_B_Av; ; Limit Test Failed

16/10/2002 2:28:27 PM

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


GPH\44012JD09\007

AC Conducted Emissions. FCC Part 15.

Test for Brain Boxes of BL510\642, (Laptop supply test point)

Operating condition: Receive Mode

44012JD09 007

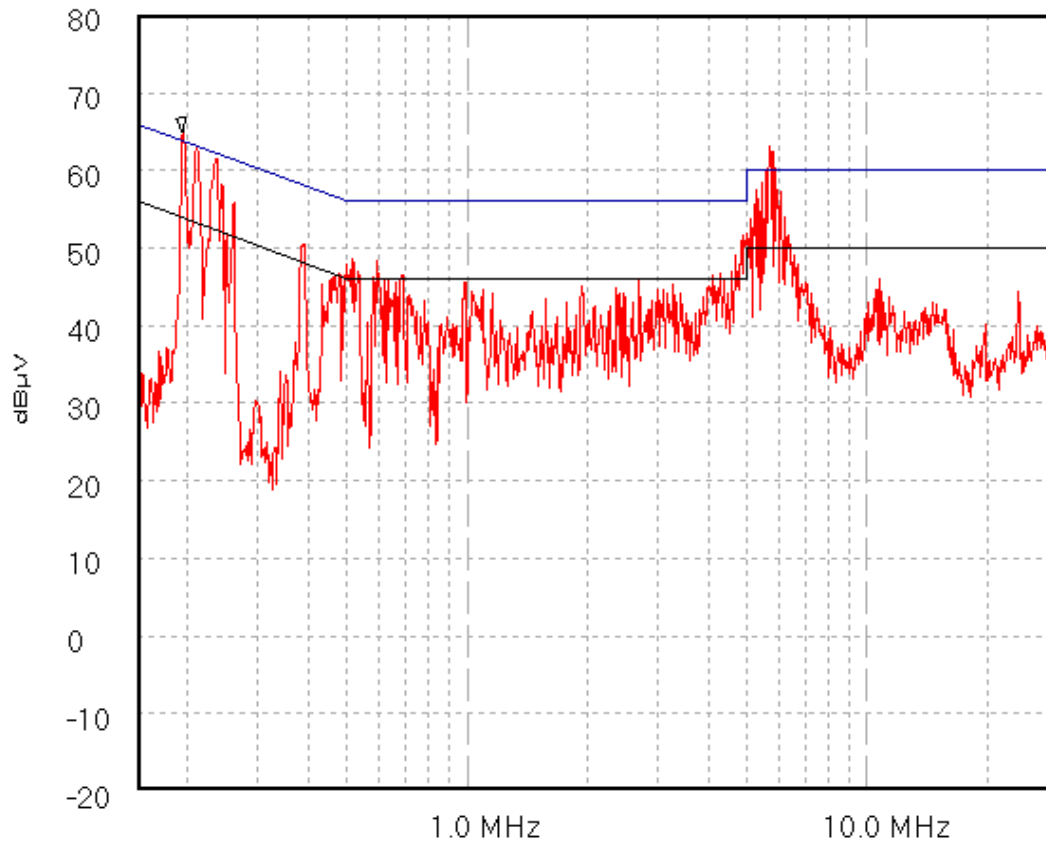

Trace 1

FCC_B_QP — FCC_B_Av

Start 150.0 kHz; Stop 30.0 MHz - Log Scale

Ref 80 dB μ V; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 1.94 S

Peak 194.35 kHz, 64.79 dB μ V

Limit/Mask: FCC_B_QP; FCC_B_Av; ; Limit Test Failed

16/10/2002 2:43:37 PM

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


GPH\44012JD09\008

AC Conducted Emissions. FCC Part 15.

Test for Brain Boxes of BL510\642, (Laptop supply test point)

Operating condition: Hopping mode

44012JD09 008

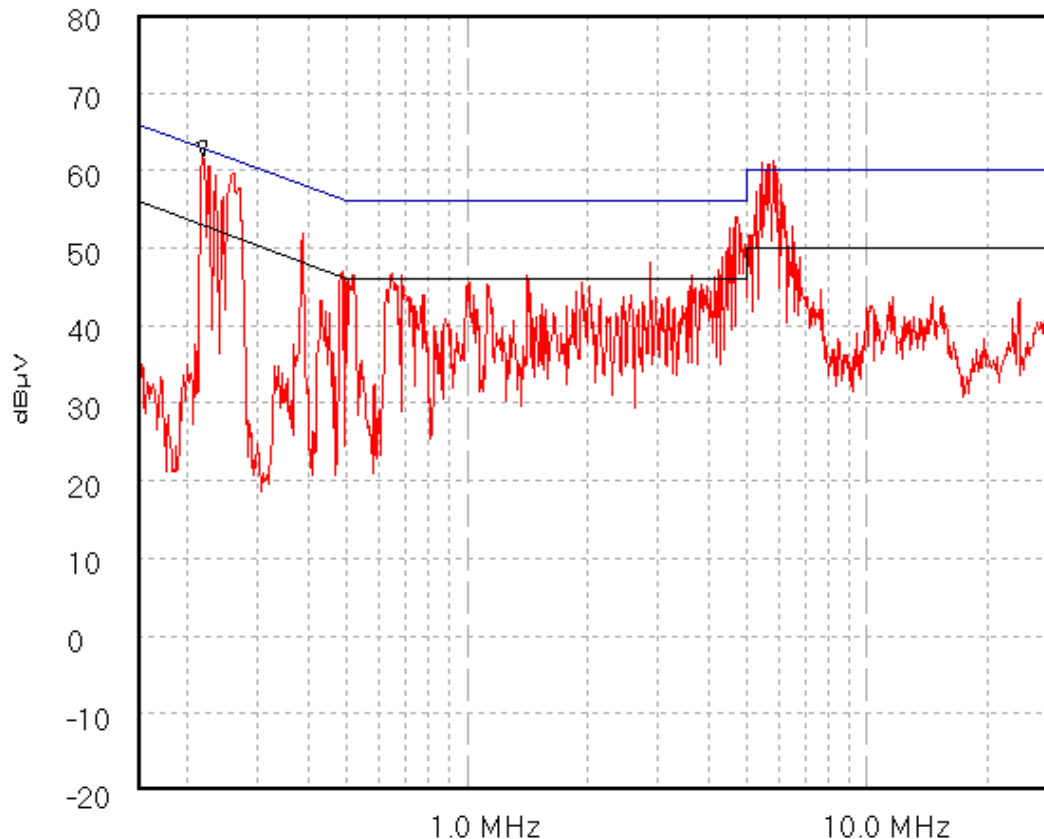

Trace 1
FCC_B_QP — FCC_B_Av

Start 150.0 kHz; Stop 30.0 MHz - Log Scale

Ref 80 dBrm; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 1.94 S

Peak 218.635 kHz, 61.9 dBrm

Limit/Mask: FCC_B_QP; FCC_B_Av; ; Limit Test Failed

16/10/2002 2:46:06 PM

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


GPH\44012JD09\009

AC Conducted Emissions. FCC Part 15.

Test for Brain Boxes of BL510\642, (Laptop supply test point)

Operating condition: Bottom Channel

44012JD09 009

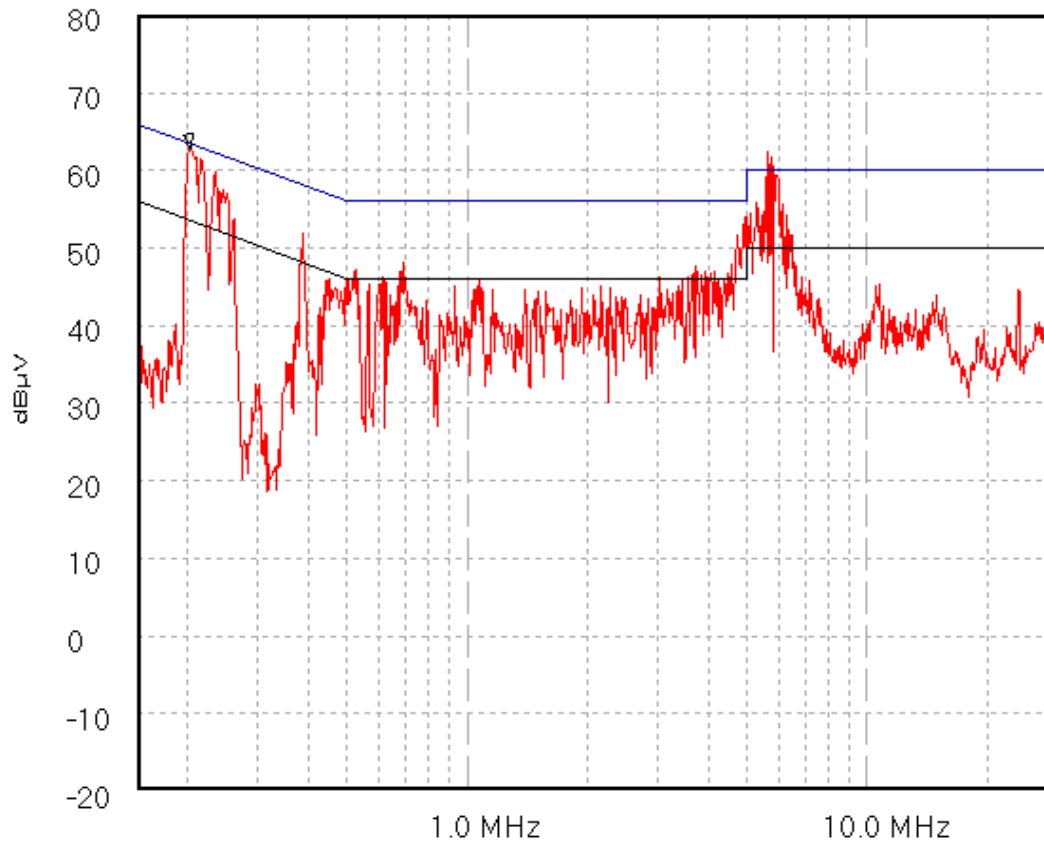

Trace 1
FCC_B_QP — FCC_B_Av

Start 150.0 kHz; Stop 30.0 MHz - Log Scale

Ref 80 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 60.0 mS

Peak 202.527 kHz, 62.74 dBμV

Limit/Mask: FCC_B_QP; FCC_B_Av; : Limit Test Failed

16/10/2002 2:48:12 PM

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


GPH\44012JD09\011

AC Conducted Emissions. FCC Part 15.

Test for Brain Boxes of BL510\642, (Laptop supply test point)

Operating condition: Top Channel

44012JD09 011

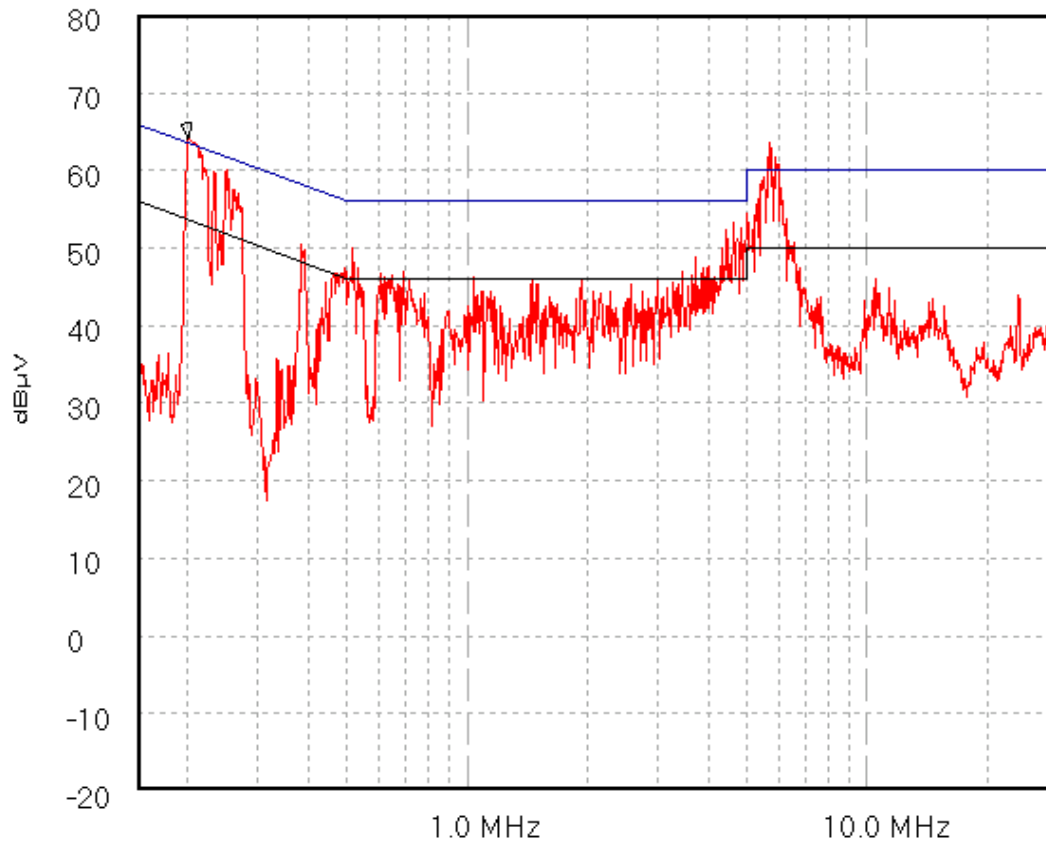

Trace 1

FCC_B_QP — FCC_B_Av

Start 150.0 kHz; Stop 30.0 MHz - Log Scale

Ref 80 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 1.94 S

Peak 201.338 kHz, 64.08 dBμV

Limit/Mask: FCC_B_QP; FCC_B_Av; ; Limit Test Failed

16/10/2002 2:53:01 PM

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


GPH\44012JD09\012

AC Conducted Emissions. FCC Part 15.

Test for Brain Boxes of BL510\642, (Laptop supply test point)

Operating condition: Middle Channel

44012JD09 012

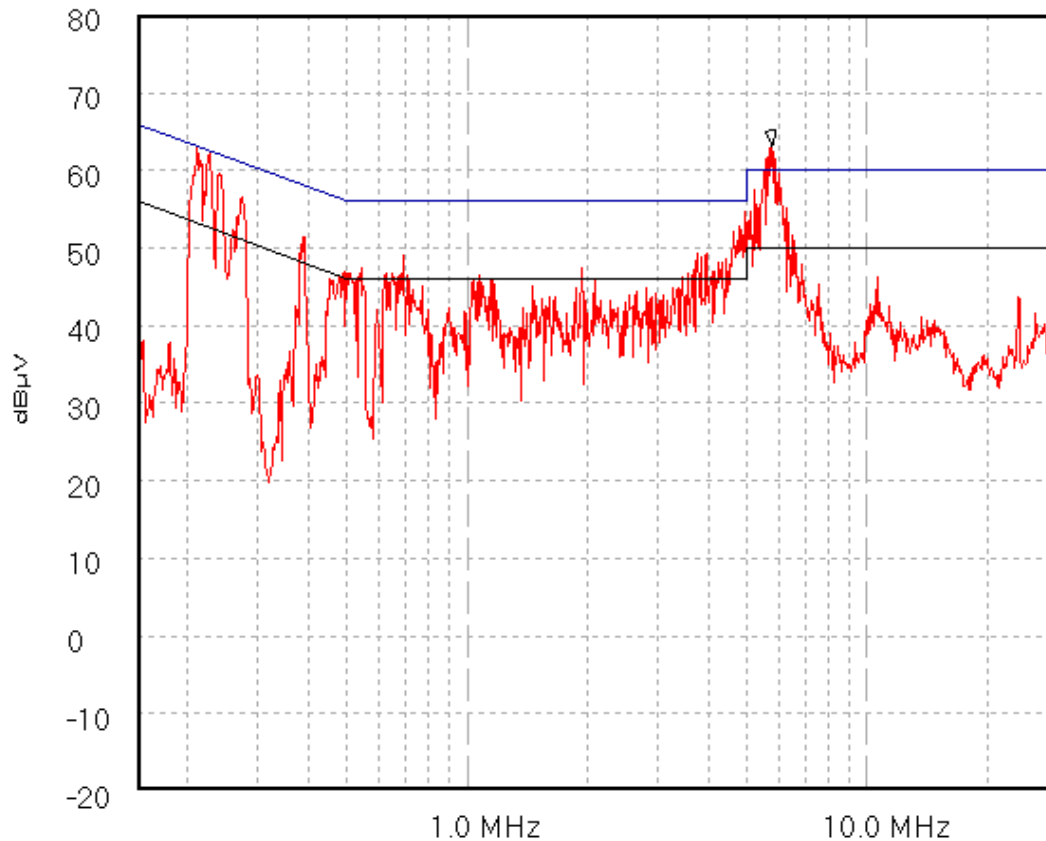

Trace 1
FCC_B_QP — FCC_B_Av

Start 150.0 kHz; Stop 30.0 MHz - Log Scale

Ref 80 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 1.94 S

Peak 5.771 MHz, 63.14 dBμV

Limit/Mask: FCC_B_QP; FCC_B_Av; ; Limit Test Failed

16/10/2002 3:13:00 PM

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


GPH\44012JD09\023

AC Conducted Emissions. FCC Part 15.

Test for Brain Boxes of BL-510/642 RS232 Adaptor. EUT Power Lead.

Operating condition:- Receive Mode.

44012JD09 023

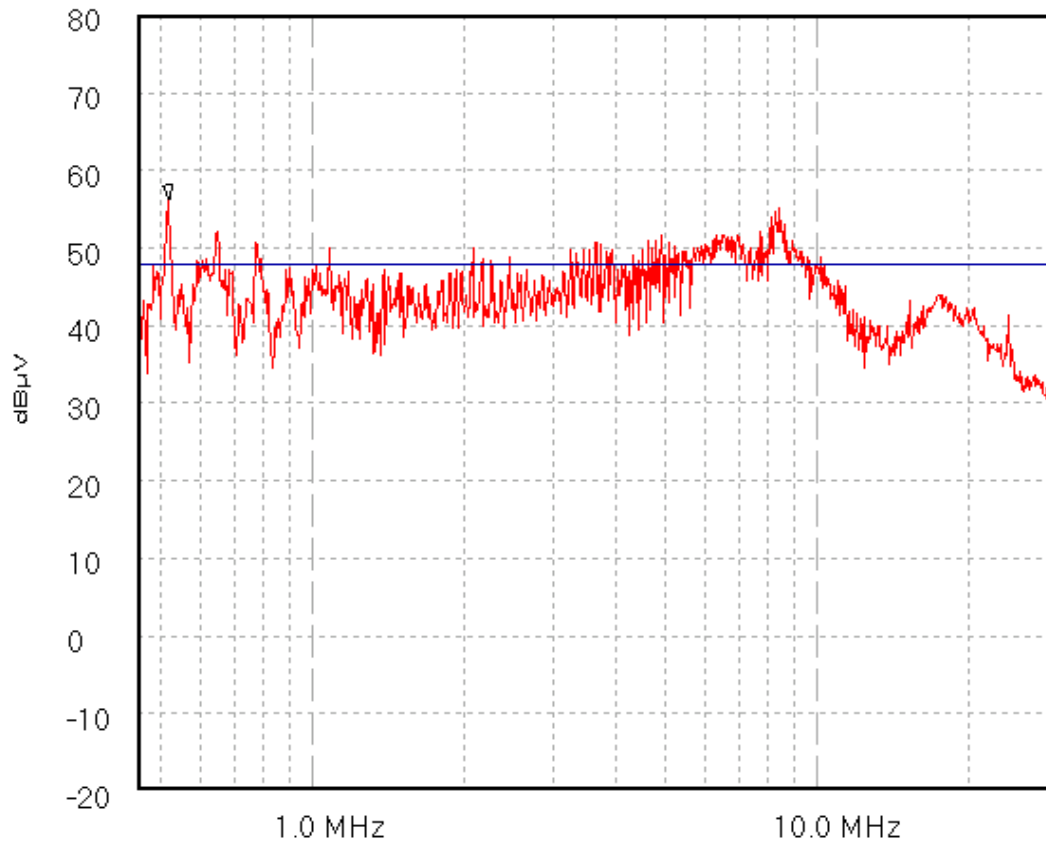

Trace 1
15_107_Class_B_QP

Start 450.0 kHz; Stop 30.0 MHz - Log Scale

Ref 80 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 2.2 S

Peak 517.618 kHz, 56.26 dBμV

Limit/Mask: 15_107_Class_B_QP; ; Limit Test Failed

17/10/2002 09:21:51

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


GPH\44012JD09\024

AC Conducted Emissions. FCC Part 15.

Test for Brain Boxes of BL-510/642 RS232 Adaptor. EUT Power Lead.

Operating condition:- Bottom Channel.

44012JD09 024

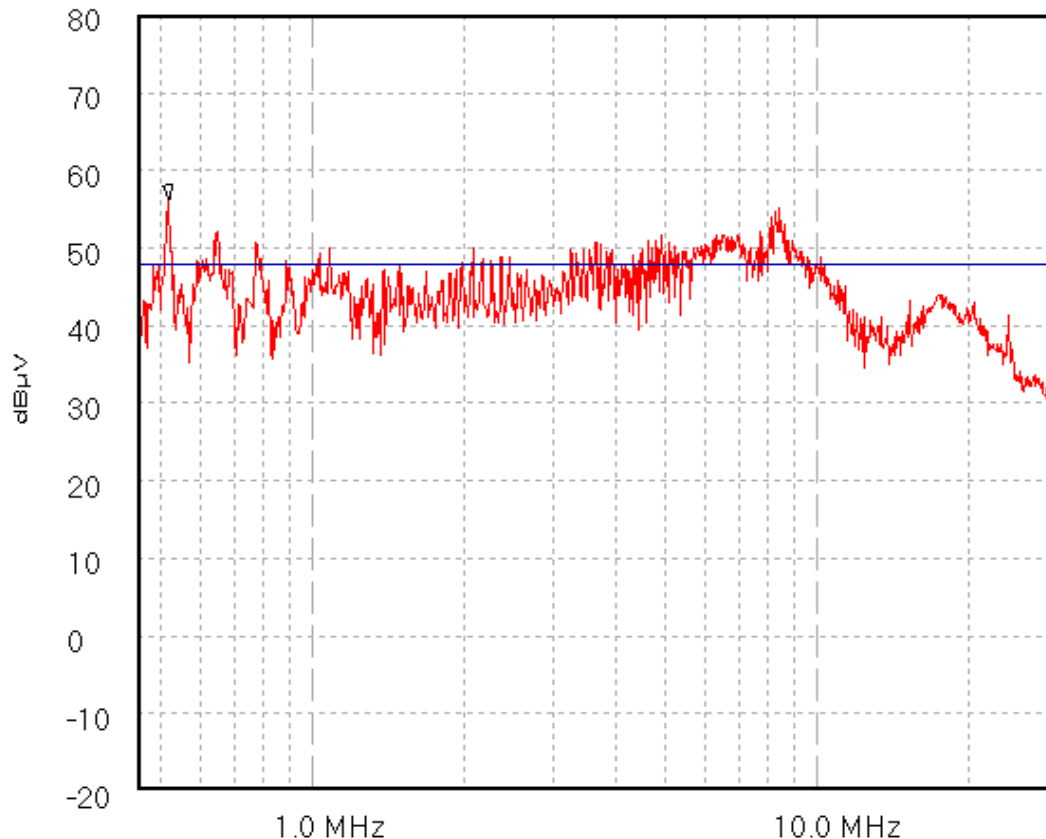

Trace 1
15_107_Class_B_QP

Start 450.0 kHz; Stop 30.0 MHz - Log Scale

Ref 80 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 2.2 S

Peak 517.618 kHz, 56.26 dBμV

Limit/Mask: 15_107_Class_B_QP; ; Limit Test Failed

17/10/2002 09:24:54

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


GPH\44012JD09\025

AC Conducted Emissions. FCC Part 15.

Test for Brain Boxes of BL-510/642 RS232 Adaptor. EUT Power Lead.

Operating Condition:- Middle Channel.

44012JD09 025

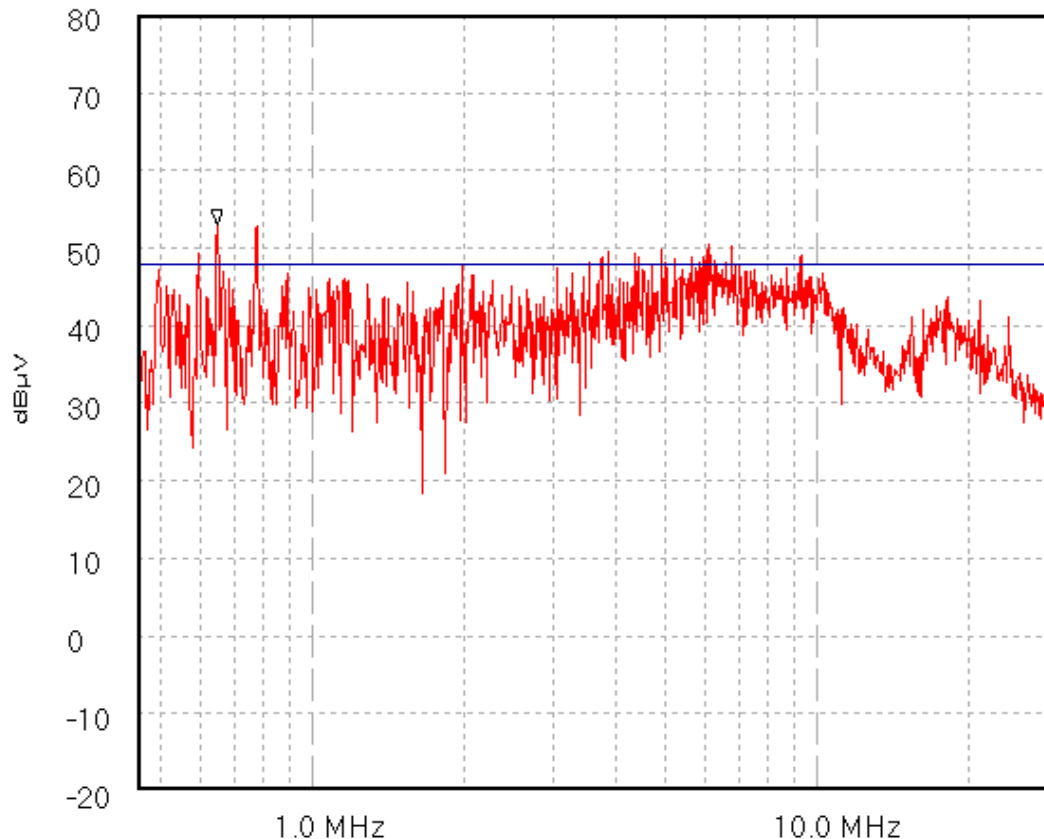

Trace 1
15_107_Class_B_QP

Start 450.0 kHz; Stop 30.0 MHz - Log Scale

Ref 80 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 2.2 S

Peak 647.566 kHz, 53.06 dBμV

Limit/Mask: 15_107_Class_B_QP; ; Limit Test Failed

17/10/2002 09:32:25

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


GPH\44012JD09\026

AC Conducted Emissions. FCC Part 15.

Test for Brain Boxes of BL-510/642 RS232 Adaptor. EUT Power Lead.

Operating condition:- Top Channel.

44012JD09 026

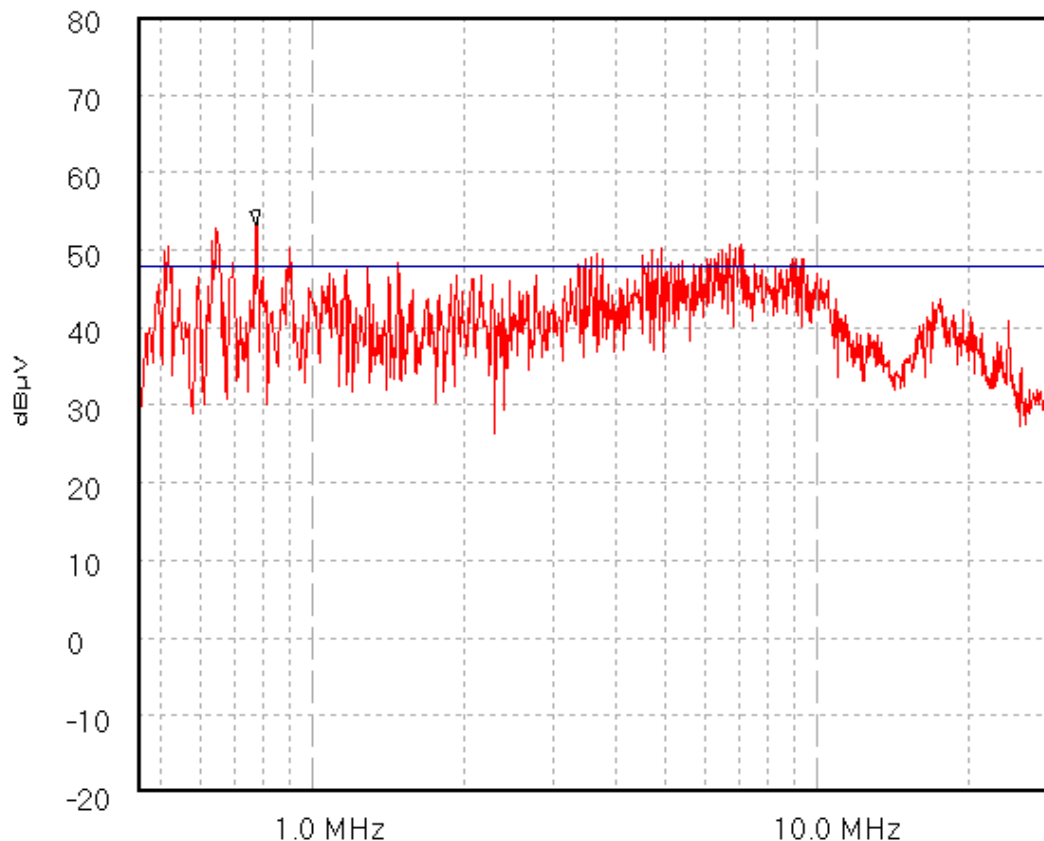

Trace 1
15_107_Class_B_QP

Start 450.0 kHz; Stop 30.0 MHz - Log Scale

Ref 80 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 2.2 S

Peak 773.204 kHz, 53.16 dBμV

Limit/Mask: 15_107_Class_B_QP; ; Limit Test Failed

17/10/2002 09:34:24

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


GPH\44012JD09\027

AC Conducted Emissions. FCC Part 15.

Test for Brain Boxes of BL-510/642 RS232 Adaptor. EUT Power Lead.

Operating condition:- Hopping Mode.

44012JD09 027

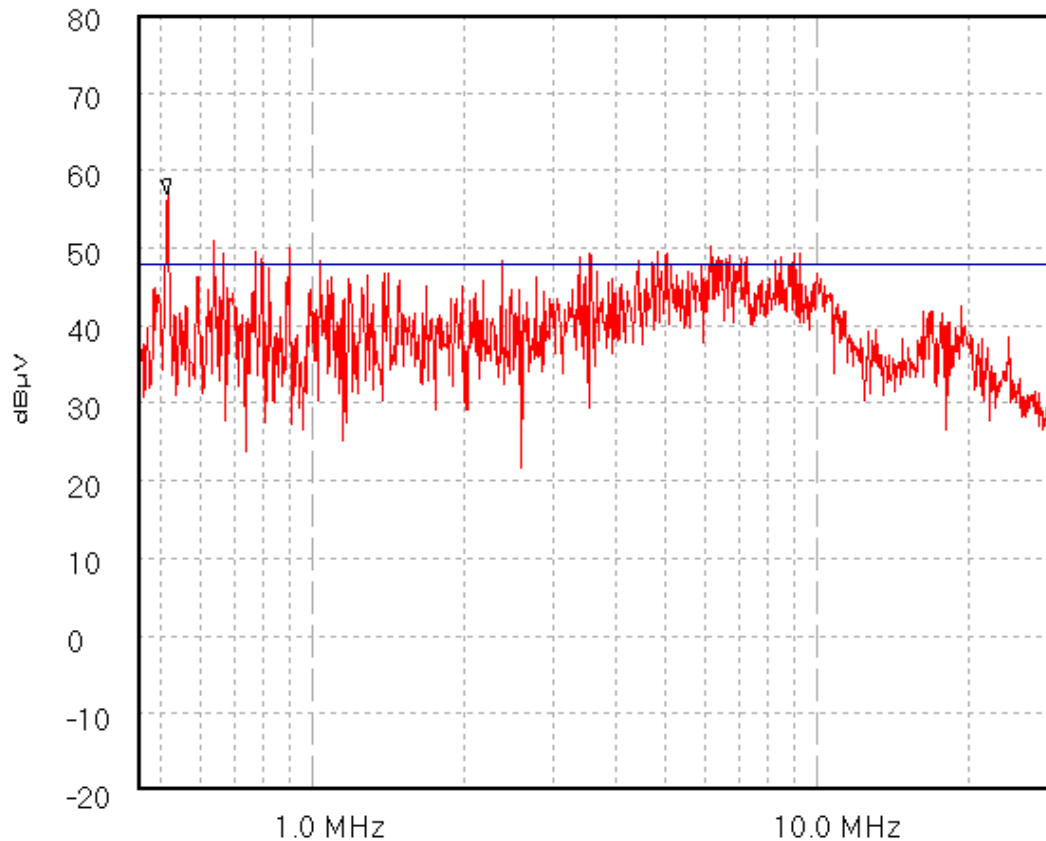

Trace 1
15_107_Class_B_QP

Start 450.0 kHz; Stop 30.0 MHz - Log Scale

Ref 80 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 2.2 S

Peak 515.208 kHz, 56.85 dBμV

Limit/Mask: 15_107_Class_B_QP; ; Limit Test Failed

17/10/2002 09:35:44

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


GPH\44012JD09\028

AC Conducted Emissions. FCC Part 15.

Test for Brain Boxes of BL-510/642 RS232 Adaptor. Laptop power lead.

Operating Condition:- Receive Mode.

44012JD09 028

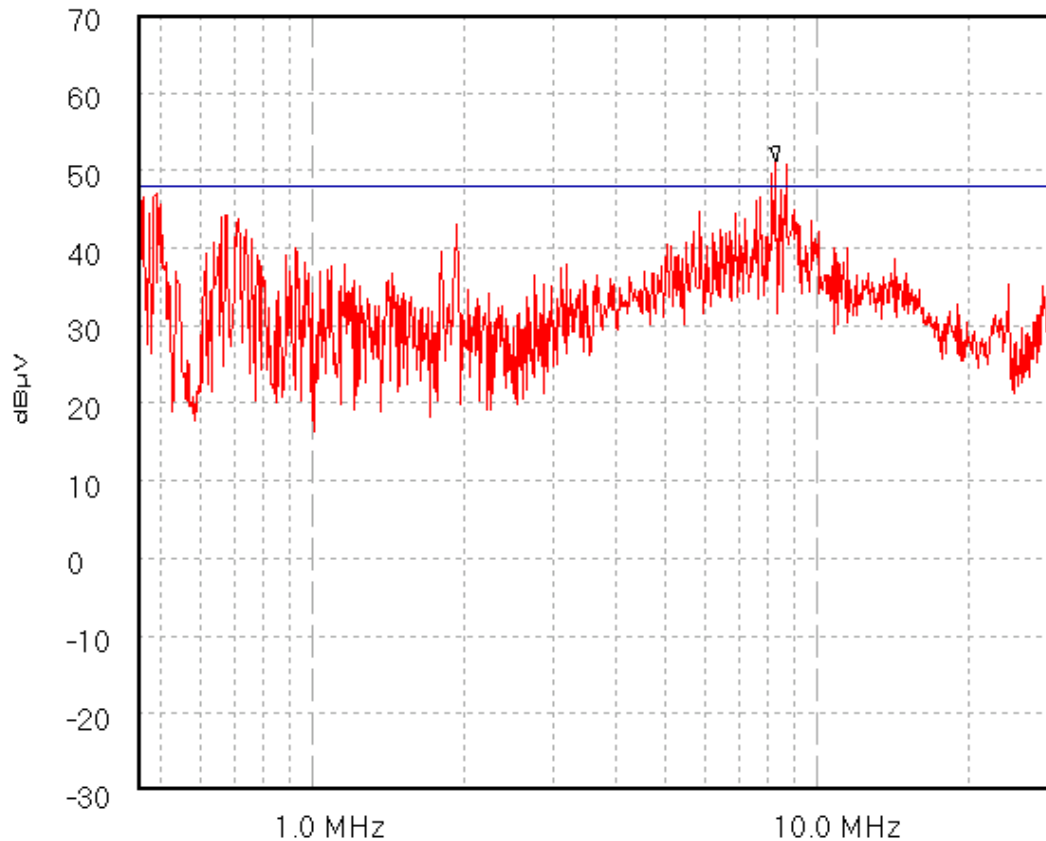

Trace 1
15_107_Class_B_QP

Start 450.0 kHz; Stop 30.0 MHz - Log Scale

Ref 70 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 260.0 mS

Peak 8.314 MHz, 51.06 dBμV

Limit/Mask: 15_107_Class_B_QP; ; Limit Test Failed

17/10/2002 09:50:30

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


GPH\44012JD09\029

AC Conducted Emissions. FCC Part 15.

Test for Brain Boxes of BL-510/642 RS232 Adaptor. Laptop power lead.

Operating Condition:- Bottom Channel.

44012JD09 029

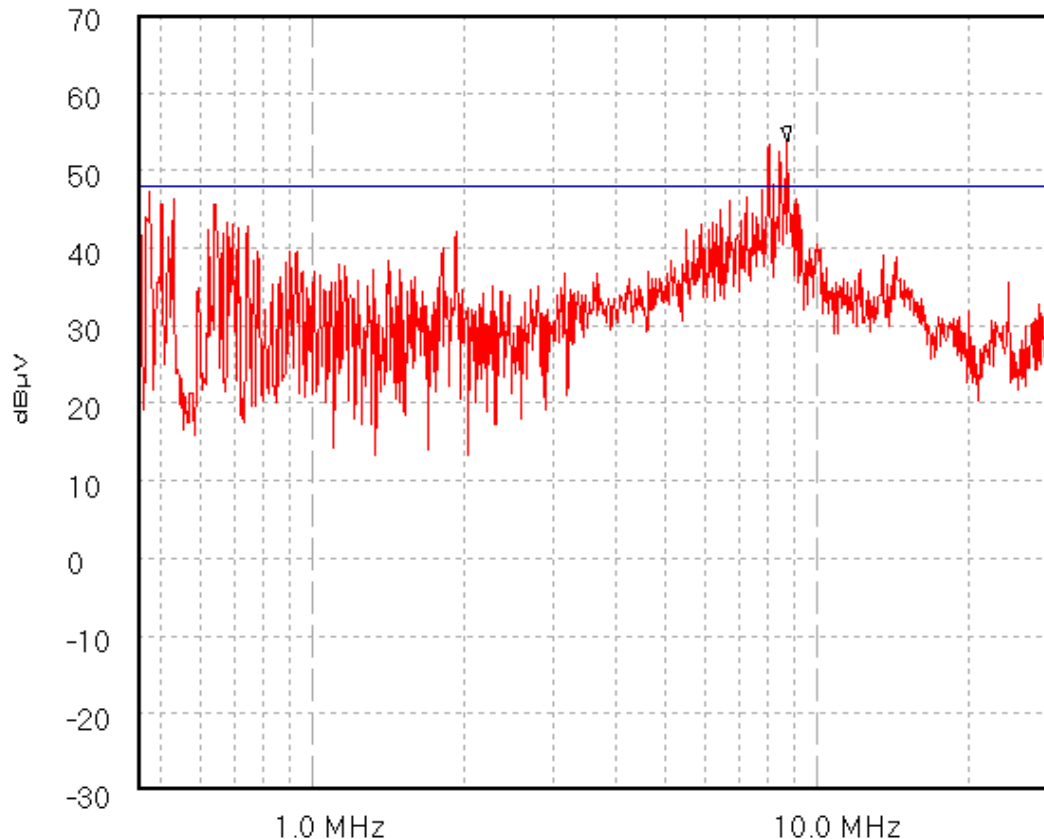

Trace 1

15_107_Class_B_QP

Start 450.0 kHz; Stop 30.0 MHz - Log Scale

Ref 70 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 2.2 S

Peak 8.752 MHz, 53.75 dBμV

Limit/Mask: 15_107_Class_B_QP; ; Limit Test Failed

17/10/2002 09:52:52

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


GPH\44012JD09\030

AC Conducted Emissions. FCC Part 15.

Test for Brain Boxes of BL-510/642 RS232 Adaptor. Laptop power lead.

Operating Condition:- Middle Channel.

44012JD09 030

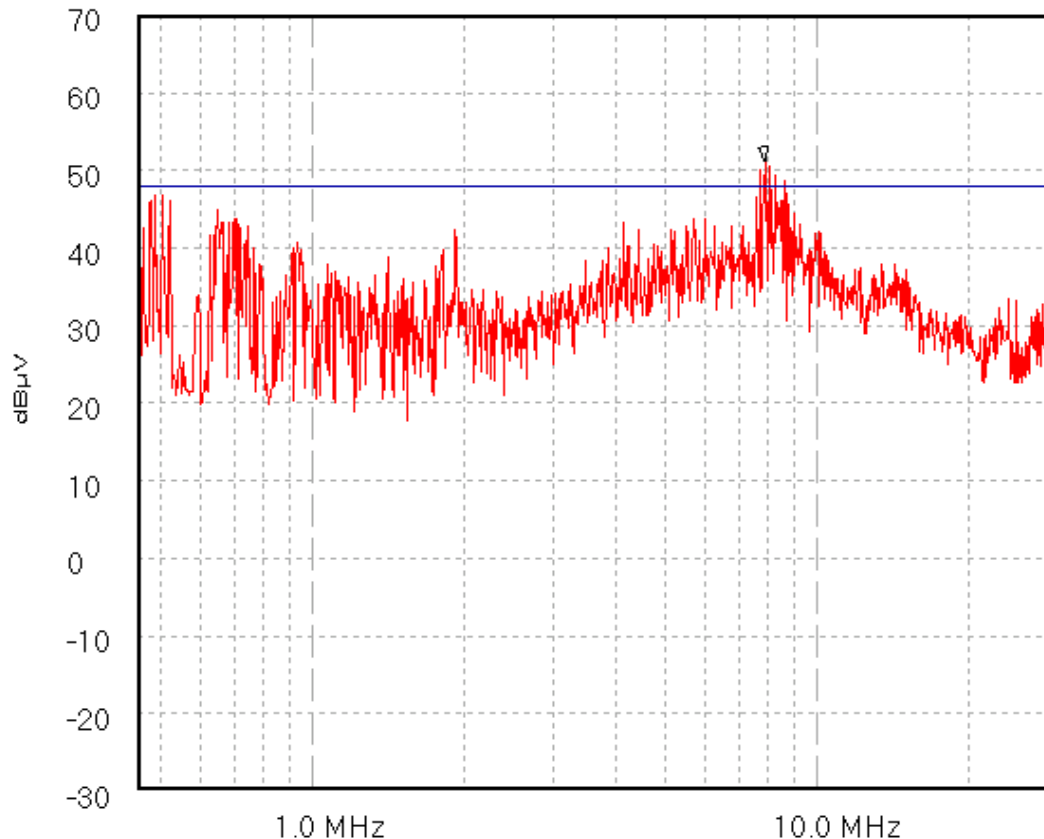

Trace 1
15_107_Class_B_QP

Start 450.0 kHz; Stop 30.0 MHz - Log Scale

Ref 70 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 2.2 S

Peak 7.898 MHz, 51.04 dBμV

Limit/Mask: 15_107_Class_B_QP; ; Limit Test Failed

17/10/2002 09:54:13

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


GPH\44012JD09\031

AC Conducted Emissions. FCC Part 15.

Test for Brain Boxes of BL-510/642 RS232 Adaptor. Laptop power lead.

Operating Condition:- Top Channel.

44012JD09 031

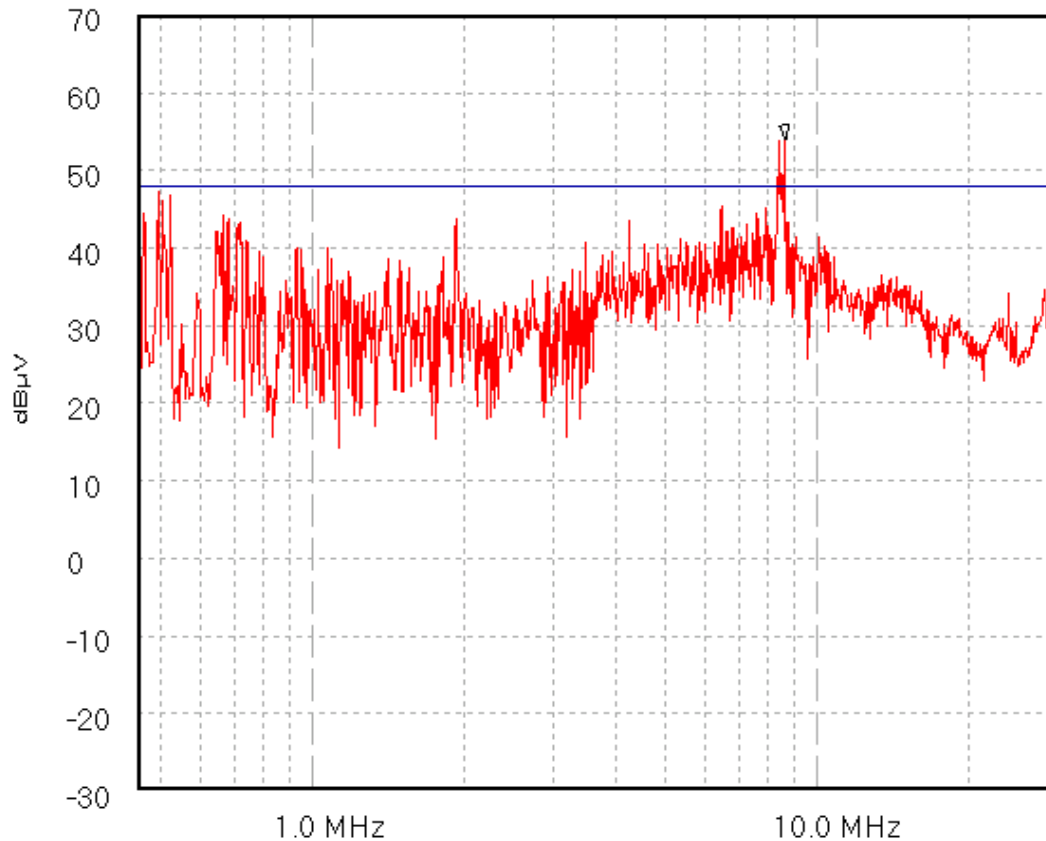

Trace 1
15_107_Class_B_QP

Start 450.0 kHz; Stop 30.0 MHz - Log Scale

Ref 70 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 2.2 S

Peak 8.63 MHz, 53.96 dBμV

Limit/Mask: 15_107_Class_B_QP; ; Limit Test Failed

17/10/2002 09:55:23

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247


GPH\44012JD09\032

AC Conducted Emissions. FCC Part 15.

Test for Brain Boxes of BL-510/642 RS232 Adaptor. Laptop power lead.

Operating Condition:- Hopping Mode.

44012JD09 032

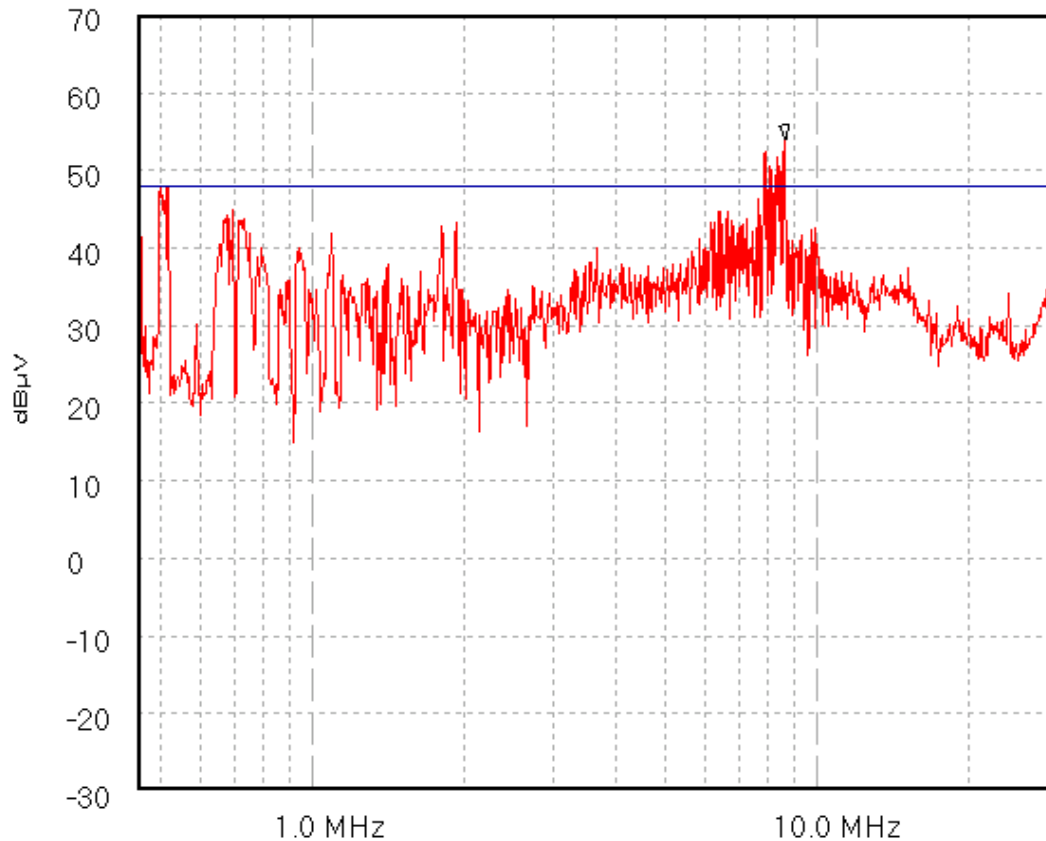

Trace 1
15_107_Class_B_QP

Start 450.0 kHz; Stop 30.0 MHz - Log Scale

Ref 70 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 9.0 kHz; VBW 10.0 kHz; Att 10 dB; Swp 2.2 S

Peak 8.671 MHz, 54.01 dBμV

Limit/Mask: 15_107_Class_B_QP; ; Limit Test Failed


17/10/2002 09:56:38

Test Of: Brain Boxes Ltd.

BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE001

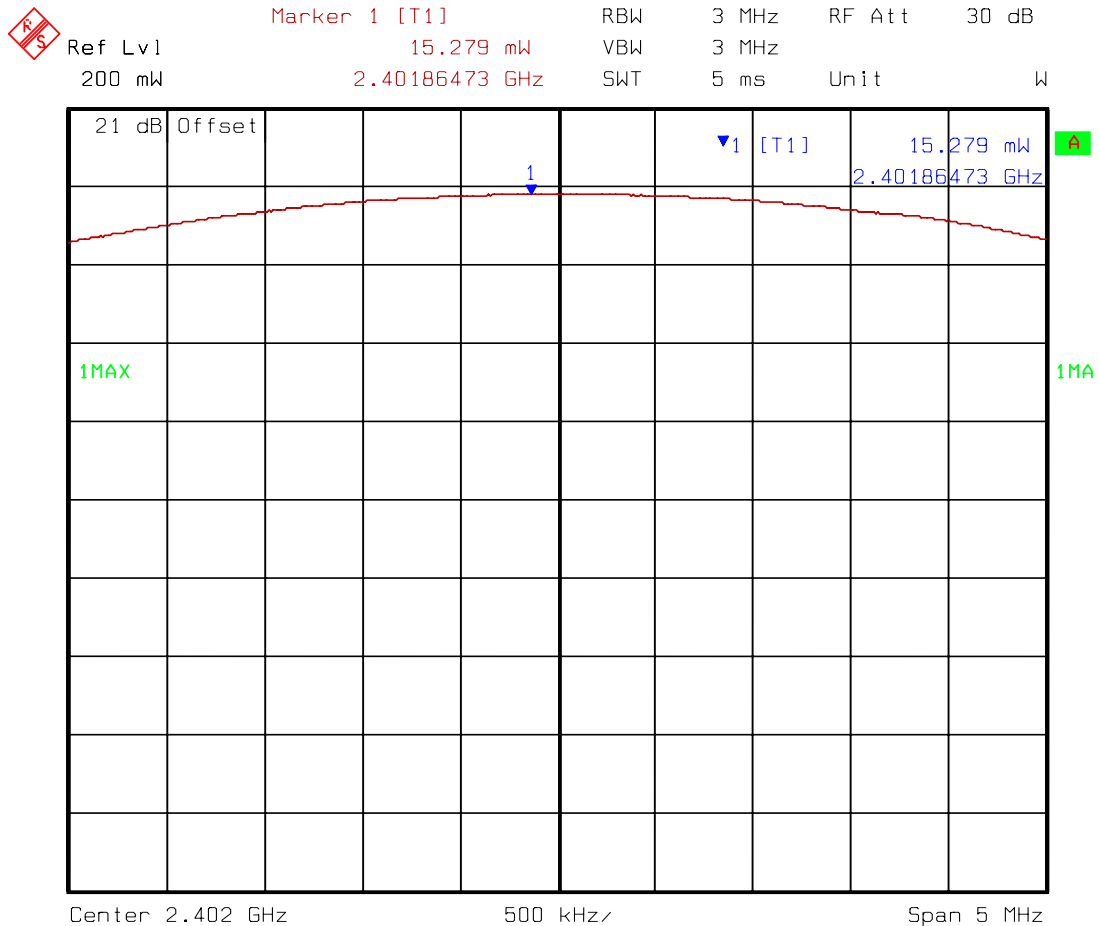

Title: Peak Output Power - Bottom Channel, 93.5Vac


Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247

Date: 23.OCT.2002 10:50:40

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE002

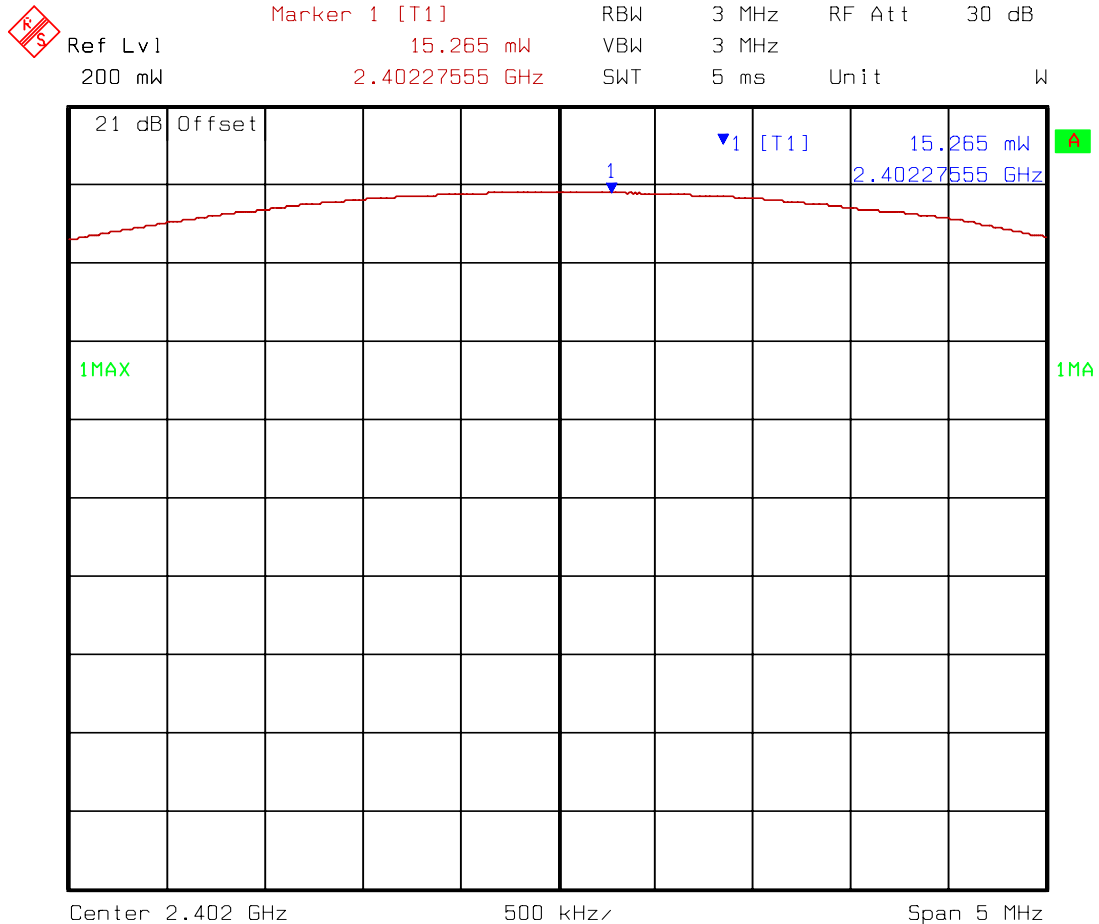

Title: Peak Output Power - Bottom Channel, 110Vac

Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247


Date: 23.OCT.2002 10:47:12

Test Of: Brain Boxes Ltd.

BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE003

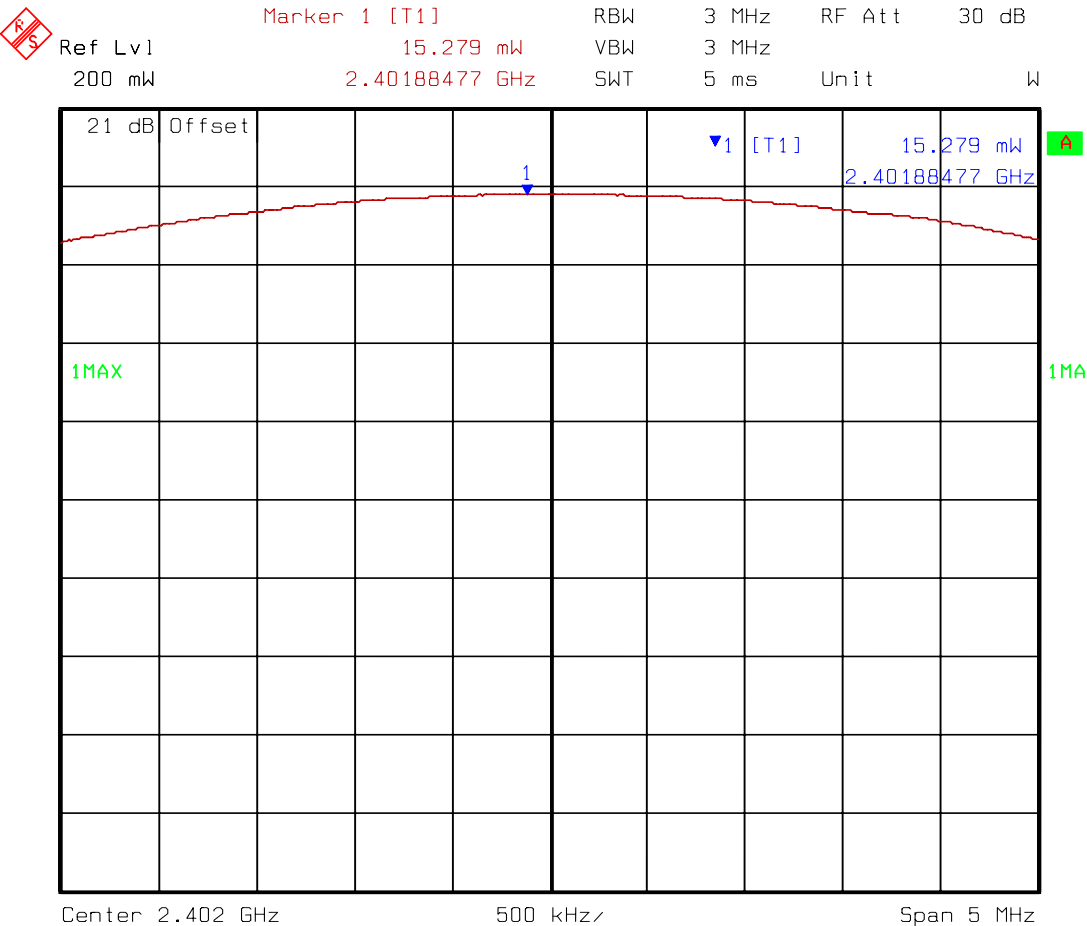

Title: Peak Output Power - Bottom Channel, 126.5Vac

Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247

Date: 23.OCT.2002 11:03:30

Test Of: Brain Boxes Ltd.


BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE004



Marker 1 [T1] RBW 3 MHz RF Att 30 dB
Ref Lvl 16.993 mW VBW 3 MHz
200 mW 2.44088477 GHz SWT 5 ms Unit W

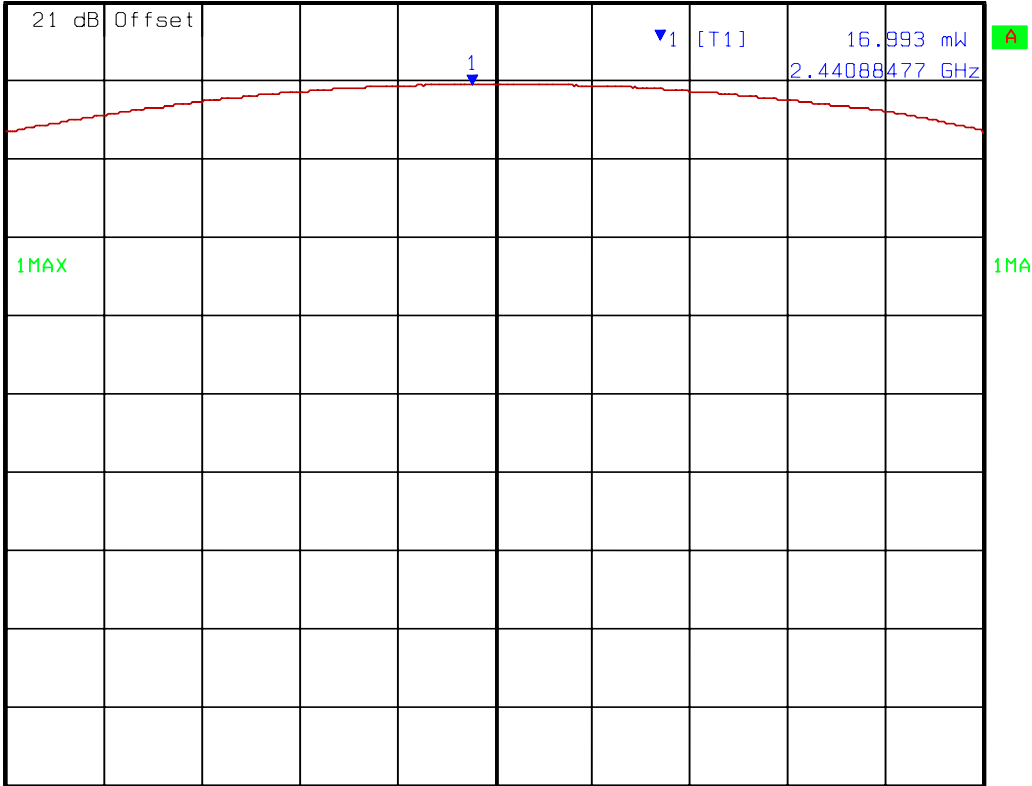

Center 2.441 GHz 500 kHz Span 5 MHz


Title: Peak Output Power - Middle Channel, 93.5Vac
Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247
Date: 23.OCT.2002 10:49:45

Test Of: Brain Boxes Ltd.

BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE005

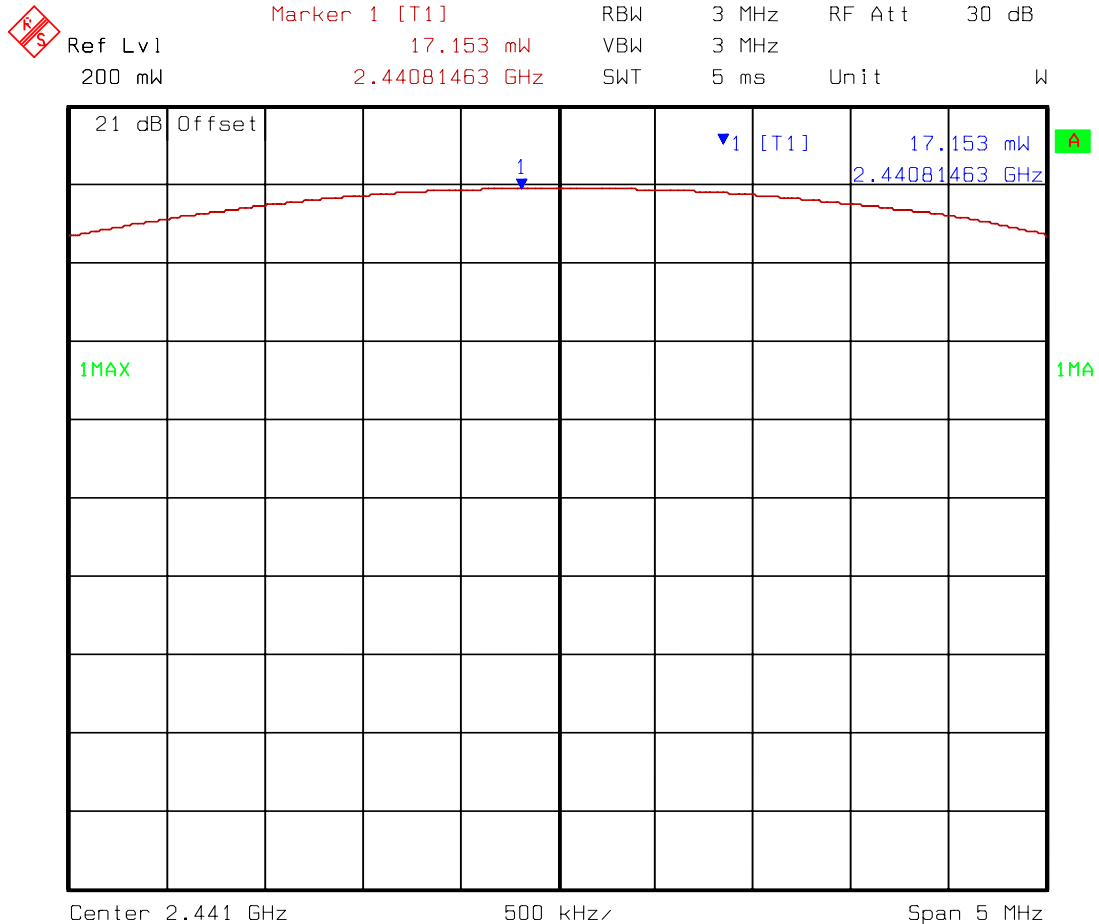

Title: Peak Output Power - Middle Channel, 110Vac


Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247

Date: 23.OCT.2002 10:48:35

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE006

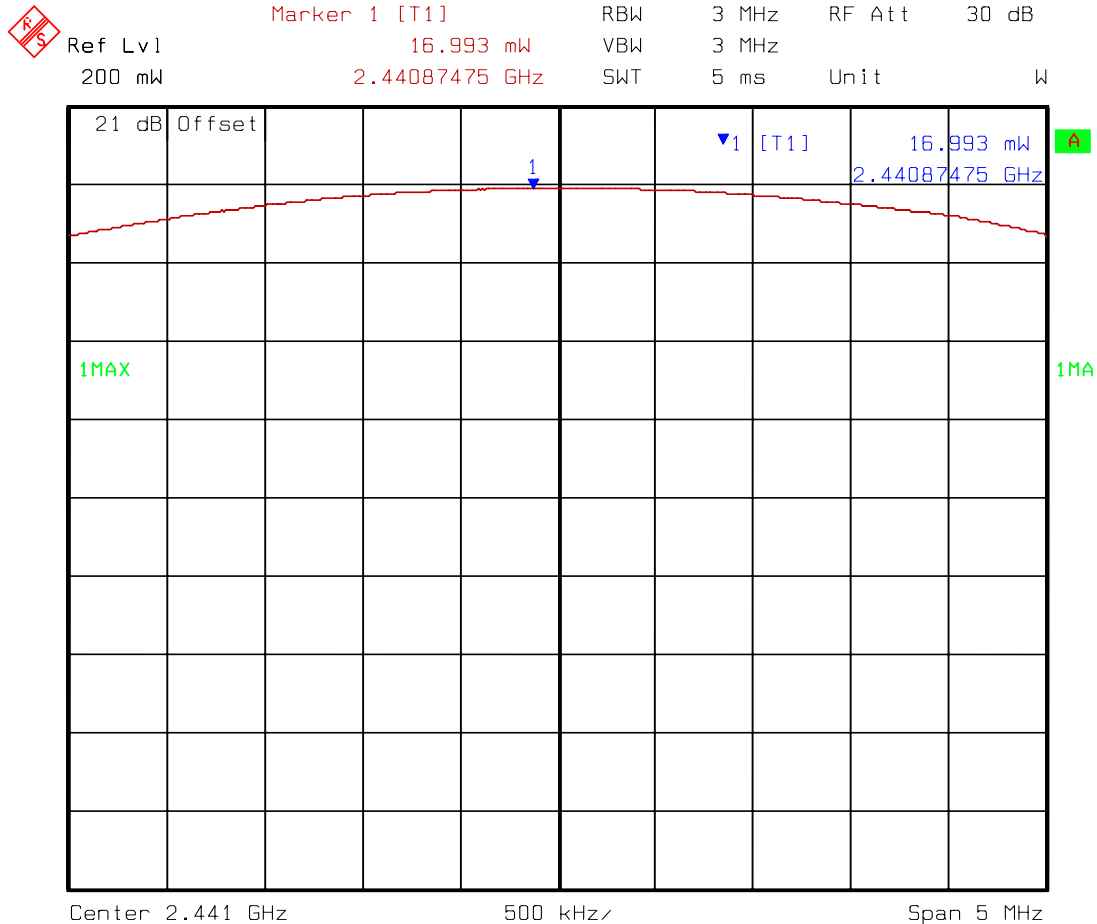

Title: Peak Output Power - Middle Channel, 126.5Vac

Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247


Date: 23.OCT.2002 11:02:34

Test Of: Brain Boxes Ltd.

BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE007

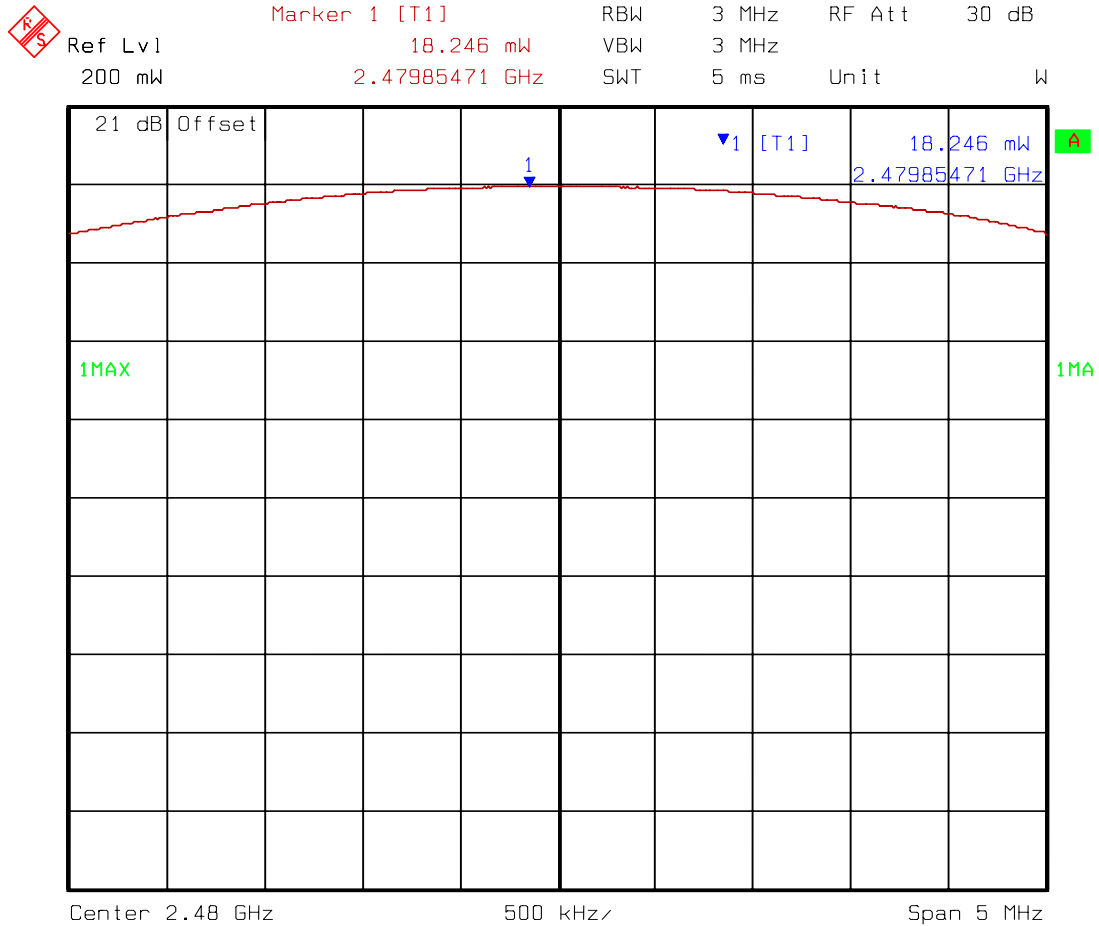

Title: Peak Output Power - Top Channel, 93.5Vac

Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247

Date: 23.OCT.2002 10:51:35

Test Of: Brain Boxes Ltd.


BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE008



Ref Lvl 200 mW
Marker 1 [T1] 18.246 mW
2.47981463 GHz
RBW 3 MHz
VBW 3 MHz
SWT 5 ms
RF Att 30 dB
Unit W

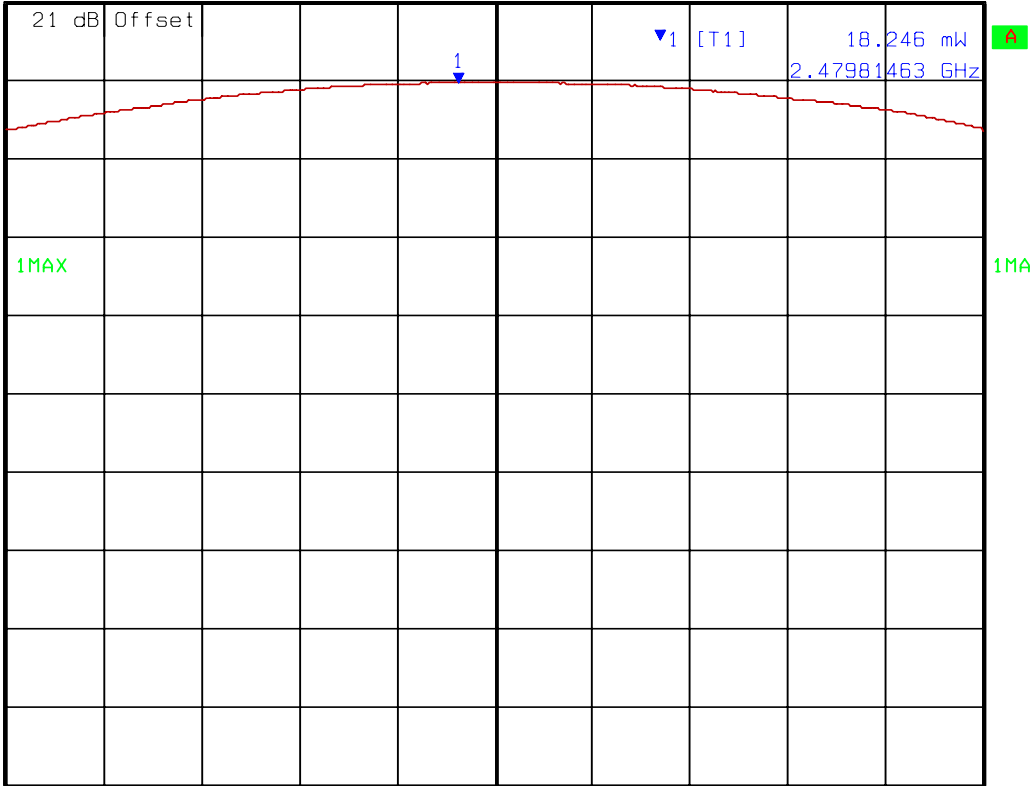

Center 2.48 GHz 500 kHz Span 5 MHz


Title: Peak Output Power - Top Channel, 110Vac
Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247
Date: 23.OCT.2002 10:52:41

Test Of: Brain Boxes Ltd.

BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE009

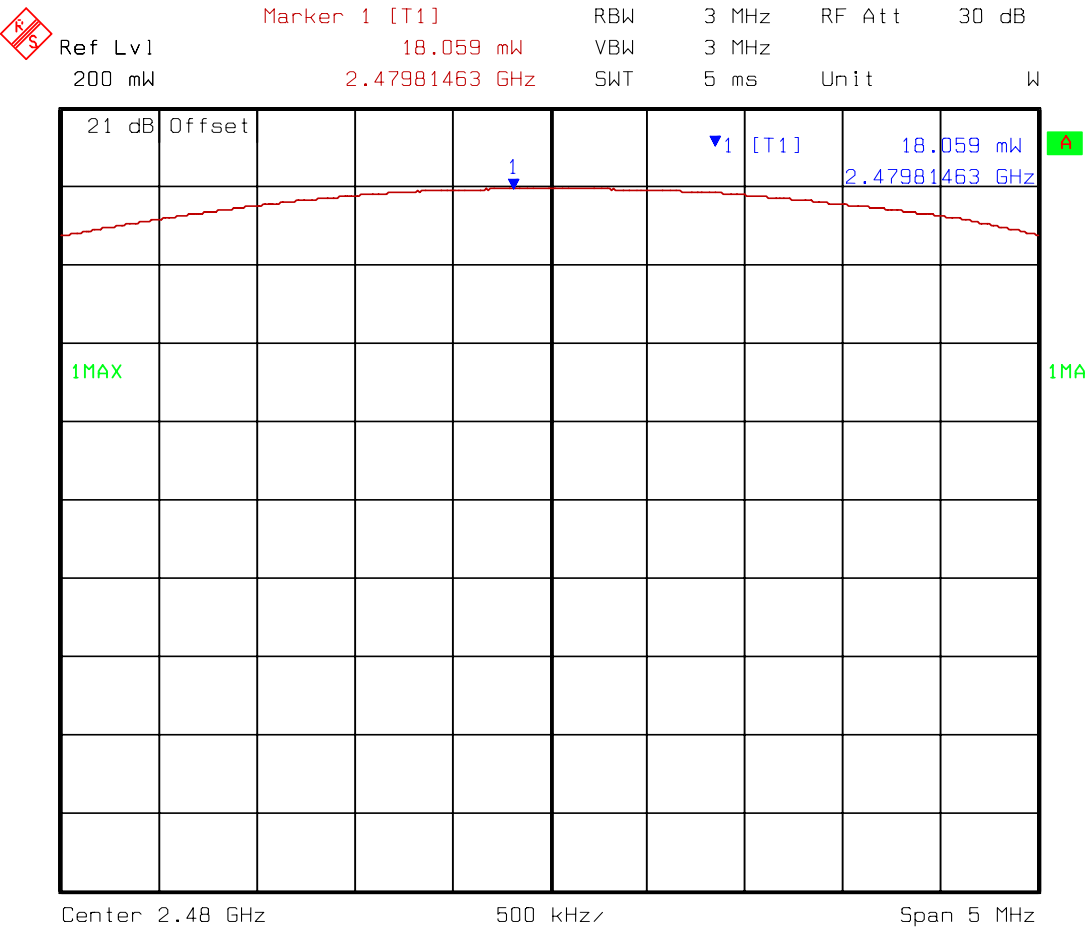


Title: Peak Output Power - Top Channel, 126.5Vac
Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247
Date: 23.OCT.2002 10:53:43

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE010

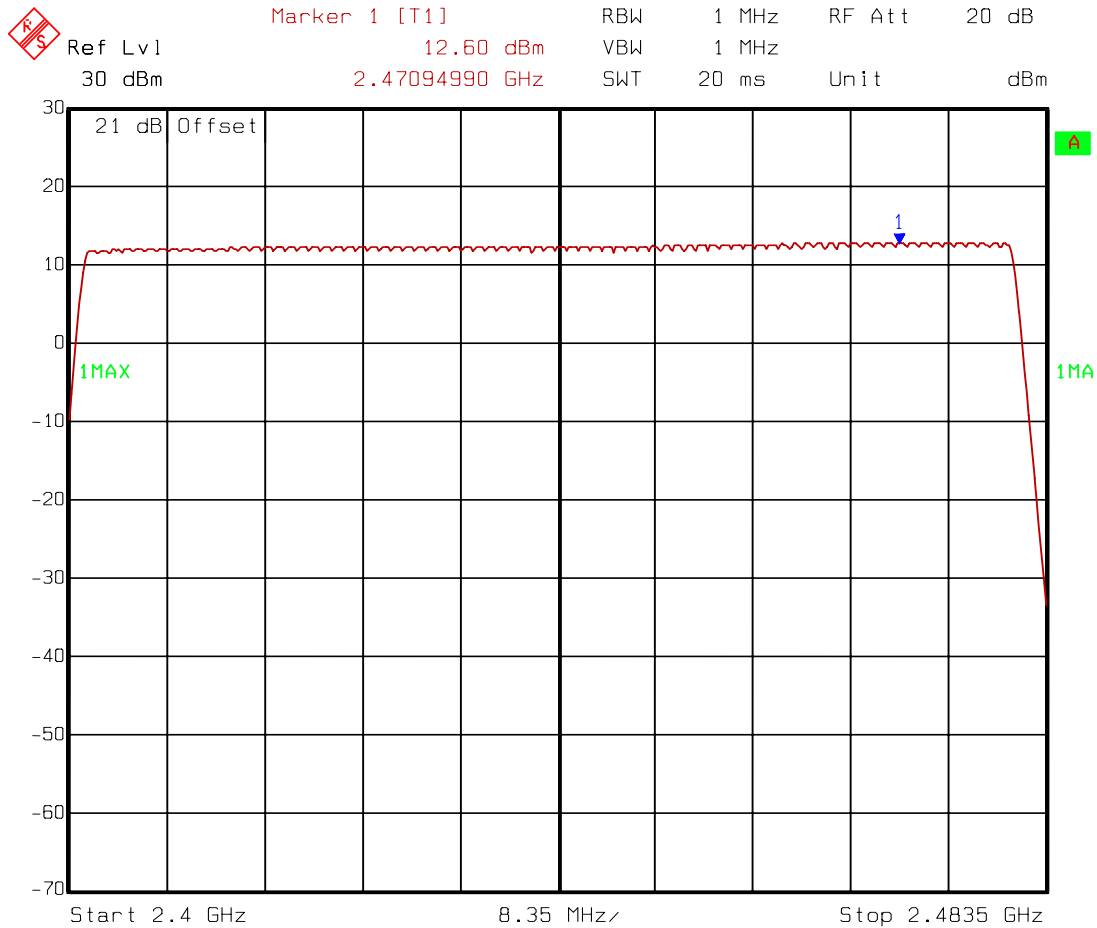

Title: Number of Hopping Frequencies - Hopping All Channels


Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247

Date: 23.OCT.2002 13:48:32

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE011

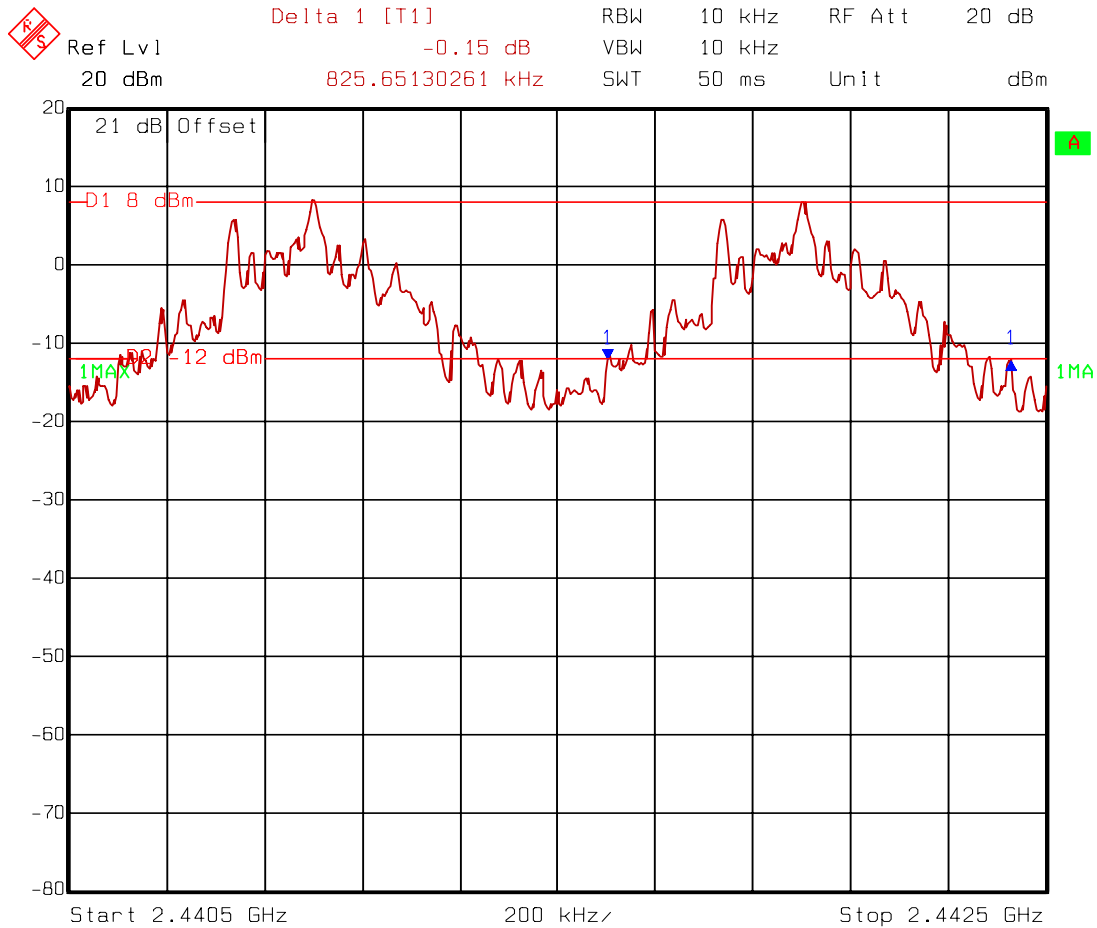

Title: 20dB Bandwidth - Hopping All Channels


Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247

Date: 23.OCT.2002 14:53:49

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE012

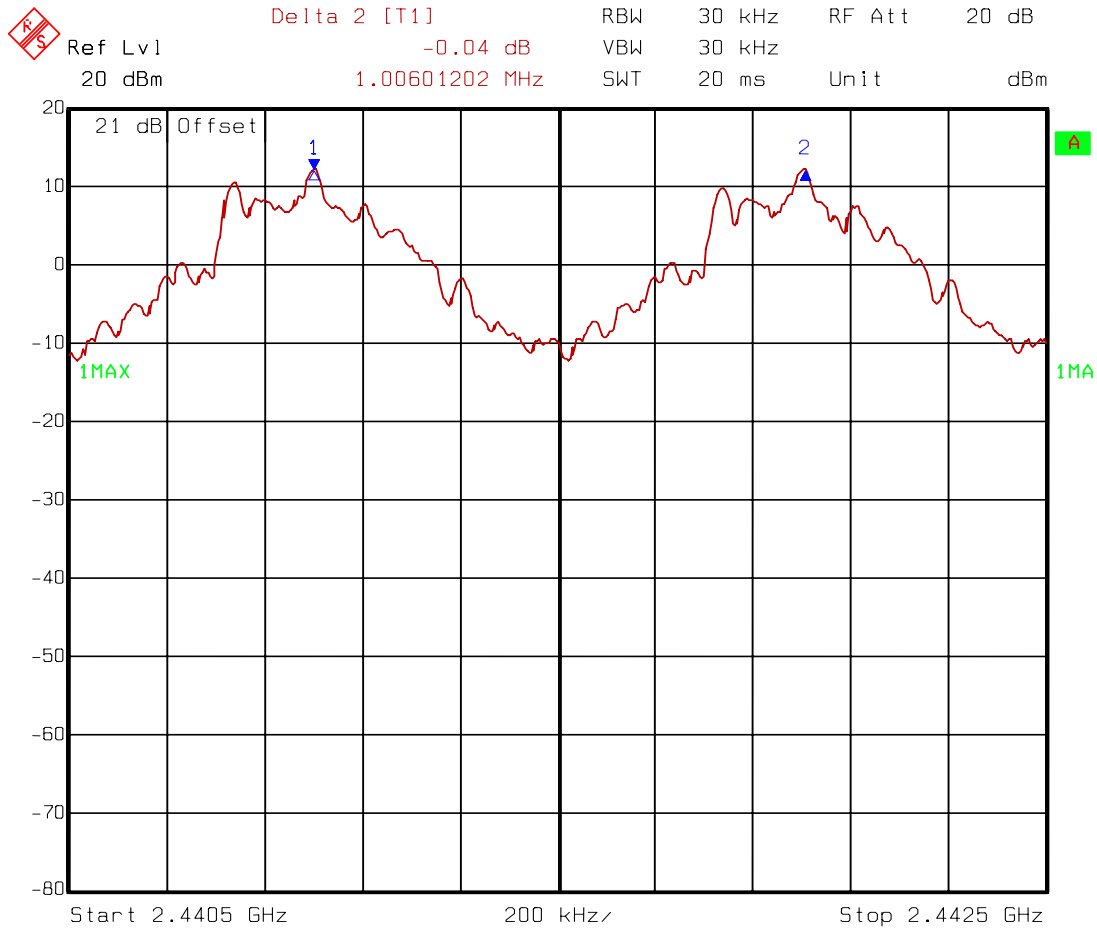


Title: Carrier Frequency Separation - Hopping All Channels
Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247
Date: 23.OCT.2002 11:27:52

Test Of: Brain Boxes Ltd.

BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE013

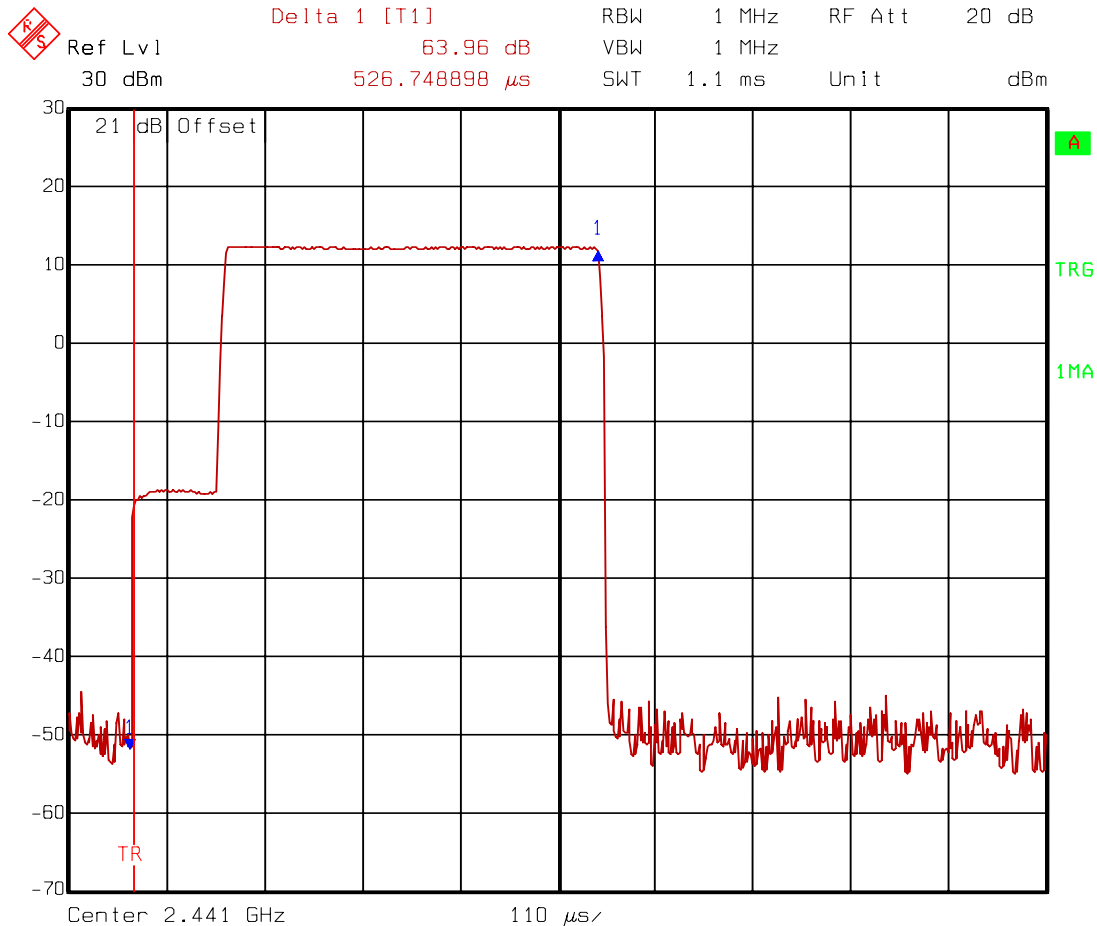

Title: Time of Occupancy (Dwell Time) - Hopping All Channels


Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247

Date: 23.OCT.2002 13:59:03

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE014

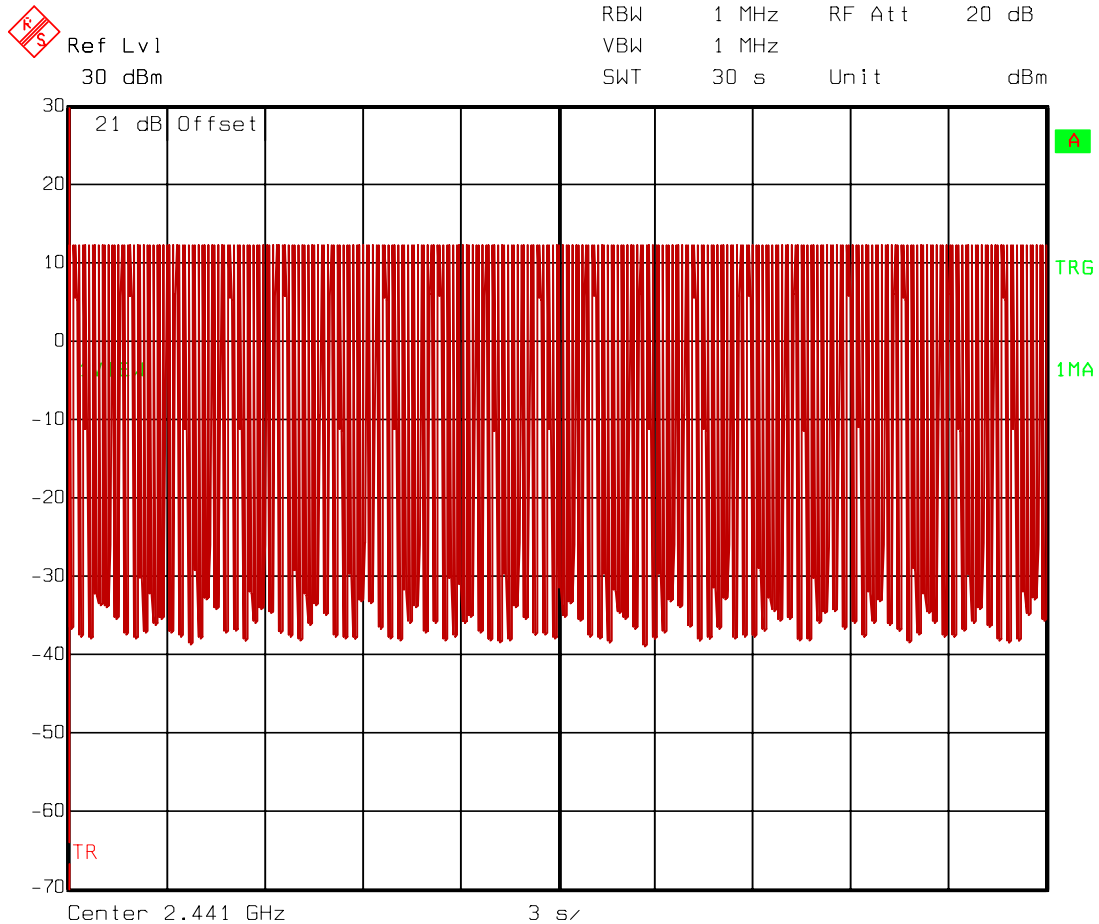

Title: Time of Occupancy 30 Second Period - Hopping All Channels


Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247

Date: 23.OCT.2002 14:14:26

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE015

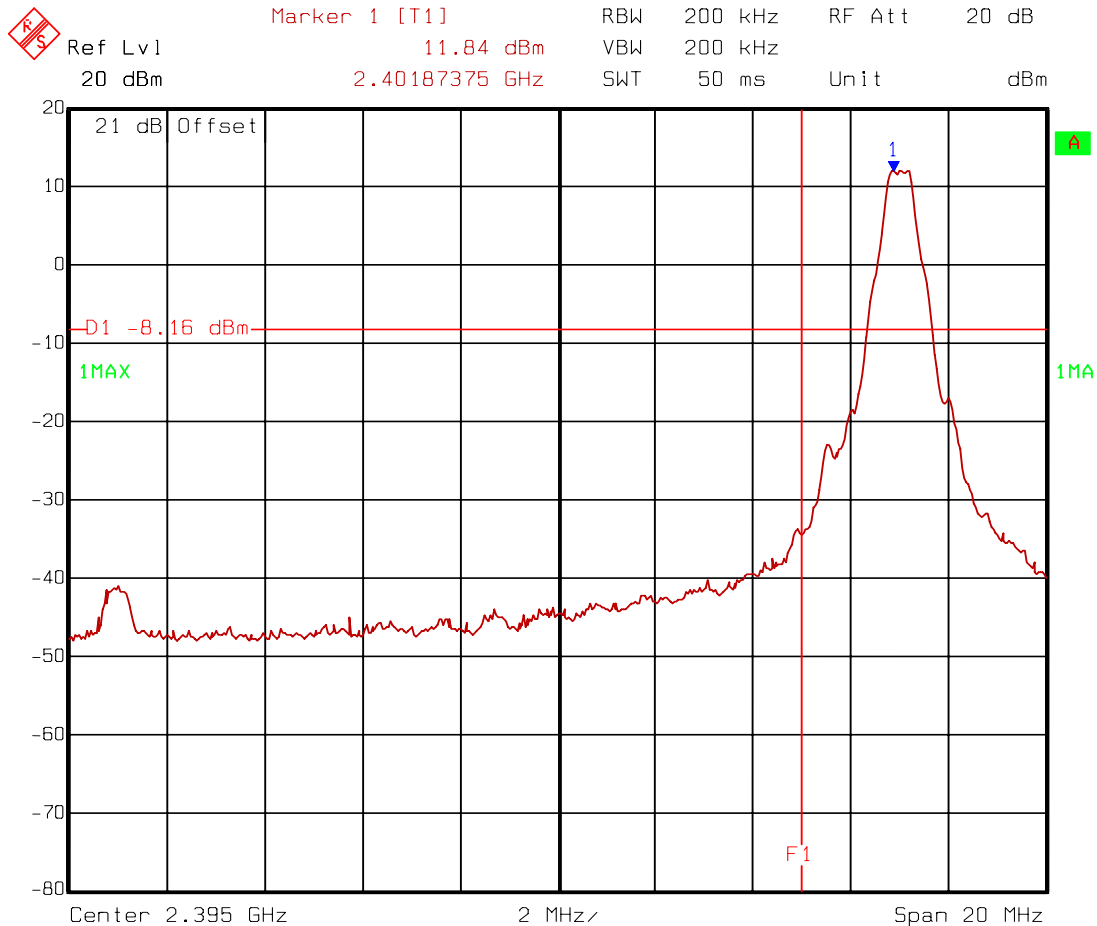

Title: Band Edge - Bottom Channel


Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247

Date: 23.OCT.2002 15:44:49

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\CE016

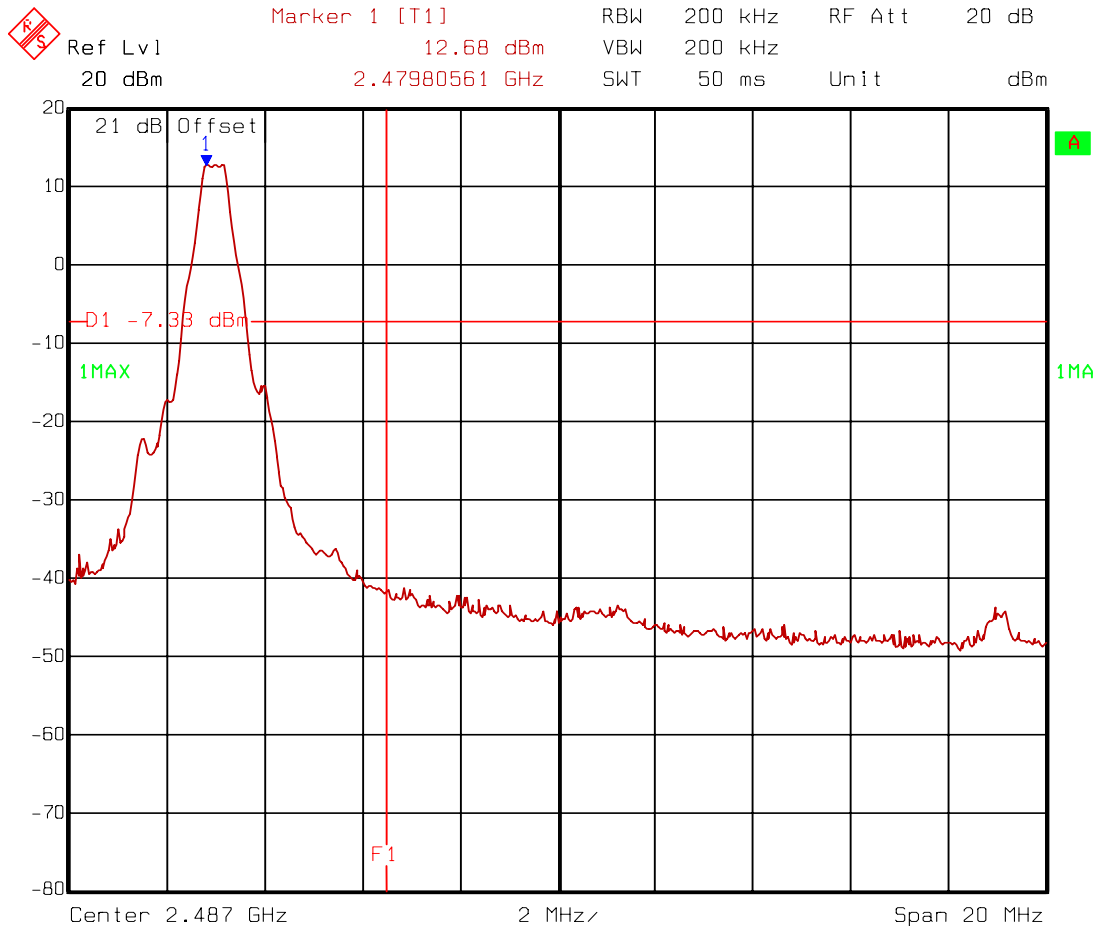

Title: Band Edge - Top Channel

Comment A: Testing of Brain Boxes BL-510\642 to FCC Part 15.247

Date: 23.OCT.2002 15:49:59


Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\001

Testing for Brain Boxes BL-510/642. FCC Part 15.247.
Conducted Spurious Emissions - Bottom Channel

44012JD09a 001

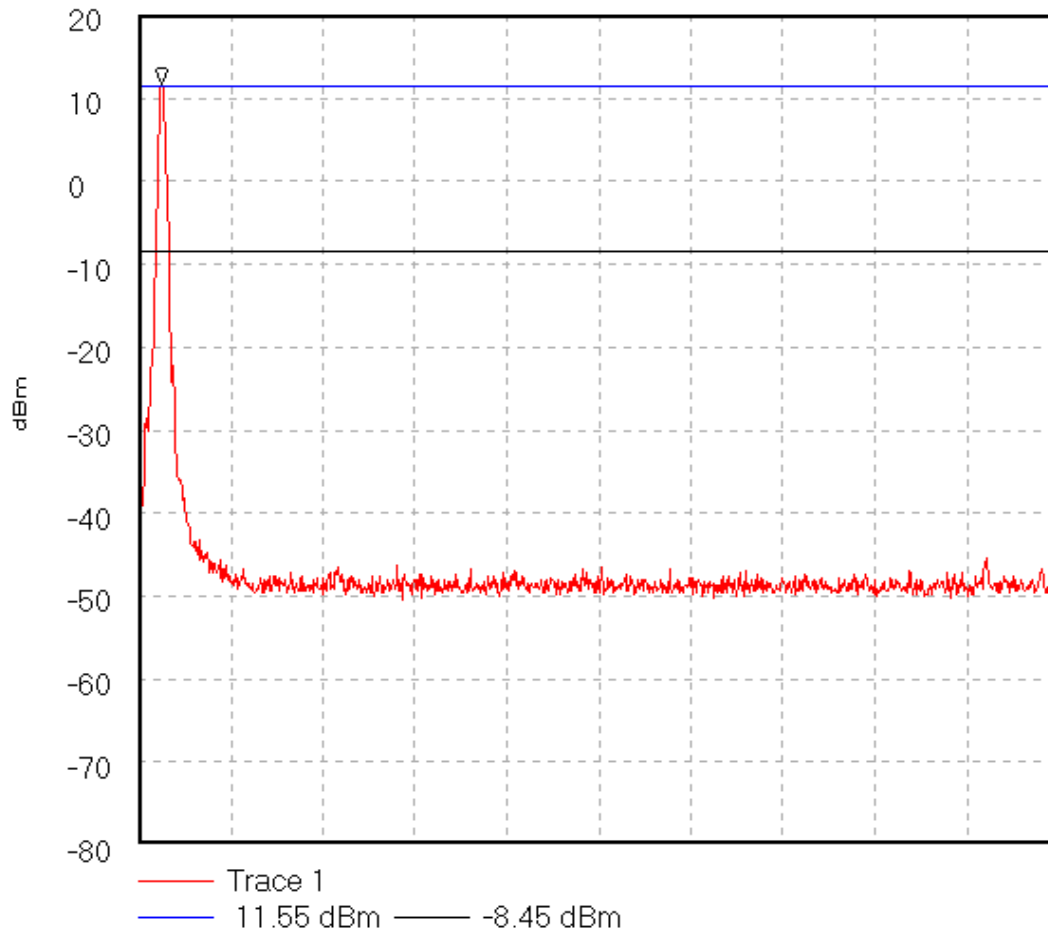

Start 2.4 GHz; Stop 2.4835 GHz

Ref 20 dBm; Ref Offset 21.0 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 10 dB; Swp 40.0 mS

Peak 2.402041 GHz, 11.73 dBm

Display Line: 11.55 dBm; -8.45 dBm; ; Limit Test Passed


04/01/80 00:12:32

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\002

Testing of Brain Boxes BL-510/642. FCC Part 15.247.
Conducted Spurious Emissions - Bottom Channel

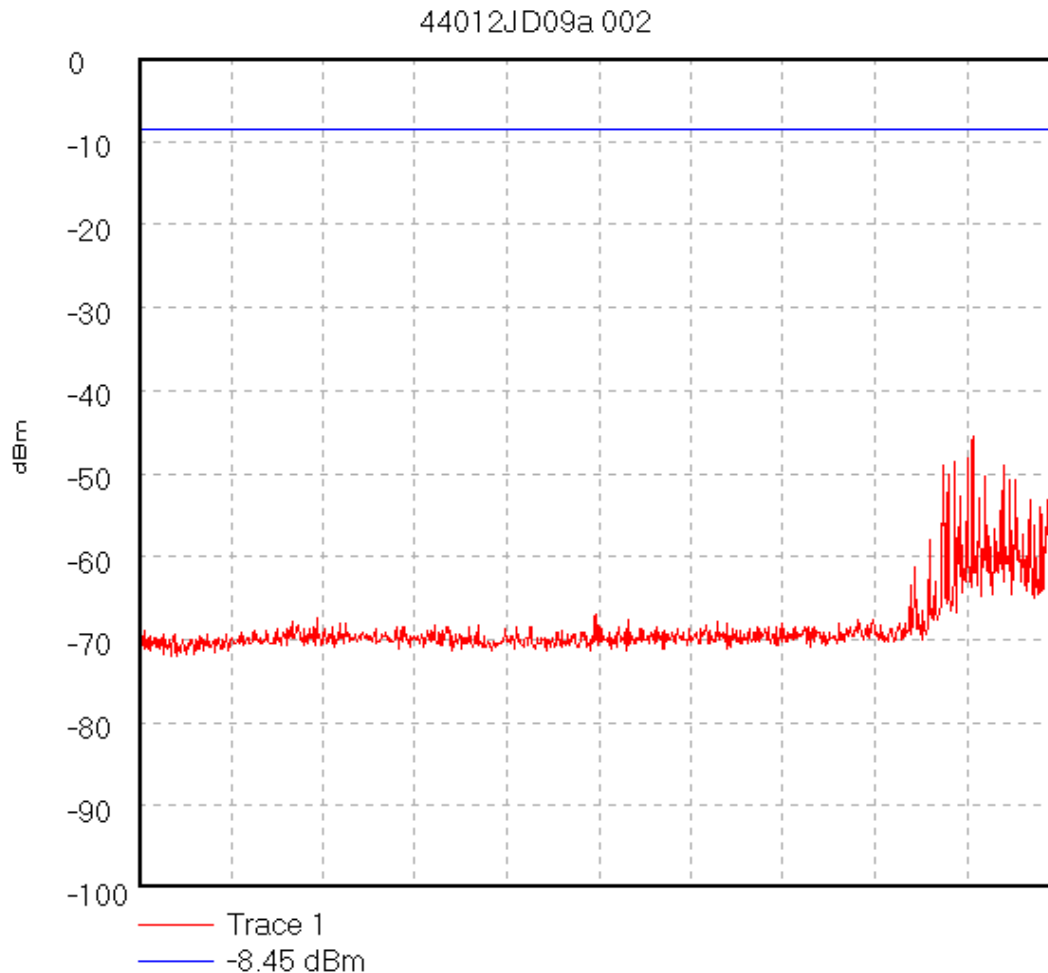

Start 30.0 MHz; Stop 2.4 GHz

Ref 0 dBm; Ref Offset 21.0 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 720.0 mS

Peak 2.389467 GHz, -45.17 dBm

Display Line: -8.45 dBm; ; Limit Test Passed


04/01/80 00:32:58

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\003

Testing of Brain Boxes BL-510/642. FCC Part 15.247.
Conducted Spurious Emissions - Middle Channel

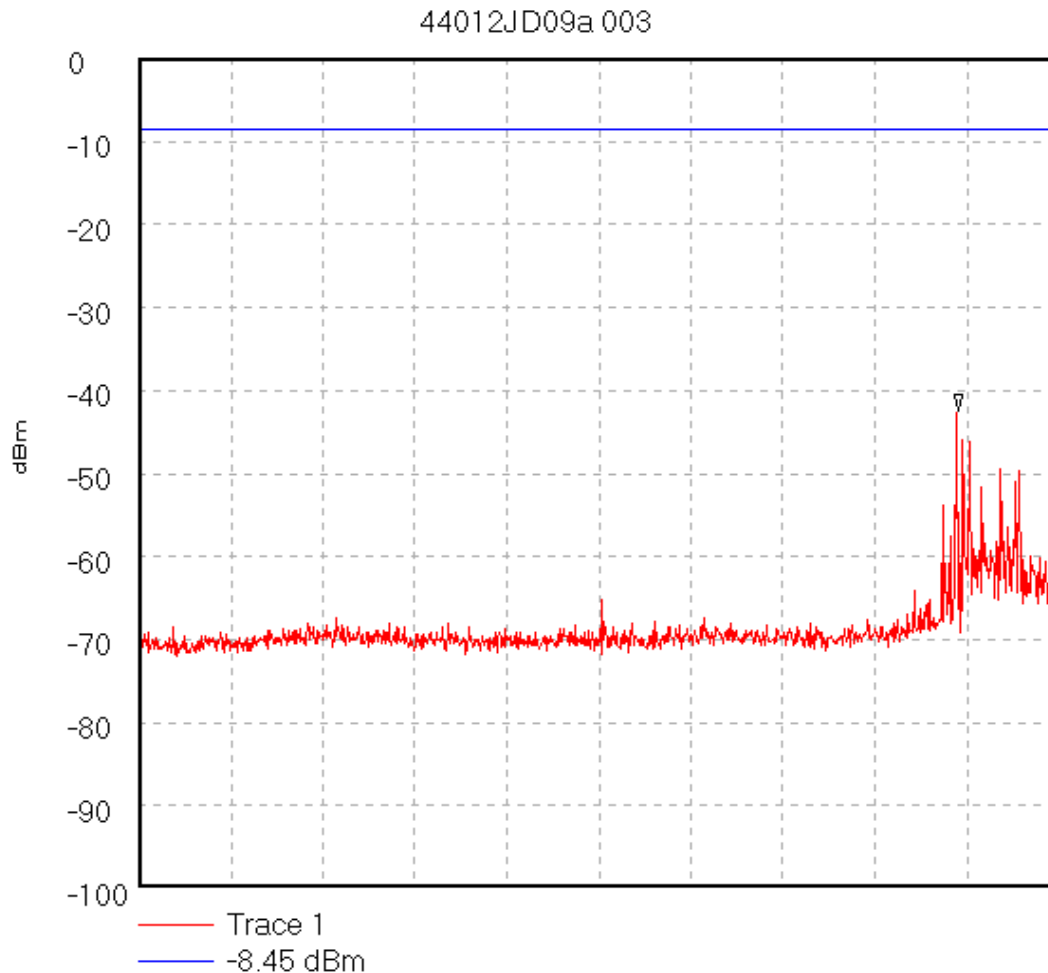

Start 30.0 MHz; Stop 2.4 GHz

Ref 0 dBm; Ref Offset 21.0 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 720.0 mS

Peak 2.1393 GHz, -42.58 dBm

Display Line: -8.45 dBm; ; Limit Test Passed


04/01/80 00:34:26

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\004

Testing of Brain Boxes BL-510/642. FCC Part 15.247.
Conducted Spurious Emissions - Top Channel

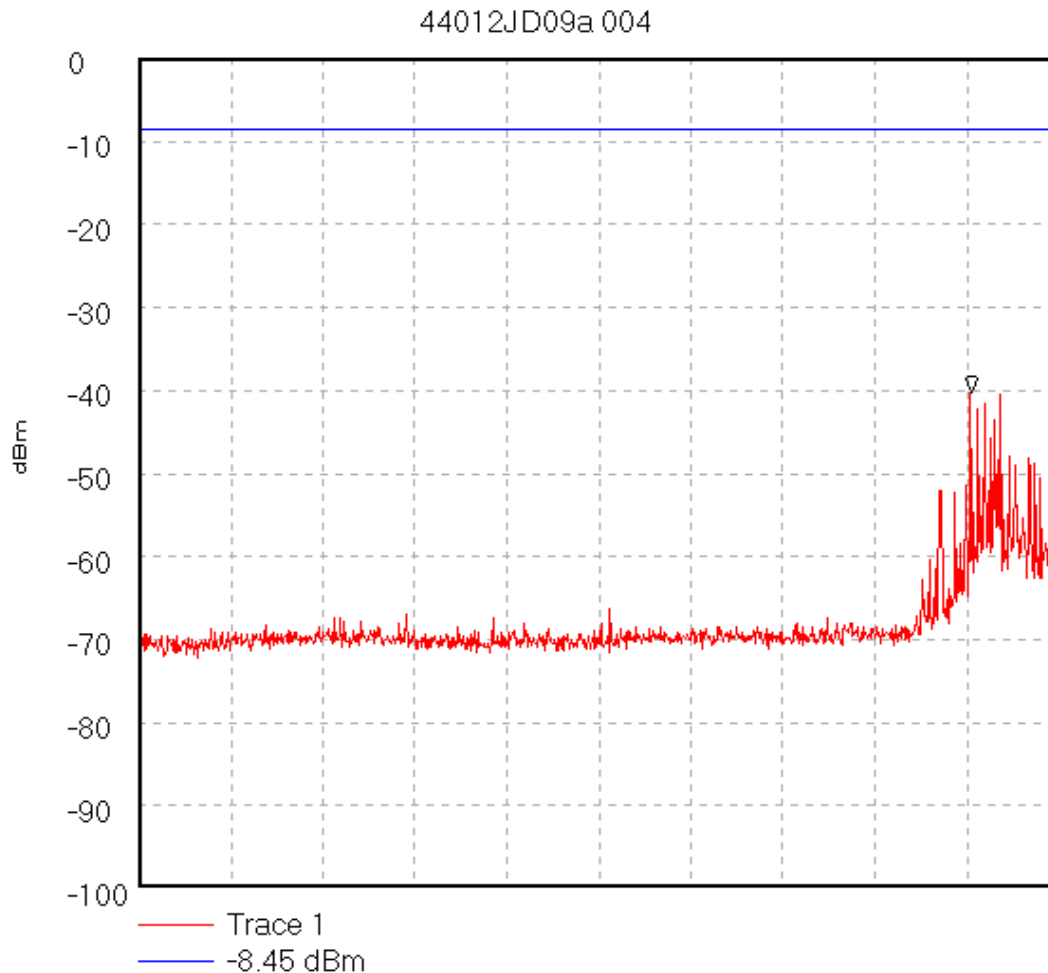

Start 30.0 MHz; Stop 2.4 GHz

Ref 0 dBm; Ref Offset 21.0 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 720.0 mS

Peak 2.173533 GHz, -40.24 dBm

Display Line: -8.45 dBm; ; Limit Test Passed


04/01/80 00:35:56

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\005

Testing of Brain Boxes BL-510/642. FCC Part 15.247.
Conducted Spurious Emissions - Hopping All Channels

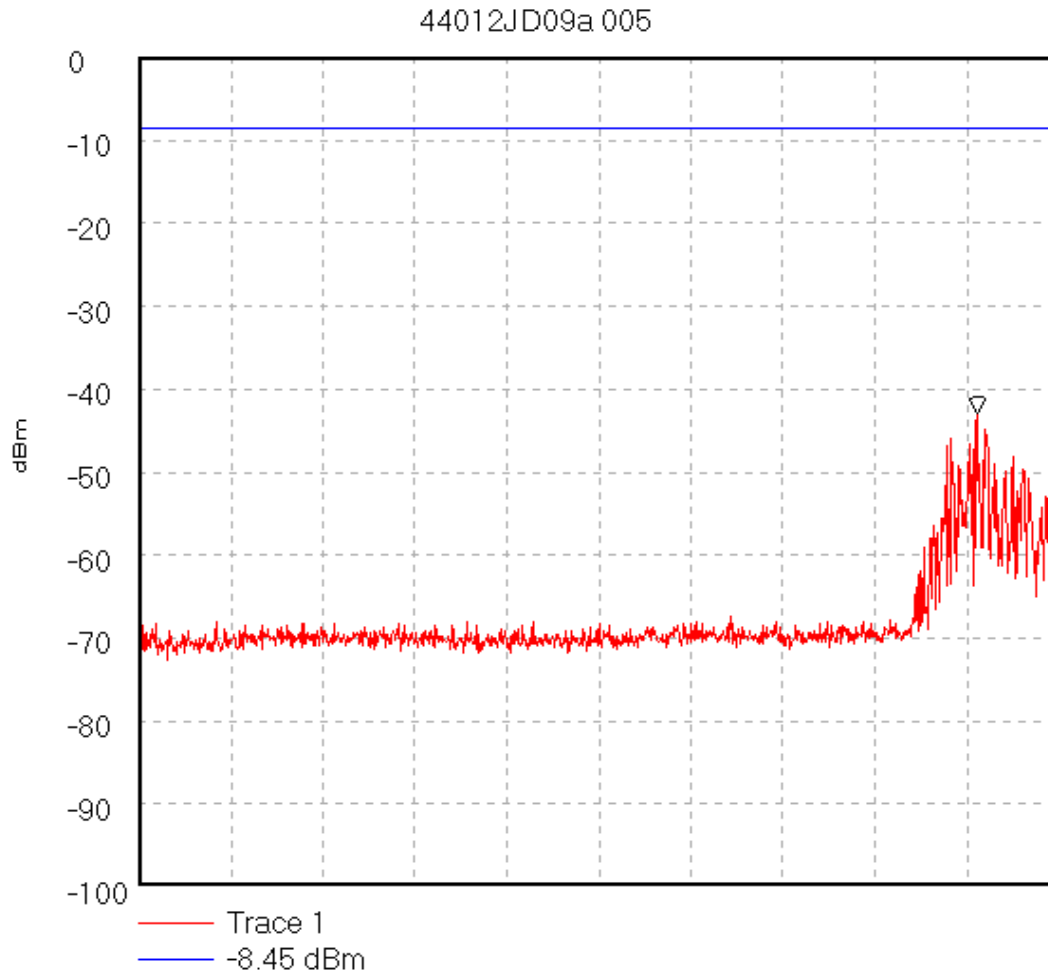

Start 30.0 MHz; Stop 2.4 GHz

Ref 0 dBm; Ref Offset 21.0 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 720.0 mS

Peak 2.191967 GHz, -42.96 dBm

Display Line: -8.45 dBm; ; Limit Test Passed


04/01/80 00:37:02

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\006

Testing of Brain Boxes BL-510/642. FCC Part 15.247.
Conducted Spurious Emissions - Receive Mode

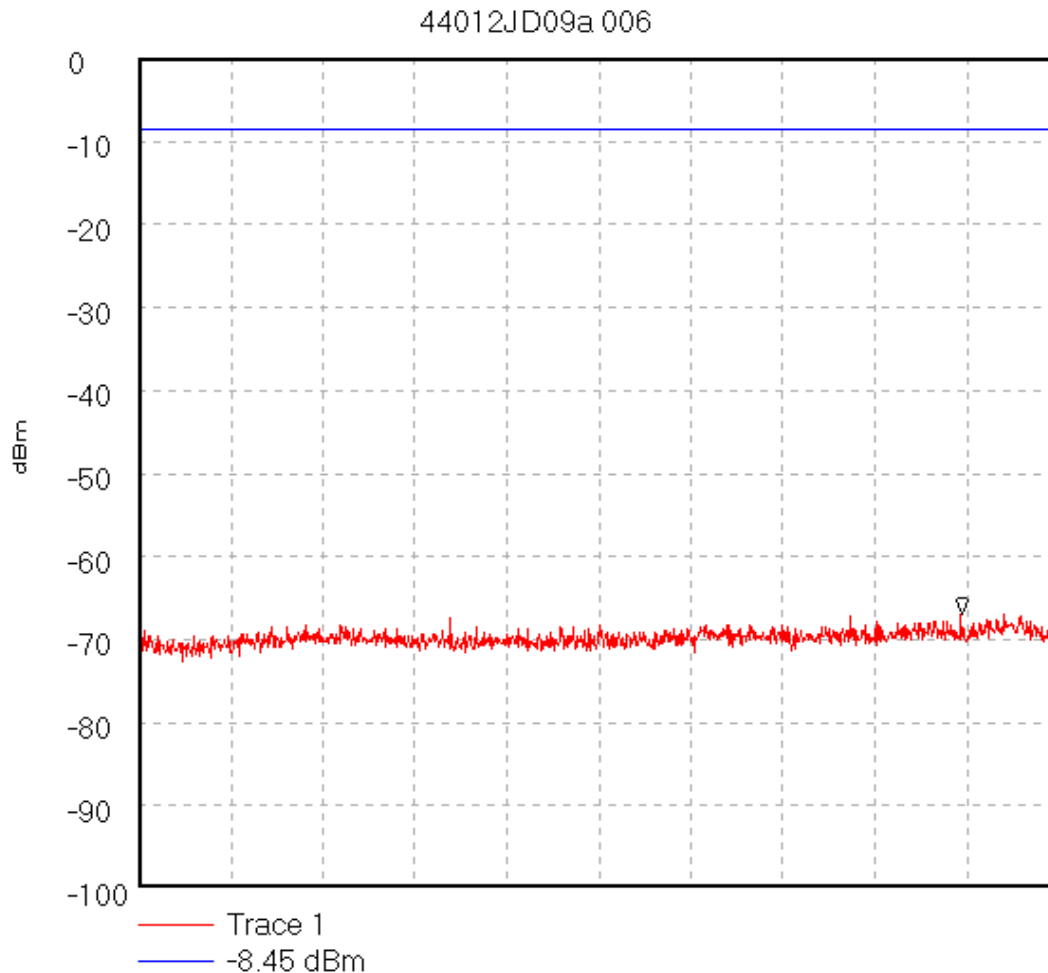

Start 30.0 MHz; Stop 2.4 GHz

Ref 0 dBm; Ref Offset 21.0 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 720.0 mS

Peak 2.149833 GHz, -66.96 dBm

Display Line: -8.45 dBm; ; Limit Test Passed


04/01/80 00:39:26

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\007

Testing of Brain Boxes BL-510/642. FCC Part 15.247.
Conducted Spurious Emissions - Receive Mode

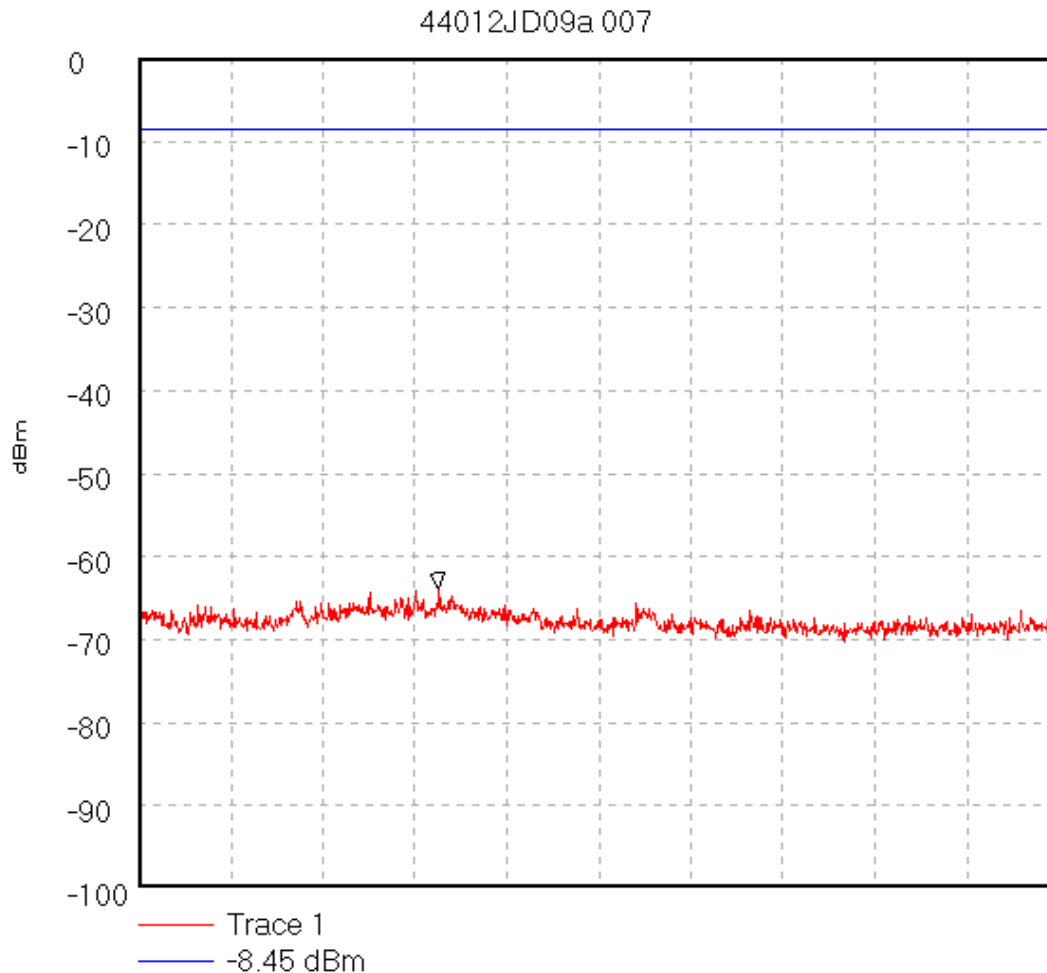

Start 2.4835 GHz; Stop 12.5 GHz

Ref 0 dBm; Ref Offset 22.1 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 3.2 S

Peak 5.75557 GHz, -64.01 dBm

Display Line: -8.45 dBm; ; Limit Test Passed


04/01/80 00:49:00

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\008

Testing of Brain Boxes BL-510/642. FCC Part 15.247.
Conducted Spurious Emissions - Hopping All Channels

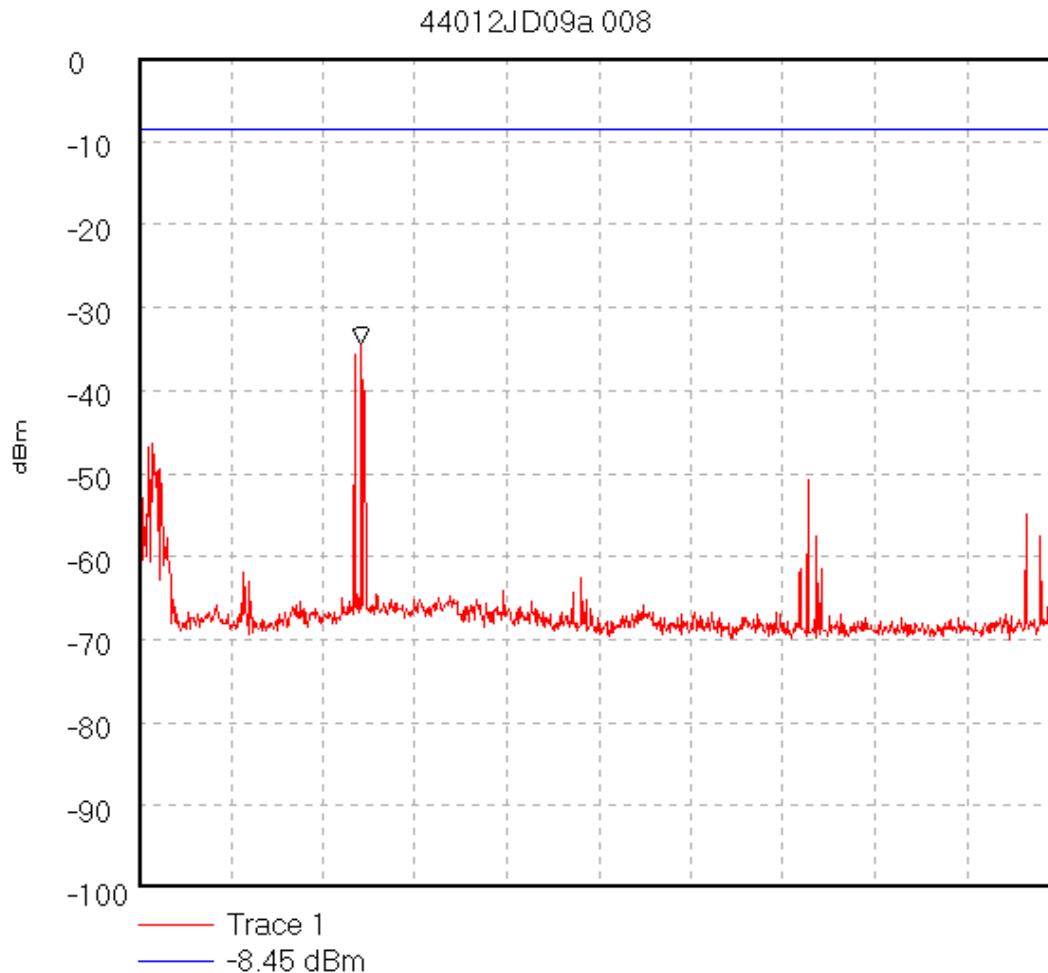

Start 2.4835 GHz; Stop 12.5 GHz

Ref 0 dBm; Ref Offset 22.1 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 3.2 S

Peak 4.909719 GHz, -34.33 dBm

Display Line: -8.45 dBm; ; Limit Test Passed


04/01/80 00:51:59

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\009

Testing of Brain Boxes BL-510/642. FCC Part 15.247.
Conducted Spurious Emissions - Bottom Channel

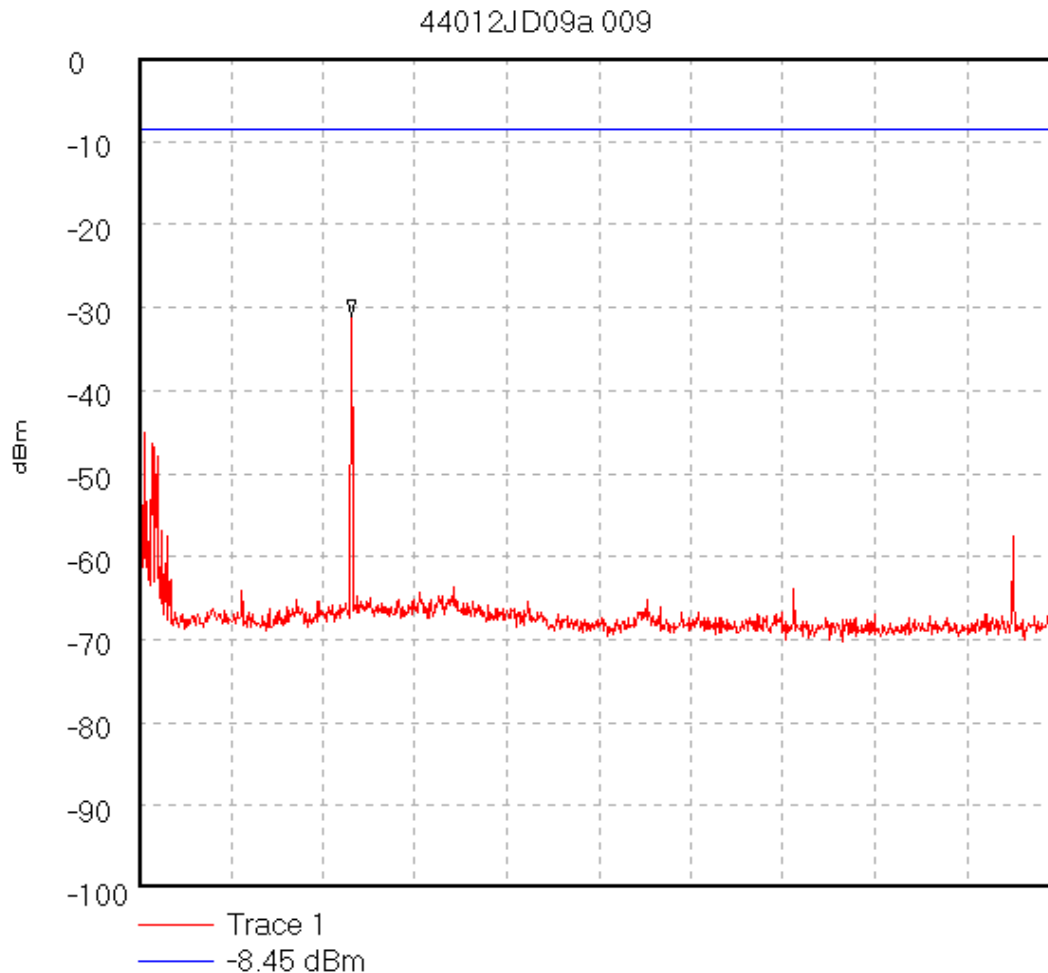

Start 2.4835 GHz; Stop 12.5 GHz

Ref 0 dBm; Ref Offset 22.1 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 3.2 S

Peak 4.798424 GHz, -31.18 dBm


Display Line: -8.45 dBm; ; Limit Test Passed

04/01/80 00:53:31

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\010
Testing of Brain Boxes BL-510/642. FCC Part 15.247.
Conducted Spurious Emissions - Middle Channel

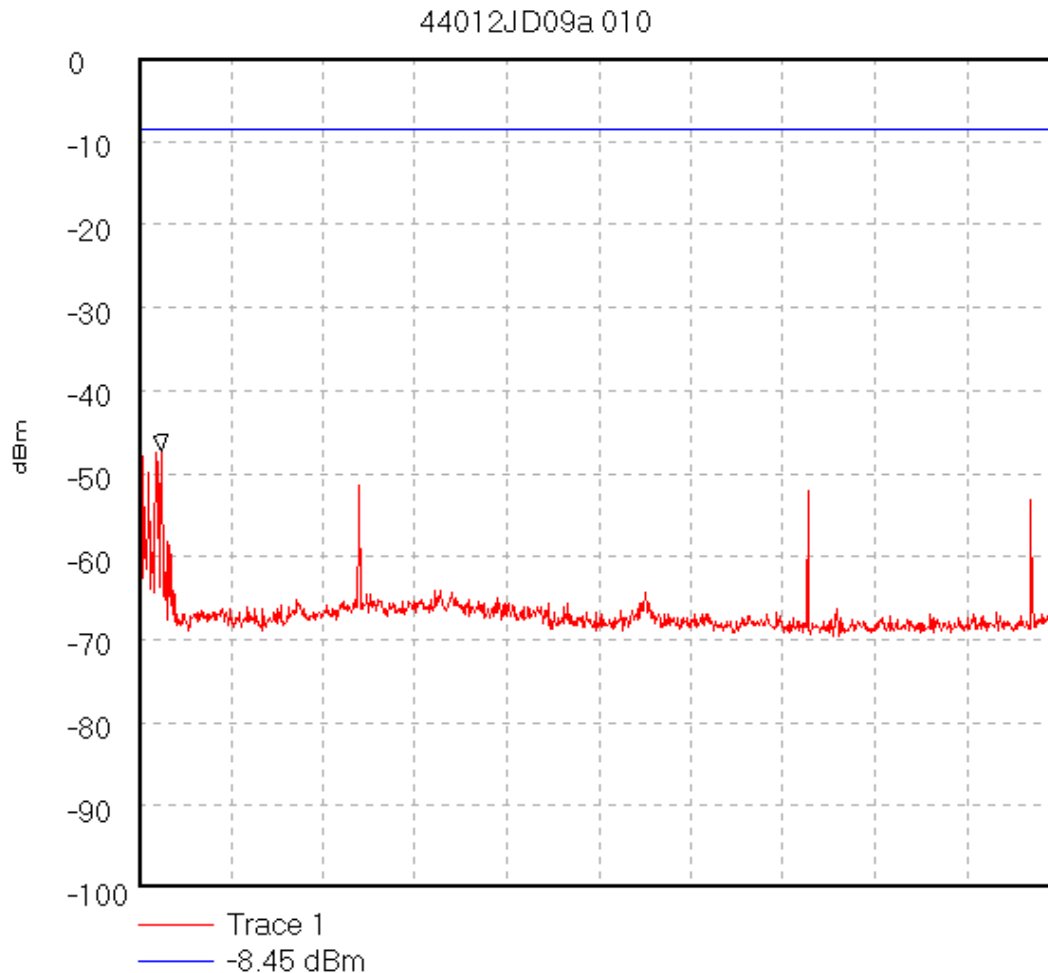

Start 2.4835 GHz; Stop 12.5 GHz

Ref 0 dBm; Ref Offset 22.1 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 3.2 S

Peak 2.739477 GHz, -47.35 dBm


Display Line: -8.45 dBm; ; Limit Test Passed

04/01/80 00:58:16

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\011
Testing of Brain Boxes BL-510/642. FCC Part 15.247.
Conducted Spurious Emissions - Top Channel

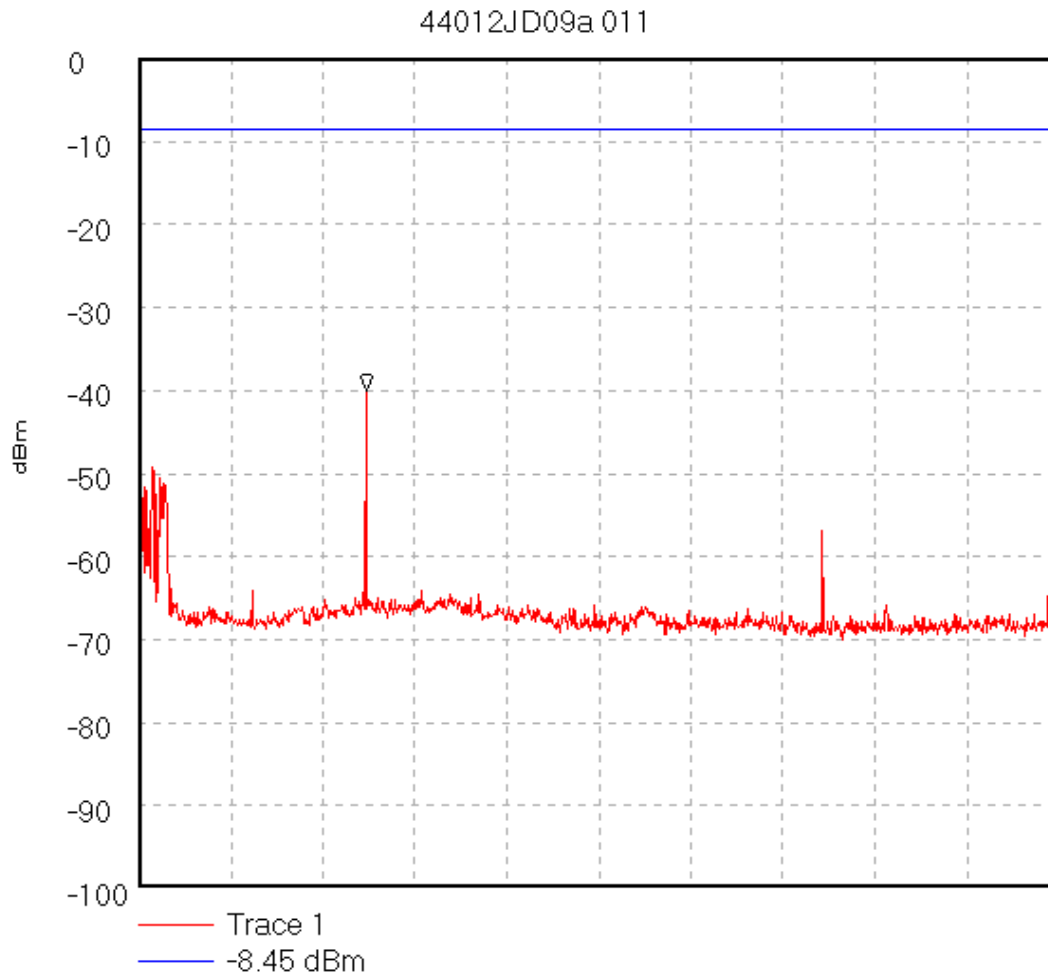

Start 2.4835 GHz; Stop 12.5 GHz

Ref 0 dBm; Ref Offset 22.1 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 3.2 S

Peak 4.954237 GHz, -40.04 dBm


Display Line: -8.45 dBm; ; Limit Test Passed

04/01/80 00:59:25

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\012
Testing of Brain Boxes BL-510/642. FCC Part 15.247.
Conducted Spurious Emissions - Top Channel

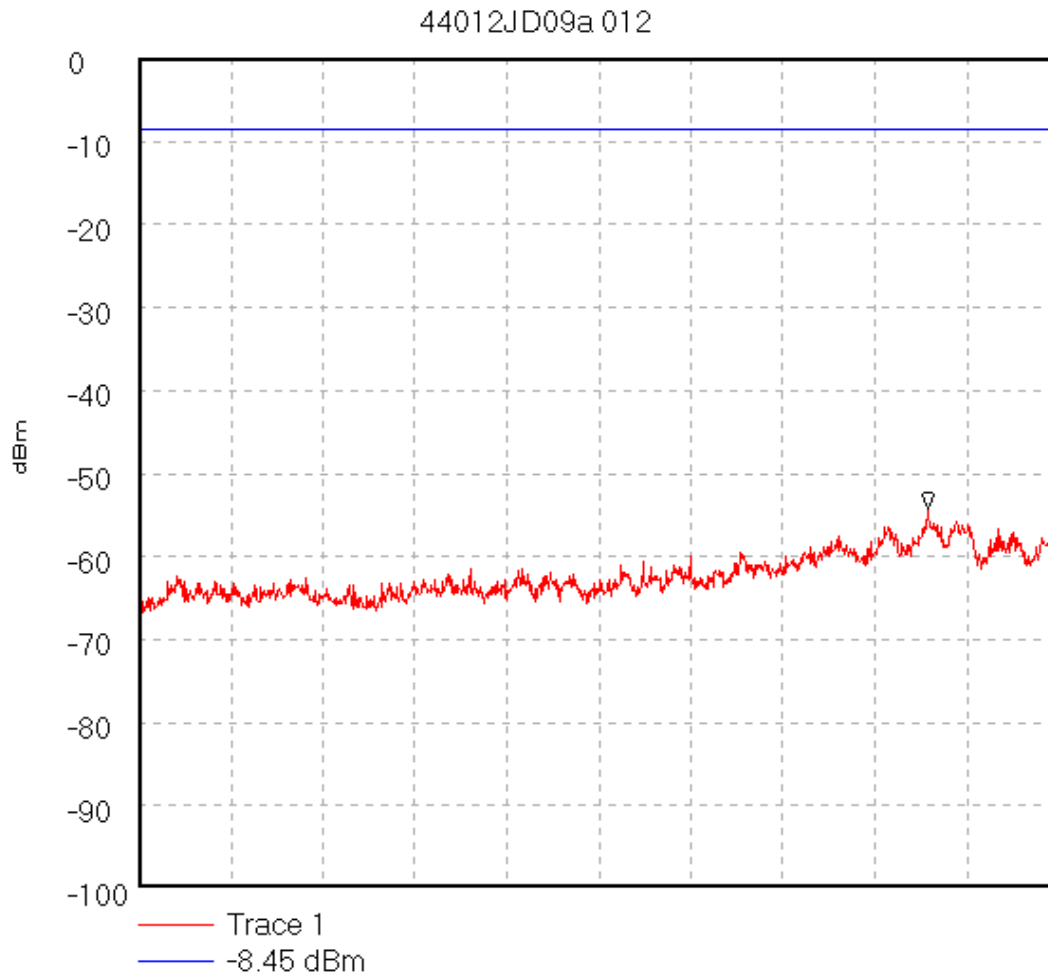

Start 12.5 GHz; Stop 26.5 GHz

Ref 0 dBm; Ref Offset 26.0 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 4.2 S

Peak 24.508889 GHz, -54.34 dBm

Display Line: -8.45 dBm; ; Limit Test Passed


04/01/80 01:02:06

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\013

Testing of Brain Boxes BL-510/642. FCC Part 15.247.
Conducted Spurious Emissions - Middle Channel

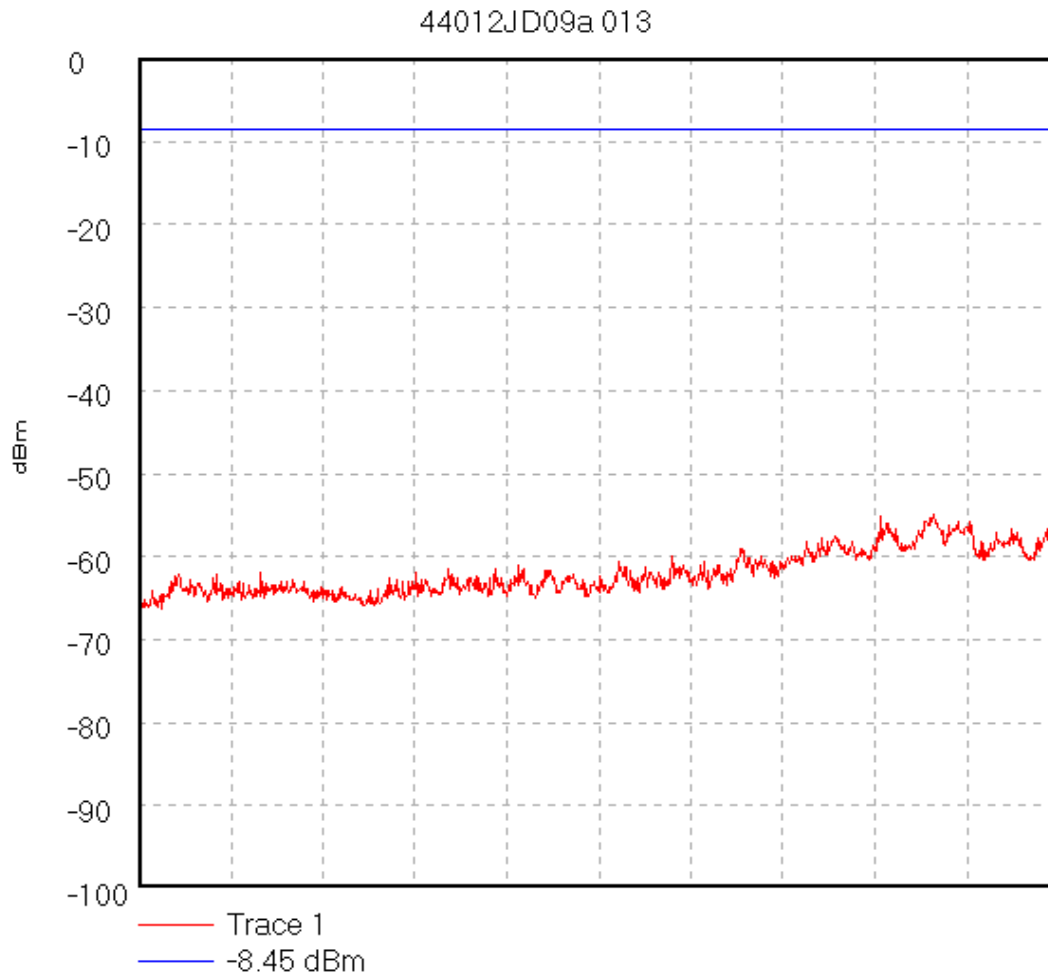

Start 12.5 GHz; Stop 26.5 GHz

Ref 0 dBm; Ref Offset 26.0 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 4.2 S

Peak 26.5 GHz, -54.34 dBm

Display Line: -8.45 dBm; ; Limit Test Passed


04/01/80 01:03:34

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\014

Testing of Brain Boxes BL-510/642. FCC Part 15.247.
Conducted Spurious Emissions - Bottom Channel

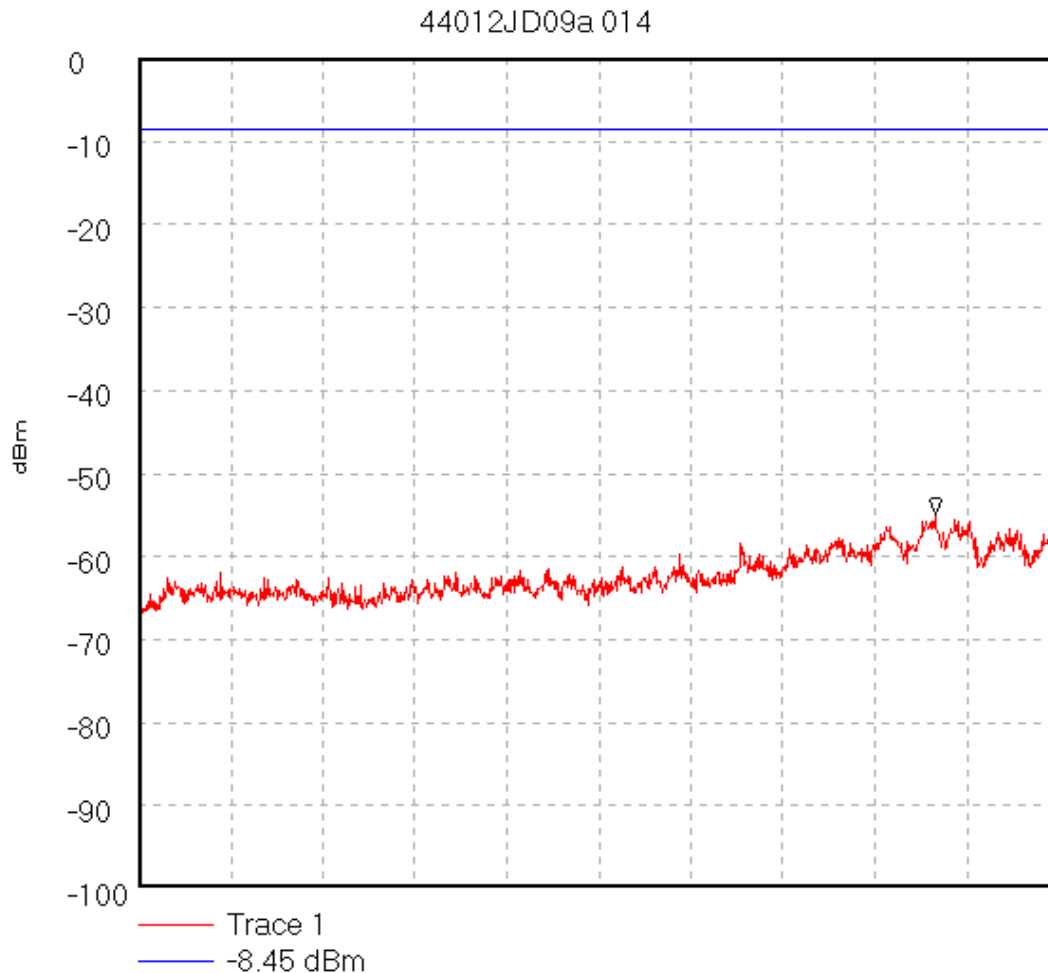

Start 12.5 GHz; Stop 26.5 GHz

Ref 0 dBm; Ref Offset 26.0 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 4.2 S

Peak 24.633333 GHz, -54.85 dBm

Display Line: -8.45 dBm; ; Limit Test Passed


04/01/80 01:04:43

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\015

Testing of Brain Boxes BL-510/642. FCC Part 15.247.
conducted Spurious Emissions - Hopping All Channels

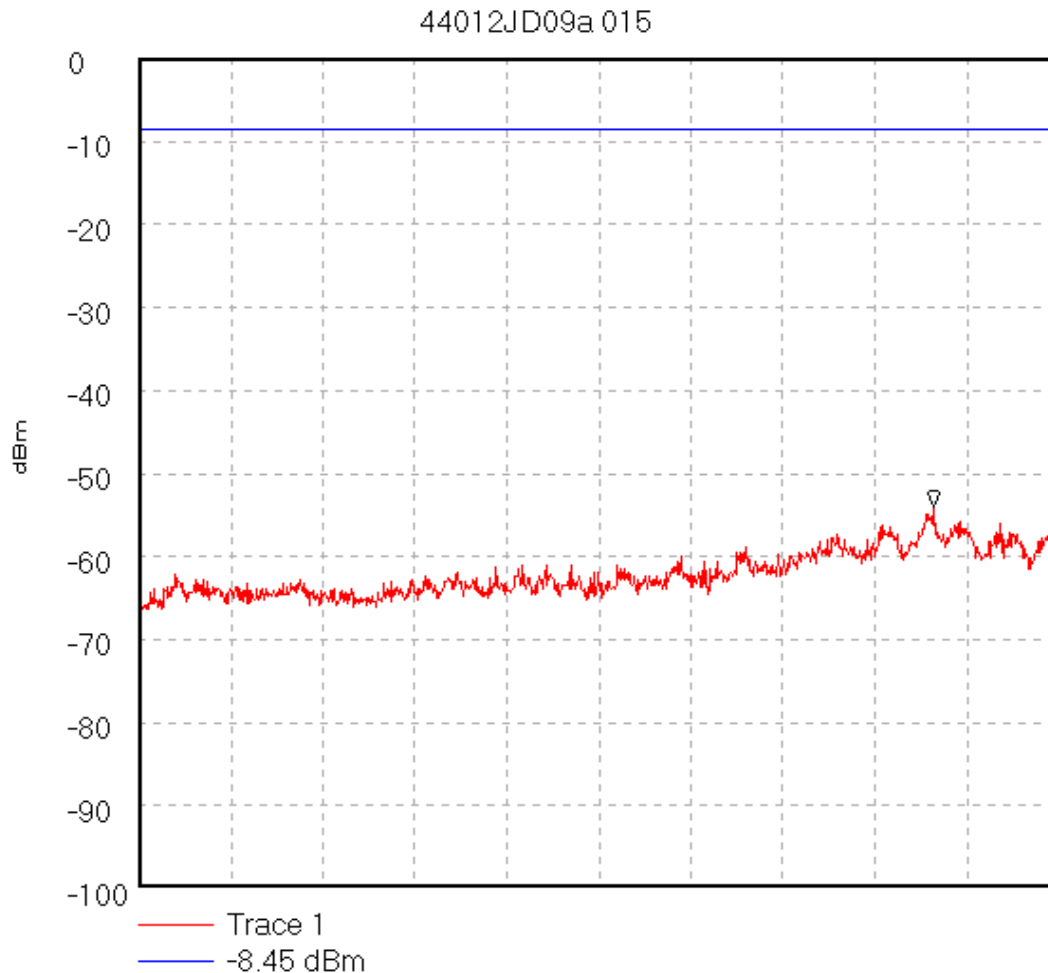

Start 12.5 GHz; Stop 26.5 GHz

Ref 0 dBm; Ref Offset 26.0 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 4.2 S

Peak 24.602222 GHz, -54.11 dBm

Display Line: -8.45 dBm; ; Limit Test Passed


04/01/80 01:05:46

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09a\016

Testing of Brain Boxes BL-510/642. FCC Part 15.247.
Conducted Spurious Emissions - Receive Mode

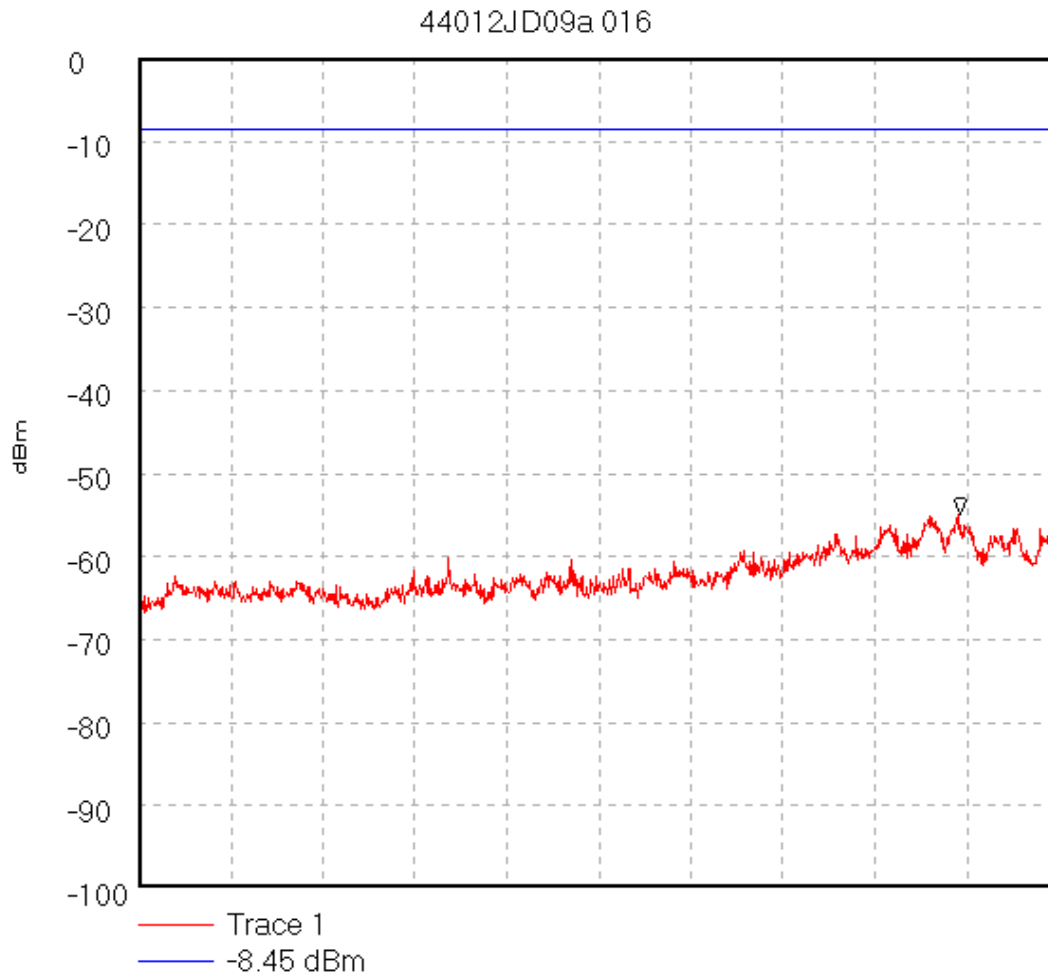

Start 12.5 GHz; Stop 26.5 GHz

Ref 0 dBm; Ref Offset 26.0 dB; 10 dB/div

RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 4.2 S

Peak 24.991111 GHz, -54.9 dBm

Display Line: -8.45 dBm; ; Limit Test Passed

04/01/80 01:11:07

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\032
Radiated Emissions testing for Brain Boxes.
TX Hopping - Bottom Channel - Band Edge



Start 2.3985 GHz; Stop 2.4015 GHz

Ref 90 dBµV; Ref Offset 0.0 dB; 10 dB/div

RBW 30.0 kHz; VBW 30.0 kHz; Att 0 dB; Swp 20.0 mS

Marker 2.4015 GHz, 77.87 dBµV

Display Line: 54 dBµV;


10/15/02 5:03:06 PM

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

GPH\44012JD09\033

**Radiated Emissions testing for Brain Boxes
TX Hopping - Top Channel - Band Edge**

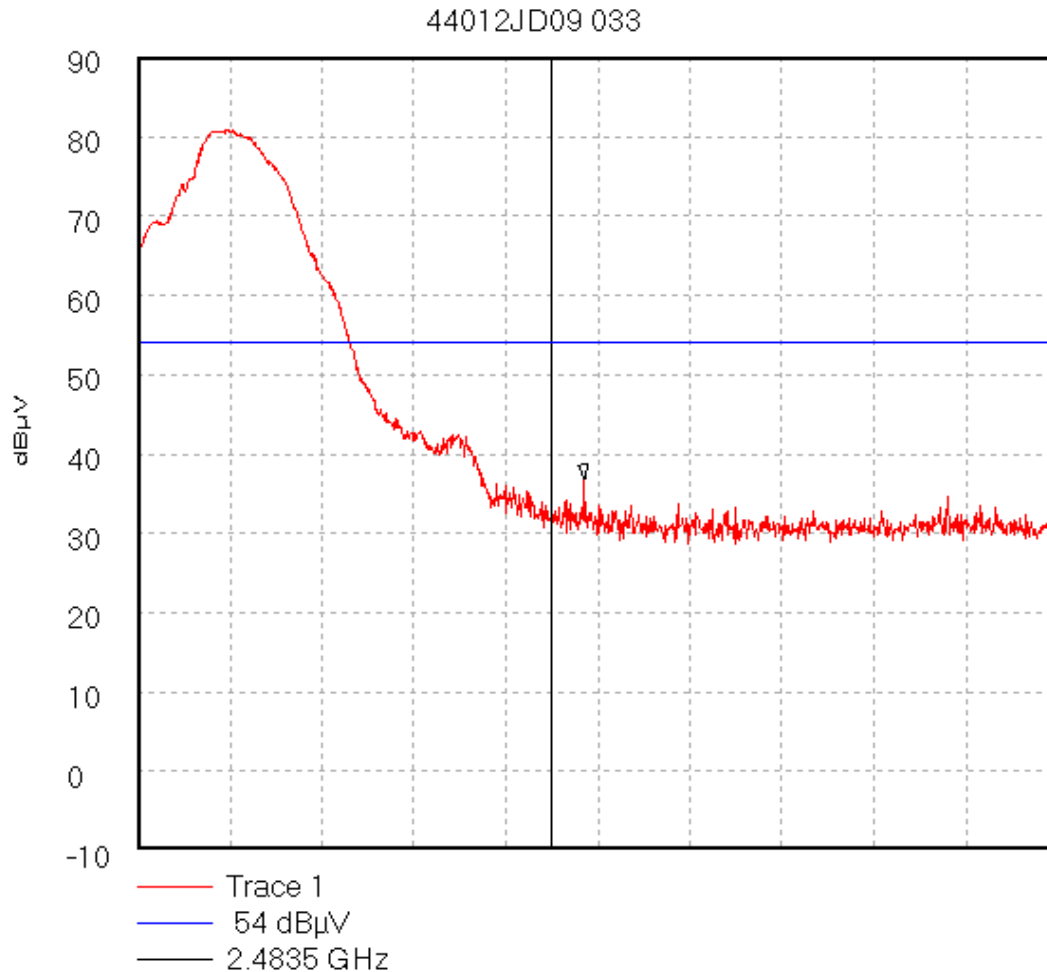

Start 2.479 GHz; Stop 2.489 GHz

Ref 90 dBμV; Ref Offset 0.0 dB; 10 dB/div

RBW 300.0 kHz; VBW 300.0 kHz; Att 0 dB; Swp 20.0 mS

Marker 2.483856 GHz, 36.81 dBμV

Display Line: 54 dBμV;

10/15/02 5:09:53 PM

**Test Of: Brain Boxes Ltd.
BL-510****To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247**

Appendix 5. Photographs of EUT

This appendix contains the following photographs:

Photo Reference Number	Title
PHT/44012JD09/001	Side view of EUT in screened room.
PHT/44012JD09/002	Side view of EUT in screened room.
PHT/44012JD09/003	Side view of EUT on Open Area Test Site.
PHT/44012JD09/004	Side view of EUT on Open Area Test Site.

These pages are not included in the total number of pages for this report.

RADIO FREQUENCY INVESTIGATION LTD.

TEST REPORT

Operations Department

S.No: RFI/EMCB1/RP44012JD09A

Page 110 of 110

Issue Date: 06 December 2002

**Test Of: Brain Boxes Ltd.
BL-510**

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

This page has been left intentionally blank.

Test Of: Brain Boxes Ltd.

BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

PHT/44012JD09/001 Right side view of EUT (AC Conducted Emissions).



RADIO FREQUENCY INVESTIGATION LTD.

TEST REPORT

Operations Department

S.No: RFI/EMCB1/RP44012JD09A

Photograph Appendix

Test Of: Brain Boxes Ltd.
BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

PHT/44012JD09/002 Left side view of EUT (AC Conducted Emissions).



RADIO FREQUENCY INVESTIGATION LTD.

TEST REPORT

Operations Department

S.No: RFI/EMCB1/RP44012JD09A

Photograph Appendix

Test Of: Brain Boxes Ltd.

BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

PHT/44012JD09/003 Left side view of EUT on Open Area Test Site.



RADIO FREQUENCY INVESTIGATION LTD.

TEST REPORT

Operations Department

S.No: RFI/EMCB1/RP44012JD09A

Photograph Appendix

Test Of: Brain Boxes Ltd.

BL-510

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247

PHT/44012JD09/004 Right side view of EUT on Open Area Test Site.

