



# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test report file number : E054R-055

Applicant : SHINCHANG ELECTRICS CO., LTD.

Address : 734-2, Wonshi-Dong, Ansan-Si, Gyungki-Do, 425-090, Korea

Manufacturer : SHINCHANG ELECTRICS CO., LTD.

Address : 732-2, Wonshi-Dong, Ansan-Si, Gyungki-Do, 425-090 Korea

Type of Equipment : REMOTE KEYLESS ENTRY SYSTEM

FCC ID : NYOSEKS-09TX

Model / Type No. : SEKS-09Tx

Serial number : N/A

Total page of Report : 12 pages (including this page)

Date of Incoming : April 06, 2005

Date of issuing : April 20, 2005

## SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C §15.231**

This test report contains only the result of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by:

Young-Min, Choi / Project Engineer  
EMC Div.  
ONETECH Corp.

Reviewed by:

Y. K. Kwon / Director  
EMC Div.  
ONETECH Corp.



## CONTENTS

	Page
<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>3</b>
<b>2. GENERAL INFORMATION.....</b>	<b>4</b>
2.1 PRODUCT DESCRIPTION .....	4
2.2 RELATED SUBMITTAL(S) / GRANT(S).....	4
2.3 TEST SYSTEM DETAILS .....	5
2.4 TEST METHODOLOGY .....	5
2.5 TEST FACILITY.....	5
<b>3. SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
3.1 JUSTIFICATION .....	5
3.2 EUT EXERCISE SOFTWARE .....	5
3.3 EQUIPMENT MODIFICATIONS .....	5
3.4 CONFIGURATION OF TEST SYSTEM .....	6
3.5 ANTENNA REQUIREMENT .....	6
<b>4. PRELIMINARY TEST .....</b>	<b>6</b>
4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS .....	6
4.2 RADIATED EMISSIONS TESTS .....	6
<b>5. FINAL RESULT OF MEASURMENT .....</b>	<b>7</b>
5.1 FIELD STRENGTH OF THE CARRIER TEST .....	7
5.4 BANDWIDTH OF THE OPERATING FREQUENCY .....	9
<b>6. FIELD STRENGTH CALCULATION .....</b>	<b>11</b>
<b>7. LIST OF TEST EQUIPMENT .....</b>	<b>12</b>



## 1. VERIFICATION OF COMPLIANCE

APPLICANT : SHINCHANG ELECTRICS CO., LTD.  
ADDRESS : 734-2, Wonshi-Dong, Ansan-Si, Gyeonggi-Do, 425-090, Korea  
CONTACT PERSON : Seongchul, Choi / Research Engineer  
TELEPHONE NO : 82-41-901-0463  
FCC ID : NYOSEKS-09TX  
MODEL NO/NAME : SEKS-09Tx  
SERIAL NUMBER : N/A  
DATE : April 20, 2005

DEVICE TYPE	REMOTE KEYLESS ENTRY SYSTEM - INTENTIONAL RADIATOR
E.U.T. DESCRIPTION	RF REMOTE KEYLESS ENTRY SYSTEM FOR VEHICLE - TRANSMITTER
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/2001
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C §15.231
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



## 2. GENERAL INFORMATION

### 2.1 Product Description

The SHINCHANG ELECTRICS CO., LTD., Model SAKS-09Tx (referred to as the EUT in this report) is a transmitter that controls locking and unlocking the door of a vehicle by wireless remote controller. The associated receiver is manufactured by Shinchang Electrics Co., Ltd, Model No: SEKS-09Rx. The product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
TX FREQUENCY	315.00 MHz
MODULATION	FM
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	52.5 MHz
ANTENNA TYPE	Built-in on the PCB in the EUT
CODE	Rolling Code (Hopping Algorithm)
TRANSMISSION TIME	Not longer than 1 sec
RATED SUPPLY VOLTAGE	DC 3V (Lithium cell)
OPERATING VOLTAGE RANGE	DC 2.5 ~ 3.2V
NUMBER OF LAYERS	2 LAYERS
FUNCTION OF BUTTON	Doors Lock & Unlock and Panic Button

\* Remark: This equipment automatically deactivates the transmitter within not more than 1 second of being released.

#### Model Differences:

- No other model differences have been mentioned

### 2.2 Related Submittal(s) / Grant(s)

- None



## 2.3 Test System Details

The EUT was tested with the following all equipment used in the tested systems are:

Model	Manufacturer	FCC ID	Description	Connected to
SEKS-09Rx	SHINCHANG ELECTRICS CO., LTD.	NYOSEKS-09RX	RECEIVER	N/A

## 2.4 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4/2001. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

## 2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on October 02, 2002. (Registration Number: 529838)

## 3. SYSTEM TEST CONFIGURATION

### 3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	Shinchang Electric Co., LTD.	95430-1F100	N/A

### 3.2 EUT exercise Software

To get a maximum radiated emission from the EUT, the button on the EUT was continuously pressed to transmit the signal. To activate continuous transmission, place a small plastic block between rubber band and the push button on the EUT.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

### 3.3 Equipment Modifications

None



### 3.4 Configuration of Test System

**Line Conducted Test:** It needs not to test this requirement, because the EUT supplies from a DC battery.

**Radiated Emission Test:** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4/2001 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3meter open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

#### Occupied Bandwidth Measurement:

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 20 kHz/division frequency span, 10 kHz resolution bandwidth and 10dB/division logarithmic display from an 8568B spectrum analyzer.

### 3.5 Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### Antenna Construction:

The transmitter antenna of the EUT is built-in on the PCB in the EUT, no consideration of replacement by the user.

## 4. PRELIMINARY TEST

### 4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
N/A	N/A

It is not need to test this requirement, because the power of the EUT is supplied from a DC battery.

### 4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
TX mode	X



## 5. FINAL RESULT OF MEASURMENT

### 5.1 Field Strength of the Carrier Test

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level	: <u>43 %</u>	Temperature : <u>21°C</u>
Limits apply to	: <u>Industry Canada RSS-210, Issue 5 Section 6.1.1(b)</u>	
Type of Test	: <u>Intentional Radiator</u>	
Result	: <u>PASSED BY -3.27 dB with Peak detector</u>	

EUT	: REMOTE KEYLESS ENTRY SYSTEM	Date: April 07, 2005
Operating Condition	: TX mode	
Distance	: 3 Meter	

Radiated Emissions			Ant	Correction Factors			Total	FCC	
Carrier Freq. (MHz)	Amplitude (dBuV)	Detector Mode	Pol.	Antenna (dB/m)	Cable (dB)	Average Level Factor	Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
315.00	54.50	Peak	H	13.93	3.92	N/A	72.35	75.62	-3.27
315.00	43.00	Peak	V	13.93	3.92	N/A	60.85	75.62	-14.77

\*Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

“Q.P.” : Quasi-Peak, “AVE”: Average, “H”: Horizontal Polarization, “V”: Vertical Polarization

When peak value meets AVG limit, there is no need to report AVG value.

Tested by: Ki-Hong, Nam / Test Engineer



### 5.3 Spurious Emission Test

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level	: <u>43 %</u>	Temperature : <u>21°C</u>
Limits apply to	: <u>Industry Canada RSS-210, Issue 5 Section 6.1.1(b)</u>	
Type of Test	: <u>Intentional Radiator</u>	
Result	: <u>PASSED BY -11.72dB at 1154.99 MHz</u>	

EUT	: REMOTE KEYLESS ENTRY SYSTEM	Date: April 07, 2005
Operating Condition	: TX mode	
Distance	: 3 Meter	

Radiated Emissions			Ant	Correction Factors		Total	FCC	
Freq. (MHz)	Amplitude (dBuV)	Detect Mode	Pol.	Antenna (dBuV/m)	Cable (dB)	Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
154.54	14.90	Peak	H	15.16	2.35	32.41	55.62	-23.21
263.69	10.60	Peak	H	17.49	3.45	31.54	55.62	-24.08
367.50	10.90	Peak	H	14.73	4.27	29.90	55.62	-25.72
419.60	11.60	Peak	H	15.97	4.44	32.01	55.62	-23.61
630.00	10.00	Peak	V	19.02	5.54	34.56	55.62	-21.06
945.14	9.70	Peak	H	22.60	8.09	40.39	55.62	-15.23
1154.99	11.00	Peak	H	24.40	8.50	43.90	55.62	-11.72
Other spurious frequencies were not found up to 4400 MHz.								

\*Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

Tested by: Ki-Hong, Nam / Test Engineer



## 5.4 Bandwidth of the operating frequency

Humidity Level : 41 % Temperature: 20°C  
Limits apply to : Industry Canada RSS-210, Issue 5 Section 6.1.1(c+)  
Type of Test : Intentional Radiator  
Result : PASSED

---

EUT : REMOTE KEYLESS ENTRY SYSTEM Date: April 07, 2005  
Operating Condition : TX mode  
Minimum Resolution  
Bandwidth : 10 kHz

Carrier Freq. (MHz)	Bandwidth of the emission. (kHz)	Limit (kHz)	Remark
315.00	44.70	787.5	<u>The point 20dB down from the</u> <u>modulated carrier</u>

Remark: Please refer to Photo Data for test data.

---

Tested by: Ki-Hong, Nam / Test Engineer




# ONETECH

Testing & Evaluation Lab.

Page 10 of 12  
FCC ID. : NYOSEKS-09TX  
File No. : E054R-055

### Photo Data

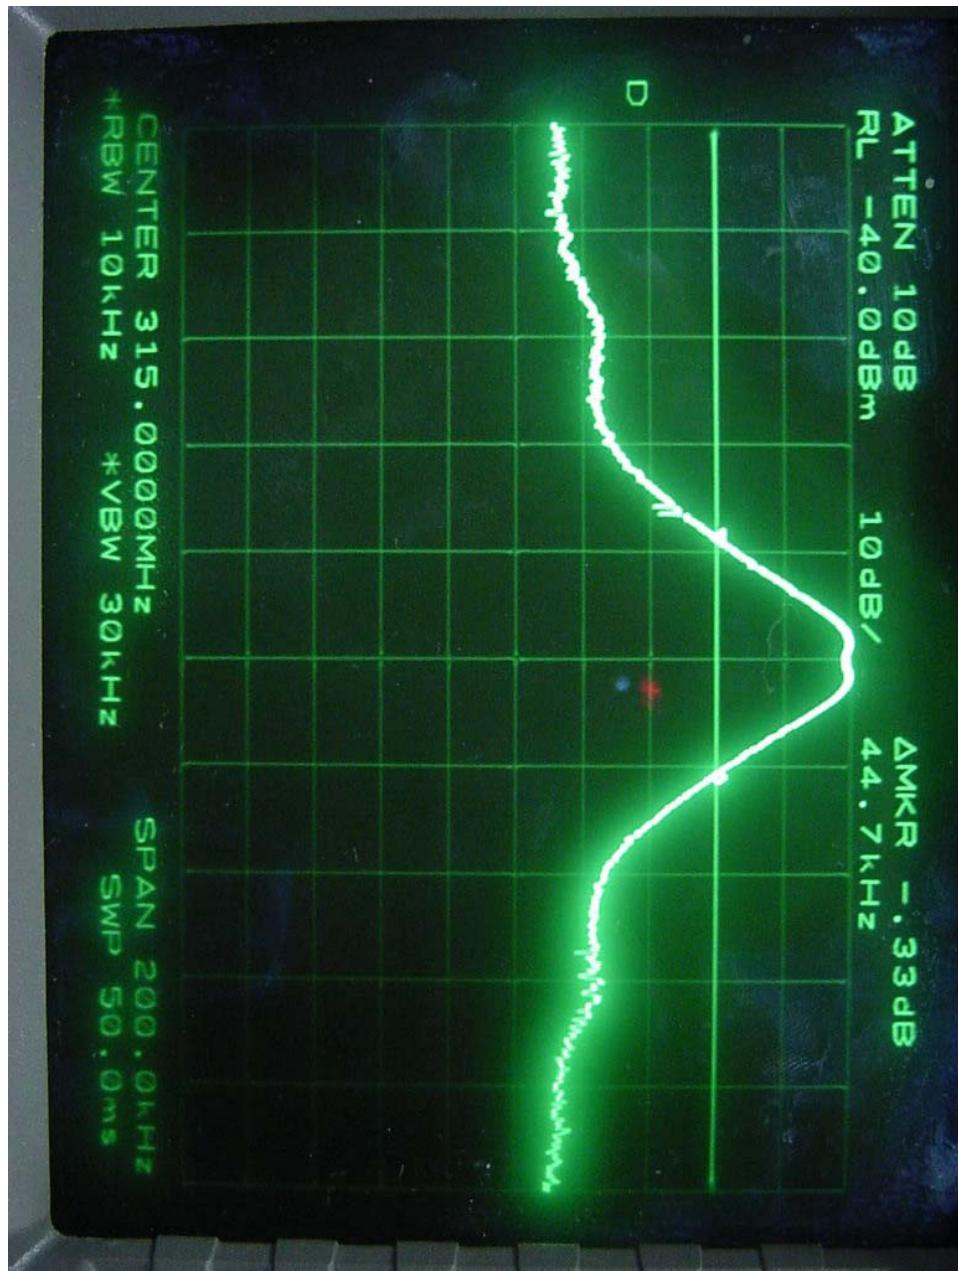



## 6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

---

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



## 7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUe CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	DEC/04	12MONTH	■
2.	Test receiver	R/S	ESHS10	834467/007	MAY/04	12MONTH	
3.	Spectrum analyzer	HP	8568B	3019A05456	MAR/05	12MONTH	■
4.	RF preselector	HP	85685A	3107A01264	MAR/05	12MONTH	■
5.	Quasi-Peak Adapter	HP	85650A	3107A01542	MAR/05	12MONTH	■
6.	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	JUL/04	12MONTH	■
7.	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	JUL/04	12MONTH	■
8.	Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA9120D294	JUN/04	12MONTH	■
9.	LISN	EMCO	3825/2	9109-1867 9109-1869	JUL/04 NOV/04	12MONTH	
10.	RF Amplifier	HP	8347F	3307A01354	JUN/04	N/A	
11.	Spectrum Analyzer	HP	8564E	3650A00756	JUL/04	12MONTH	■
12.	Plotter	HP	7475A	30052 22986	N/A	N/A	■
13.	Position Controller	HD	HD100	100/788	N/A	N/A	■
14.	Turn Table	HD	DS420S	N/A	N/A	N/A	■
15.	Antenna Master	HD	HD240	N/A	N/A	N/A	■
16.	Isolation Transformer	Digitek Power	DPT	DPF-22027	N/A	N/A	■
17.	Isolation Transformer	Digitek Power	DPT	DPF-22028	N/A	N/A	■
18.	Frequency Converter	Digitek Power	VFS/DEFC	N/A	N/A	N/A	■