

# FCC Part 15 Subpart C §15.231

## Test Report

<b>Equipment Under Test</b>	<b>Remote Keyless Entry Transmitter</b>
<b>Model Name</b>	<b>SYEC3FOB2003</b>
<b>Variant Model Name</b>	<b>-</b>
<b>FCC ID</b>	<b>NYOSYEC3FOB2003</b>
<b>Applicant</b>	<b>SEOYON ELECTRONICS CO., LTD.</b>
<b>Manufacturer</b>	<b>SEOYON ELECTRONICS CO., LTD.</b>
<b>Date of Test(s)</b>	<b>2019. 09. 18 ~ 2019. 09. 30</b>
<b>Date of Issue</b>	<b>2019. 10 .01</b>

In the configuration tested, the EUT complied with the standards specified above.

<b>Issue to</b>	<b>Issue by</b>
<b>SEOYON ELECTRONICS CO., LTD.</b> 100, Saneop-ro 156beon-gil, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea  Tel.: +82-70-4850-3311 Fax: +82-2-532-8811	<b>MOVON CORPORATION</b> 498-2, Geumeo-ro, Pogok-eup, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17030  Tel.: +82-31-338-8837 Fax: +82-31-338-8847



## Revision history

Revision	Date of issue	Description	Revised by
--	Oct. 01, 2019	Initial	-

## Table of contents

<b>1. APPLICANT INFORMATION.....</b>	<b>4</b>
<b>2. LABORATORY INFORMATION.....</b>	<b>4</b>
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
<b>4. EUT DESCRIPTION.....</b>	<b>6</b>
<b>5. MEASUREMENT EQUIPMENT .....</b>	<b>7</b>
<b>6. ANTENNA REQUIREMENT .....</b>	<b>8</b>
<b>7. FIELD STRENGTH OF FUNDAMENTAL.....</b>	<b>9</b>
<b>8. RADIATED SPURIOUS EMISSIONS .....</b>	<b>11</b>
<b>9. RECEIVER RADIATED SPURIOUS EMISSIONS .....</b>	<b>14</b>
<b>10. BANDWIDTH MEASUREMENT .....</b>	<b>16</b>
<b>11. TRANSMISSION TIME .....</b>	<b>18</b>

## 1. Applicant Information

### 1.1. Details of applicant

Applicant : SEOYON ELECTRONICS CO., LTD.  
Address : 100, Saneop-ro 156beon-gil, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea  
Contact Person : Hee Tack Ryu  
Telephone : +82-31-420-3481  
Fax : +82-31-426-9325

### 1.2. Manufacturer Information

Manufacturer : SEOYON ELECTRONICS CO., LTD.  
Address : 100, Saneop-ro 156beon-gil, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea

## 2. Laboratory Information

Company name : MOVON CORPORATION  
Test site number : FCC, (KR0151)  
Address : 498-2, Geumeo-ro, Pogok-eup, Cheoin-gu, Yongin-si, Gyeonggi-do, South Korea  
Web site : <http://www.movonlab.com>  
Telephone : +82-31-338-8837  
Facsimile : +82-31-338-8847

### 3. Summary of test results

The EUT has been tested according to the following specifications:

FCC Rule	Description	Result
§15.203	Antenna requirement	C
§15.209(a) §15.231(b)	Field Strength of Fundamental, Radiated spurious emissions	C
§15.109(a)	Receiver radiated spurious emission	C
§15.231(c)	Bandwidth measurement	C
§15.231(a)	Transmission time	C
§15.207(a)	AC Conducted power line test	N/A <sup>Note1</sup>

#### ※ Abbreviation

C Complied  
N/A Not applicable  
F Fail


#### ※ Note

Note 1 : This test is not applicable because the EUT uses battery and it's not to be connected to the Public utility(AC) power line

#### ※ The sample was tested according to the following specification:

FCC Parts 15.209, 15.231; ANSI C63.10:2013

#### Approval Signatories

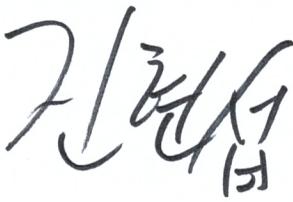Test and Report Completed by :	Report Approval by :
	
David park Test Engineer MOVON CORPORATION	Issac Jin Technical Manager MOVON CORPORATION

#### 4. EUT Description

<b>Kind of product</b>	Remote Keyless Entry Transmitter
<b>Model Name</b>	SYEC3FOB2003
<b>Variant Model Name</b>	-
<b>FCC ID</b>	NYO SYEC3FOB2003
<b>Power supply</b>	DC 3.0 V
<b>Frequency range</b>	TX: 433.92 MHz , RX:125 KHz
<b>Modulation technique</b>	FSK
<b>Number of channels</b>	1 ch
<b>Antenna gain / Type</b>	- 26.20 dB i (Max.)
<b>Test Site Registration Number</b>	FCC(KR0151)

##### 4.1. Declarations by the manufacturer

None

##### 4.2. Details of modification

None

## 5. Measurement equipment

Equipment	Manufacturer	Model	Serial number	Calibration Interval	Calibration date	Calibration due.
Test Receiver	R&S	ESVS30	829673/015	1 year	2018-12-06	2019-12-06
Signal Generator	R&S	SMB100A	178128	1 year	2018-12-07	2019-12-07
Spectrum Analyzer	R&S	FSV-40	100832	1 year	2019-05-27	2020-05-27
Power Meter	Agilent	E4416A	GB41290645	1 year	2019-05-27	2020-05-27
Power Sensor	Agilent	9327A	US40441490	1 year	2019-05-27	2020-05-27
Horn Antenna	R&S	HF906	100236	2 year	2019-04-09	2021-04-09
Horn Antenna	AH Systems	SAS-572	269	2 year	2017-08-01	2020-08-01
Horn Antenna	AH Systems	SAS-573	164	2 year	2018-04-26	2020-04-26
Bi-Log Ant.	S/B	VULB 9161SE	4159	2 year	2018-06-11	2020-06-11
Loop Antenna	ETS LINDGREN	6502	00118166	2 year	2018-10-30	2020-10-30
Power Amplifier	TESTEK	TK-PA18H	170013-L	1 year	2019-05-27	2020-05-27
Power Amplifier	MITEQ	AFS43-01002600	2048519	1 year	2018-10-29	2019-10-29
Power Amplifier	MITEQ	AMF-6F-2600400 0-33-8P-HS	1511665	1 year	2018-12-10	2019-12-10
Step Attenuator	Agilent	8494B	US37181955	1 year	2019-05-29	2020-05-29
Controller	INNCO	CO2000	CO2000/064/6961003/ L	N/A	N/A	N/A
Antenna Master	INNCO	MA4000	MA4000/038/6961003/ L	N/A	N/A	N/A
Controller	INNCO	CO3000	CO3000/812/34240914/ L	N/A	N/A	N/A
Antenna Master	INNCO	MA4640-XP-ET	None	N/A	N/A	N/A
RF Cable	SUHNER	SUCOFLEX100	84047746	3 month	2019-09-09	2019-12-09
RF Cable	SUHNER	SUCOFLEX102	801270/2	3 month	2019-09-09	2019-12-09
RF Cable	SUHNER	SUCOFLEX102	801532/2	3 month	2019-09-09	2019-12-09
DC Power Supply	Agilent	U8002A	MY56110033	1 year	2018.10.30	2019-10-30
High Pass Filter	Wainwright	WHKX10-900-100 0-18000-40SS	5	1 year	19.05.27	20.05.27

**\*Remark**  
**Support equipment**

Description	Manufacturer	Model	Serial number
-	-	-	-

## 6. Antenna requirement

### 6.1. Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 6.2. Test results

#### Complied

The PCB Antenna is an integral antenna, and no antenna other than that furnished by the responsible party shall be used with the device

## 7. Field strength of Fundamental

### 7.1. Regulation

According to § 15.109(a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: 83

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30 - 88	100**	3
88 – 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz.

However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to §15.231(b)

In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequency (MHz)	Field strength of Fundamental ( $\mu$ V/m)	Field Strength of spurious emissions ( $\mu$ V/m)
40.66-40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750**	125 to 375**
174 - 260	3,750	375
260 - 470	3,750 to 12,500**	375 to 1,250**
Above 470	12,500	1,250

\*\* linear interpolations

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $\mu$ V /m at 3 meters =  $56.81818(F) - 6136.3636$ ; for the band 260-470 MHz,  $\mu$ V /m at 3 meters =  $41.6667(F) - 7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

## 7.2. Test procedure

The method of measurement used to test this Unlicensed Wireless device is ANSI C63.10-2013.

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. It tested x,y and z – 3 axis each, mentioned only worst case data at this report.  
by measuring peak result and applying DCCF.

## 7.3. Test results

Complied

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol.	Ant. factor (dB/m)	CL (dB)	DCCF (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
433.92	56.85	Peak	V	17.12	3.03	-	77.00	100.83	23.83
433.92	56.65	Average	H	17.12	3.03	-	76.80	80.83	4.03

### ※Remark

1. Average Limit = 80.83 dBuV/m
2. Peak Limit = 80.83 dBuV/m + 20 dB = 100.83 dBuV/m  
If the average limit is specified for the EUT, the peak limit is 20 dB above the average limit as specified in FCC 15.35 (b)
3. Actual = Reading + Ant. factor - Amp + CL (Cable loss)

## 8. Radiated spurious emissions

### 8.1. Regulation

According to § 15.109(a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: 83

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30 - 88	100**	3
88 – 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz.

However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to §15.231(b)

In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequency (MHz)	Field strength of Fundamental ( $\mu$ V/m)	Field Strength of spurious emissions ( $\mu$ V/m)
40.66-40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750**	125 to 375**
174 - 260	3,750	375
260 - 470	3,750 to 12,500**	375 to 1,250**
Above 470	12,500	1,250

\*\* linear interpolations

## 8.2. Test procedure

The method of measurement used to test this Unlicensed Wireless device is ANSI C63.10-2013.

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. It tested x,y and z – 3 axis each, mentioned only worst case data at this report.

### Note

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1/T for Average detection (AV) at frequency above 1 GHz. (where T = pulse width)
4. The radiated restricted band edge and Spurious radiated emissions average measurements use a duty cycle correction factor (DCCF).

## 8.3. Test results

**Complied** (Measurement data : refer to the next page)

### 8.3.1. Radiated spurious emission (9 kHz to 30 MHz)

Frequency (MHz)	Reading (dBuV)	Detector Mode	Pol.	Ant. factor (dB/m)	Amp+CL (dB)	DCCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.									

### 8.3.2. Radiated spurious emission (30 MHz to 1 000 MHz)

Frequency (MHz)	Reading (dBuV)	Detector Mode	Pol.	Ant. factor (dB/m)	CL (dB)	DCCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
867.84	10.38	QP	H	22.62	4.00	-	37.00	46.02	21.14

### 8.3.3. Radiated spurious emission (Above 1 000 MHz)

Frequency (MHz)	Reading (dBuV)	Detector Mode	Pol.	Ant. factor (dB/m)	Amp+CL (dB)	DCCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1303.90	46.18	Peak	H	24.02	41.36	-	28.84	80.83	51.99
1303.90	44.40	Average	H	24.02	41.36	-	27.06	60.83	33.77
1738.10	47.56	Peak	H	25.62	40.27	-	32.91	80.83	47.92
1738.10	45.59	Average	H	25.62	40.27	-	30.94	60.83	29.89
*4337.20	45.88	Peak	H	31.40	36.35	-	40.93	74.00	33.07
*4337.20	43.76	Average	H	31.40	36.35	-	38.81	54.00	15.19

#### ※Remark

1. Actual = Reading + Ant. factor - Amp + CL (Cable loss) + DCCF
2. \* is Restricted band.

## **9 Receiver radiated spurious emission**

### **9.1. Test setup**

Same as clause 5.1.

#### **9.1.1. Receiver radiated spurious emissions**

Same as clause 5.1.1

### **9.2. Limit**

According to §15.109(a), Except for Class A digital devices, the field strength of radiated emission from unintentional radiator at a distance of 3 m shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ N/m)	Radiated ( $\mu$ N/m)
0.009–0.490	300		2400/F(kHz)
0.490–1.705	30	See the remark	24000/F(kHz)
1.705–30.0	30		30
30 - 88	3	40.0	100
88 – 216	3	43.5	150
216 – 960	3	46.0	200
Above 960	3	54.0	500

### **9.3. Test procedures**

Same as clause 5.3.

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003  
In case of the air temperature of the test site is out of the range is 10 to 40°C before the testing  
proceeds the warm-up time of EUT maintain adequately

#### **9.3.1. Test procedures for radiated spurious emissions**

Same as Clause 5.3.1.

## 9.4. Test results

Ambient temperature: 20 °C

Relative humidity: 45% R.H.

### 9.4.1. Spurious radiated emission.

The frequency spectrum from 30 MHz Below was investigated. Emission levels are not reported much lower than the limits by over 30 dB. All reading values are peak values.

#### A. channel (125 KHz)

Frequency (MHz)	Reading (dBuV)	Detector Mode	Pol.	Ant. factor (dB/m)	Amp+CL (dB)	DCCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.									

#### ※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

## 10. Bandwidth measurement

### 10.1. Regulation

The bandwidth of the emission shall be no wider than 0.25 % of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the point 20 dB down from the modulated carrier.

### 10.2. Test procedure

The method of measurement used to test this Unlicensed Wireless device is ANSI C63.10-2013.

1. The transmitter output is connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW= 2 kHz, VBW= 2 kHz and Span= 200 kHz.
3. The bandwidth of fundamental frequency was measured and recorded.


### 10.3. Test results

**Complied** (Test plot : refer to the next page)


Frequency(MHz)	20 dB bandwidth(kHz)	Limit(kHz)	99% bandwidth(kHz)
433.92	45.35	1 084.80	44.57

## 10.4. Test plot

### 10.4.1. 20 dB Bandwidth

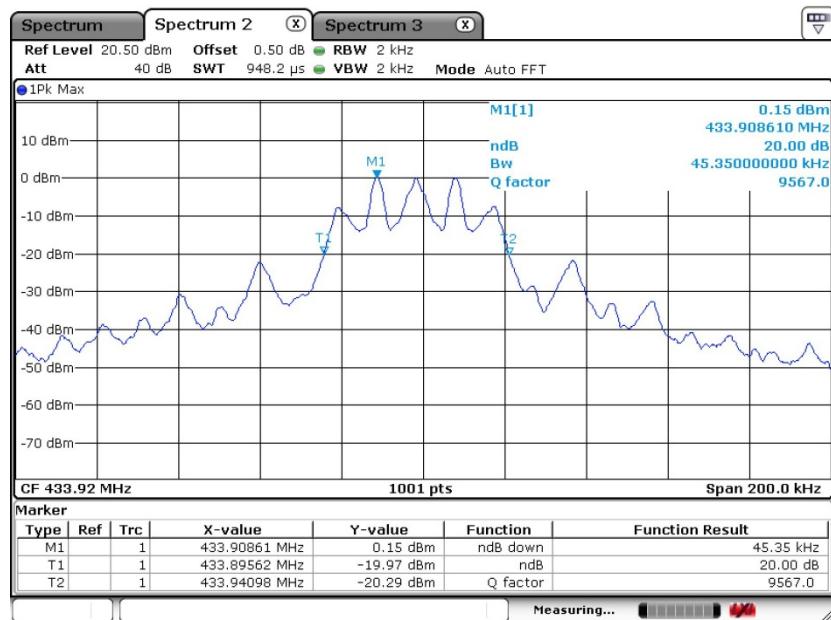

### 10.4.2. 99% Bandwidth

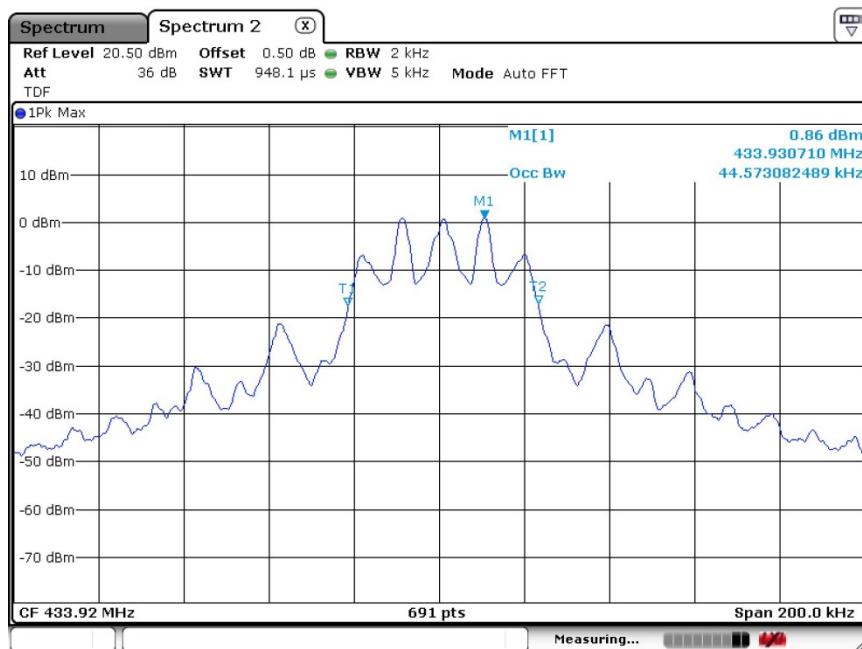

## 11. Transmission time

### 11.1. Regulation

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 11.2. Test procedure

The method of measurement used to test this Unlicensed Wireless device is ANSI C63.10-2013.

1. The transmitter output is connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW= 3 MHz, VBW= 3 MHz, Span=0 Hz.
3. The bandwidth of fundamental frequency was measured and recorded.

### 11.3. Test results

Complied

Frequency(MHz)	Transmission time(ms)	Limit(ms)
433.92	128.00	5 000.00

### 11.4. Test plot

