

PCTEL, Inc.

TEST REPORT FOR

**Rugged 802.11ac WiFi Access Point
Model: AP-WIFI-1200-US**

Tested to The Following Standards:

FCC Part 15 Subpart E Section(s)

15.407 (h)(2)

Radar Detection Function of Dynamic Frequency Selection (DFS)

Report No.: 104484-28

Date of issue: February 10, 2021



Test Certificate # 803.01

This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

This report contains a total of 64 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.

TABLE OF CONTENTS

Administrative Information	3
Test Report Information	3
Report Authorization	3
Test Facility Information	4
Software Versions	4
Site Registration & Accreditation Information	4
Summary of Results	5
Modifications During Testing	6
Conditions During Testing	6
Equipment Under Test	6
General Product Information	7
FCC Part 15 Subpart E	13
15.407(h)(2) DFS Detection Threshold	15
15.407(h)(2) UNII Detection Bandwidth	20
15.407(h)(2)(i)(A) Channel Availability Check Time	29
15.407(h)(2)(i)(B) Channel Move Time, Channel Closing Time	35
15.407(h)(2)(iv) Non-Occupancy Period	35
5.1 Table 2 – Statistical Performance Check	39
Channel Loading	48
Appendix A: Test Equipment Setup Block Diagram	53
Appendix B: Detection Threshold Diagram	54
Appendix C Test Setup Photos	55
Appendix D: Waveform Type 5 and Type 6	57
Appendix E: Radar Waveform Requirement	59
Appendix F: Measurement Uncertainty	64

ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR:

PCTEL, Inc.
471 Brighton Drive
Bloomington IL, 60108

Representative: Stephen Saliga – PCTEL Inc.
Erin Littel - F Squared Labs
Customer Reference Number: 5090R1

DATE OF EQUIPMENT RECEIPT:**DATE(S) OF TESTING:****REPORT PREPARED BY:**

Terri Rayle
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338


Project Number: 104484

January 13, 2021

January 13-16, 2021

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.

A handwritten signature in black ink, reading "Steve Behm", is written over a horizontal line.

Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
CKC Laboratories, Inc.
110 Olinda Place
Brea, CA 92823

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.19

Site Registration & Accreditation Information

Location	*NIST CB #	FCC	Canada	Japan
Canyon Park, Bothell, WA	US0103	US1024	3082C	A-0136
Brea, CA	US0103	US1024	3082D	A-0136
Fremont, CA	US0103	US1024	3082B	A-0136
Mariposa, CA	US0103	US1024	3082A	A-0136

*CKC's list of NIST designated countries can be found at: <https://standards.gov/cabs/designations.html>

SUMMARY OF RESULTS

Standard: FCC Part 15 Subpart E - 15.407(h)(2) (UNII) 5.25-5.35 GHz and 5.47-5.725 GHz bands

Requirement	Test Procedure Clause	Description	Mods	Results
15.407(h)(2)	7.5	DFS Detection Threshold (master & client with DFS)	NA	Pass
15.407(h)(2)	7.8.1	UNII Detection Bandwidth (master & client with DFS)	NA	Pass
15.407(h)(2)(i)(A) 15.407(h)(2)(ii)	7.8.2.1 7.8.2.2 7.8.2.3	Channel Availability Check Time. (master & client with DFS)	NA	Pass
15.407(h)(2)(i)(B) 15.407(h)(2)(iii)	7.8.3	Channel Move Time, Channel Closing Time (master, client with DFS, client)	NA	Pass
15.407(h)(2)(iv)	7.8.3	Non-Occupancy Period (master & client with DFS)	NA	Pass
5.1 Table 2*	7.8.4	Statistical Performance Check (master & client with DFS)	NA	Pass
7.7*	7.7	Channel Loading (master and client with radar detection)	NA	Pass

NA = Not Applicable

* KDB requirement.

ISO/IEC 17025 Decision Rule

The declaration of pass or fail herein is based upon assessment to the specification(s) listed above, including where applicable, assessment of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions
No modifications were made during testing.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions
The EUT, an Access Point device operating as a DFS Master is placed on the test bench. Antenna 1, Antenna 2 ports are connected to several power dividers to enable communication with a Client, received injected Radar signal from a signal generator and provide timing feedback to a spectrum analyzer for evaluation of DFS parameter.
See Appendix A and B for Test Setup Block Diagrams

Test Procedure

The DFS testing presented in this report is perform in accordance with the following test procedure to meet the requirement

905462 D02 UNII DFS Compliance Procedures New Rules v02. April 8, 2016.

Each clause of the test procedure is identified in specific section of this report.

EQUIPMENT UNDER TEST (EUT)

During testing numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration 1

Equipment Tested:

Device	Manufacturer	Model #	S/N
Rugged 802.11ac WiFi Access Point	PCTEL, Inc.	AP-WIFI-1200-US	S4

Support Equipment:

Device	Manufacturer	Model #	S/N
POE	Phihong	POE29U-1A(PL)	NA
Laptop	Dell	E6430s	3ZQ24X1
Laptop	Lenovo	R61	L3—B7192
Laptop	Lenovo	E530	AN03319
Dual Speed Hub	Netgear	DS309	DS39A0800012
USB WiFi Adaptor	Netgear	AC1200	NA

General Product Information:

Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Operational Mode(s):	☒ Master
FCCID of Master Used for Testing:	Note the EUT is a Master FCCID: NYPWIFIAP1200
Network Type:	☒ Access Point
System Architecture:	802.11a, 802.11VHT20, 802.11 VHT40, 802.11 VHT80 *Non-H20T protocol is intended for beacon and NOT for data transfer.
Operating Frequency Range(s):	☒ 5150-5250 MHz ☒ 5250-5350 MHz ☒ 5470-5725 MHz ☒ 5725-5850 MHz
Modulation Type(s):	OFDM , BPSK,QPSK, 16QAM, 64QAM, 256QAM
Channel bandwidth(s):	☒ 20 MHz ☒ 40 MHz ☒ 80 MHz
Measured 99% BW:	5470-5725 MHz 802.11a :16.2 MHz 802.11VHT20 :17.4 MHz 802.11VHT40 :36.4 MHz 802.11VHT80 :75.2 MHz
Maximum Duty Cycle:	98%
Highest Power (EIRP, dBm/Watt):	29.8dBm
Lowest Power (EIRP, dBm/Watt):	21.7dBm
Number of TX/RX Chains:	2
Antenna Type(s) and Gain:	Omnidirectional Max: 7 dBi Min: 7 dBi
Antenna cable loss	0
Beamforming Capable:	Yes
Antenna Connection Type:	External Connector
Antenna Impedance (ohm):	50
Nominal Input Voltage:	POE 48V DC, 120/60Hz.
Boot up time from power cycle:	53 Seconds
Transmit Power Control (TPC):	Yes
Manufacturer Statement:	The manufacturer has confirmed that information regarding the parameters of the detected Radar Waveforms is not available to the end user.
Firmware / Software used for Test:	Linux version 4.4.60 (pctel@ubuntu) (gcc version 5.2.0 (OpenWrt GCC 5.2.0 361f3ad+r49254))


EUT and Support Equipment Photo(s)




EUT Top Side




EUT Bottom Side

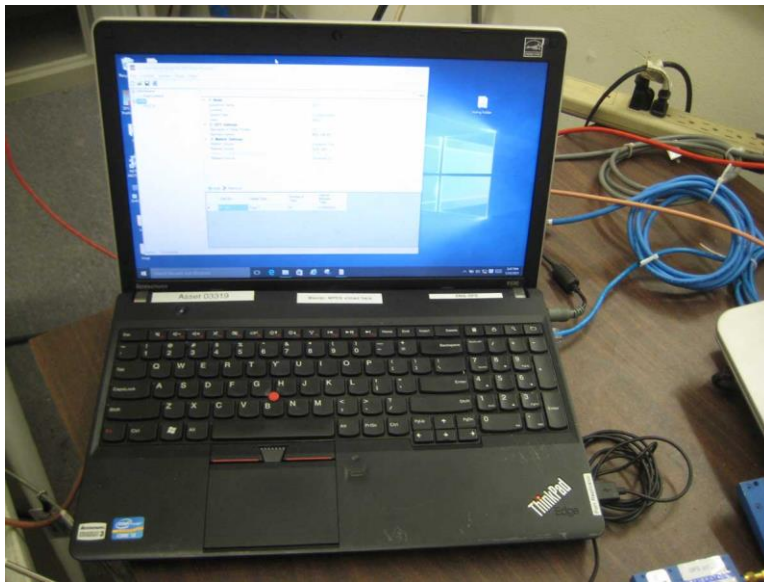

Laptop #1

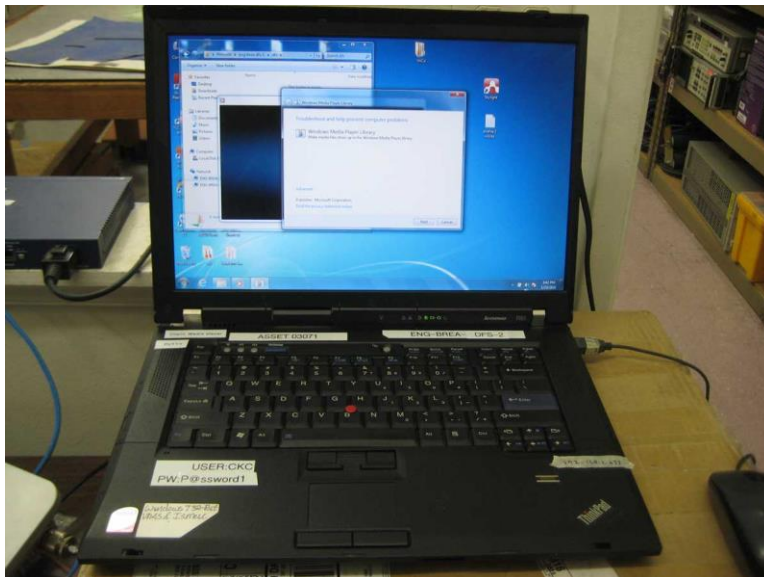


Laptop #2

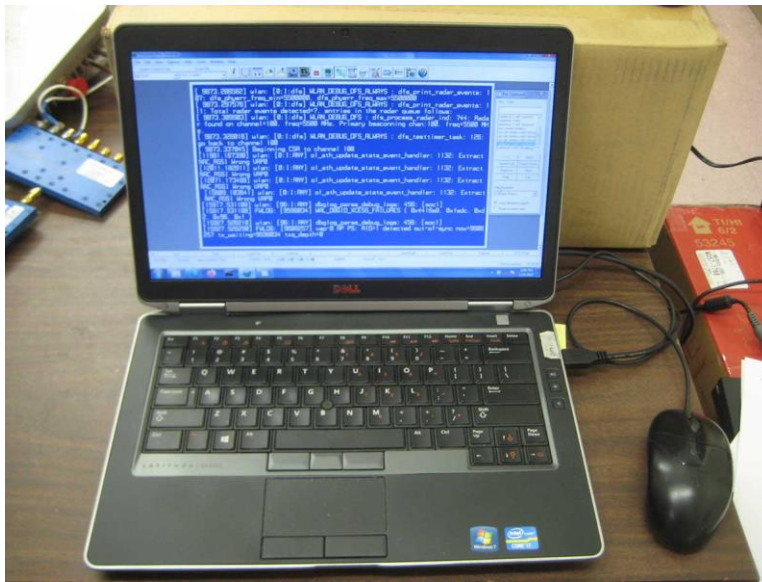

Laptop #3



USB WiFi Adapter

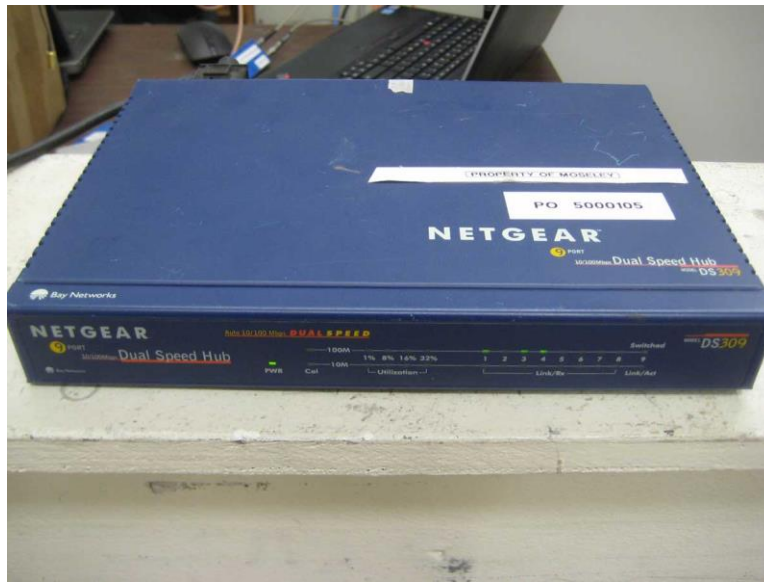

Dual Speed Hub



POE

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
02869	Spectrum Analyzer	Agilent	E4440A	8/3/2020	8/3/2021
03470	Spectrum Analyzer	Agilent	E4440A	5/2/2019	5/2/2021
07657	cable	Astrolab, Inc.	32022-29094K-29094K-24TC	7/30/2020	7/30/2022
03592	Vector Signal Generator	Keysight	N5182B	1/18/2020	1/18/2022
P07134	Attenuator	Weinschel	3M10	NCR	NCR
P07135	Attenuator	Weinschel	3M10	NCR	NCR
P07181	Attenuator	Weinschel	3M30	NCR	NCR
P07182	Attenuator	Weinschel	3M30	NCR	NCR
P06794	Splitter/Combiner	Anaren	41130	5/14/2019	5/14/2021
P07137	Power Divider	Anaren	41130	7/3/2019	7/3/2021
P07209	Power Divider	Anaren	40297	4/23/2019	4/23/2021
P07655	Cable	Astrolab, Inc.	32022-29094K-29094K-24TC	7/30/2020	7/30/2022
P07660	Cable	Astrolab, Inc.	32022-29094K-29094K-24TC	7/30/2020	7/30/2022

NCR = No Calibration Required

Environmental Conditions			
Temperature (°C)	21	Relative Humidity (%):	24

Unless otherwise noted, all test performed under the listed environmental condition.

Waveform information.
The waveforms used are commercially available pre-defined DFS waveform per Agilent N7607B Signal Studio for DFS radar profile. The waveforms meeting the following requirement.
USA : FCC15.407, FCC-13-22

FCC Part 15 Subpart E

Requirements

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<i>Non-Occupancy Period</i>	Yes	Not required	Yes
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Availability Check Time</i>	Yes	Not required	Not required
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required
<i>Channel Closing Transmission Time</i>	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

**Table 3: DFS Detection Thresholds for Master Devices
and Client Devices with Radar Detection**

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

Table 4: DFS Response Requirement Values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U- NII 99% transmission power bandwidth. See Note 3.
Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	


15.407(h)(2) DFS Detection Threshold

Test Setup/Conditions			
Test Location:	Brea Lab Bench	Test Engineer:	E. Wong
Test Method:	7.5	Test Date(s):	1/13/2021
Configuration:	1		
Test Setup:	Conducted DFS detection threshold is adjusted with test method as illustrated in test setup diagram. A spectrum analyzer with Peak detector activated, set at zero span and RBW and VBW >3 MHz was used for measurement of DFS detection threshold. Each Radar waveform is loaded into the Vector Signal Generator and triggered. The RF output level of the Signal generator with each waveform is adjust test until the measured signal level at measuring point to be injected to the antenna port of the master device reaches the required equivalent DFS detection threshold. All other ports of test system are terminated to 50-ohm load. The signal output level of the vector signal generator is recorded and used for regeneration of test level. Waveform 13-22		


Calibration Data Summary								
Antenna Port: 1 and 2								
Frequency (MHz)	Waveform Type	Detection Threshold See note1 (dBm)	Min antenna Gain (dBi)	Max cable Loss (dB)	Additional level See note2 (dB)	Required Equivalent Threshold (dBm)	Measured Level (dBm)	Sig Gen Level (dBm)
5500	0	-64	7	0	1	-56	-56.60	-17.5
5500	1	-64	7	0	1	-56	-56.80	-17.5
5500	2	-64	7	0	1	-56	-56.10	-17.5
5500	3	-64	7	0	1	-56	-56.04	-17.5
5500	4	-64	7	0	1	-56	-56.03	-17.5
5500	5	-64	7	0	1	-56	-56.20	-17.5
5500	6	-64	7	0	1	-56	-56.80	-12.5

DFS Detection Thresholds	
Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	


Plot(s)

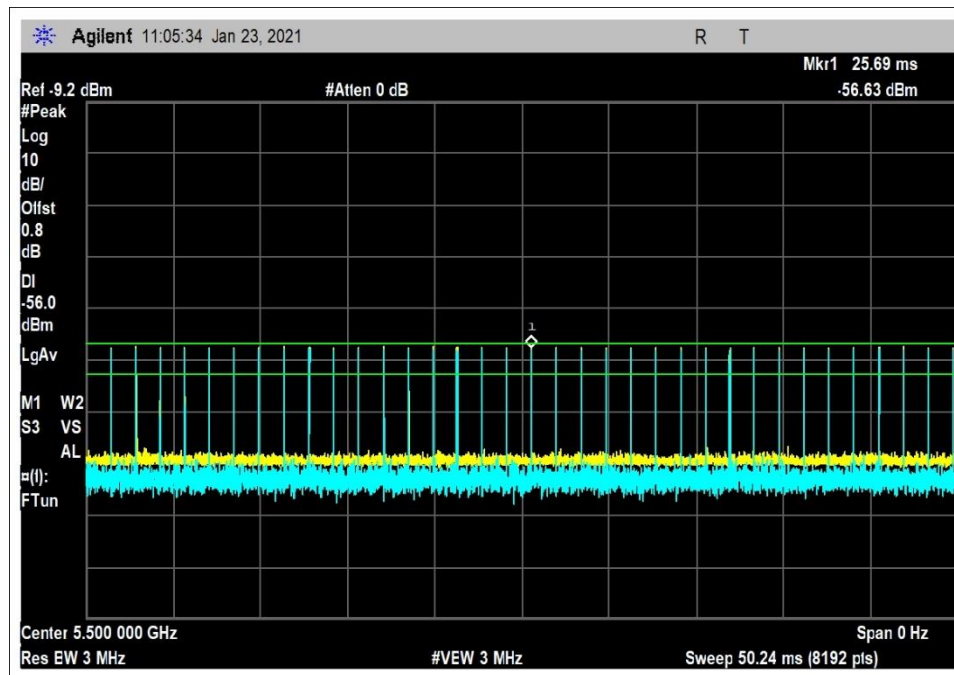


Type 0: Short Pulse Radar Type

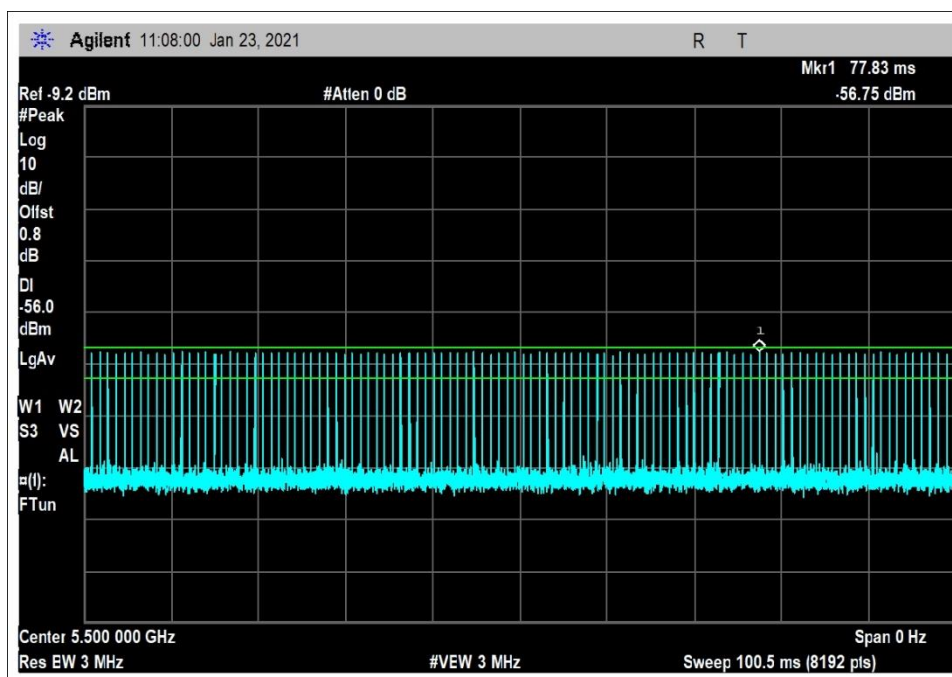


Type 1: Short Pulse Radar Type

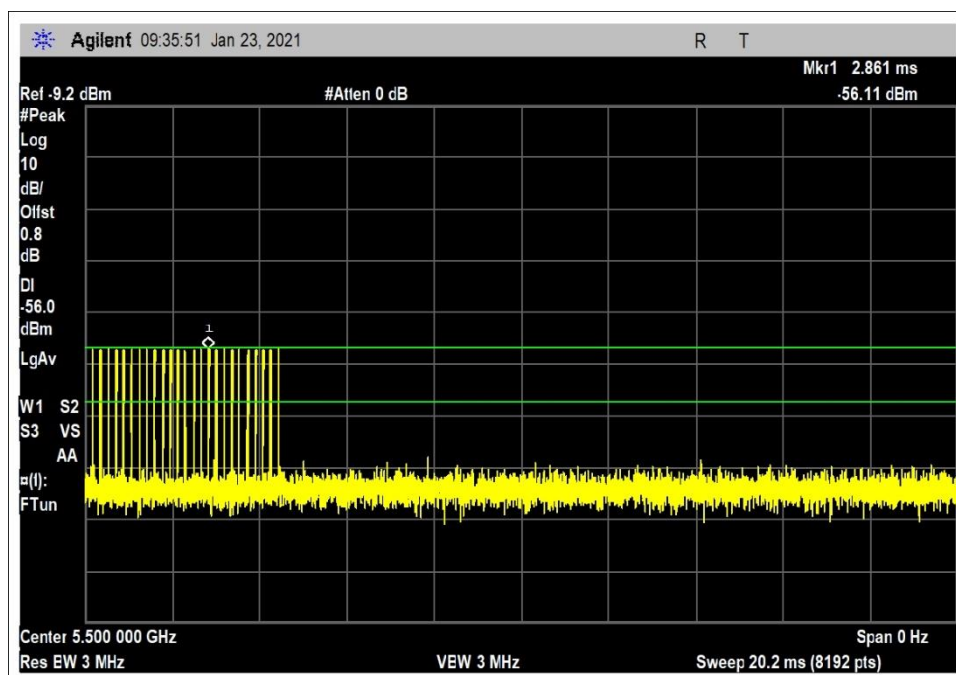


Type 2: Short Pulse Radar Types

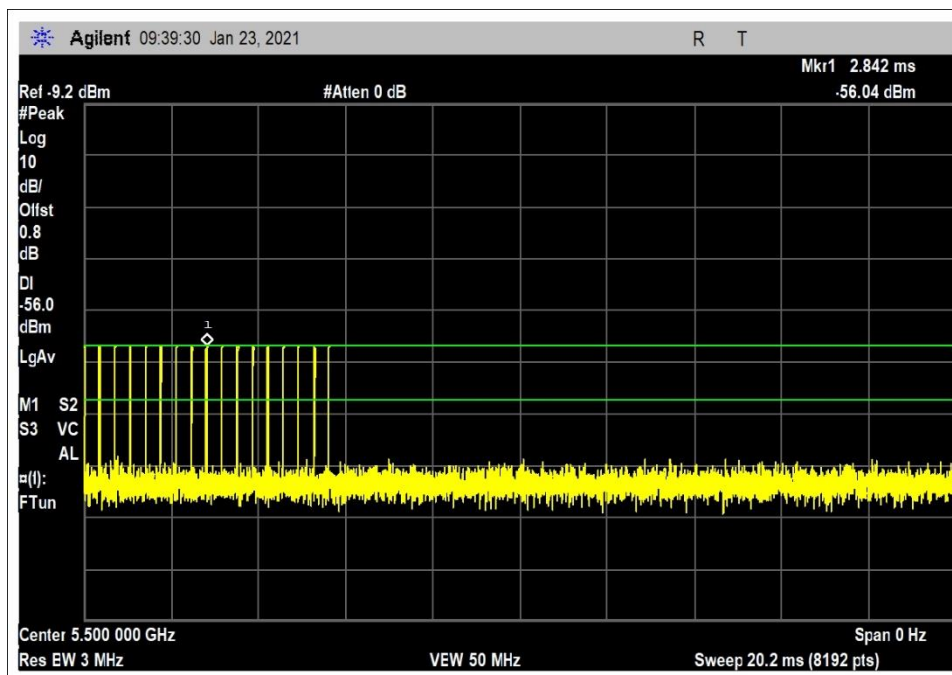


Type 3: Short Pulse Radar Type.

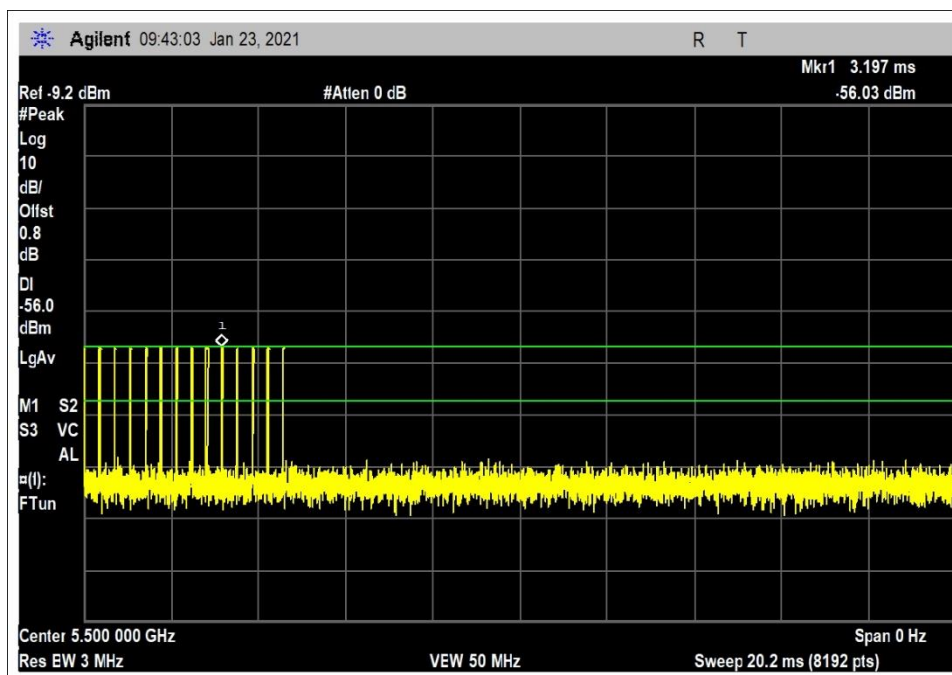

Type 4: Short Pulse Radar Types

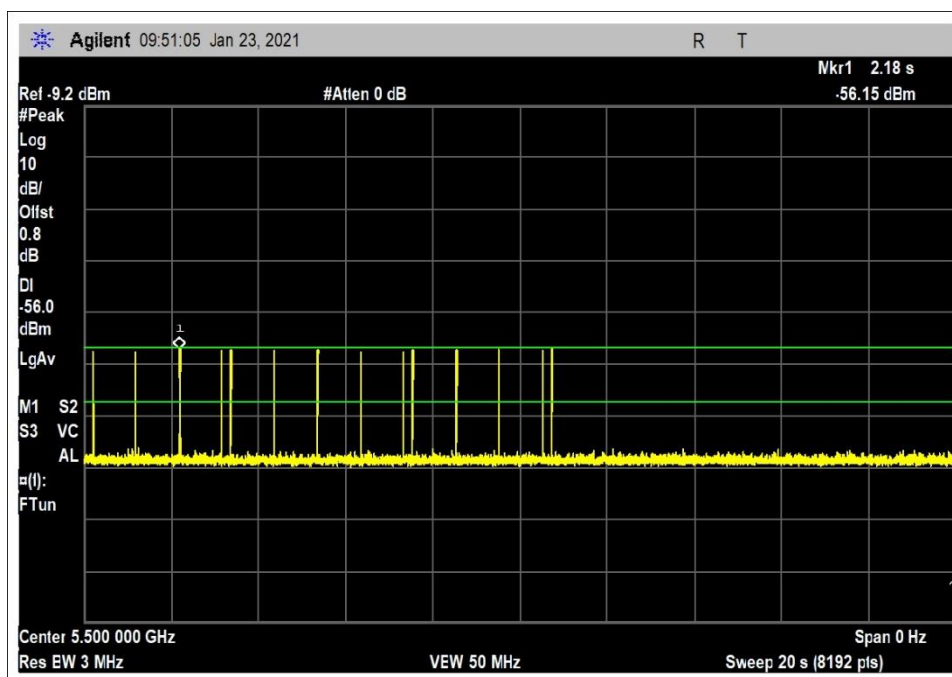

Type 5: Long Pulse Radar Type, plot of a single burst (1-3 pulses) on the Channel frequency should be provided.

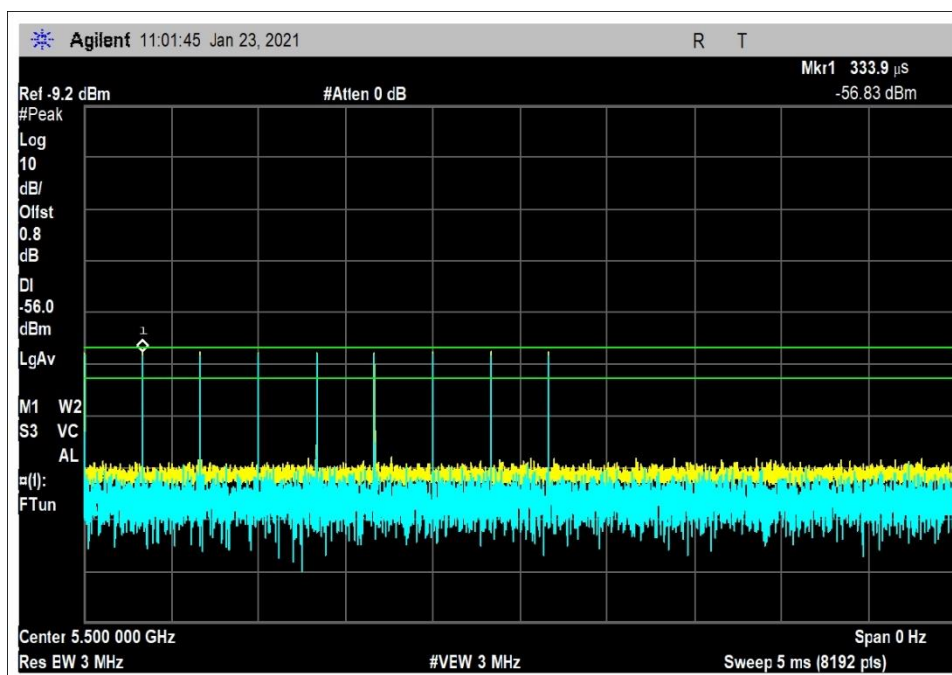


Type 6: Frequency Hopping waveform, a plot showing 9 pulses on one frequency within the UNII Detection Bandwidth should be provided.

15.407(h)(2) UNII Detection Bandwidth


Test Setup/Conditions			
Test Location:	Brea Lab Bench	Test Engineer:	E. Wong
Test Method:	7.8.1	Test Date(s):	1/14/2021
Configuration:	1		
Test Setup:	Conducted UNII detection was measured as illustrated in setup diagram. The EUT is set up as a standalone device (no associated Client or Master, as appropriate) and no traffic. Frame based systems is set to a talk/listen ratio reflecting the worst case (maximum) that is user configurable during this test as applicable. UNII detection bandwidth of each protocol was evaluated. Response of the EUT is monitored by Laptop #3 which is connected to the Master via Comm port. The response of the EUT to radar detection is monitored Terminal emulator program PuTTY installed. Test performed for all available BW modes.		

Test Data Summary							
Radar Waveform Type: 0							
Fl (MHz)	Fh (MHz)	Protocol	Detection BW (MHz)	99% BW (MHz)	Ratio BW (%)	Limit (%)	Results
5490	5510	802.11a	20	16.2	123.5	>100	Pass
5490	5510	802.11VHT20	20	17.4	114.9	>100	Pass
5490	5530	802.11VHT40	40	36.4	109.9	>100	Pass
5490	5570	802.11VHT80	80	75.2	106.4	>100	Pass


Plot(s)

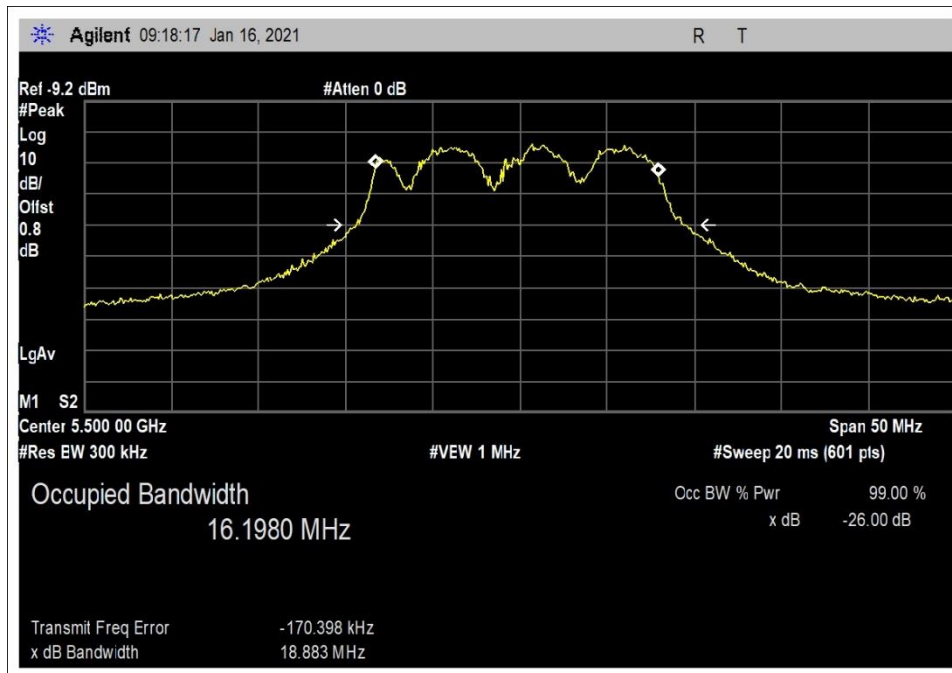


99% BW 802.11A

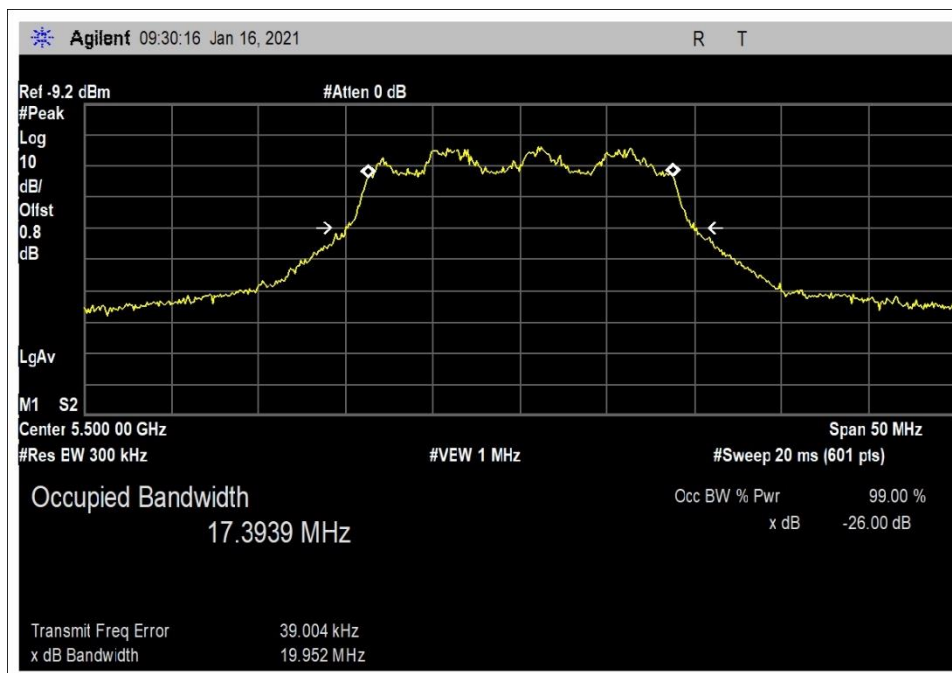

99%BW 802.11VHT20

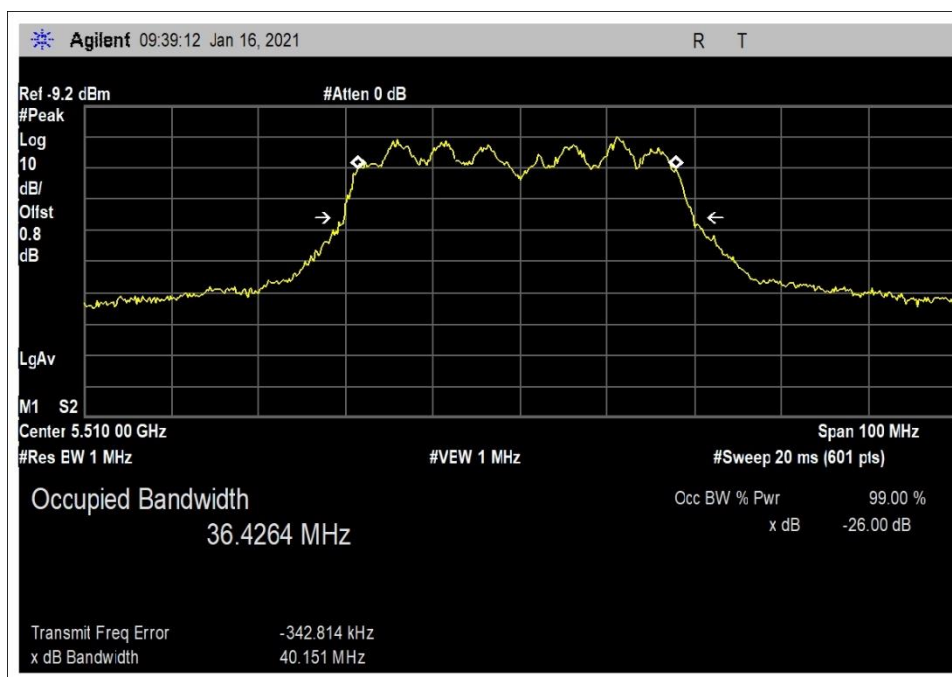

99%BW 802.11VHT40

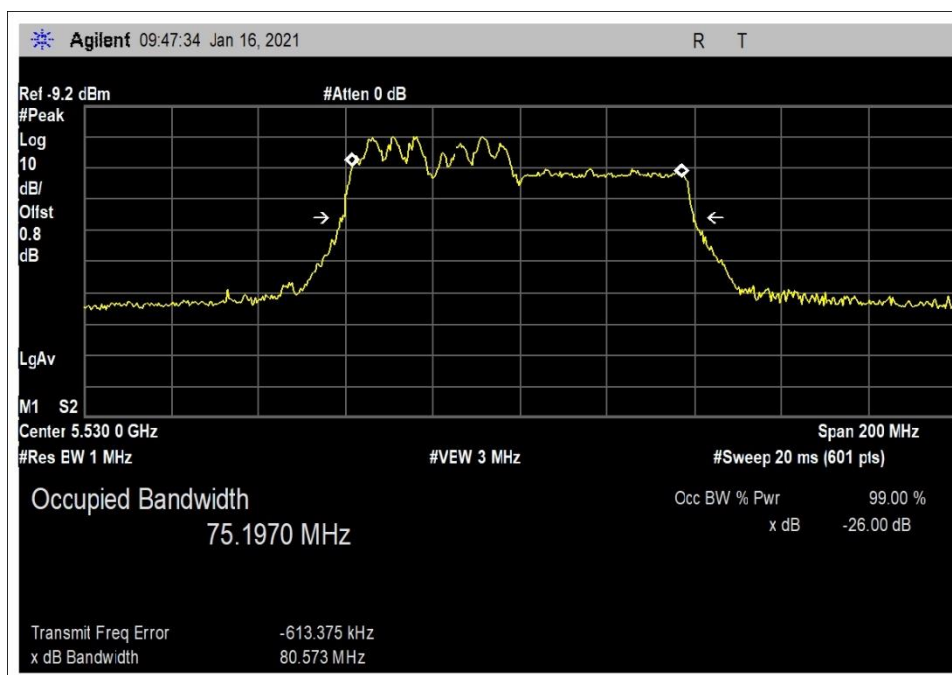

99%BW 802.11VHT80

Test Results

Result: 802.11a			
Fl	(90% success rate)	5490	MHz
Fh	(90% success rate)	5510	MHz
Measured 99% Bandwidth	=	16.2	MHz
Detection Bandwidth (Fh - Fl)		20	MHz
(Detection BW / 99% BW) %		123.5	%
Requirement:	% of detection BW > 100%	Pass	

Result: 802.11 HT20			
Fl	(90% success rate)	5490	MHz
Fh	(90% success rate)	5510	MHz
Measured 99% Bandwidth	=	17.4	MHz
Detection Bandwidth (Fh - Fl)		20	MHz
(Detection BW / 99% BW) %		114.9	%
Requirement:	% of detection BW > 100%	Pass	

Result: 802.11 HT40			
Fl	(90% success rate)	5490	MHz
Fh	(90% success rate)	5530	MHz
Measured 99% Bandwidth	=	36.4	MHz
Detection Bandwidth (Fh - Fl)		40	MHz
(Detection BW / 99% BW) %		109.9	%
Requirement:	% of detection BW > 100%	Pass	

Result: 802.11 HT80			
Fl	(90% success rate)	5490	MHz
Fh	(90% success rate)	5570	MHz
Measured 99% Bandwidth	=	75.2	MHz
Detection Bandwidth (Fh - Fl)		80	MHz
(Detection BW / 99% BW) %		106.4	%
Requirement:	% of detection BW > 100%	Pass	

Protocol : 802.11 a											
EUT Operating Freq(MHz)=	5500										
Radar Waveform Type =	1										
DFS Detection Trial (1 = detection , 0= no detection)											Detection rate
Radar Freq (MHz)	1	2	3	4	5	6	7	8	9	10	%
5470											0
5485	0	0	0	0	0	0	0	0	0	0	0
5486	0	0	0	0	0	0	0	0	0	0	0
5487	0	0	0	0	0	0	0	0	0	0	0
5488	0	0	0	0	0	0	0	0	0	0	0
5489	0	0	0	0	0	0	0	0	0	0	0
5490	1	1	1	1	1	1	1	1	1	1	100
5491											0
5492											0
5493											0
5494											0
5495	1	1	1	1	1	1	1	1	1	1	100
5496											0
5497											0
5498											0
5499											0
5500	1	1	1	1	1	1	1	1	1	1	100
5501											0
5502											0
5503											0
5504											0
5505	1	1	1	1	1	1	1	1	1	1	100
5506											0
5507											0
5508											0
5509											0
5510	1	1	1	1	1	1	1	1	1	1	100
5511	0	0	0	0	0	0	0	0	0	0	0
5512	0	0	0	0	0	0	0	0	0	0	0
5513	0	0	0	0	0	0	0	0	0	0	0
5514	0	0	0	0	0	0	0	0	0	0	0
5515	0	0	0	0	0	0	0	0	0	0	0
5550											0

Protocol : 802.11 HT20											
EUT Operating Freq(MHz)=	5500										
Radar Waveform Type =	1										
	DFS Detection Trial (1 = detection , 0= no detection)										Detection rate
Radar Freq (MHz)	1	2	3	4	5	6	7	8	9	10	%
5450											0
5485	0	0	0	0	0	0	0	0	0	0	0
5486	0	0	0	0	0	0	0	0	0	0	0
5487	0	0	0	0	0	0	0	0	0	0	0
5488	0	0	0	0	0	0	0	0	0	0	0
5489	0	0	0	0	0	0	0	0	0	0	0
5490	1	1	1	1	1	1	1	1	1	1	100
5491											0
5492											0
5493											0
5494											0
5495	1	1	1	1	1	1	1	1	1	1	100
5496											0
5497											0
5498											0
5499											0
5500	1	1	1	1	1	1	1	1	1	1	100
5501											0
5502											0
5503											0
5504											0
5505	1	1	1	1	1	1	1	1	1	1	100
5506											0
5507											0
5508											0
5509											0
5510	1	1	1	1	1	1	1	1	1	1	100
5511	0	0	0	0	0	0	0	0	0	0	0
5512	0	0	0	0	0	0	0	0	0	0	0
5513	0	0	0	0	0	0	0	0	0	0	0
5514	0	0	0	0	0	0	0	0	0	0	0
5515	0	0	0	0	0	0	0	0	0	0	0
5550											0

Protocol : 802.11 HT40											
EUT Operating Freq(MHz)=	5510										
Radar Waveform Type =	1										
	DFS Detection Trial (1 = detection , 0= no detection)										Detection rate
Radar Freq (MHz)	1	2	3	4	5	6	7	8	9	10	%
5460											0
5485	0	0	0	0	0	0	0	0	0	0	0
5486	0	0	0	0	0	0	0	0	0	0	0
5487	0	0	0	0	0	0	0	0	0	0	0
5488	0	0	0	0	0	0	0	0	0	0	0
5489	0	0	0	0	0	0	0	0	0	0	0
5490	1	1	1	1	1	1	1	1	1	1	100
5491											0
5492											0
5493											0
5494											0
5495	1	1	1	1	1	1	1	1	1	1	100
5496											0
5497											0
5498											0
5499											0
5500	1	1	1	1	1	1	1	1	1	1	100
5501											0
5502											0
5503											0
5504											0
5505	1	1	1	1	1	1	1	1	1	1	100
5506											0
5507											0
5508											0
5509											0
5510	1	1	1	1	1	1	1	1	1	1	100
5511											0
5512											0
5513											0
5514											0
5515	1	1	1	1	1	1	1	1	1	1	100
5516											0
5517											0
5518											0
5519											0
5520	1	1	1	1	1	1	1	1	1	1	100
5521											0
5522											0
5523											0
5524											0
5525	1	1	1	1	1	1	1	1	1	1	100
5526											0
5527											0
5528											0
5529											0
5530	1	1	1	1	1	1	1	1	1	1	100
5531	0	0	0	0	0	0	0	0	0	0	0
5532	0	0	0	0	0	0	0	0	0	0	0
5533	0	0	0	0	0	0	0	0	0	0	0
5534	0	0	0	0	0	0	0	0	0	0	0
5535	0	0	0	0	0	0	0	0	0	0	0
5560											0

Protocol : 802.11 HT8											
EUT Operating Freq(MHz)=	5530										
Radar Waveform Type =	1										
	DFS Detection Trial (1 = detection , 0= no detection)										Detection rate
Radar Freq (MHz)	1	2	3	4	5	6	7	8	9	10	%
5480											0
5485	0	0	0	0	0	0	0	0	0	0	0
5486	0	0	0	0	0	0	0	0	0	0	0
5487	0	0	0	0	0	0	0	0	0	0	0
5488	0	0	0	0	0	0	0	0	0	0	0
5489	0	0	0	0	0	0	0	0	0	0	0
5490	1	1	1	1	1	1	1	1	1	1	100
5491											0
5492											0
5493											0
5494											0
5495	1	1	1	1	1	1	1	1	1	1	100
5496											0
5497											0
5498											0
5499											0
5500	1	1	1	1	1	1	1	1	1	1	100
5501											0
5502											0
5503											0
5504											0
5505	1	1	1	1	1	1	1	1	1	1	100
5506											0
5507											0
5508											0
5509											0
5510	1	1	1	1	1	1	1	1	1	1	100
5511											0
5512											0
5513											0
5514											0
5515	1	1	1	1	1	1	1	1	1	1	100
5516											0
5517											0
5518											0
5519											0
5520	1	1	1	1	1	1	1	1	1	1	100
5521											0
5522											0
5523											0
5524											0
5525	1	1	1	1	1	1	1	1	1	1	100
5526											0
5527											0
5528											0
5529											0
5530	1	1	1	1	1	1	1	1	1	1	100
5531											0
5532											0
5533											0
5534											0
5535	1	1	1	1	1	1	1	1	1	1	100

5536											0
5537											0
5538											0
5539											0
5540	1	1	1	1	1	1	1	1	1	1	100
5541											0
5542											0
5543											0
5544											0
5545	1	1	1	1	1	1	1	1	1	1	100
5546											0
5547											0
5548											0
5549											0
5550	1	1	1	1	1	1	1	1	1	1	100
5551											0
5552											0
5553											0
5554											0
5555	1	1	1	1	1	1	1	1	1	1	100
5556											0
5557											0
5558											0
5559											0
5560	1	1	1	1	1	1	1	1	1	1	100
5561											0
5562											0
5563											0
5564											0
5565	1	1	1	1	1	1	1	1	1	1	100
5566											0
5567											0
5568											0
5569											0
5570	1	1	1	1	1	1	1	1	1	1	100
5571	0	0	0	0	0	0	0	0	0	0	0
5572	0	0	0	0	0	0	0	0	0	0	0
5573	0	0	0	0	0	0	0	0	0	0	0
5574	0	0	0	0	0	0	0	0	0	0	0
5575	0	0	0	0	0	0	0	0	0	0	0
5580											0

15.407(h)(2)(i)(A) Channel Availability Check Time

Nominal Noise Floor - Master/ Client with Radar Detection


Applies to Channel availability check, Initial radar bursts, in-service monitoring and 30-minute non-occupancy period tests.

Test Setup/Conditions			
Test Location:	Brea Lab A	Test Engineer:	E. Wong
Test Method:	7.8.2.1, 7.8.2.2, 7.8.2.3	Test Date(s):	1/16/2021
Configuration:	1		
Test Setup:	Conducted Nominal Noise floor measurement of the system was measured with test method as illustrated in test setup diagram. A spectrum analyzer with Peak detector activated and RBW and VBW >3 MHz was used for measurement of DFS detection threshold. The span is set to the bandwidth of the signal protocol to be used for Channel availability measurement IAW plot requirement of clause 8.3, d) 3) the Master and Client are not transmitting, the Radar signal is turned off.		

Test Data Summary		
Frequency (MHz)	Channel bandwidth (MHz)	Nominal Noise Floor (dBm)
5500	20	-76.8

* No limit, however, must be below the Radar signal

Plot(s)

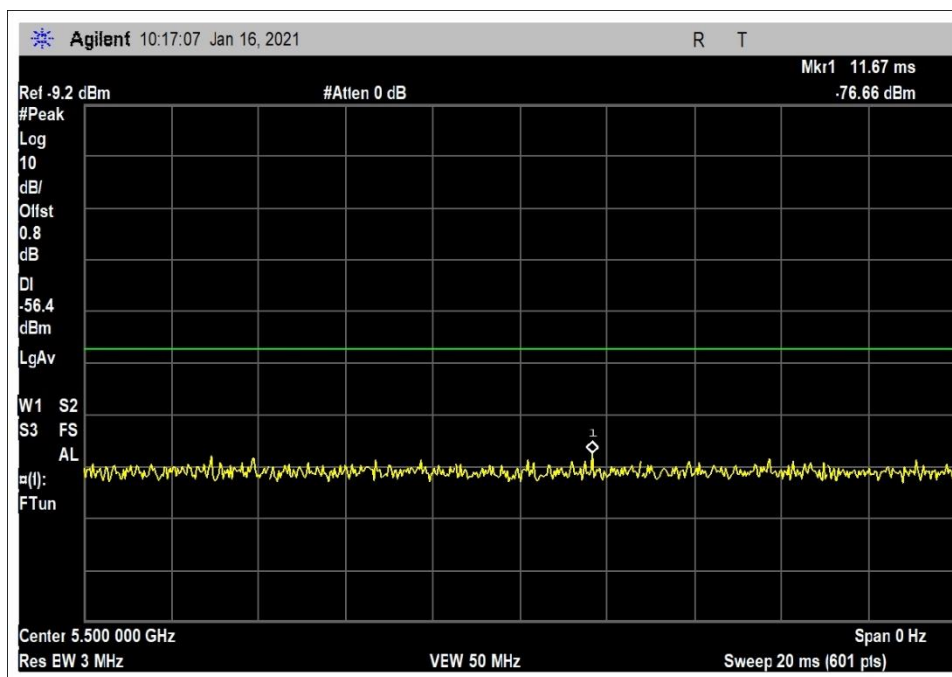


Initial Channel Availability Check Time -- Master

Test Setup/Conditions			
Test Location:	Brea Lab Bench	Test Engineer:	E. Wong
Test Method:	7.8.2.1	Test Date(s):	1/16/2021
Configuration:	1		
Test Setup:	Conducted Initial Channel Availability Check time was measured as illustrated in test setup diagram. A spectrum analyzer with Peak detector activated, set at zero span and RBW and VBW >3 MHz. Initial Channel Availability time was evaluated with Widest bandwidth mode. The spectrum analyzer is tuned to Channel occupied by the radar with minimum sweep time of 2.5minute. Test performed using one representative BW mode.		

Test Data Summary				
Frequency (MHz)	Protocol	CAC Time (sec)	Limit (sec)	Results
5500	802.11VHT20	60.2	> 60	Pass

Note: Manufacturers firmware reported 62sec

Plot(s)

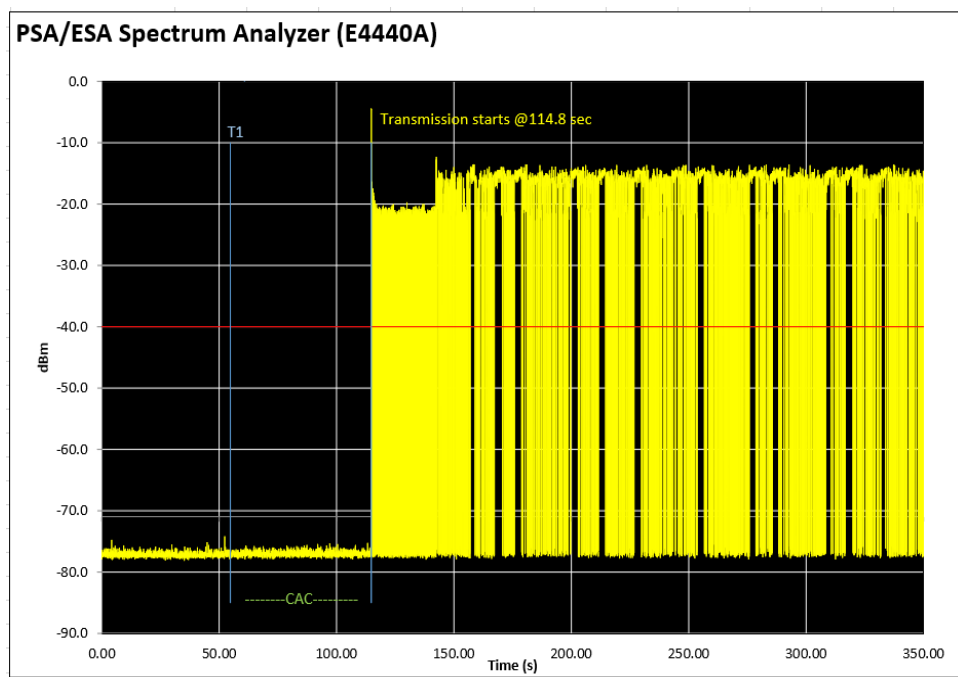

Radar Burst Near Channel Availability Check Time -- Master

Test Setup/Conditions			
Test Location:	Brea Lab A	Test Engineer:	E. Wong
Test Method:	7.8.2.2, 7.8.2.3	Test Date(s):	1/16/2021
Configuration:	1		
Test Setup:	Conducted Initial Channel Availability Check time was measured as illustrated in test setup diagram. A spectrum analyzer with Peak detector activated, set at zero span and RBW and VBW >3 MHz. Radar Burst at the Beginning of the Channel Availability Check Time was evaluated with the Widest bandwidth mode. The spectrum analyzer is tuned to Channel occupied by the radar with minimum sweep time of 2.5minute. Observation of EUT emission continues 2.5 minutes /150sec after radar burst has been generated. For test at Start of CAC, Radar burst Triggered within 6 second window starting at T1 For test at End of CAC, Radar burst triggered within 6 second window starting at T1 +54 seconds. Test performed using one representative BW mode.		

Timing Summary					
Test	Reboot time (s)	Start of Traffic (s)	Radar Timing T1 (s)	Radar Timing (Rel to Reboot 0 – 6 sec T1+54 sec)	Radar Timing (Rel to CAC)
No Radar Triggered	56.5	114			
Radar Near Start of CAC	56.5		54	54- 60	57.8
Radar Near End of CAC	56.5		54	108-114	109.5


Test Data Summary					
Frequency (MHz)	Protocol / Modulation	Waveform Type	Timing	Limit	Results
5500	802.11HT20	0	Start	No transmission within 2.5 minute /150 sec after radar burst.	Pass
5500	802.11HT20	0	End		Pass

Fail: Transmission detected by the spectrum analyzer within observation period and the Master device indicates Radar was detected


Pass: No Transmission detected by the spectrum analyzer within observation period, nor the Master device indicates Radar was detected.

Plot(s)

Initial Channel Availability Check time

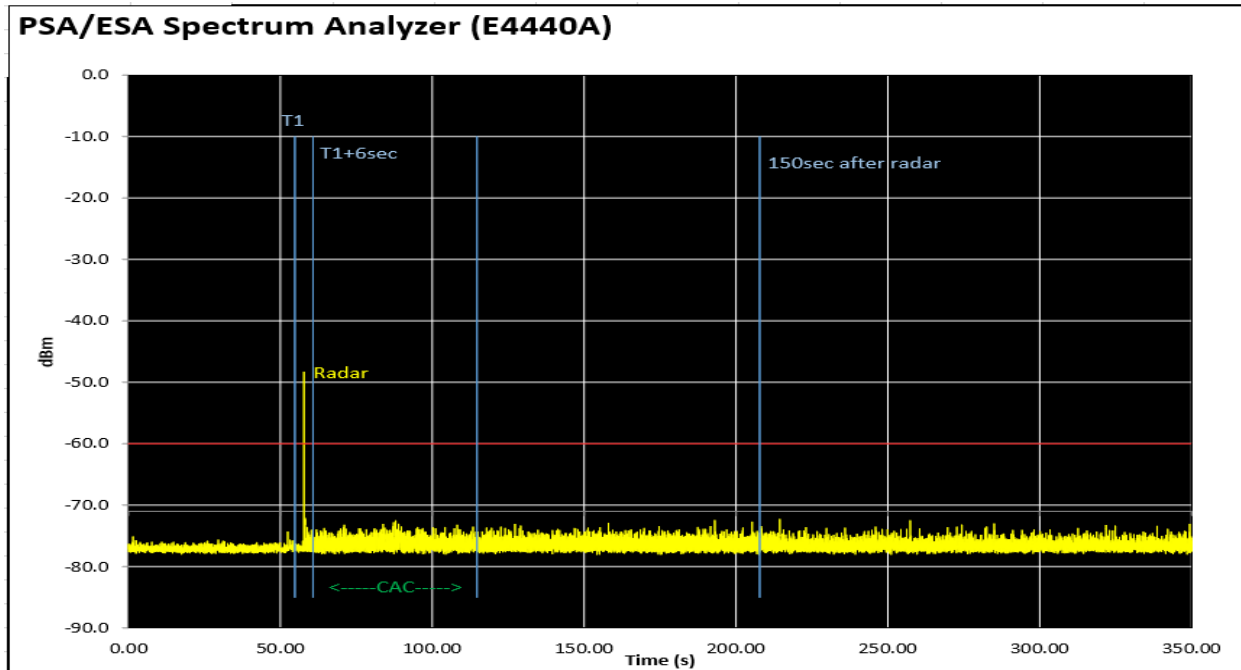

Radar Burst at the beginning of the Channel Availability Check time

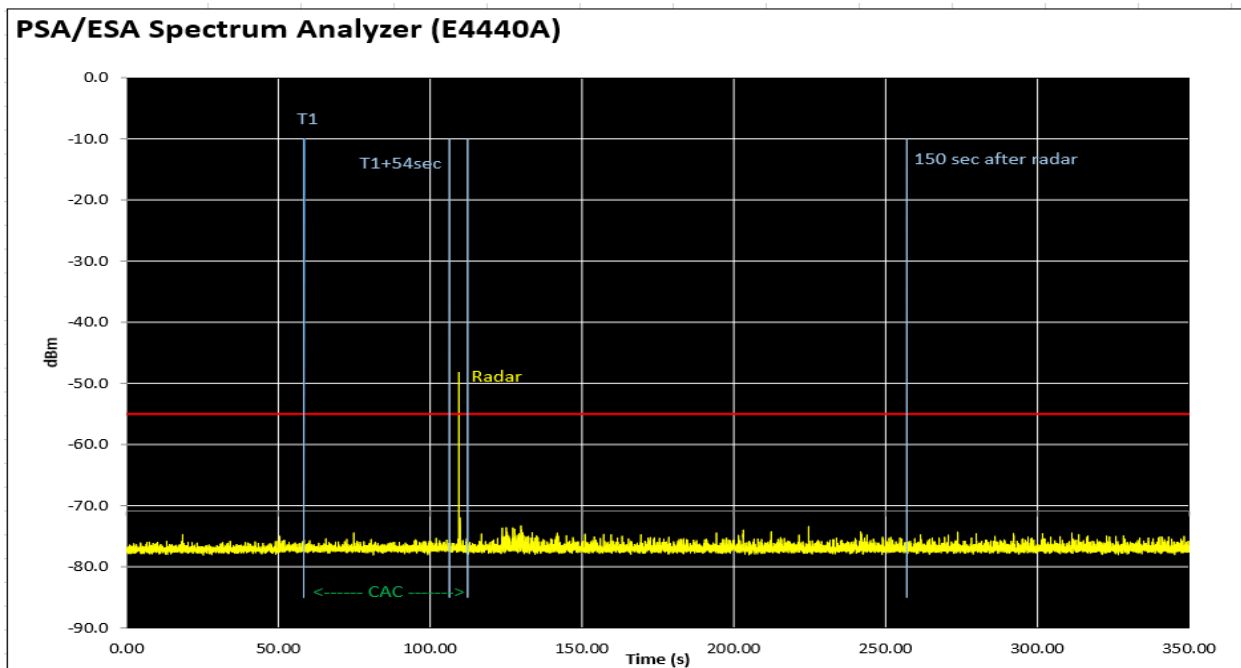

Radar Burst at the end of the Channel Availability Check time

15.407(h)(2)(i)(B) Channel Move Time, Channel Closing Time 15.407(h)(2)(iv) Non-Occupancy Period

Channel Move / Closing Time and Non-Occupancy Period

Master/ Client with Radar Detection/ Client without Radar Detection

Test Setup/Conditions			
Test Location:	Brea Lab A	Test Engineer:	E. Wong
Test Method:	7.8.3	Test Date(s):	1/16/2021
Configuration:	1		
Test Setup:	Conducted In-Service Monitoring was evaluated as illustrated in test setup diagram. The Test frequency contains control signals. A spectrum analyzer with Peak detector activated, set at zero span and RBW and VBW >3 MHz. In-Service monitoring was evaluated with the Widest bandwidth mode. Radar burst at required test level was triggered and the time to vacate the channel and remained unoccupied was evaluated. Plot and Spectrum analyzer trace data was captured with maximum available BIN, the trace data is imported to Analysis application to detect channel move time and channel closing time. Time above Threshold (T1 to T1+200ms) and (T1+200ms to Ts+10s) meet required maximum timing requirements. Test performed with widest BW mode available. (see table a2) 802.11HT80, radar inject and monitored at 5500MHz, the service channel of 802,11HT80 is at 5500MHz. Start of radar pulse T0 = 499.4ms End of radar pulse T1=523.8ms For Channel move and Channel closing time Sweep at 11sec, there was no transmission detected after 1 second, second acquisition performed at 2 second sweep time. Time analyses perform with 2 sec sweep. For Non-Occupancy time, a second spectrum analyzer was connected to the power splitter at the EUT antenna port, tuned to the channel under investigation with 1 second sweep time and set in max hold. Transmission trace way verified prior to testing.		

Test Data Summary						
Frequency (MHz)	Protocol	Waveform Type	Channel Test	Measured Time	Limit	Results
5500	802.11VHT80	0	Move ¹	3.7 ms	<10 s	Pass
5500	802.11VHT80	0	T1 - Closing ^{1,2}	1.5ms	<200ms	Pass
5500	802.11VHT80	0	CS - Closing ^{1,2}	2.2ms	<60 ms/10s	Pass
5500	802.11VHT20	0	Non-Occupancy ³	NA	>30 s	

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.


Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: This test is required for Master and Client with Radar Detection.


Fail: Transmission detected within 30 minutes after Radar burst.

Pass: No transmission within 30 minutes after Radar burst.


Plot(s)

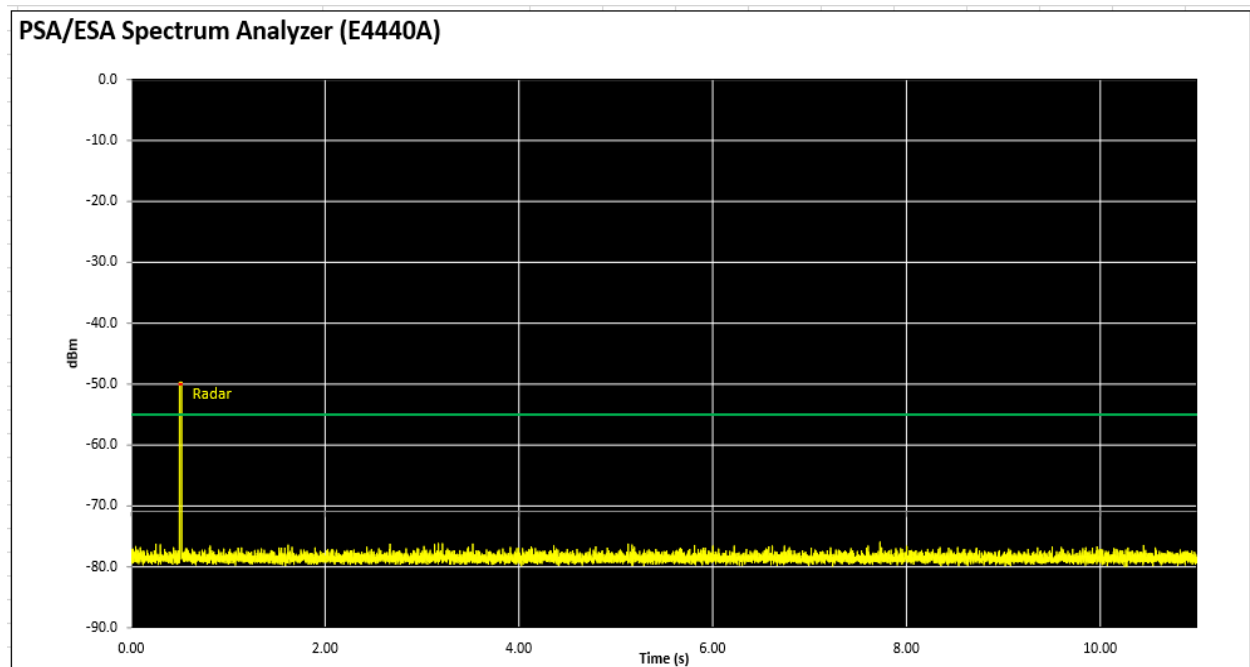

Radar pulse at 500ms, 10 sec sweep

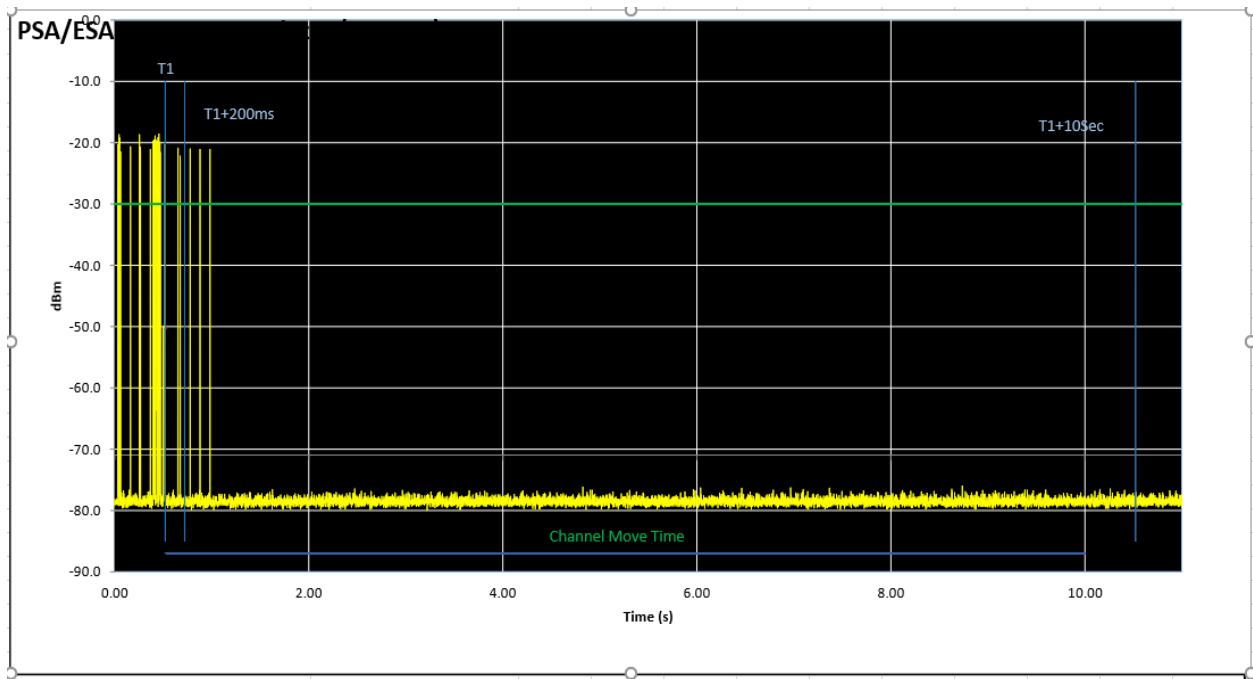


Transmission with radar pulse at 500ms, 10 sec sweep

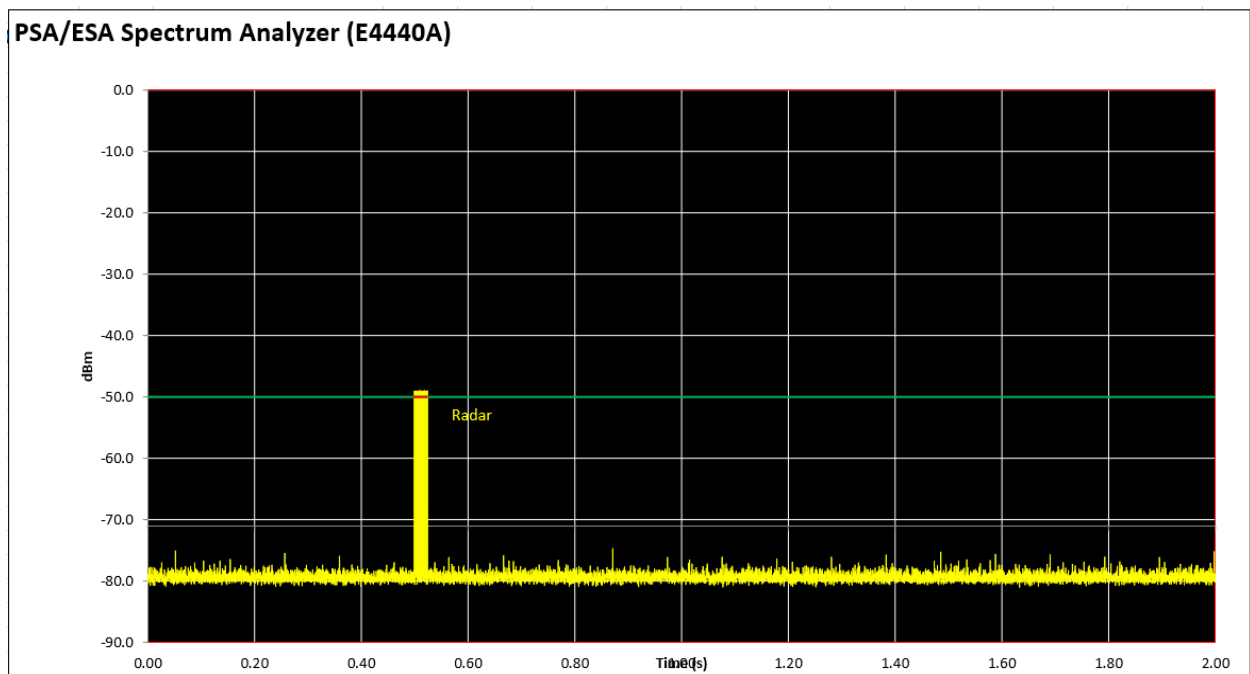

Radar pulse at 500ms, 2 sec sweep


PSA/ESA Spectrum Analyzer (E4440A)

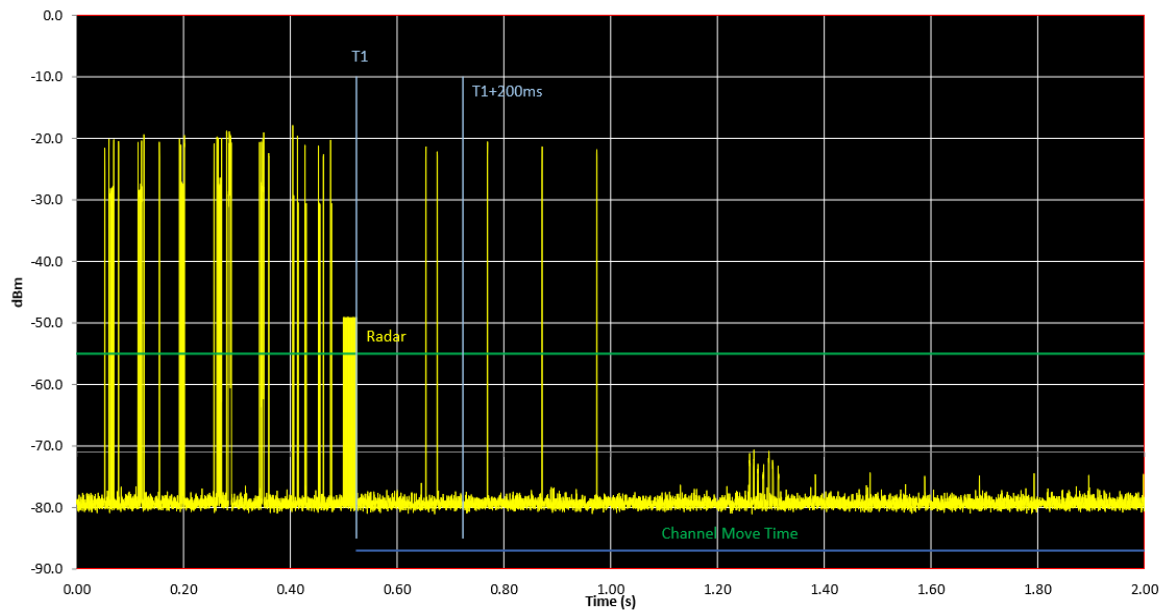

Transmission with radar pulse at 500ms 2 sec sweep

BIN T1+200ms	6
Time T1+200ms ms	1.5
BIN after T1+200ms to 10sec	9
Aggregate time (T1+200ms, to 10 sec) ms	2.2

PSA/ESA Spectrum Analyzer (E4440A)

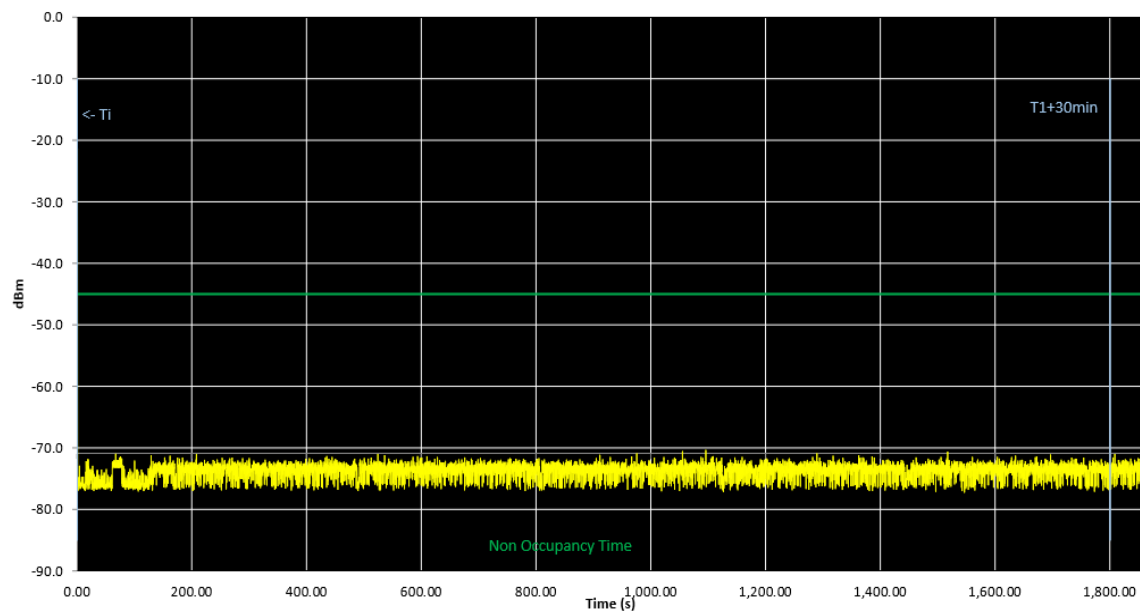

Non-Occupancy time

5.1 Table 2 – Statistical Performance Check

Test Setup/Conditions			
Test Location:	Brea Lab Bench	Test Engineer:	E. Wong
Test Method:	7.8.4	Test Date(s):	1/15/2021
Configuration:	1		
Test Setup:	Conducted Statistical Performance Check was evaluated as illustrated in test setup diagram. Initial check: Radar burst at required test level was triggered. Transmissions of the EUT was observed at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Radar Type 0 to ensure detection occurs. Transmissions of the EUT was observed at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs. Statistical Performance of each protocol was evaluated with Radar burst triggered at required test level. Frequencies selected for statistical performance check include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices, it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency. Video file of various channel loading meeting channel loading of at least 17 % were used		

Test Data Summary

802.11a				
		Detection	Limit	Pass/Fail
Waveform	Number of trial	%	%	
Short Pulse				
Waveform 1	30	90.0	60	Pass
Waveform 2	30	80.0	60	Pass
Waveform 3	30	93.3	60	Pass
Waveform 4	30	86.7	60	Pass
Aggregate	120	87.5	80	Pass
Long Pulse				
Waveform 5	30	83.3	80	Pass
Waveform 6	30	100.0	70	Pass

802.11VHT20				
		Detection	Limit	Pass/Fail
Waveform	Number of trial	%	%	
Short Pulse				
Waveform 1	30	80.0	60	Pass
Waveform 2	30	80.0	60	Pass
Waveform 3	30	80.0	60	Pass
Waveform 4	30	86.7	60	Pass
Aggregate	120	81.7	80	Pass
Long Pulse				
Waveform 5	30	86.7	80	Pass
Waveform 6	30	100.0	70	Pass

		802.11VHT40		
		Detection	Limit	Pass/Fail
Waveform	Number of trial	%	%	
Short Pulse				
Waveform 1	30	96.7	60	Pass
Waveform 2	30	83.3	60	Pass
Waveform 3	30	73.3	60	Pass
Waveform 4	30	83.3	60	Pass
Aggregate	120	84.2	80	Pass
Long Pulse				
Waveform 5	30	93.3	80	Pass
Waveform 6	30	100.0	70	Pass

802.11VHT80				
		Detection	Limit	Pass/Fail
Waveform	Number of trial	%	%	
Short Pulse				
Waveform 1	30	96.7	60	Pass
Waveform 2	30	90.0	60	Pass
Waveform 3	30	90.0	60	Pass
Waveform 4	30	76.7	60	Pass
Aggregate	120	88.3	80	Pass
Long Pulse				
Waveform 5	30	96.7	80	Pass
Waveform 6	30	100.0	70	Pass

Test Data

Waveform Type 1				5500MHz	5500MHz	5510MHz	5530MHz
				5Mbps	10Mbps	10Mbps	10Mbps
				802.11a	802.11VHT20	802.11VHT40	802.11 VHT80
Trial	Pulse/burst	Pulse width	PRI	Detection	Detection	Detection	Detection
		us	(us)	1=Yes,0=No	1=Yes,0=No	1=Yes,0=No	1=Yes,0=No
0	57	1	938	1	0	1	1
1	76	1	698	1	1	1	1
2	86	1	618	1	1	1	1
3	99	1	538	1	1	1	1
4	61	1	878	1	0	1	1
5	18	1	3066	1	1	1	1
6	83	1	638	0	1	1	1
7	58	1	918	1	1	1	1
8	63	1	838	1	0	1	1
9	62	1	858	1	0	1	1
10	67	1	798	1	1	1	1
11	74	1	718	0	0	0	0
12	92	1	578	1	1	1	1
13	89	1	598	1	1	1	1
14	95	1	558	1	1	1	1
15	21	1	2536	1	1	1	1
16	55	1	966	1	1	1	1
17	64	1	827	1	1	1	1
18	22	1	2501	1	1	1	1
19	21	1	2595	1	1	1	1
20	48	1	1114	1	1	1	1
21	41	1	1302	1	0	1	1
22	18	1	3045	1	1	1	1
23	33	1	1624	1	1	1	1
24	19	1	2878	1	1	1	1
25	52	1	1027	1	1	1	1
26	22	1	2485	1	1	1	1
27	33	1	1600	0	1	1	1
28	46	1	1172	1	1	1	1
29	45	1	1177	1	1	1	1
Statistic Performance (%)				90.0	80.0	96.7	96.7

Waveform Type 2				5Mbps	5Mbps	10Mbps	10Mbps
				5500MHz	5500MHz	5510MHz	5530MHz
				802.11a	802.11VHT20	802.11VHT40	802.11VHT80
Trial	Pulse/burst	Pulse width	PRI	Detection	Detection	Detection	Detection
		us	(us)	1=Yes,0=No	1=Yes,0=No	1=Yes,0=No	1=Yes,0=No
0	26	3.2	179	1	1	1	0
1	23	1.1	207	1	0	0	1
2	24	2.1	230	1	0	1	1
3	29	4.8	200	1	1	0	1
4	28	3.9	214	1	1	1	1
5	26	2.9	222	1	1	1	1
6	26	3.2	204	0	0	1	1
7	25	2.5	192	1	1	1	1
8	26	3.1	164	1	1	1	1
9	23	1.2	156	1	1	1	1
10	27	3.9	210	1	1	1	1
11	29	4.6	201	1	1	1	1
12	26	3.2	162	1	0	1	1
13	25	2.2	197	0	1	1	1
14	29	4.5	163	1	1	1	1
15	26	3	203	0	0	0	1
16	29	5	168	1	1	1	1
17	25	2.4	217	0	1	1	0
18	26	2.9	191	1	0	1	1
19	25	2.3	166	1	1	1	1
20	27	3.7	150	1	1	1	1
21	25	2.2	176	1	1	1	1
22	29	4.9	195	1	1	1	1
23	26	2.9	202	1	1	1	1
24	25	2.5	178	1	1	1	1
25	23	1.1	206	1	1	1	0
26	27	3.8	155	0	1	0	1
27	29	4.7	157	1	1	1	1
28	25	2.4	224	1	1	1	1
29	28	4.2	159	0	1	1	1
Statistic Performance (%)				80.0	80.0	83.3	90.0


Waveform Type 3				5Mbps	10Mbps	10Mbps	10Mbps
				5500MHz	5500MHz	5510MHz	5530MHz
				802.11a	802.11VHT20	802.11VHT40	802.11VHT80
Trial	Pulse/burst	Pulse width	PRI	Detection	Detection	Detection	Detection
		us	(us)	1=Yes,0=No	1=Yes,0=No	1=Yes,0=No	1=Yes,0=No
0	17	8.2	355	1	1	1	0
1	16	6.1	487	1	0	1	1
2	16	7.1	344	1	1	1	1
3	18	9.8	288	1	1	0	1
4	18	8.9	230	1	0	0	1
5	17	7.9	432	0	1	0	1
6	17	8.2	207	1	0	1	1
7	17	7.5	443	1	1	0	1
8	17	8.1	439	1	1	1	1
9	16	6.2	223	1	0	1	1
10	18	8.9	208	1	1	1	1
11	18	9.6	463	1	1	1	1
12	17	8.2	441	0	1	1	1
13	16	7.2	323	1	1	1	1
14	18	9.5	297	1	1	0	1
15	17	8	412	1	1	1	0
16	18	10	324	1	1	1	1
17	17	7.4	271	1	0	1	1
18	17	7.9	349	1	1	1	1
19	16	7.3	409	1	0	1	1
20	18	8.7	373	1	1	1	1
21	16	7.2	254	1	1	1	1
22	18	9.9	274	1	1	1	1
23	17	7.9	278	1	1	1	1
24	17	7.5	317	1	1	0	1
25	16	6.1	260	1	1	0	1
26	18	8.8	211	1	1	1	1
27	18	9.7	272	1	1	0	1
28	17	7.4	264	1	1	1	0
29	18	9.2	284	1	1	1	1
Statistic Performance (%)				93.3	80.0	73.3	90.0

Waveform Type 4				5Mbps	5Mbps	10Mbps	10Mbps
				5500MHz	5500MHz	5510MHz	5530MHz
				802.11a	802.11VHT20	802.11VHT40	802.11 VHT80
Trial	Pulse/burst	Pulse width	PRI	Detection	Detection	Detection	Detection
		us	(us)	1=Yes,0=No	1=Yes,0=No	1=Yes,0=No	1=Yes,0=No
0	14	16	355	1	1	1	0
1	12	11.3	487	1	1	1	1
2	13	13.5	344	0	1	1	1
3	16	19.4	288	1	1	1	0
4	15	17.5	230	0	1	1	1
5	14	15.3	432	1	1	0	0
6	14	15.9	207	1	1	0	1
7	13	14.3	443	1	1	1	1
8	14	15.8	439	1	1	1	1
9	12	11.5	223	1	1	1	1
10	15	17.4	208	0	0	0	1
11	16	19	463	1	0	1	1
12	14	16	441	1	1	1	0
13	13	13.8	323	1	0	1	0
14	16	18.9	297	1	1	1	1
15	14	15.5	412	1	1	1	1
16	16	19.9	324	1	1	1	0
17	13	14.1	271	1	1	1	1
18	14	15.2	349	1	1	1	1
19	13	13.8	409	1	1	1	1
20	15	17.1	373	1	1	1	1
21	13	13.8	254	0	1	0	1
22	16	19.8	274	1	1	1	1
23	14	15.3	278	1	0	1	0
24	13	14.5	317	1	1	0	1
25	12	11.3	260	1	1	1	1
26	15	17.3	211	1	1	1	1
27	16	19.2	272	1	1	1	1
28	13	14.2	264	1	1	1	1
29	15	18.2	284	1	1	1	1
Statistic Performance (%)				86.7	86.7	83.3	76.7


Waveform 5		5Mbps	10Mbps	10Mbps	10Mbps
		5500MHz	5500MHz	5510MHz	5530MHz
		802.11a	802.11VHT20	802.11VHT40	802.11 VHT80
Trial	See appendix for Waveform detail	Detection	Detection	Detection	Detection
		1=Yes,0=No	1=Yes,0=No	1=Yes,0=No	1=Yes,0=No
0	FCC Waveform 5 Test 0	1	1	1	1
1	FCC Waveform 5 Test 1	1	0	1	1
2	FCC Waveform 5 Test 2	0	1	1	1
3	FCC Waveform 5 Test 3	1	1	1	1
4	FCC Waveform 5 Test 4	1	1	1	1
5	FCC Waveform 5 Test 5	1	1	1	1
6	FCC Waveform 5 Test 6	1	1	1	1
7	FCC Waveform 5 Test 7	1	1	1	1
8	FCC Waveform 5 Test 8	1	1	1	1
9	FCC Waveform 5 Test 9	0	1	0	1
10	FCC Waveform 5 Test 10	1	1	1	1
11	FCC Waveform 5 Test 11	1	1	1	1
12	FCC Waveform 5 Test 12	1	1	1	1
13	FCC Waveform 5 Test 13	1	1	1	0
14	FCC Waveform 5 Test 14	1	1	0	1
15	FCC Waveform 5 Test 15	1	1	1	1
16	FCC Waveform 5 Test 16	1	1	1	1
17	FCC Waveform 5 Test 17	0	1	1	1
18	FCC Waveform 5 Test 18	1	1	1	1
19	FCC Waveform 5 Test 19	0	1	1	1
20	FCC Waveform 5 Test 20	1	0	1	1
21	FCC Waveform 5 Test 21	1	0	1	1
22	FCC Waveform 5 Test 22	1	1	1	1
23	FCC Waveform 5 Test 23	1	1	1	1
24	FCC Waveform 5 Test 24	1	1	1	1
25	FCC Waveform 5 Test 25	0	1	1	1
26	FCC Waveform 5 Test 26	1	1	1	1
27	FCC Waveform 5 Test 27	1	1	1	1
28	FCC Waveform 5 Test 28	1	1	1	1
29	FCC Waveform 5 Test 29	1	0	1	1
Statistic Performance (%)		83.3	86.7	93.3	96.7

Waveform Type 6		5Mbps	10Mbps	10Mbps	8Mbps
		5500MHz	5500MHz	5510MHz	5530MHz
		802.11a	802.11VHT20	802.11VHT40	802.11VHT80
Trial	See appendix for Waveform detail	Detection	Detection	Detection	Detection
		1=Yes,0=No	1=Yes,0=No	1=Yes,0=No	1=Yes,0=No
0	FCC Waveform 6 Test 0	1	1	1	1
1	FCC Waveform 6 Test 1	1	1	1	1
2	FCC Waveform 6 Test 2	1	1	1	1
3	FCC Waveform 6 Test 3	1	1	1	1
4	FCC Waveform 6 Test 4	1	1	1	1
5	FCC Waveform 6 Test 5	1	1	1	1
6	FCC Waveform 6 Test 6	1	1	1	1
7	FCC Waveform 6 Test 7	1	1	1	1
8	FCC Waveform 6 Test 8	1	1	1	1
9	FCC Waveform 6 Test 9	1	1	1	1
10	FCC Waveform 6 Test 10	1	1	1	1
11	FCC Waveform 6 Test 11	1	1	1	1
12	FCC Waveform 6 Test 12	1	1	1	1
13	FCC Waveform 6 Test 13	1	1	1	1
14	FCC Waveform 6 Test 14	1	1	1	1
15	FCC Waveform 6 Test 15	1	1	1	1
16	FCC Waveform 6 Test 16	1	1	1	1
17	FCC Waveform 6 Test 17	1	1	1	1
18	FCC Waveform 6 Test 18	1	1	1	1
19	FCC Waveform 6 Test 19	1	1	1	1
20	FCC Waveform 6 Test 20	1	1	1	1
21	FCC Waveform 6 Test 21	1	1	1	1
22	FCC Waveform 6 Test 22	1	1	1	1
23	FCC Waveform 6 Test 23	1	1	1	1
24	FCC Waveform 6 Test 24	1	1	1	1
25	FCC Waveform 6 Test 25	1	1	1	1
26	FCC Waveform 6 Test 26	1	1	1	1
27	FCC Waveform 6 Test 27	1	1	1	1
28	FCC Waveform 6 Test 28	1	1	1	1
29	FCC Waveform 6 Test 29	1	1	1	1
Statistic Performance (%)		100.0	100.0	100.0	100.0

Plot(s)

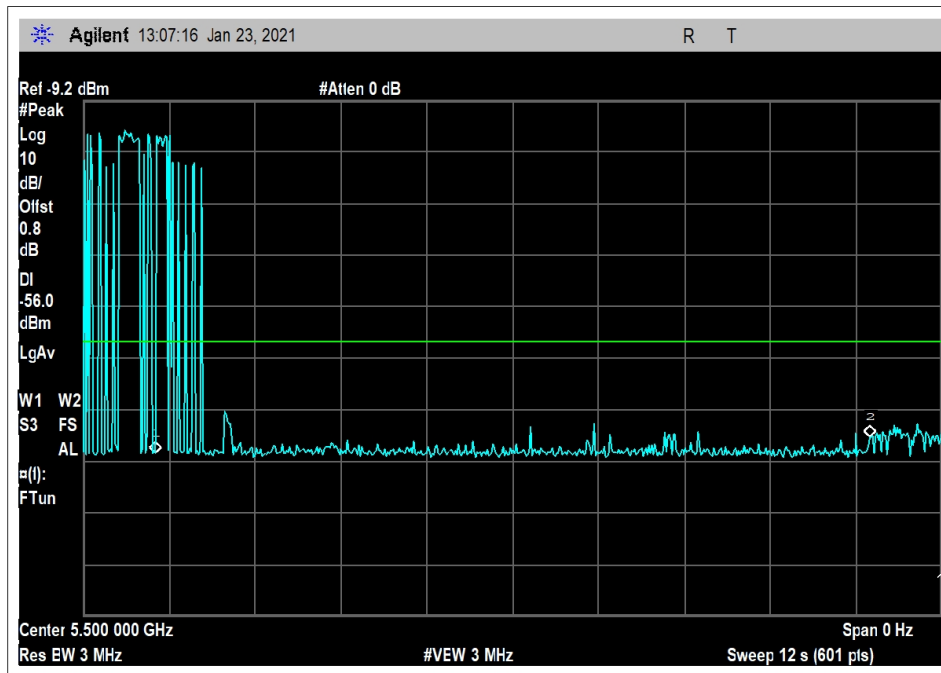

10 second plot Radar Type 0 response

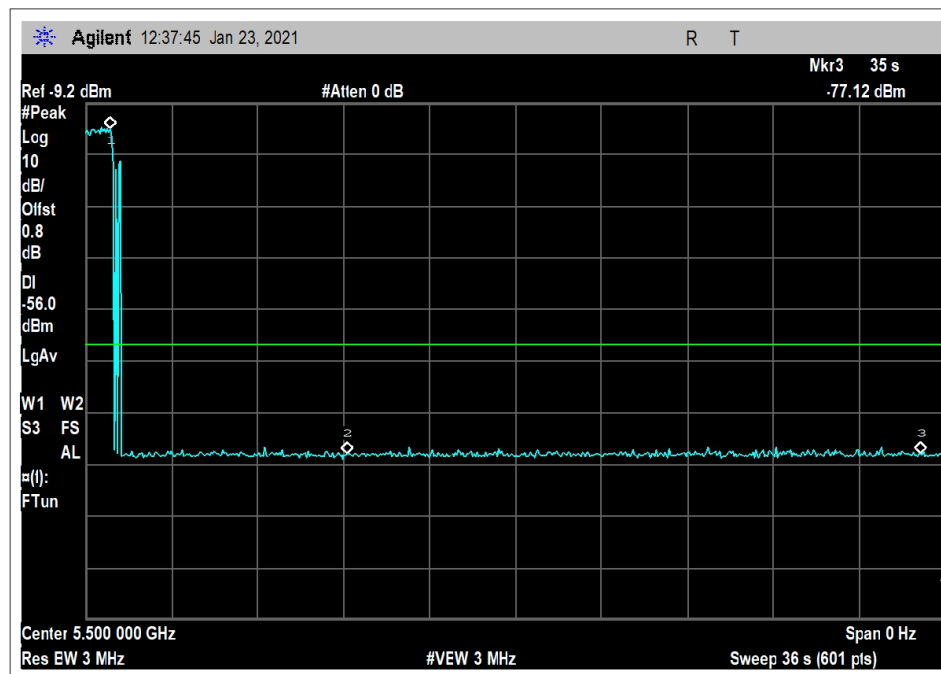


22 second plot Radar Type 5 response

Channel Loading


Test Setup/Conditions			
Test Location:	Brea Lab Bench	Test Engineer:	E. Wong
Test Method:	7.7	Test Date(s):	1/14/2021
Configuration:	1		
Test Setup:	Conducted Channel loading was measured as illustrated in test setup diagram. A spectrum analyzer with Peak detector activated, set at zero span and RBW and VBW >3 MHz. Channel loading of each protocol is evaluated. Data transfer: MPEG file is loaded on Laptop1 which is connected to the Ethernet port of the Master device. Laptop 2 is connected to the client device via Ethernet port. Communication established between the master and client, Window Media Player with V2.61 Codec package installed in Laptop2 (client device) plays the MPEG file stored in laptop1 (Master device) via steaming mode. Filename: DFS Video 5 Mbps, 8 Mbps, 10Mbps, Trace captured and analyzed with excel spread sheet. Channel loading is measured by Time On/ (Time On + Time Off), equivalently (BIN above Threshold/ total BIN)		

Test Data Summary				
Frequency (MHz)	Protocol	Loading (%)	Limit (%)	Results
5500	802.11a, 5Mbps	25.6	> 17	Pass
5500	802.11a, 10Mbps	48.5	> 17	Pass
5500	802.11VHT20, 5Mbps	19.4	> 17	Pass
5500	802.11VHT20, 10Mbps	28.0	> 17	Pass
5510	802.11VHT40, 10Mbps	28.0	> 17	Pass
5530	802.11VHT80, 8Mbps	17.8	> 17	Pass
5530	802.11VHT80, 10Mbps	20.3	> 17	Pass


Plot(s)

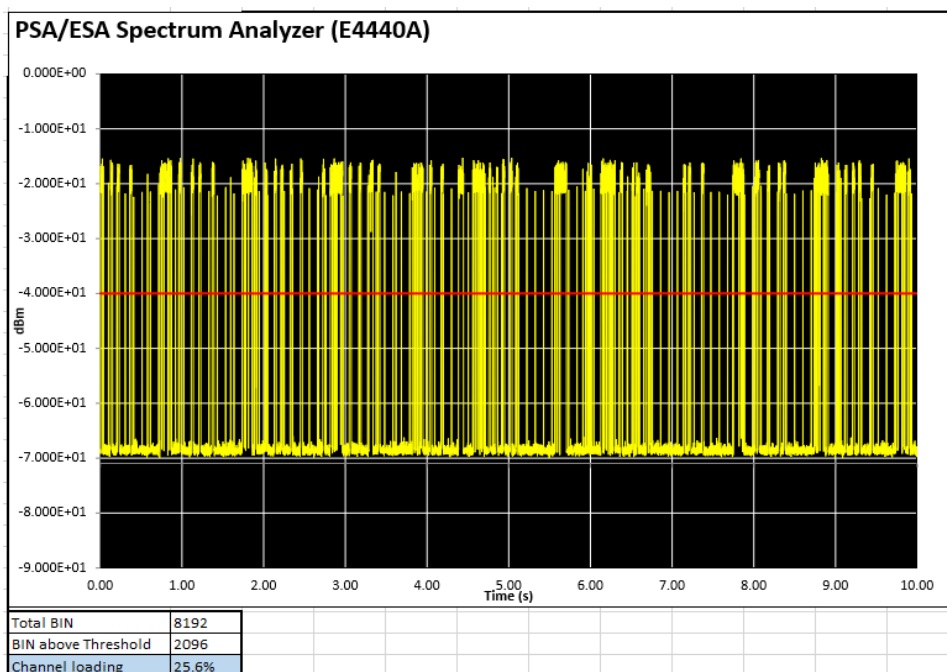


7.7 Channel Loading_801.11a_8192pt_5Mbps

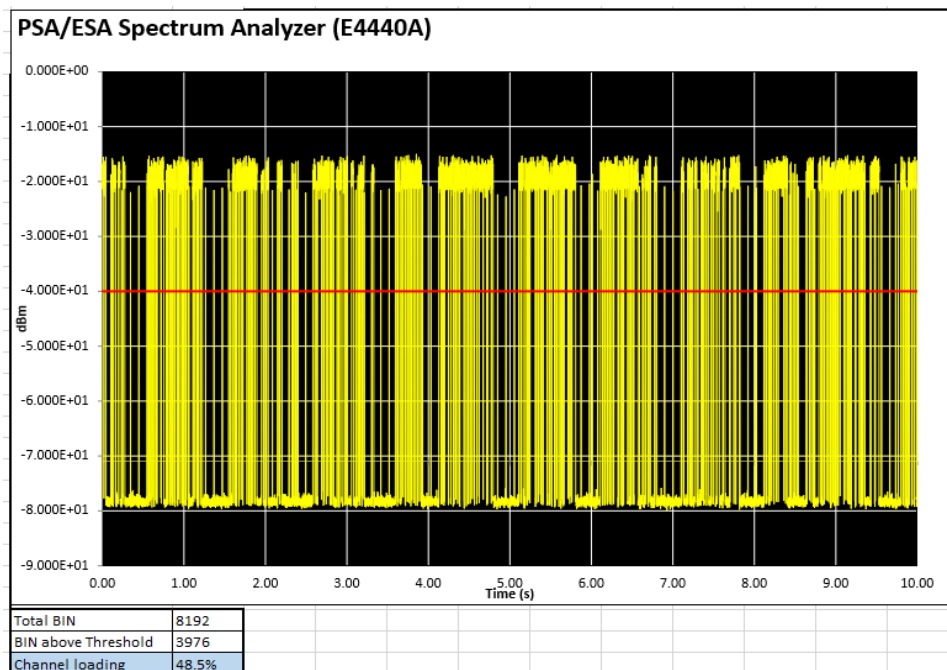


7.7 Channel Loading_801.11a_8192pt_10Mbps

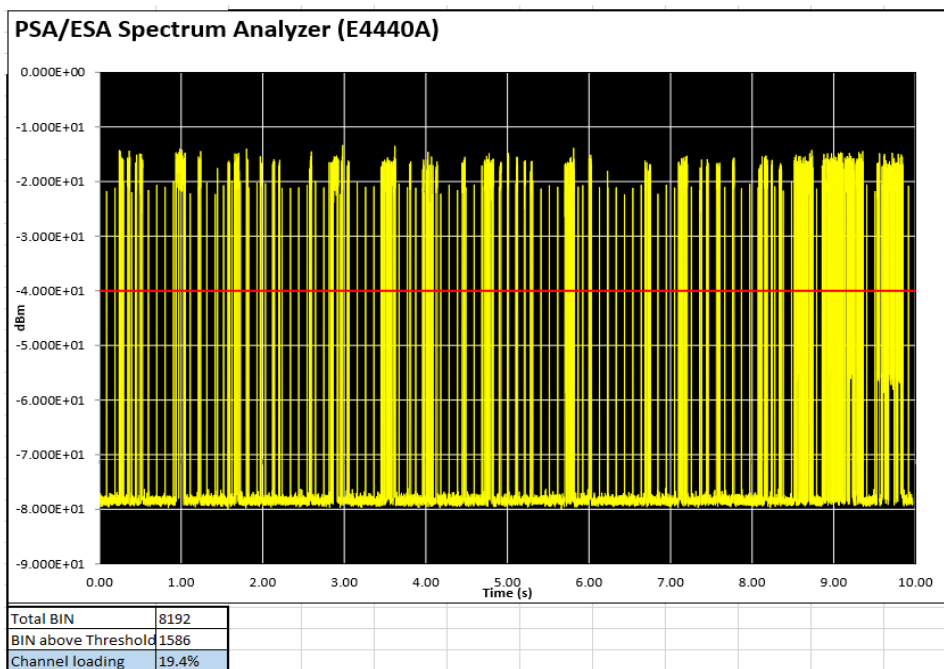


7.7 Channel Loading_801.11HT20_8192pt_5Mbps

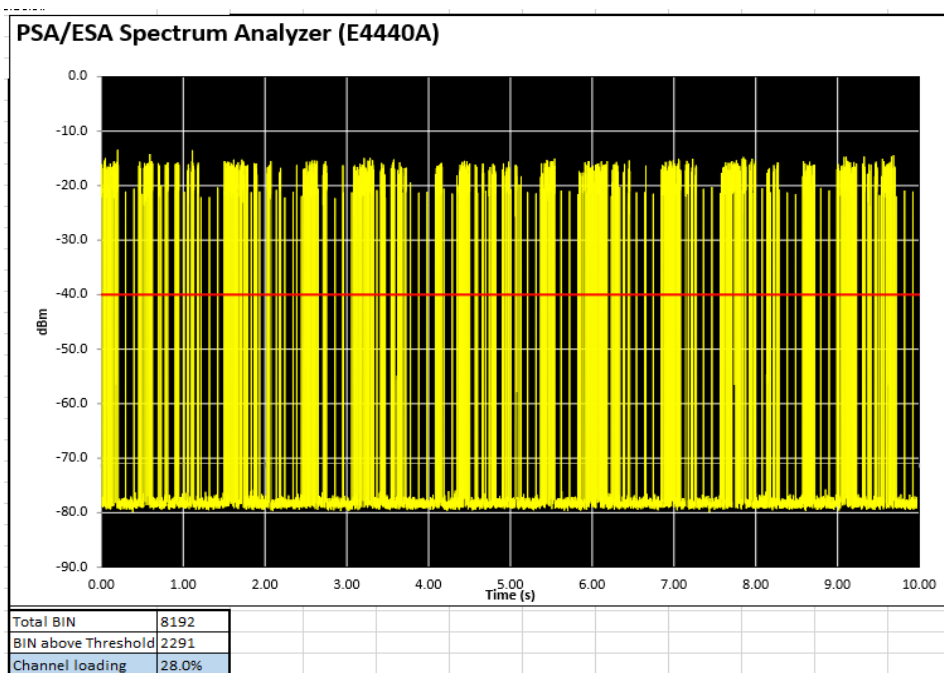


7.7 Channel Loading_801.11HT20_8192pt_10Mbps

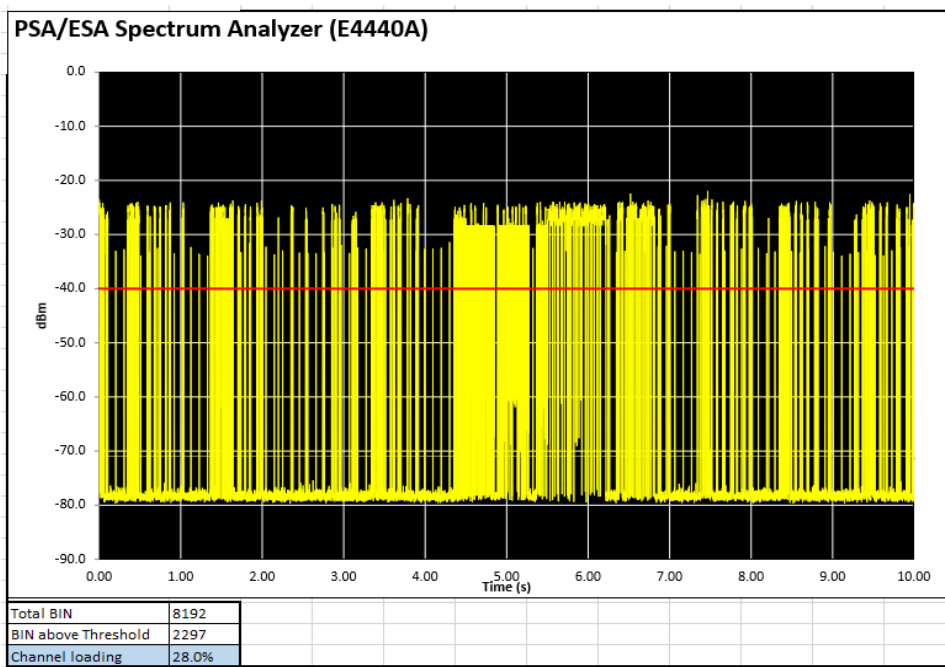

7.7 Channel Loading_801.11HT40_8192pt_10Mbps

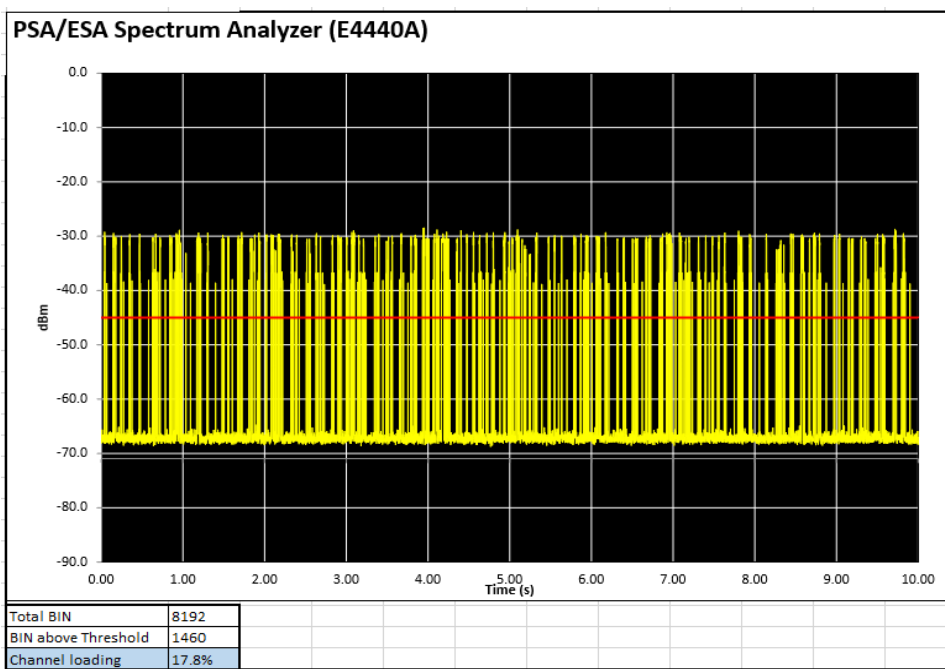


7.7 Channel Loading_801.11HT80_8192pt_8Mbps

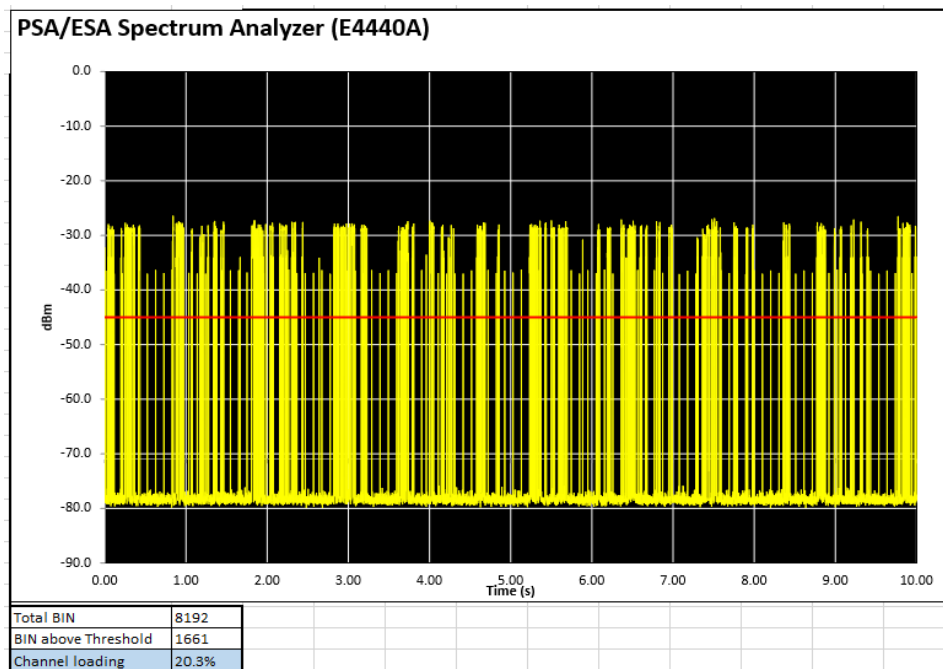


Appendix A: Test Equipment Setup Block Diagram

Setup for Master with injection at the Master

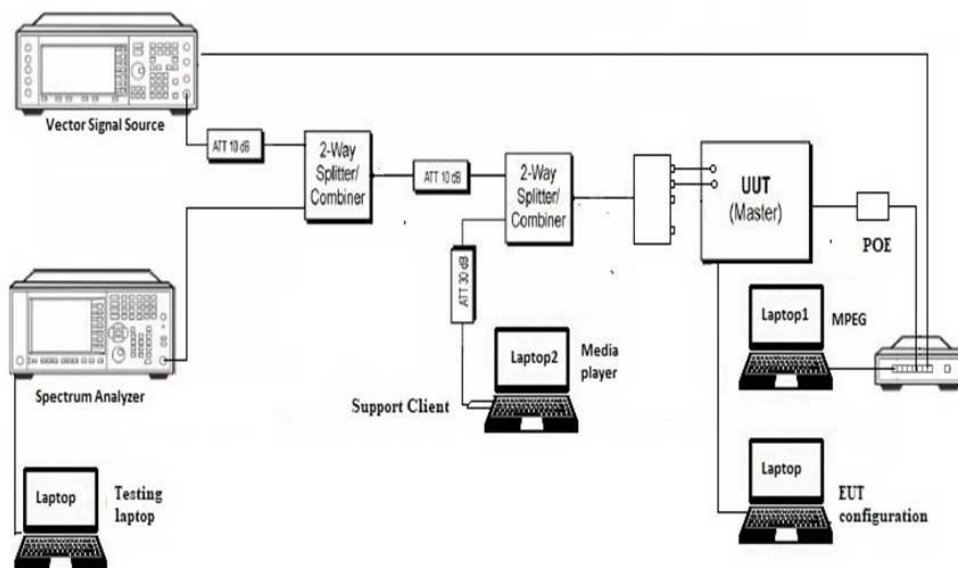


Appendix B: Detection Threshold Diagram


Setup for Master with injection at the Master

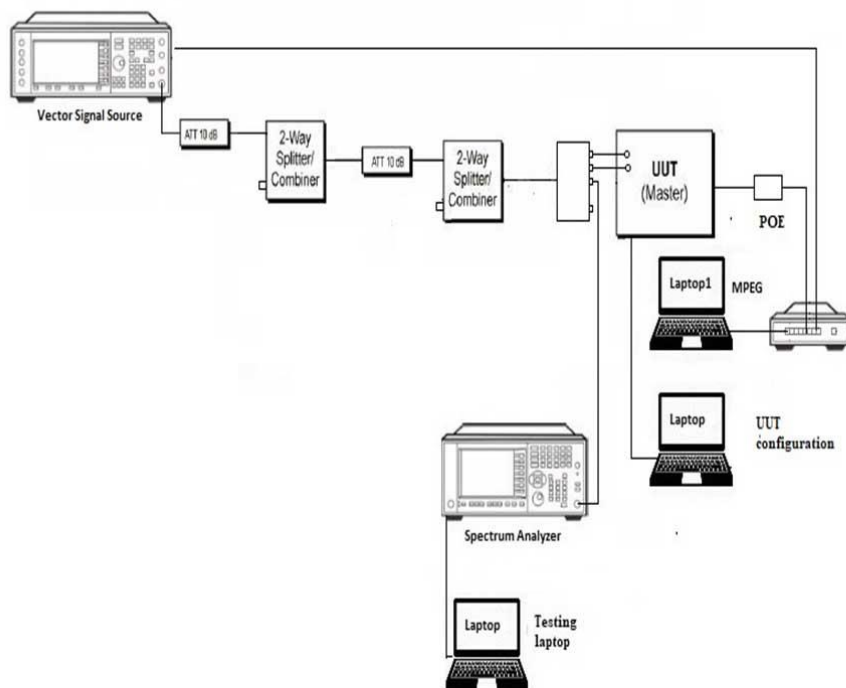


Appendix C: Test Setup Photos

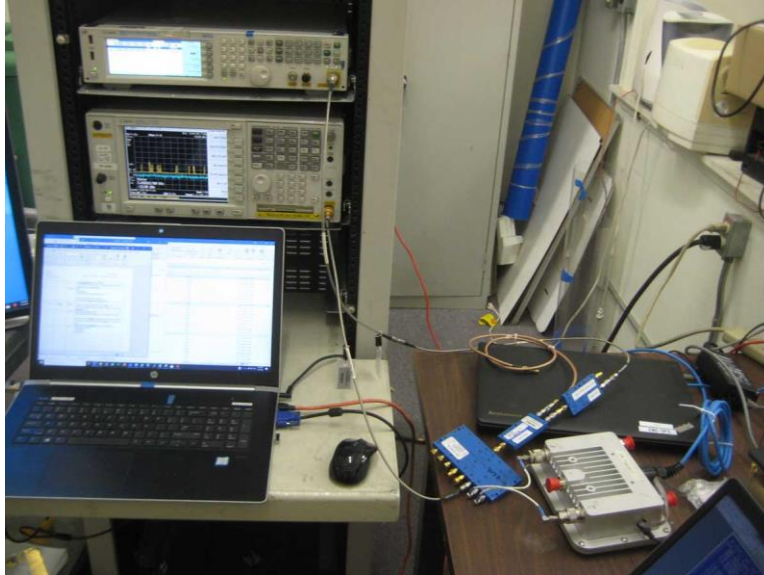

Radar Signal Calibration

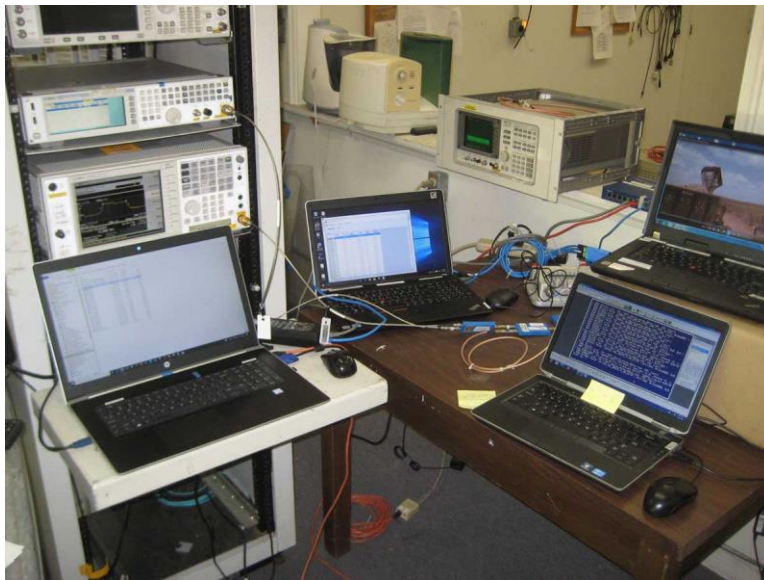

Test Setup

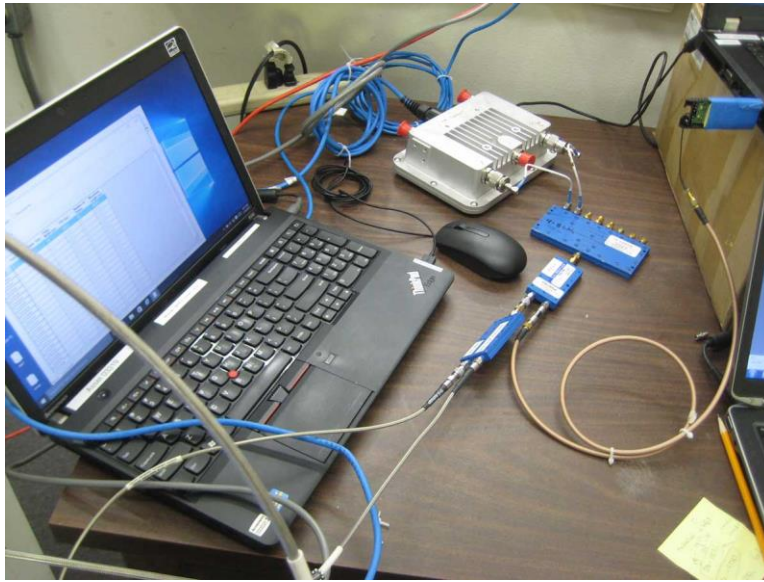

Test Setup Close-up

Appendix D: Waveform Type 5 and Type 6

This is a waveform sample of 5.5 GHz, Occupied bandwidth of 16.2MHz

Trial ID	Radar Type	Number of Bursts	Burst Period(s)	Wave Length (s)	Center Frequency
0	Type 5	15	0.8000000	12	5.5000000
1	Type 5	8	1.5000000	12	5.5000000
2	Type 5	11	1.0909091	12	5.5000000
3	Type 5	20	0.6000000	12	5.5000000
4	Type 5	17	0.7058824	12	5.5000000
5	Type 5	14	0.8571429	12	5.5000000
6	Type 5	15	0.8000000	12	5.5000000
7	Type 5	12	1.0000000	12	5.5000000
8	Type 5	14	0.8571429	12	5.5000000
9	Type 5	8	1.5000000	12	5.5000000
10	Type 5	17	0.7058824	12	5.4980000
11	Type 5	19	0.6315789	12	5.5000000
12	Type 5	15	0.8000000	12	5.4970000
13	Type 5	12	1.0000000	12	5.4960000
14	Type 5	19	0.6315789	12	5.4990000
15	Type 5	14	0.8571429	12	5.4970000
16	Type 5	20	0.6000000	12	5.5000000
17	Type 5	12	1.0000000	12	5.4960000
18	Type 5	14	0.8571429	12	5.4070000
19	Type 5	12	1.0000000	12	5.4960000
20	Type 5	16	0.7500000	12	5.5020000
21	Type 5	12	1.0000000	12	5.5040000
22	Type 5	20	0.6000000	12	5.5000000
23	Type 5	14	0.8571429	12	5.5030000
24	Type 5	13	0.9230769	12	5.5040000
25	Type 5	8	1.5000000	12	5.5060000
26	Type 5	17	0.7058824	12	5.5020000
27	Type 5	19	0.6315789	12	5.5000000
28	Type 5	12	1.0000000	12	5.5040000
29	Type 5	18	0.6666667	12	5.5010000

Waveform sample of 5.5 GHz, Occupied bandwidth of 16.2MHz

Trial ID	Radar Type	Pulse Width(Us)	PRI(us)	Pulse Per Hop	Hopping Length(ms)	Visible Frequency Number
0	Type 6	1.0	333.3	9	300.000000	5
1	Type 6	1.0	333.3	9	300.000000	1
2	Type 6	1.0	333.3	9	300.000000	4
3	Type 6	1.0	333.3	9	300.000000	6
4	Type 6	1.0	333.3	9	300.000000	2
5	Type 6	1.0	333.3	9	300.000000	1
6	Type 6	1.0	333.3	9	300.000000	4
7	Type 6	1.0	333.3	9	300.000000	6
8	Type 6	1.0	333.3	9	300.000000	5
9	Type 6	1.0	333.3	9	300.000000	1
10	Type 6	1.0	333.3	9	300.000000	4
11	Type 6	1.0	333.3	9	300.000000	8
12	Type 6	1.0	333.3	9	300.000000	5
13	Type 6	1.0	333.3	9	300.000000	5
14	Type 6	1.0	333.3	9	300.000000	4
15	Type 6	1.0	333.3	9	300.000000	6
16	Type 6	1.0	333.3	9	300.000000	2
17	Type 6	1.0	333.3	9	300.000000	5
18	Type 6	1.0	333.3	9	300.000000	4
19	Type 6	1.0	333.3	9	300.000000	5
20	Type 6	1.0	333.3	9	300.000000	5
21	Type 6	1.0	333.3	9	300.000000	8
22	Type 6	1.0	333.3	9	300.000000	5
23	Type 6	1.0	333.3	9	300.000000	2
24	Type 6	1.0	333.3	9	300.000000	3
25	Type 6	1.0	333.3	9	300.000000	3
26	Type 6	1.0	333.3	9	300.000000	4
27	Type 6	1.0	333.3	9	300.000000	5
28	Type 6	1.0	333.3	9	300.000000	7
29	Type 6	1.0	333.3	9	300.000000	3

Appendix E: Radar Waveform Requirement

The Waveform used for testing meets FCC requirement in accordance with section 6 of 905462 D02 UNII DFS Compliance Procedures New Rules v02

RADAR TEST WAVEFORMS

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

6.1 Short Pulse Radar Test Waveforms

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{PRI_{\mu sec}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 μ sec is selected, the number of pulses would be =

$$\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{3066} \right) \right\} = \text{Round up } \{17.2\} = 18.$$

Table 5a - Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.

Radar Type	Number of Trials	Number of Successful Detections	Minimum Percentage of Successful Detection
1	35	29	82.9%
2	30	18	60%
3	30	27	90%
4	50	44	88%
Aggregate $(82.9\% + 60\% + 90\% + 88\%)/4 = 80.2\%$			

6.2 Long Pulse Radar Test Waveform

Table 6 – Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *transmission period* will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the random time interval between the first and second pulses is chosen independently of the random time interval between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst Count*. Each interval is of length $(12,000,000 / \text{Burst Count})$ microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen randomly.

A representative example of a Long Pulse Radar Type waveform:

- 1) The total test waveform length is 12 seconds.
- 2) Eight (8) *Bursts* are randomly generated for the *Burst Count*.
- 3) *Burst 1* has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) *Bursts 2 through 8* are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, *Burst 1* is randomly generated (1 to 1,500,000 minus the total *Burst 1* length + 1 random PRI interval) at the 325,001 microsecond step. *Bursts 2 through 8* randomly fall in successive 1,500,000 microsecond intervals (i.e. *Burst 2* falls in the 1,500,001 – 3,000,000 microsecond range).

Figure 1 provides a graphical representation of the Long Pulse Radar Test Waveform.

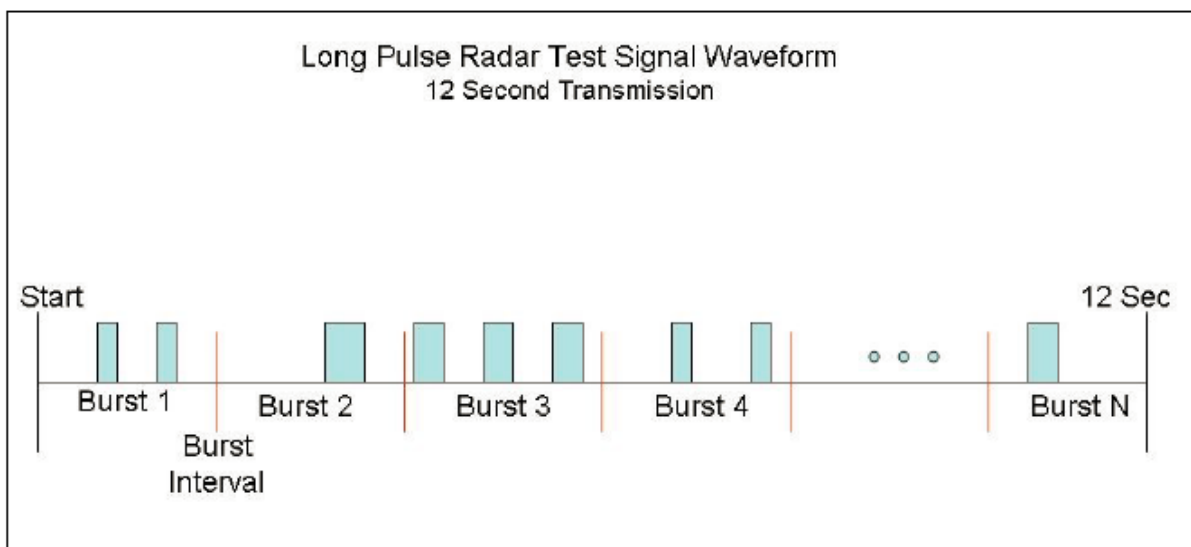


Figure 1: Graphical Representation of a Long Pulse Radar Type Waveform

6.3 Frequency Hopping Radar Test Waveform

Table 7 – Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm: ⁴

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

⁴ If a segment does not contain at least 1 frequency within the *UNII Detection Bandwidth* of the UUT, then that segment is not used.

Appendix F: Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Uncertainties reported are worst case for all CKC Laboratories' sites and represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k=2$.