

Alternative Connectors

.SMA Reverse Polarity Plug(female)

P/N: D321AH – AMPS/PCS

.SMA Reverse Thread Plug(male)


P/N: D321AT – AMPS/PCS

Electrical Properties:

Frequency Range: Dual Band
824~896MHz/1850~1990MHz
Impedance: 50Ω nominal
VSWR: <1.9:1
Gain: 0 dBi
Radiation: Omni
Polarization: Vertical
Wave: ¼ Wave Helix

Mechanical Properties:

Connector: SMA Plug(male)
Material: Polyurethane(Black)
Whip: Brass with black chrome plating
Connector: –20°C to +65°C
Operation Temp.: –30°C to +75°C
Storage Temp.:

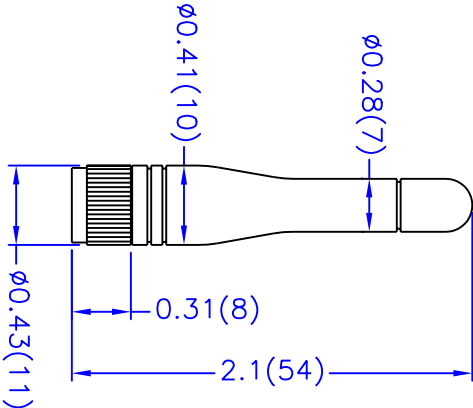

TITLE		AMPS/PCS Cellular Dual Band		VER
UNIT		Antenna – 321 Model		
in.(mm)		DWG. NO. D321AM – AMPS/PCS		
SCALE				
1:1				