
RF Test Report

Test in accordance with
Federal Communications Commission(FCC)
CFR TITLE 47, Parts 2, 22, 24

Product Name : MobileMapper 20

Model No. : MobileMapper 20

FCC ID : NZI802168

IC ID : 9288A-802168

Applicant : Trimble Nantes S.A.S.

Address : Z.A.C. de La Fleuriaye CD 60433, 44474 Carquefou
Cedex, France

Date of Receipt : 11-17-2013

Test Date : 11-17-2013~12-03-2013

Issued Date : 12/24/2013

Report No. : UL28620131105CE/FCC/IC 014-2

Report Version : V1.0

Notes:

The test results only relate to these samples which have been tested.

Partly using this report will not be admitted unless been allowed by Unilab.

Unilab is only responsible for the complete report with the reported stamp of Unilab.

Test Report Certification

Issued Date : 2013-12-24

Report No. : UL28620131105CE/FCC/IC 014-2

Product Name : MobileMapper 20
Applicant : Trimble Nantes S.A.S.
Address : Z.A.C. de La Fleuriaye CD 60433, 44474 Carquefou Cedex, France
Manufacturer : Trimble Nantes S.A.S.
Address : Z.A.C. de La Fleuriaye CD 60433, 44474 Carquefou Cedex, France
Model No. : MobileMapper 20
EUT Voltage : MIN: 3.64V, NOR: 3.8V, MAX: 4.2V
Brand Name : SPECTRA Precision
FCC ID: NZI802168
IC ID: 9288A-802168
Applicable Standard : ANSI/TIA-603-D-2010; FCC CFR Title 47 Part 2;
FCC CFR Title 47 Part 22 Subpart H;
FCC CFR Title 47 Part 24 Subpart E;
Test Result : Complied
Performed Location : Unilab (Shanghai) Co., Ltd.
FCC 2.948 register number is 714465
No. 1350, Lianxi Rd. Pudong New District, Shanghai, China
TEL: +86-21-50275125 FAX: +86-21-50275126

Documented By :


(Technical Engineer: Andy Wei)

Reviewed By :


(Senior Engineer: Forest Cao)

Approved By :


(Supervisor: Eva Wang)

TABLE OF CONTENTS

SUMMARY OF TEST RESULT.....	4
1. General Information.....	5
1.1. EUT Description	5
1.2. Mode of Operation	7
1.3. Tested System Details	9
1.4. Configuration of Tested System.....	9
1.5. EUT Exercise Software	9
2. Technical Test.....	10
2.1. Test Environment	10
3. Peak Output Power	11
3.2. Test Setup	11
3.3. Limit.....	12
3.4. Test Procedure	13
3.5. Uncertainty	13
3.6. Test Result	14
4. Occupied Bandwidth	19
4.1. Test Equipment.....	19
4.2. Test Setup	19
4.3. Limit.....	20
4.4. Test Procedure	20
4.5. Uncertainty	20
4.6. Test Result	21
5. Spurious Emission At Antenna Terminals (+/- 1MHz)	33
5.1. Test Equipment.....	33
5.2. Test Setup	33
5.3. Limit.....	34
5.4. Test Procedure	34
5.5. Uncertainty	34
5.6. Test Result	35
6. Spurious Emission.....	41
6.1. Test Equipment.....	41
6.2. Test Setup	42
6.3. Limit.....	43
6.4. Test Procedure	43
6.5. Uncertainty	44
6.6. Test Result	45
7. Frequency Stability Under Temperature & Voltage Variations.....	64
7.1. Test Equipment.....	64
7.2. Test Setup	64
7.3. Limit.....	65
7.4. Test Procedure	65
7.5. Uncertainty	65
7.6. Test Result	66
8. Attachment.....	72

SUMMARY OF TEST RESULT

Report Section	FCC CFR 47	Description	Limit	Result
3	part2.1046	Conducted Output Power	N/A	PASS
3	part 22.913(a)(2)	Effective Radiated Power	<7 Watts	PASS
3	part 24.232(c)	Equivalent Isotropic Radiated Power	<2 Watts	PASS
4	part 2.1049 part 22.917(a) part 24.238(a)	Occupied Bandwidth	N/A	PASS
5	part 2.1051 part 22.917(a) part 24.238(a)	Band Edge Measurement	$<43+10\lg(P[\text{Watts}])$	PASS
6	part 2.1051 part 22.917(a) part 24.238(a)	Conducted Spurious Emission	$<43+10\lg(P[\text{Watts}])$	PASS
6	part 2.1053 part 22.917(a) part 24.238(a)	Field Strength of Spurious Radiation	$<43+10\lg(P[\text{Watts}])$	PASS
7	part 2.1055 part 22.355 part 24.235	Frequency Stability for Temperature & Voltage	<2.5 ppm	PASS

1.General Information

1.1. EUT Description

Product Name:	MobileMapper 20
Model Name:	MobileMapper 20
Hardware Version:	E750W_V0.3
Software Version:	V1.12
RF Exposure Environment:	Uncontrolled
GSM/ GPRS	
Support Band:	GSM850/PCS1900
GPRS Class:	12
Tx Frequency Range:	GSM 850: 824.2MHz to 848.8MHz PCS 1900: 1850.2MHz to 1909.8MHz
Rx Frequency Range:	GSM 850: 869.2MHz to 893.8MHz PCS 1900: 1930.2MHz to 1989.8MHz
Type of modulation:	GSM/GPRS: GMSK
Antenna Type:	Internal
Antenna Peak Gain:	GSM 850: -3.0dBi PCS 1900: -2.0dBi
WCDMA	
Support Band:	WCDMA Band II
Tx Frequency Range:	WCDMA Band II : 1850MHz ~1910MHz
Rx Frequency Range:	WCDMA Band II : 1930MHz ~1990MHz
Type of modulation:	WCDMA(UMTS): QPSK
Antenna Type:	Internal
Antenna Peak Gain:	WCDMA Band II : -2.0dBi
Support Band:	WCDMA Band V
Tx Frequency Range:	WCDMA Band V: 824MHz ~849MHz
Rx Frequency Range:	WCDMA Band V: 869MHz ~894MHz
Type of modulation:	WCDMA(UMTS): QPSK
Antenna Type:	Internal
Antenna Peak Gain:	WCDMA Band V: -2.0dBi
Component	
AC Adapter:	Model Name:PSAI05R-050Q
	Input: AC 100-240V ~0.3A 50/60Hz 12-15VA
	Output: DC 5V/1.0A

1.2. Mode of Operation

Unilab has verified the construction and function in typical operation. EUT is inlink mode with base station emulator at maximum power level. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode		
Band	Radiated TCs	Conducted TCs
GSM 850	GSM Link GPRS 8 Link	GSM Link GPRS 8 Link
GSM1900	GSM Link GPRS 8 Link	GSM Link GPRS 8 Link
WCDMA Band V	RMC 12.2Kbps Link	RMC 12.2Kbps Link
WCDMA Band II	RMC 12.2Kbps Link	RMC 12.2Kbps Link

Note:

1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. The maximum power levels are GSM for GMSK link, GPRS multi-slot class 8 mode for GMSK link, RMC 12.2Kbps mode for WCDMA Band V and RMC 12.2Kbps mode for WCDMA Band II, only these modes were used for all tests.
3. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst (Z axis) result on this report.
4. This device is a composite device in accordance with Part 15 Subpart B regulations. The report number is UL28620131105CE/FCC/IC 014-2.

The conducted power table is as follows:

Conducted Power (Unit: dBm)						
Band	GSM 850			GSM 1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	32.21	32.18	32.01	29.04	28.89	28.45
GPRS 8	32.84	32.80	32.76	29.63	29.45	29.01
GPRS 10	29.64	29.53	29.83	26.84	26.52	26.59
GPRS 12	23.43	23.54	23.58	21.64	22.19	21.74

Band	WCDMA V			WCDMA II		
TX Channel	4132	4182	4233	9262	9400	9538
RX Channel	4357	4408	4458	9662	9800	9938
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	22.65	22.23	23.36	22.87	22.42	22.64
HSDPA Subtest-1	22.46	22.16	22.59	22.38	22.16	22.09
HSDPA Subtest-2	22.62	22.51	22.62	21.41	21.38	22.11
HSDPA Subtest-3	21.54	21.43	22.03	21.21	21.47	22.11
HSDPA Subtest-4	21.58	21.49	21.31	21.28	21.43	21.56


1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model	Serial No.	Power Cord
1	Agilent8960	Agilent	E5515C	GB46581718	N/A

1.4. Configuration of Tested System

Connection Diagram

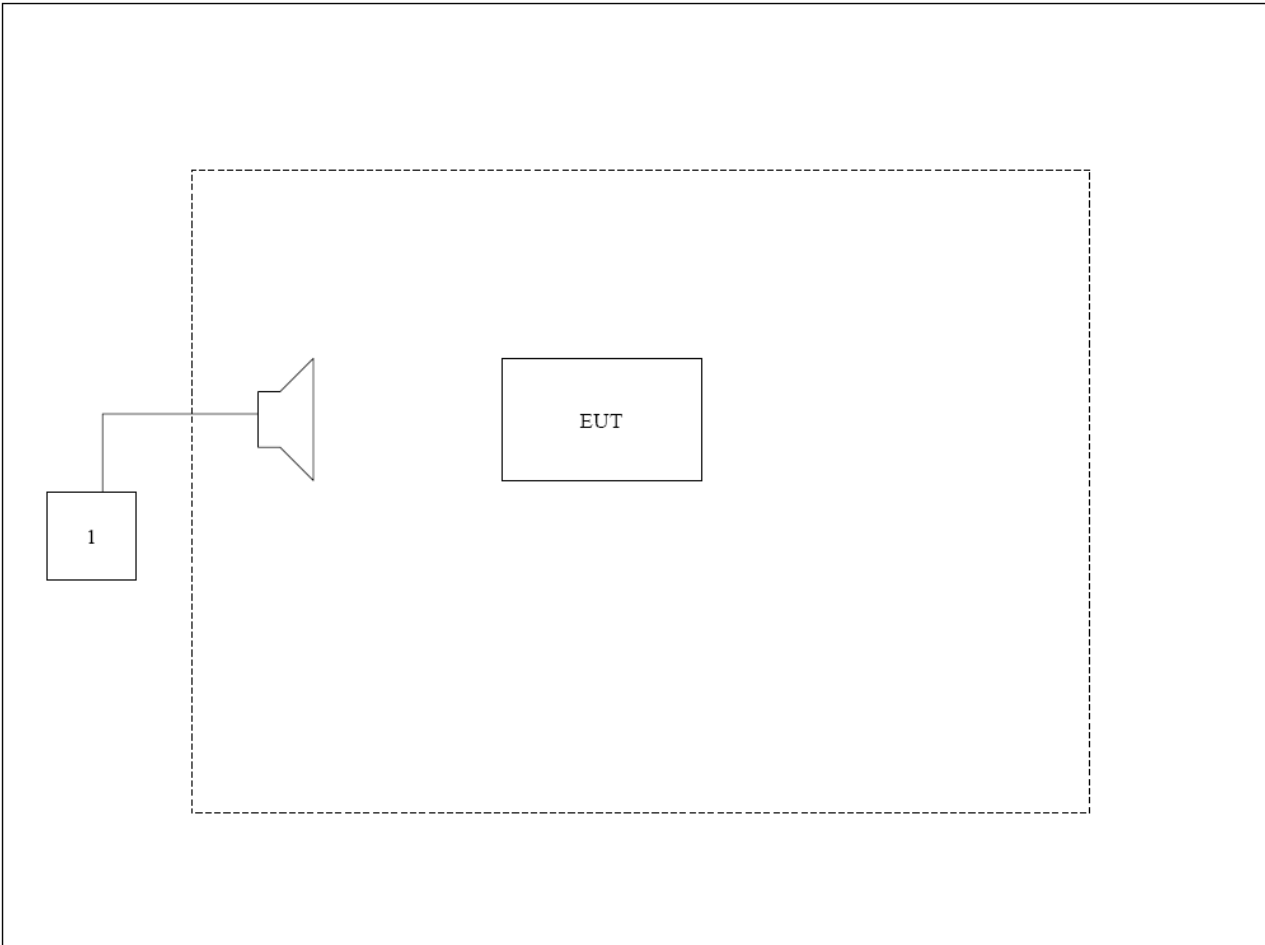

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	EUT Communicate with E5515C, then select channel to test.

2. Technical Test

2.1. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	25
Humidity (%RH)	25-75	45
Barometric pressure (mbar)	860-1060	950-1000


3. Peak Output Power

3.1. Test Equipment


Instrument	Manufacturer	Model	Serial No.	Cali. Due Date
Spectrum Analyzer	Agilent	N9038A	MY51210142	2014.07.27
Radio Communication Tester	Agilent	E5515C	GB46581718	2014.10.24
Signal Generator	Agilent	N5183A	MY50140938	2014.10.07
Preamplifier	CEM	EM30180	3008A0245	2014.03.01
DC Power Supply	Agilent	6612C	MY43002989	2014.03.04
Bilog Antenna	Schwarzbeck	VULB9160	9160-3316	2014.07.19
VHF-UHF-Biconical Antenna	Schwarzbeck	VUBA9117	9117-263	2014.07.19
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-942	2014.07.19
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-943	2014.07.19

3.2. Test Setup


Conducted Power Measurement:

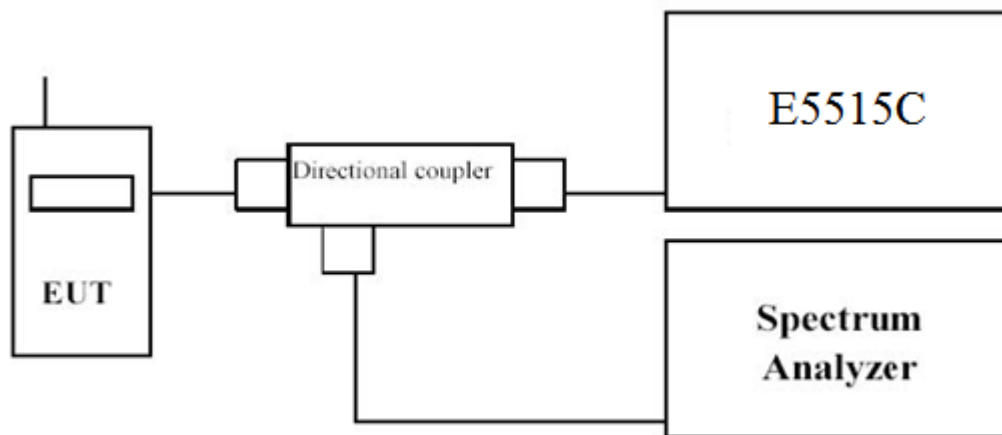

Radiated Spurious Measurement: below 1GHz

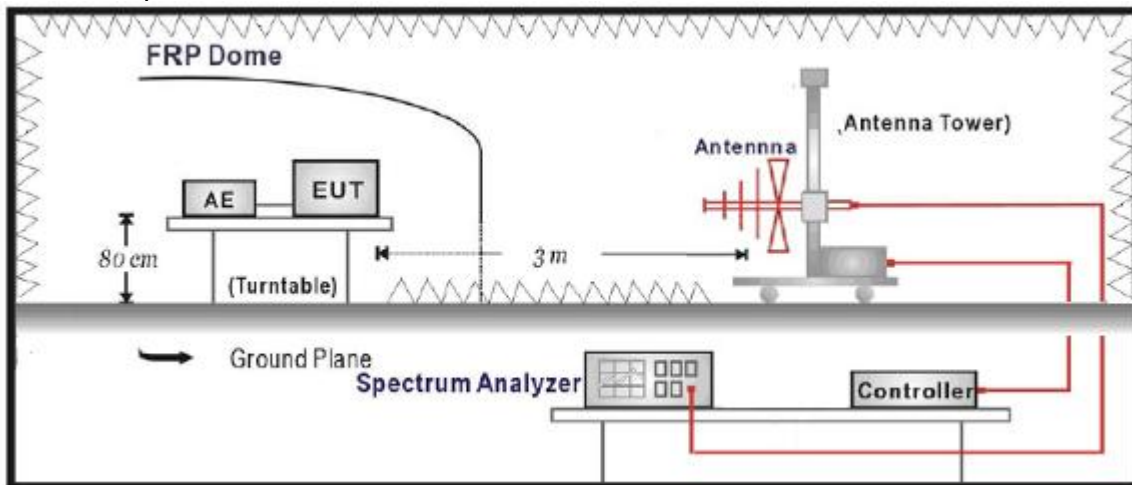

Radiated Spurious Measurement: above 1GHz

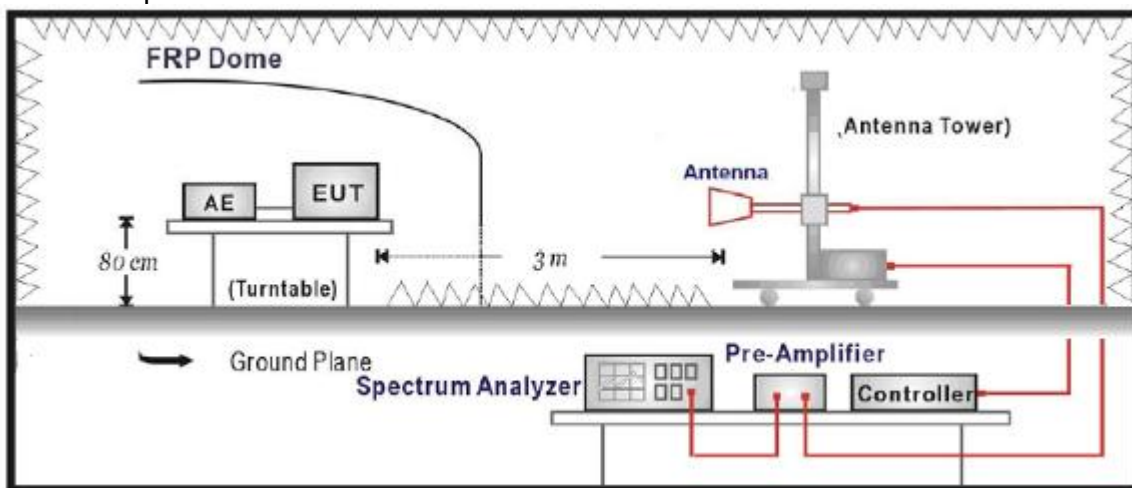

3.3. Limit

For FCC Part 22.913(a)(2):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC Part 24.232(c):

The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.

3.4. Test Procedure

Conducted Power Measurement:

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Connect a low loss RF cable from the antenna port to a spectrum analyzer and E5515C by a Directional Couple.
- c. EUT Communicate with E5515C, then selects a channel for testing.
- d. Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- a. The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c. The output of the test antenna shall be connected to the measuring receiver.
- d. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4: 2009.

3.5. Uncertainty

The measurement uncertainty is defined as for Conducted Power Measurement ± 1.1 dB,
for Radiated Power Measurement ± 3.1 dB

3.6. Test Result

The following table shows the conducted power measured:

Table 1

GSM850				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)
GSM850 (GSM)	128(Low)	824.2	32.21	1.64
	189(Mid)	836.4	32.18	1.54
	251(High)	848.8	32.01	1.59
GSM850 (GPRS 8)	128(Low)	824.2	32.84	1.92
	189(Mid)	836.4	32.80	1.91
	251(High)	848.8	32.76	1.89

Table 2

GSM1900				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)
GSM1900 (GSM)	512(Low)	1850.2	29.04	0.80
	661(Mid)	1880.0	28.89	0.77
	810(High)	1909.8	28.45	0.70
GSM1900 (GPRS 8)	512(Low)	1850.2	29.63	0.92
	661(Mid)	1880.0	29.45	0.88
	810(High)	1909.8	29.01	0.80

WCDMA				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)
WCDMA Band V	4132(Low)	826.4	22.65	0.18
	4182(Mid)	836.4	22.23	0.17
	4233(High)	846.4	22.36	0.17
WCDMA Band II	9262(Low)	1852.4	22.87	0.19
	9400(Mid)	1880.0	22.42	0.18
	9538(High)	1907.6	22.64	0.18

The following table shows the Radiated power measured :

GSM850 (GSM Link)

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	ERP (W)
Low Channel 128 (824.20MHz)						
824.2	H	27.25	3.81	-2.99	20.45	0.111
824.2	V	27.28	3.81	-2.99	20.48	0.112
Middle Channel 189 (836.40MHz)						
836.4	H	27.49	3.96	-3.04	20.49	0.112
836.4	V	28.10	3.96	-3.04	21.10	0.129
High Channel 251 (848.80MHz)						
848.8	H	27.92	3.98	-3.10	20.84	0.121
848.8	V	27.62	3.98	-3.10	20.54	0.113

GSM850 (GPRS 8 Link)

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	ERP (W)
Low Channel 128 (824.20MHz)						
824.2	H	27.14	3.83	-2.99	20.32	0.108
824.2	V	27.44	3.83	-2.99	20.62	0.115
Middle Channel 189 (836.40MHz)						
836.4	H	27.70	3.96	-3.04	20.70	0.117
836.4	V	28.00	3.96	-3.04	21.00	0.126
High Channel 251 (848.80MHz)						
848.8	H	27.41	3.97	-3.10	20.34	0.108
848.8	V	27.85	3.97	-3.10	20.78	0.120

GSM1900 (GSM Link)

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	EIRP (W)
Low Channel 512(1850.20MHz)						
1850.2	H	17.75	6.26	10.40	21.89	0.15
1850.2	V	24.54	6.26	10.40	28.68	0.74
Middle Channel 661 (1880.00MHz)						
1880.0	H	17.29	6.19	10.43	21.53	0.14
1880.0	V	24.51	6.19	10.43	28.75	0.75
High Channel 810 (1909.80MHz)						
1909.8	H	17.09	6.15	10.44	21.38	0.14
1909.8	V	24.08	6.15	10.44	28.37	0.69

GSM1900 (GPRS 8 Link)

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	EIRP (W)
Low Channel 512(1850.20MHz)						
1850.2	H	18.02	6.26	10.40	22.16	0.16
1850.2	V	24.78	6.26	10.40	28.92	0.78
Middle Channel 661 (1880.00MHz)						
1880.0	H	17.85	6.19	10.43	22.09	0.16
1880.0	V	24.35	6.19	10.43	28.59	0.72
High Channel 810 (1909.80MHz)						
1909.8	H	17.74	6.15	10.44	22.03	0.16
1909.8	V	24.23	6.15	10.44	28.52	0.71

WCDMA Band V

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	ERP (W)
Low Channel 4132(826.4MHz)						
826.4	H	22.46	3.83	-2.99	15.64	0.04
826.4	V	21.34	3.83	-2.99	14.52	0.03
Middle Channel 4182 (836.4MHz)						
836.4	H	22.84	3.96	-3.04	15.84	0.04
836.4	V	21.51	3.96	-3.04	14.51	0.03
High Channel 4233 (846.6MHz)						
846.6	H	23.13	3.97	-3.10	16.06	0.04
846.6	V	21.29	3.97	-3.10	14.22	0.03

WCDMA Band II

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	EIRP (W)
Low Channel 9262(1852.40MHz)						
1850.2	H	17.75	6.26	10.40	21.89	0.15
1850.2	V	24.54	6.26	10.40	28.68	0.74
Middle Channel 9400 (1880.00MHz)						
1880.0	H	17.29	6.19	10.43	21.53	0.14
1880.0	V	24.51	6.19	10.43	28.75	0.75
High Channel 9538 (1907.60MHz)						
1909.8	H	17.09	6.15	10.44	21.38	0.14
1909.8	V	24.08	6.15	10.44	28.37	0.69


4. Occupied Bandwidth

4.1. Test Equipment

Occupied Bandwidth

Instrument	Manufacturer	Model	Serial No	Cal. Date
Radio Communication Tester	Agilent	E5515C	GB46581718	2014.10.24
Spectrum Analyzer	Agilent	N9038A	MY51210142	2014.07.27
DC Power Supply	Agilent	6612C	MY43002989	2014.03.04

4.2. Test Setup

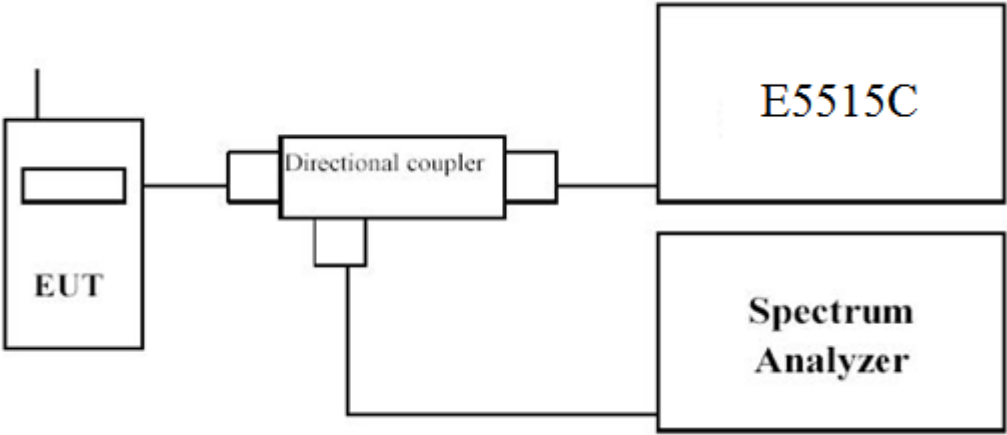

4.3. Limit

N/A

4.4. Test Procedure

Using Occupied Bandwidth measurement function of spectrum analyzer, and setting as follows:
For GSM850/1900 test --- RBW = 3 kHz and VBW = 10 kHz
For WCDMA Band V/II test --- RBW = 100 kHz and VBW = 300 kHz

4.5. Uncertainty


The measurement uncertainty is defined as ± 10 Hz

4.6. Test Result


GSM850 (GSM Link)

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
128	824.20	346.0	281.22
189	836.40	341.3	280.66
251	848.80	349.2	287.15


GSM850 (GSM Link), Channel 128

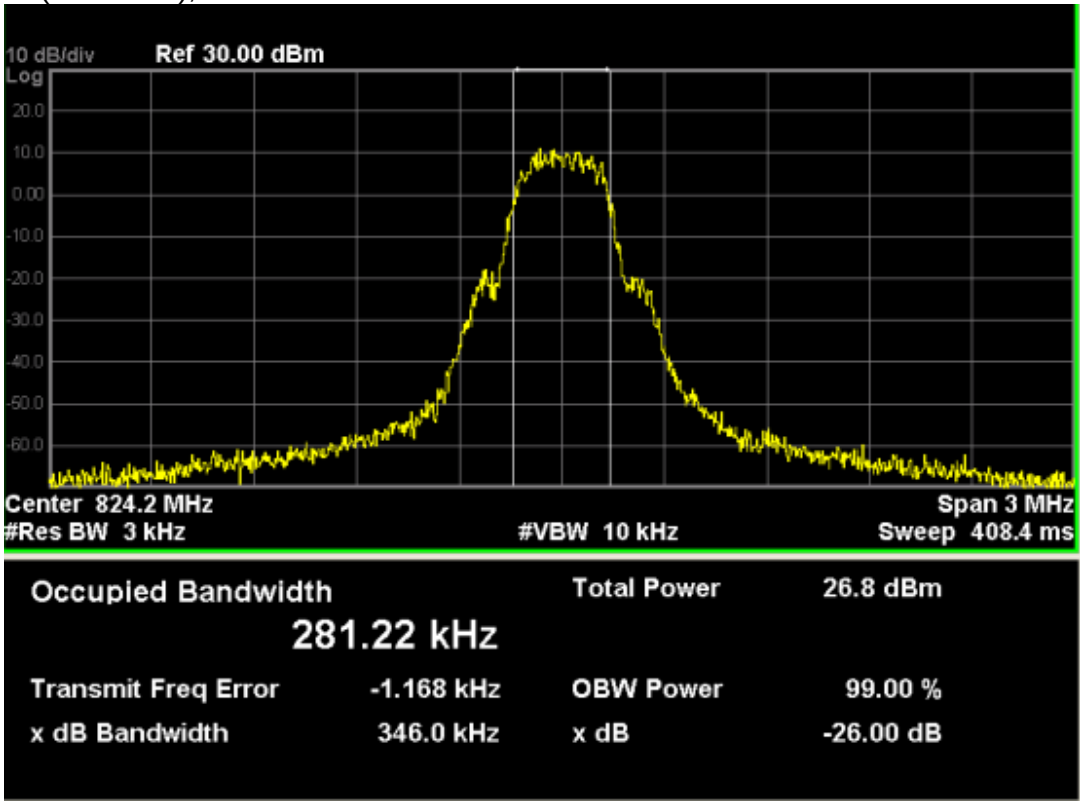

GSM850 (GSM Link), Channel 189

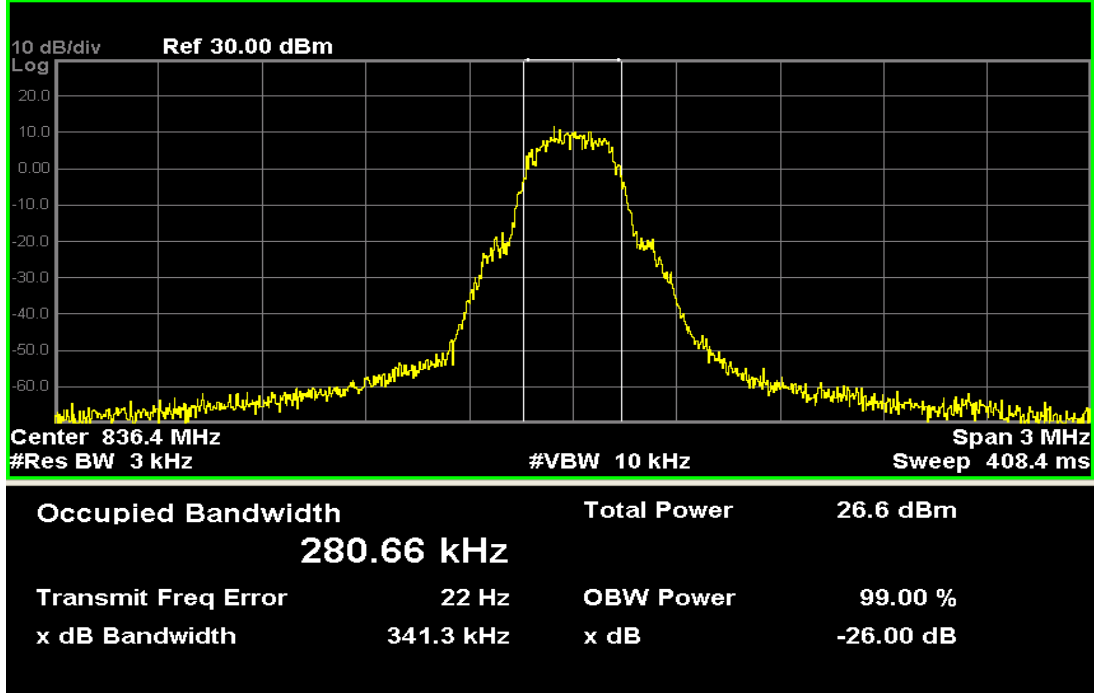


GSM850 (GSM Link), Channel 251

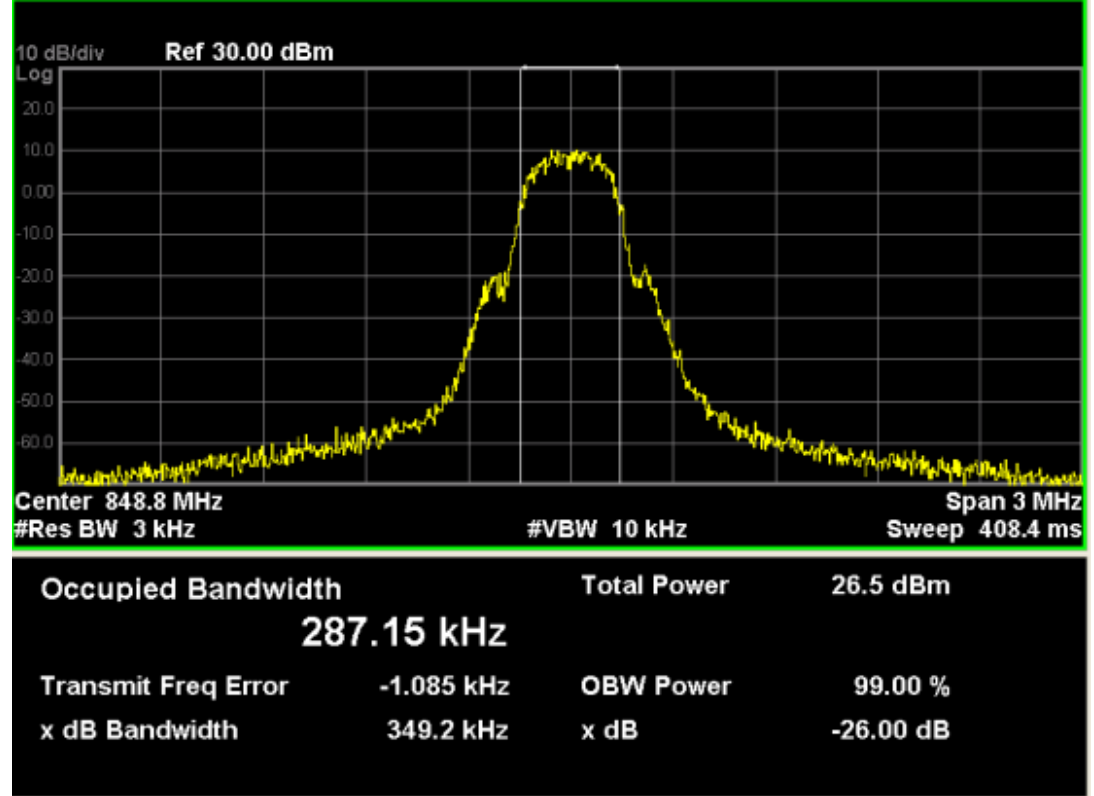


GSM850 (GPRS 8 Link)

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
128	824.20	338.4	278.25
189	836.40	391.0	293.89
251	848.80	344.2	285.07


GSM850 (GPRS 8 Link), Channel 128

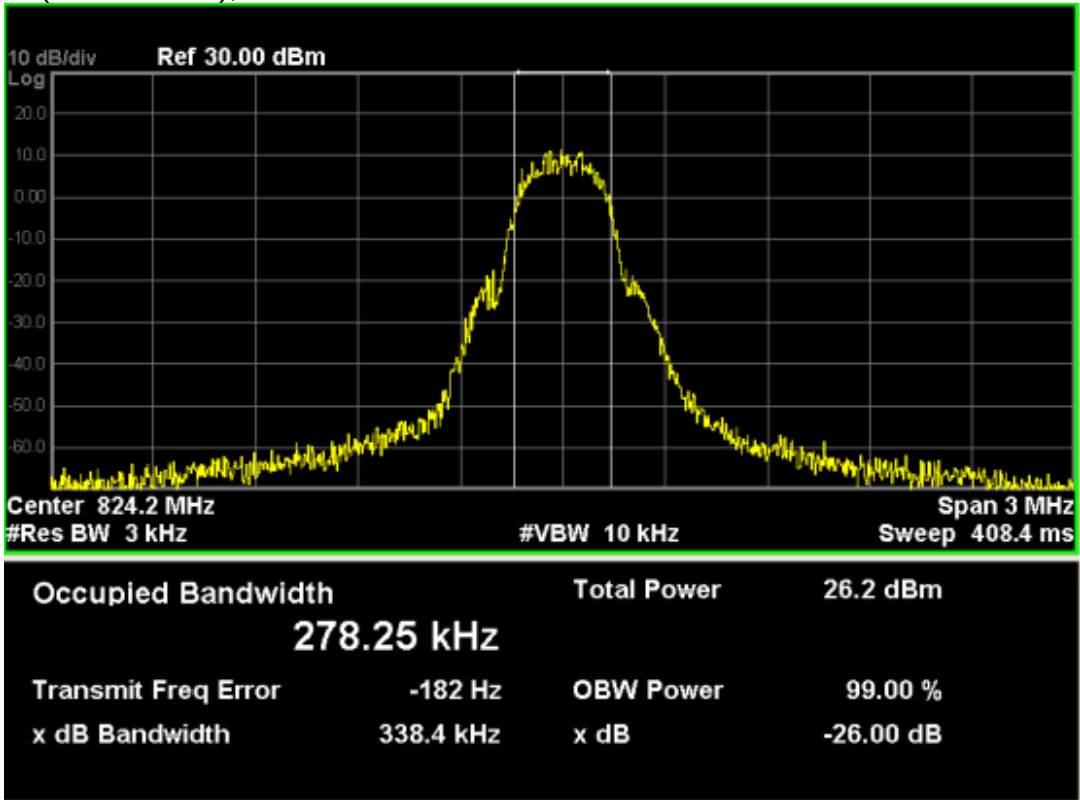

GSM850 (GPRS 8 Link), Channel 189

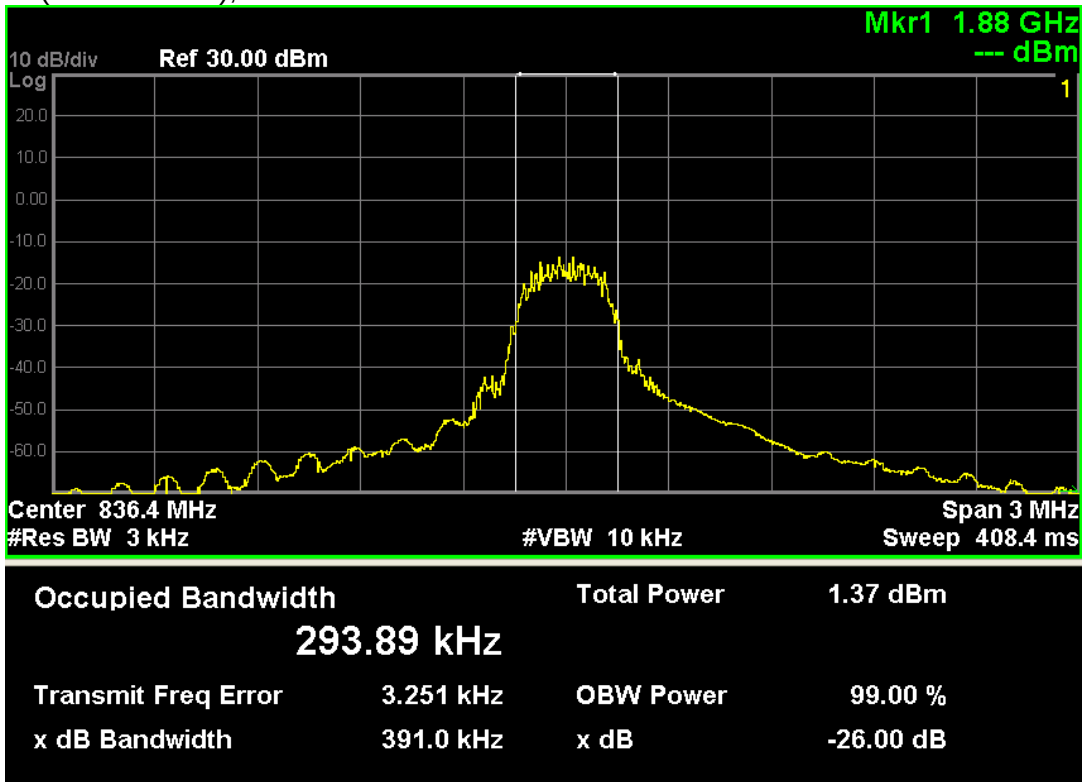


GSM850 (GPRS 8 Link), Channel 251

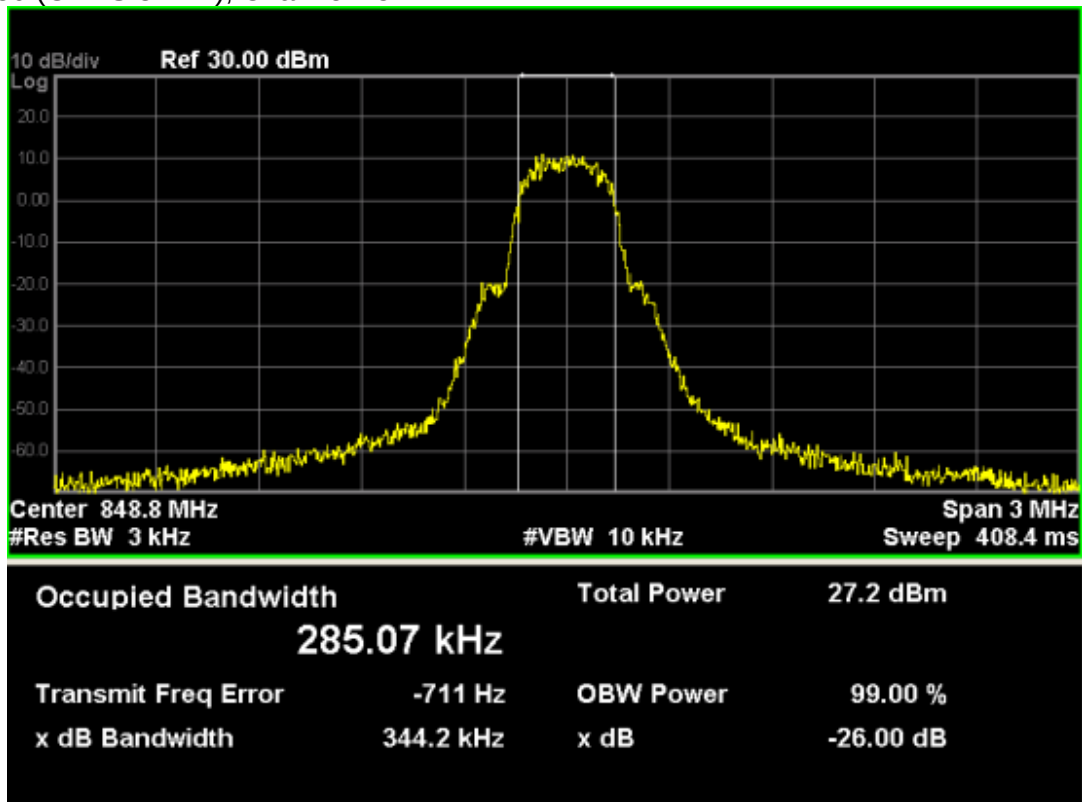


GSM 1900 (GSM Link)

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
512	1850.20	336.5	270.30
661	1880.00	395.1	294.30
810	1909.80	339.0	273.33


GSM1900 (GSM Link), Channel 512

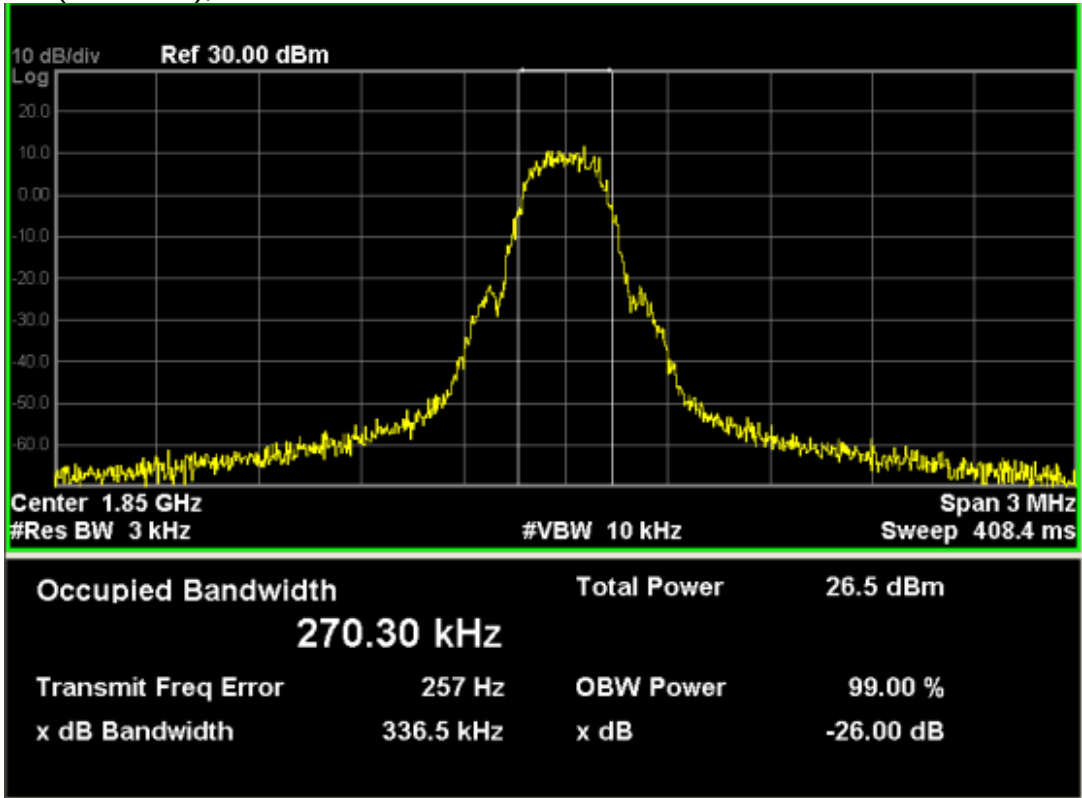

GSM1900 (GSM Link), Channel 661

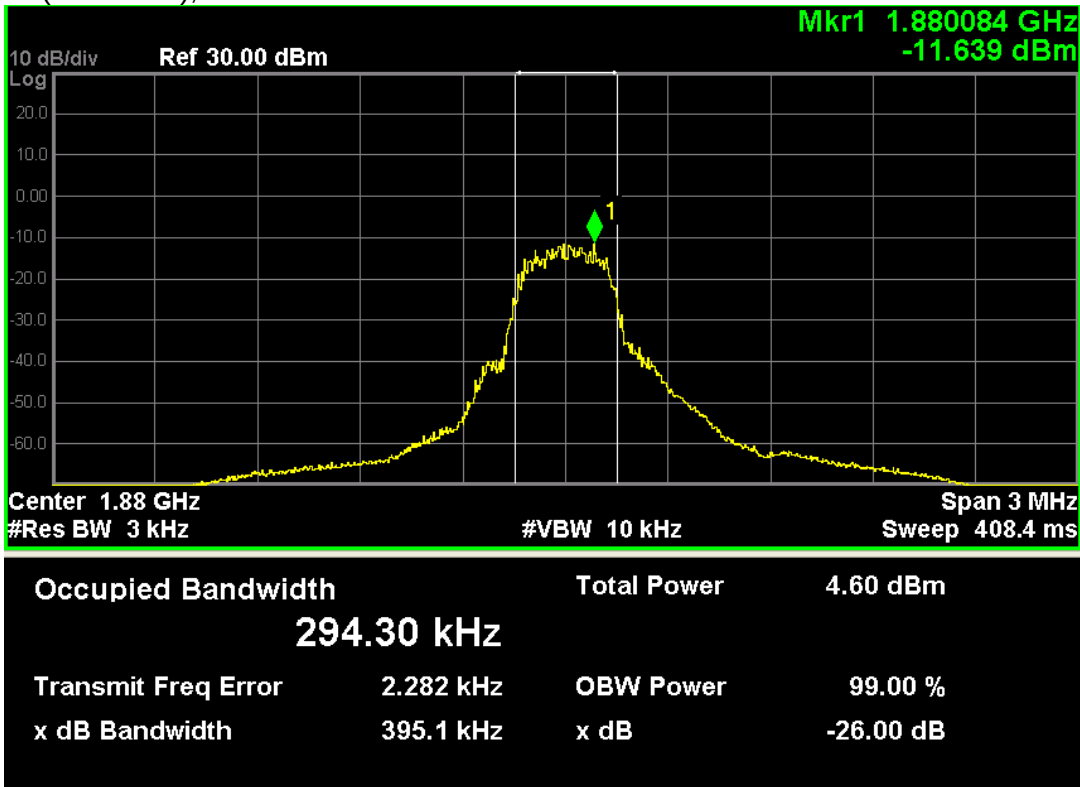


GSM1900 (GSM Link), Channel 810

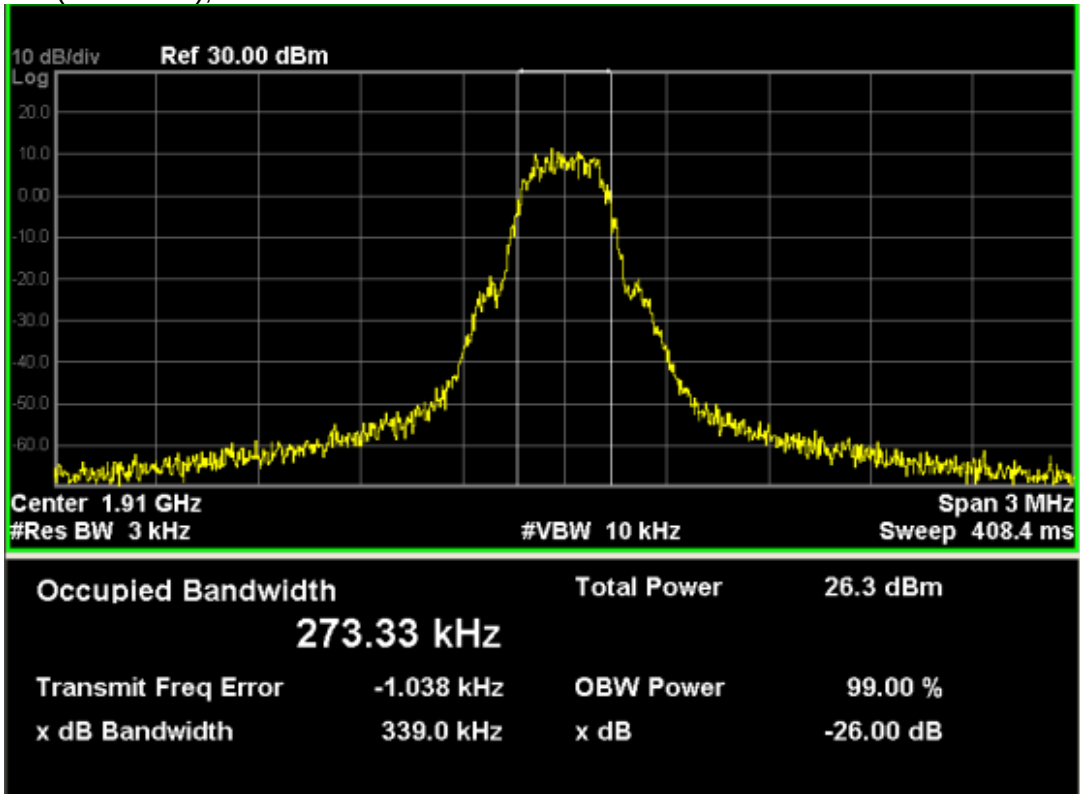


GSM1900 (GPRS 8 Link)

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
512	1850.20	300.7	248.09
661	1880.00	393.3	297.77
810	1909.80	312.4	245.18


GSM1900 (GPRS 8 Link), Channel 512

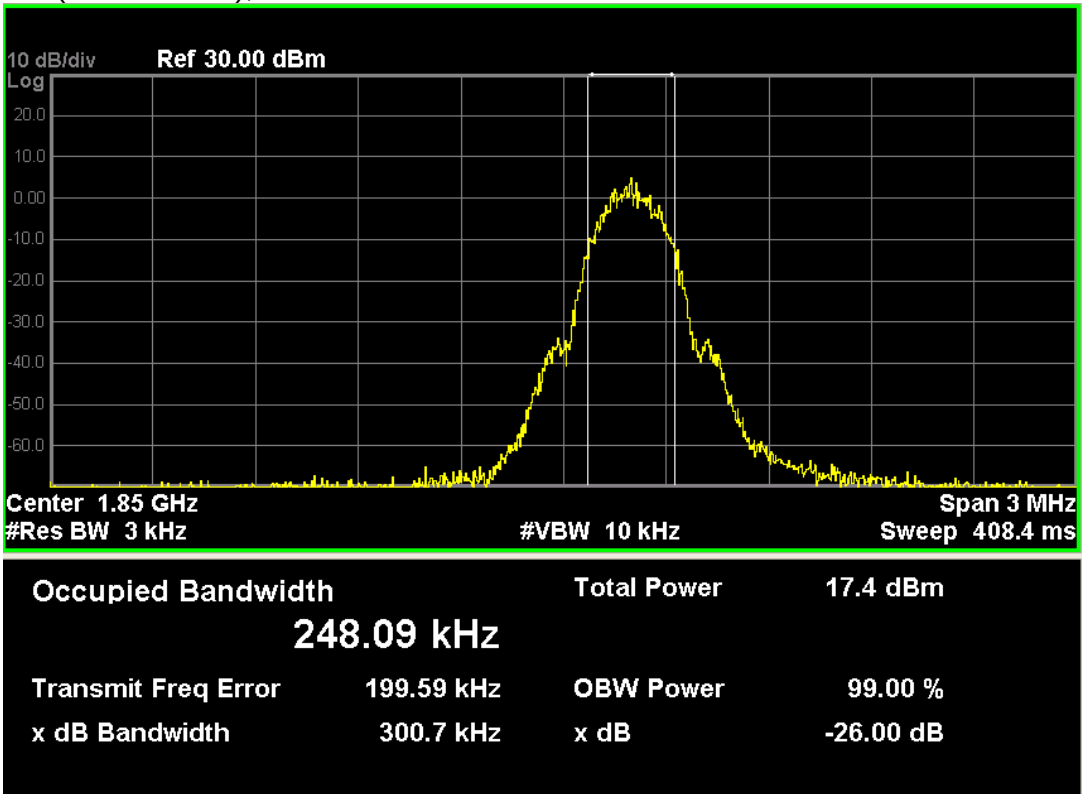

GSM1900 (GPRS 8 Link), Channel 661

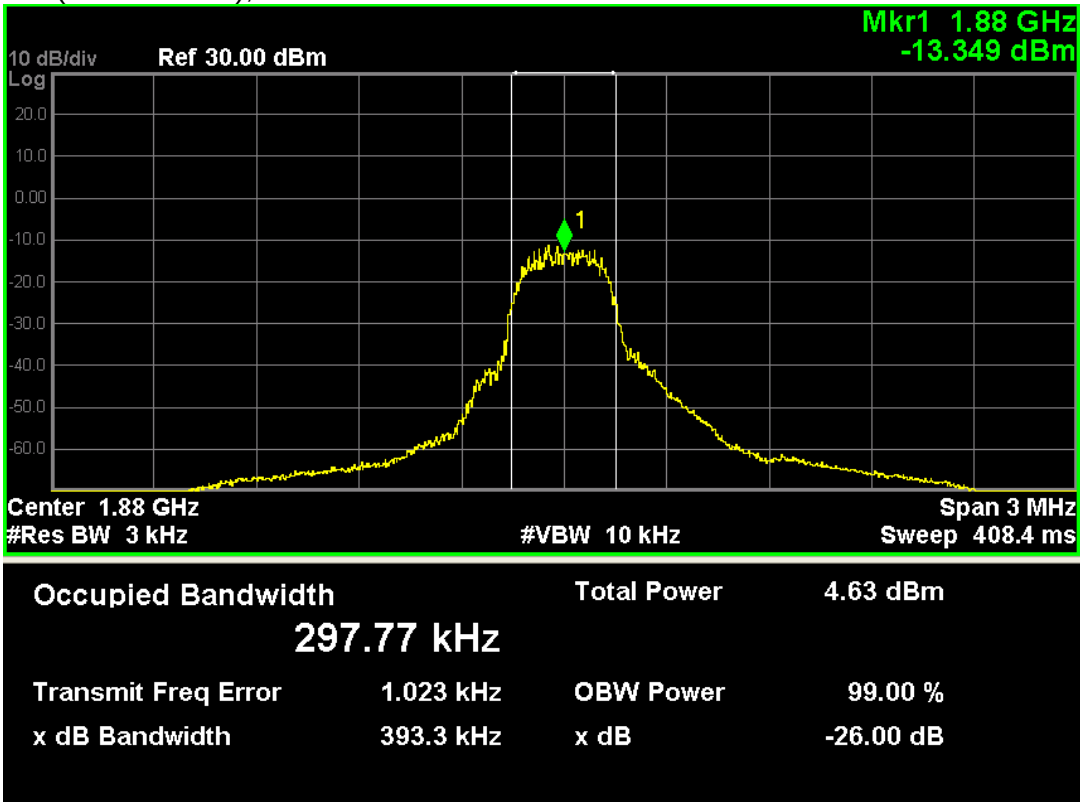


GSM1900 (GPRS 8 Link), Channel 810

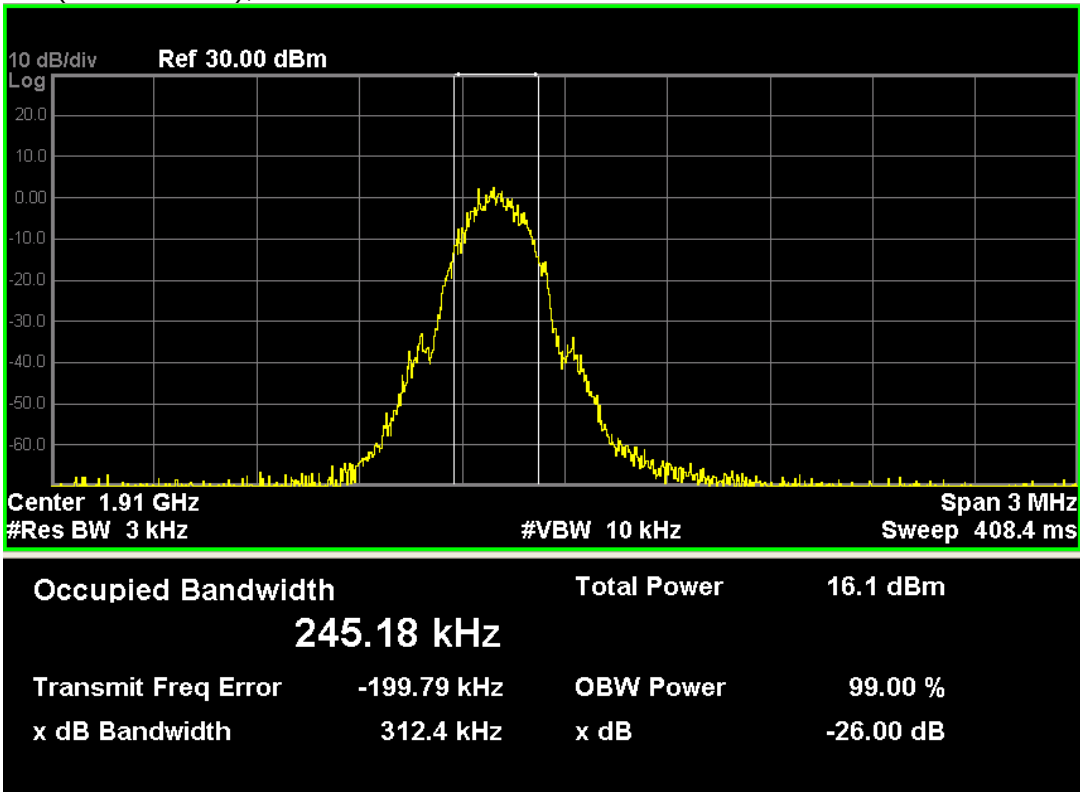


WCDMA Band V

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
4132	826.40	4.669	4.1784
4182	836.40	4.653	4.1544
4233	846.40	4.662	4.1580


WCDMA Band V, Channel 4132

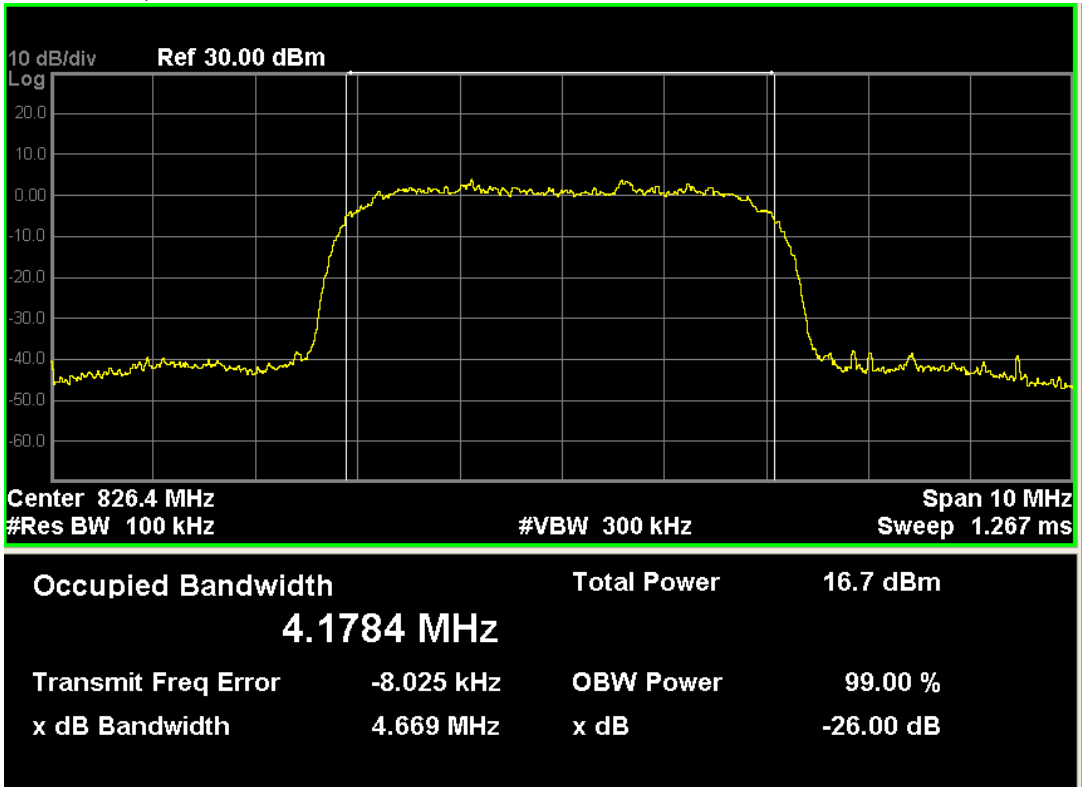

WCDMA Band V, Channel 4182

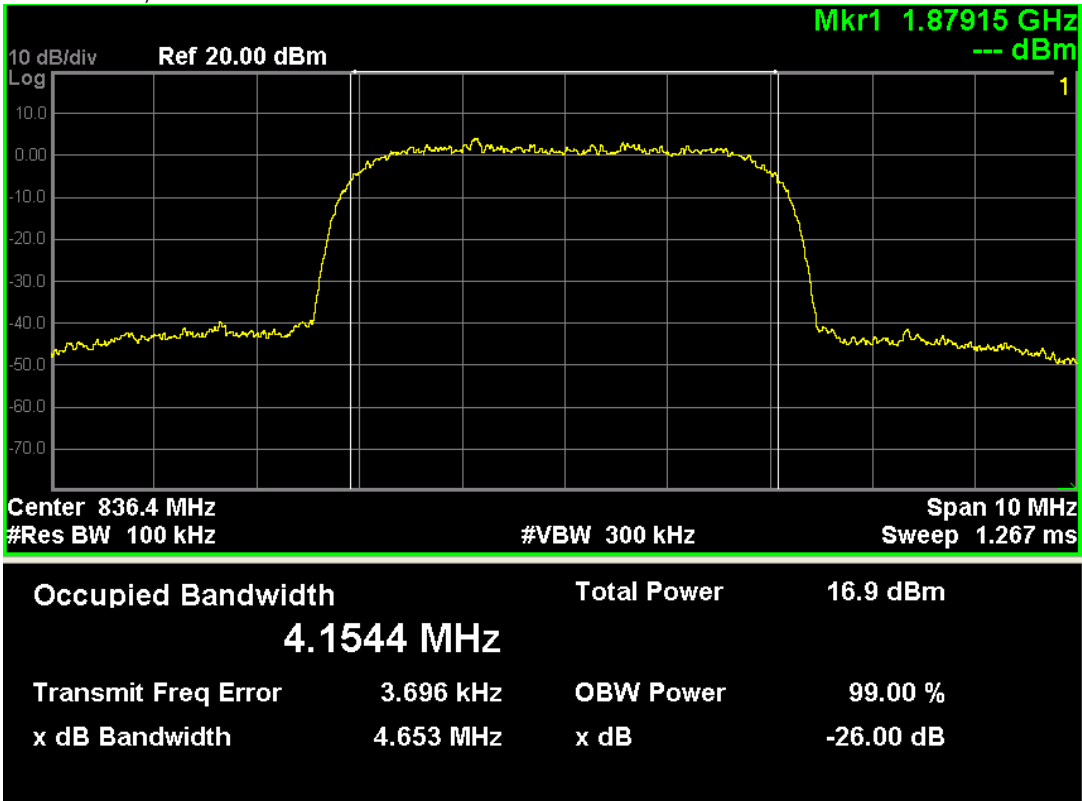


WCDMA Band V, Channel 4233

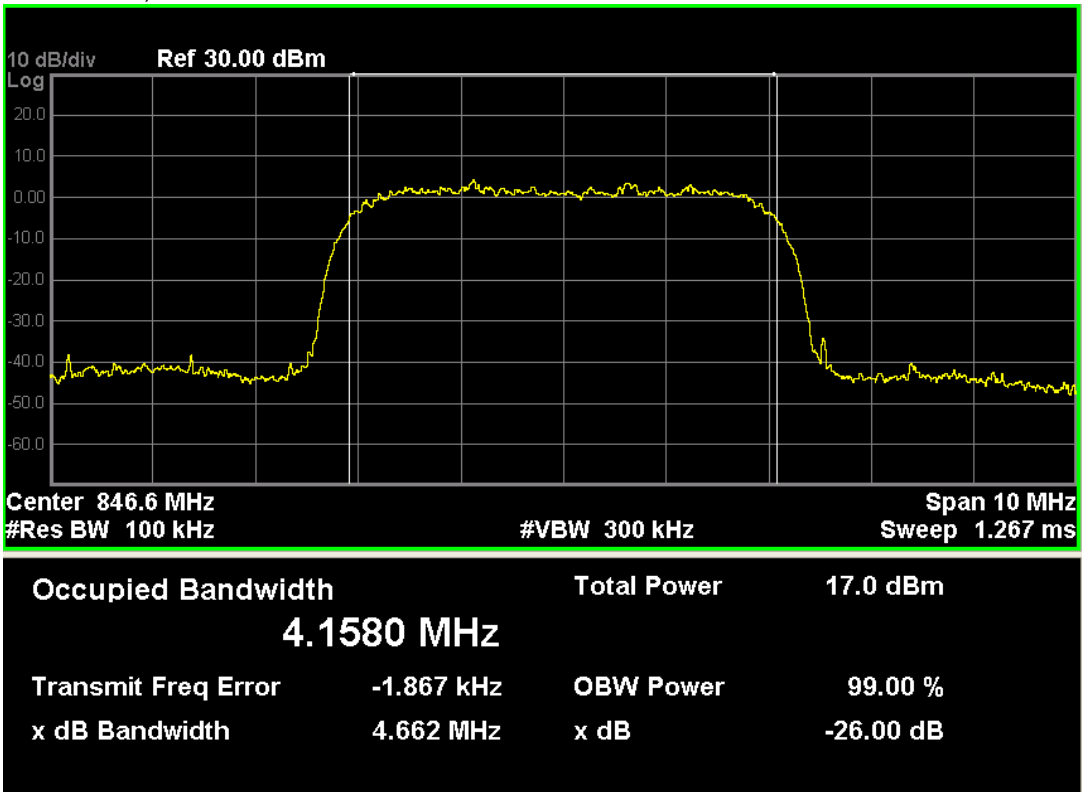


WCDMA Band II

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
9262	1852.4	4.675	4.1763
9400	1880.0	4.669	4.1579
9538	1907.6	4.680	4.1699


WCDMA Band II, Channel 9262

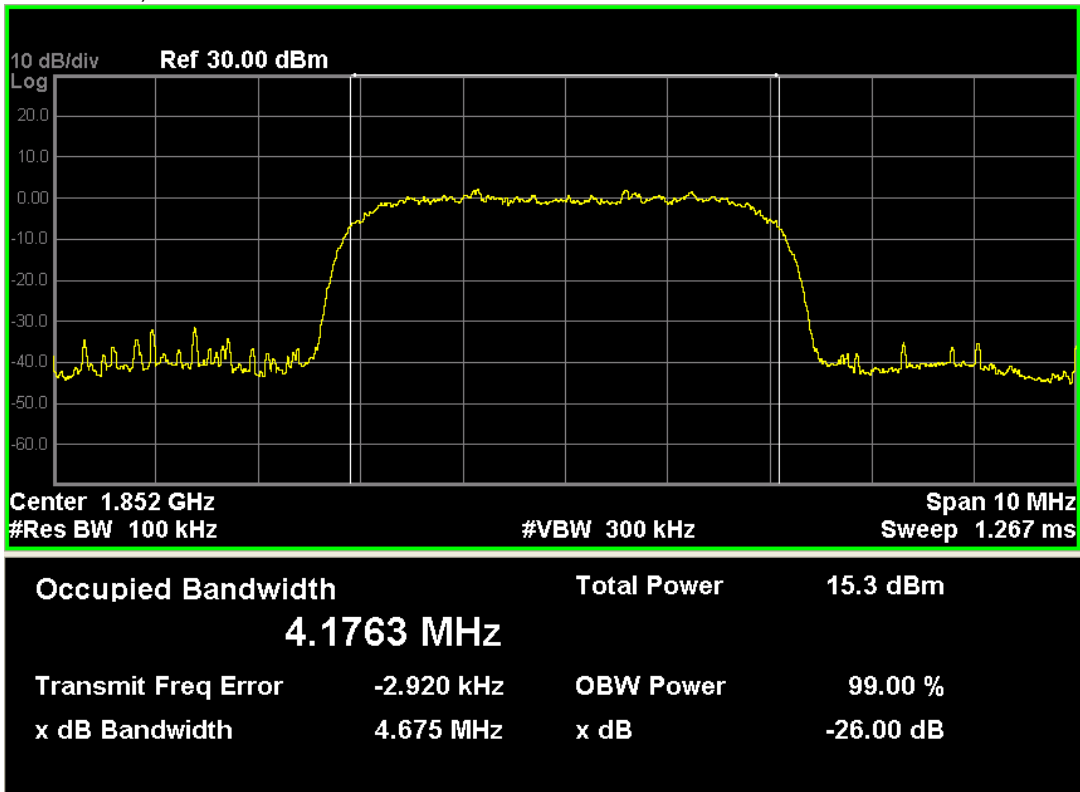

WCDMA Band II, Channel 9400

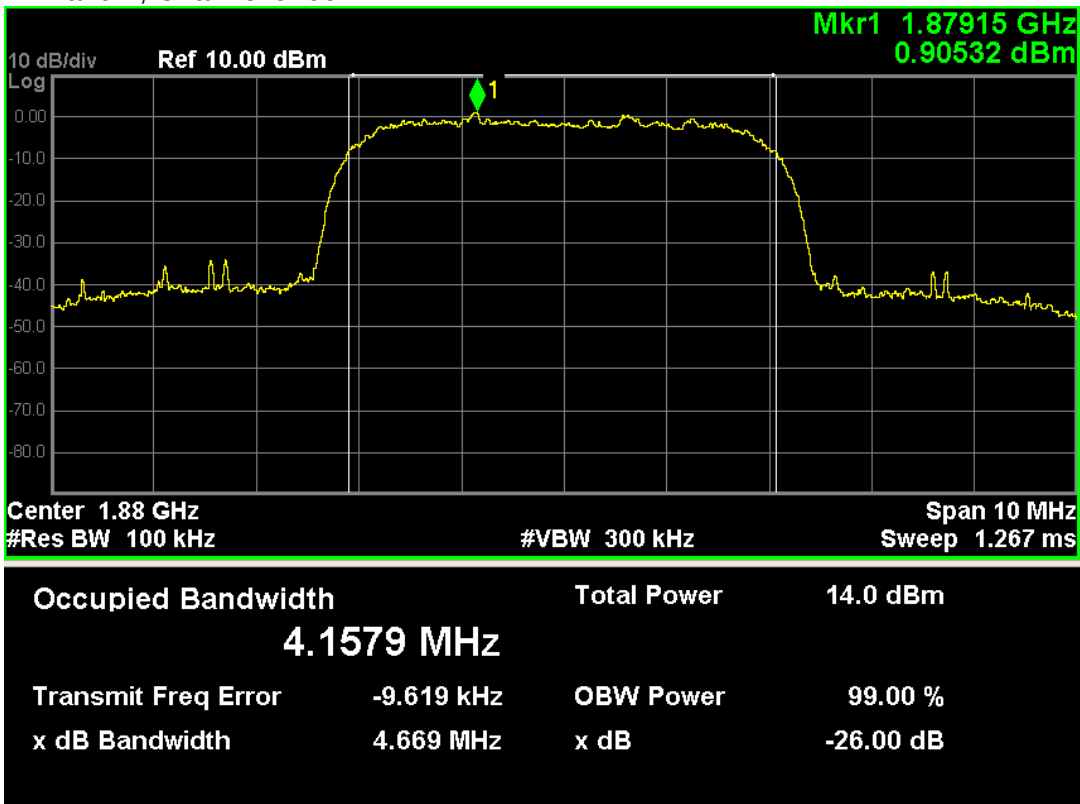

WCDMA Band II, Channel 9538

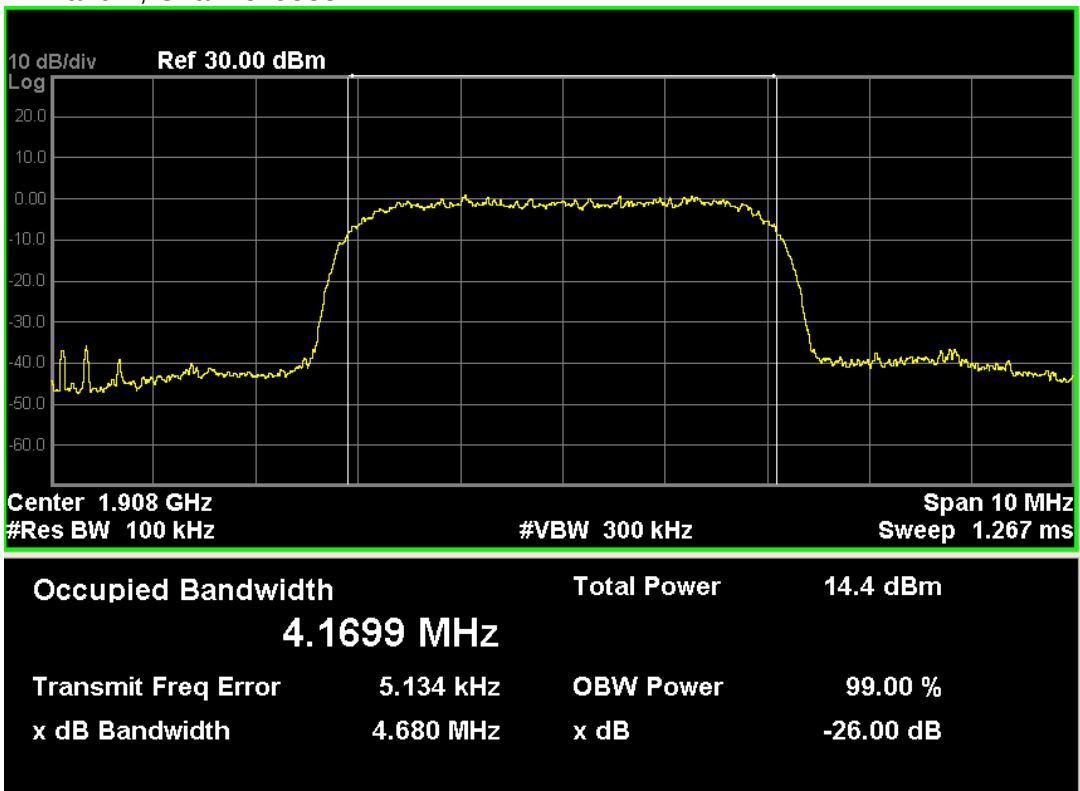


5. Spurious Emission At Antenna Terminals (+/- 1MHz)

5.1. Test Equipment

Instrument	Manufacturer	Model	Serial No	Cal. Date
Radio Communication Tester	Agilent	E5515C	GB46581718	2014.10.24
Spectrum Analyzer	Agilent	N9038A	MY51210142	2014.07.27
DC Power Supply	Agilent	6612C	MY43002989	2014.03.04

5.2. Test Setup

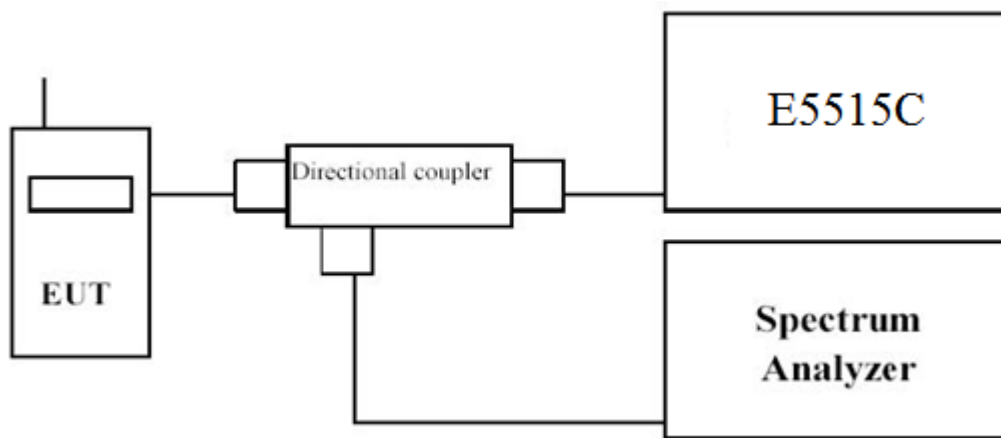

5.3. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

5.4. Test Procedure


In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

5.5. Uncertainty


The measurement uncertainty is defined as ± 1.2 dB.

5.6. Test Result


GSM850 (GSM Link), Channel 128

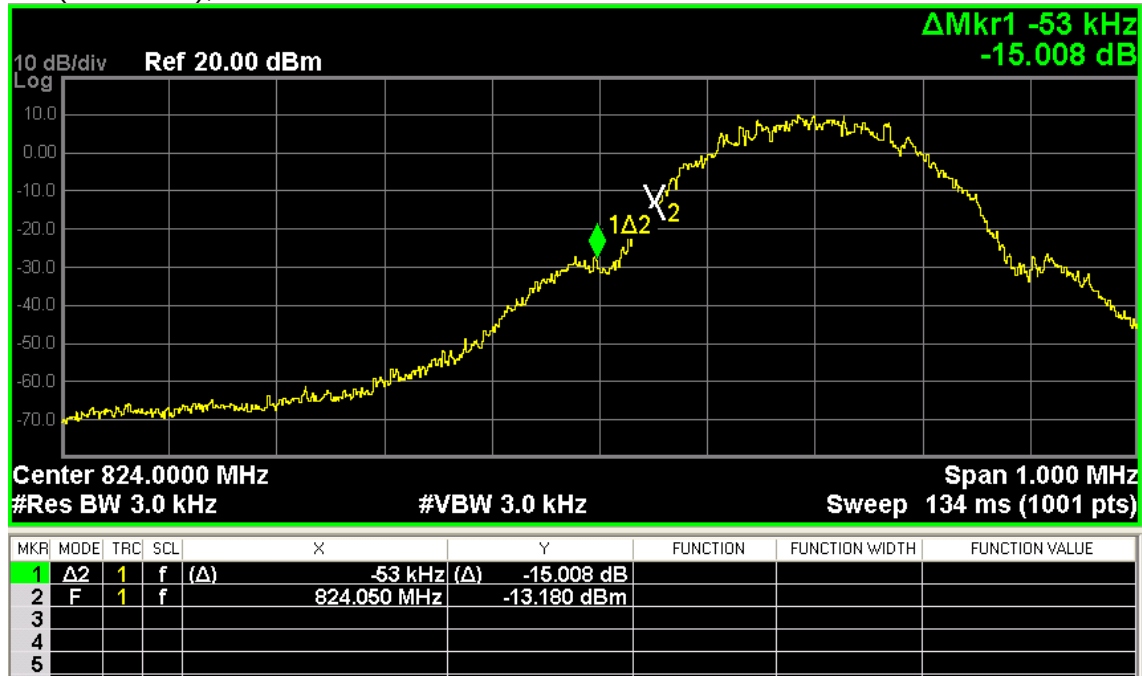


GSM850 (GSM Link), Channel 251

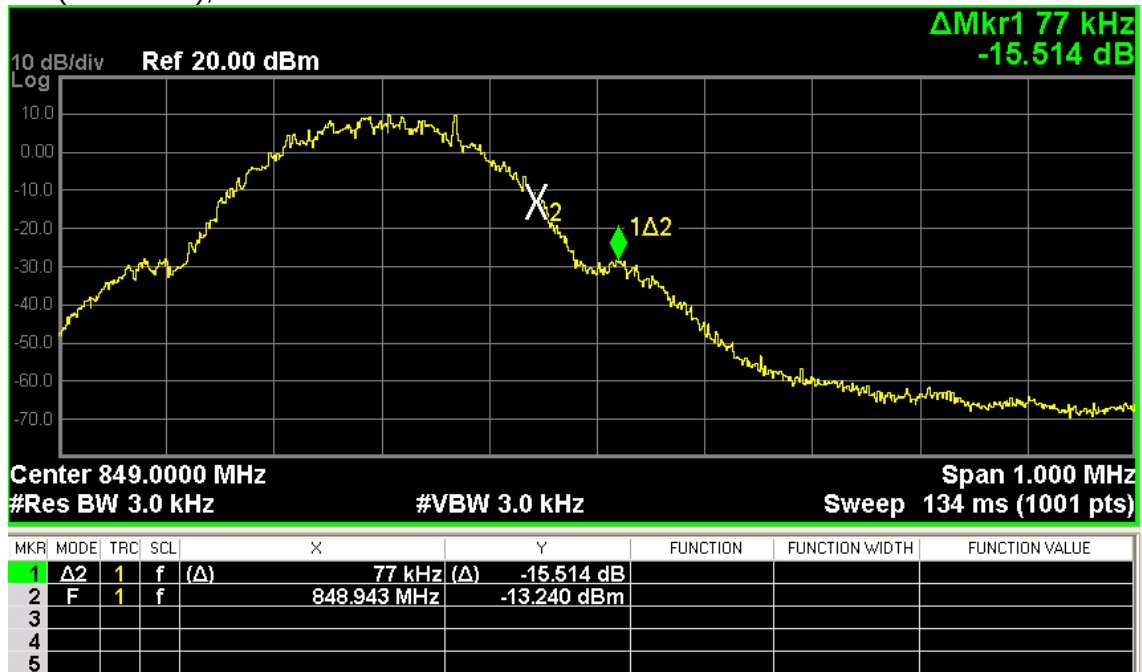

GSM850 (GPRS 8 Link), Channel 128

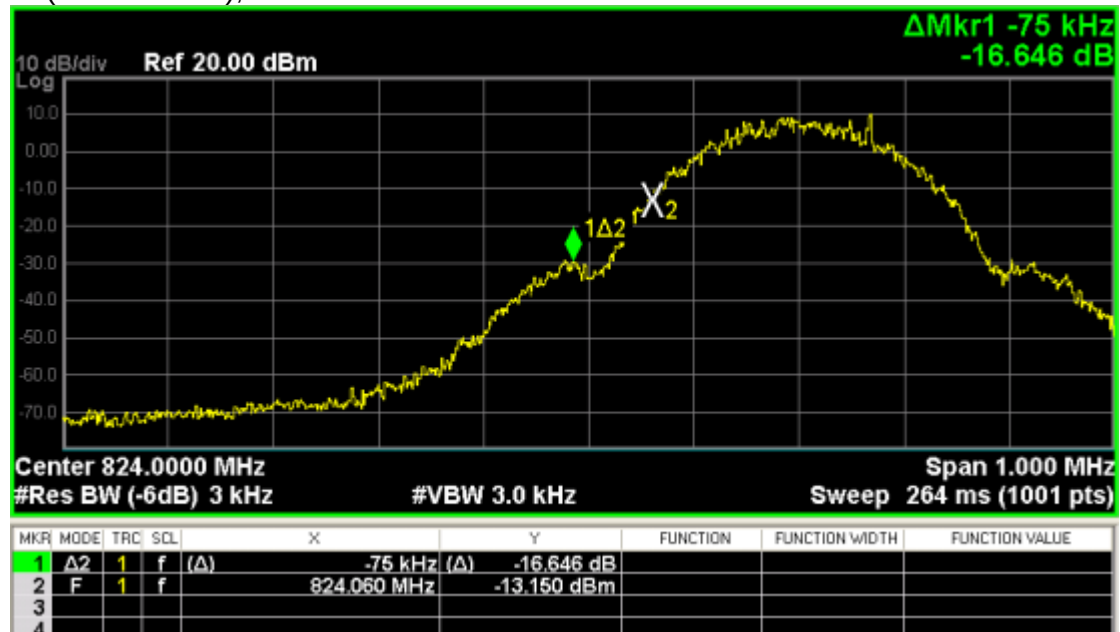

GSM850 (GPRS 8 Link), Channel 251

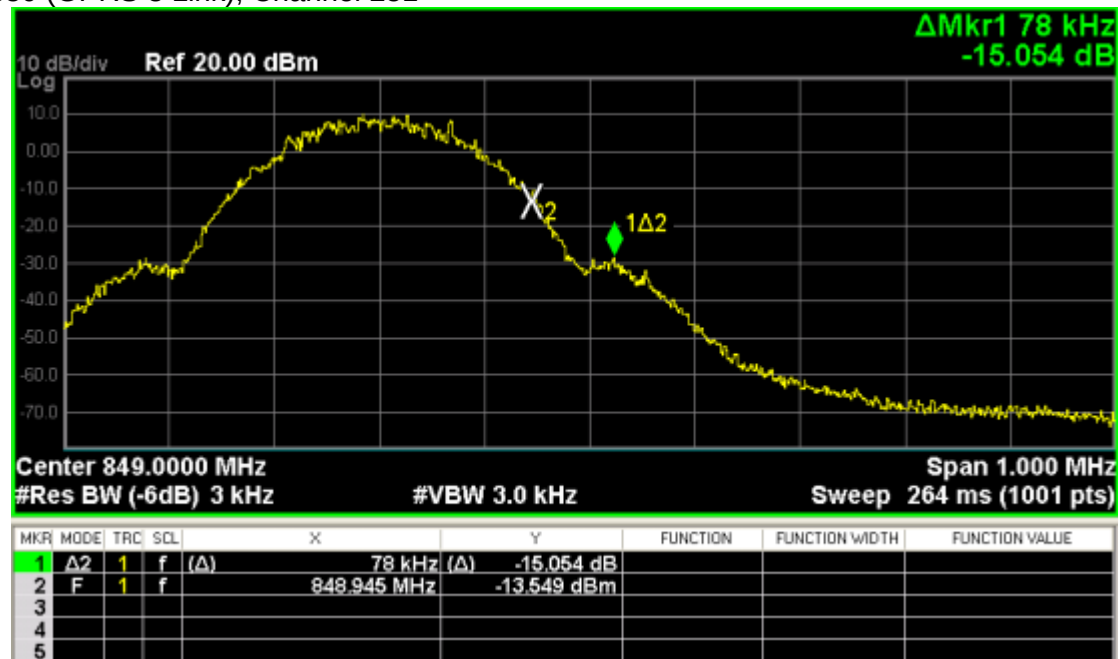


GSM 1900 (GSM Link), Channel 512




GSM 1900 (GSM Link), Channel 810




GSM1900 (GPRS 8 Link), Channel 512

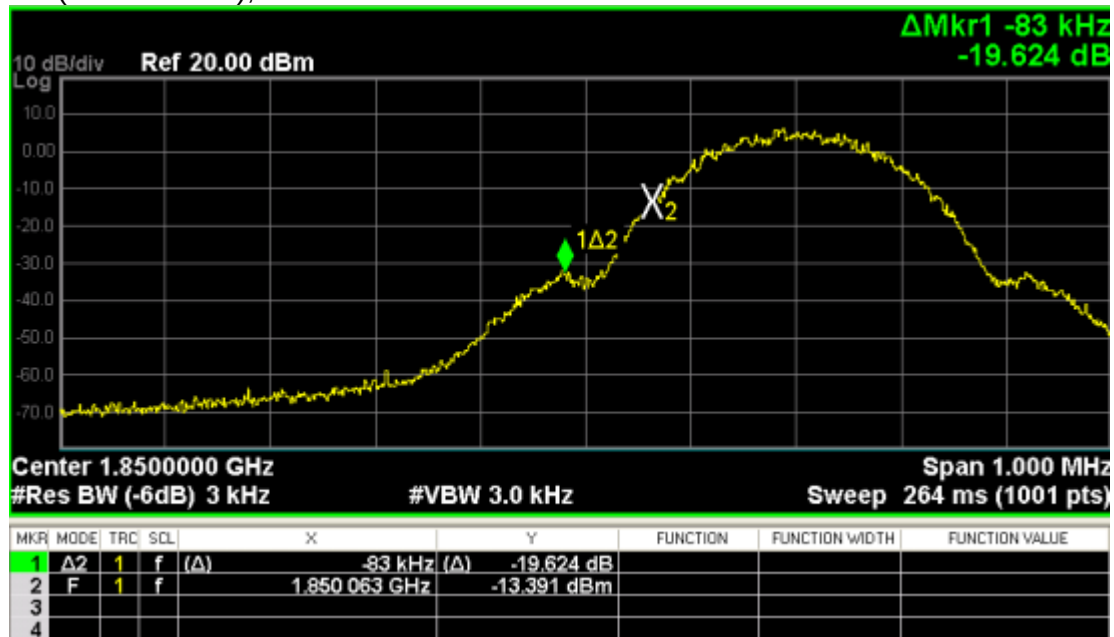

GSM1900 (GPRS 8 Link), Channel 810

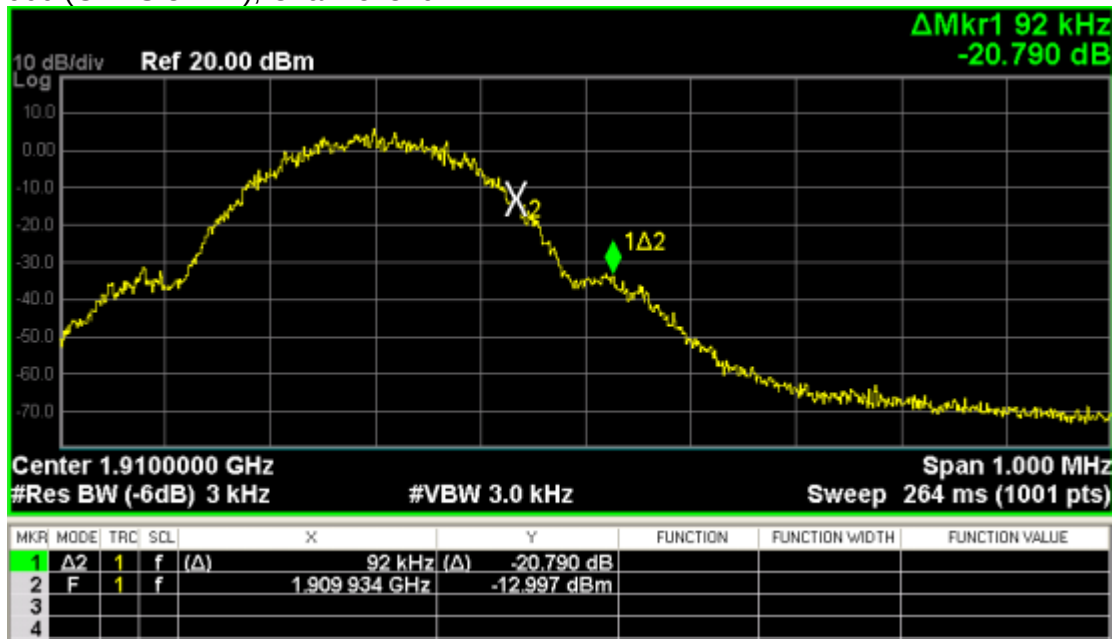


WCDMA Band V, Channel 4132

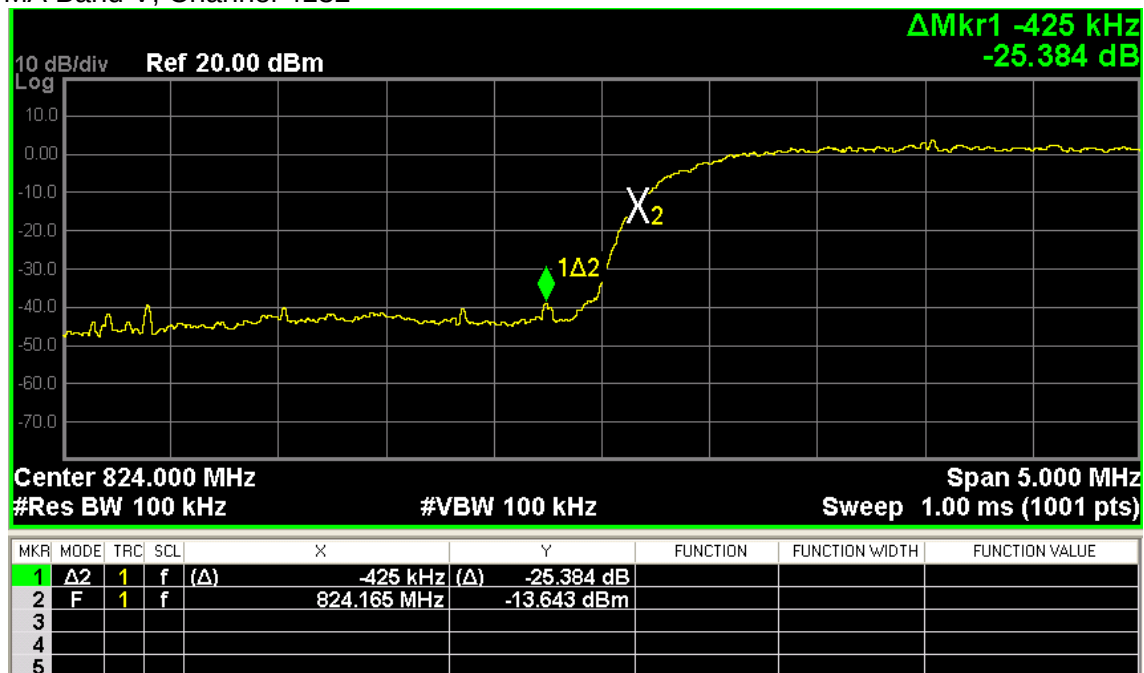


WCDMA Band V, Channel 4233



WCDMA Band II, Channel 9262

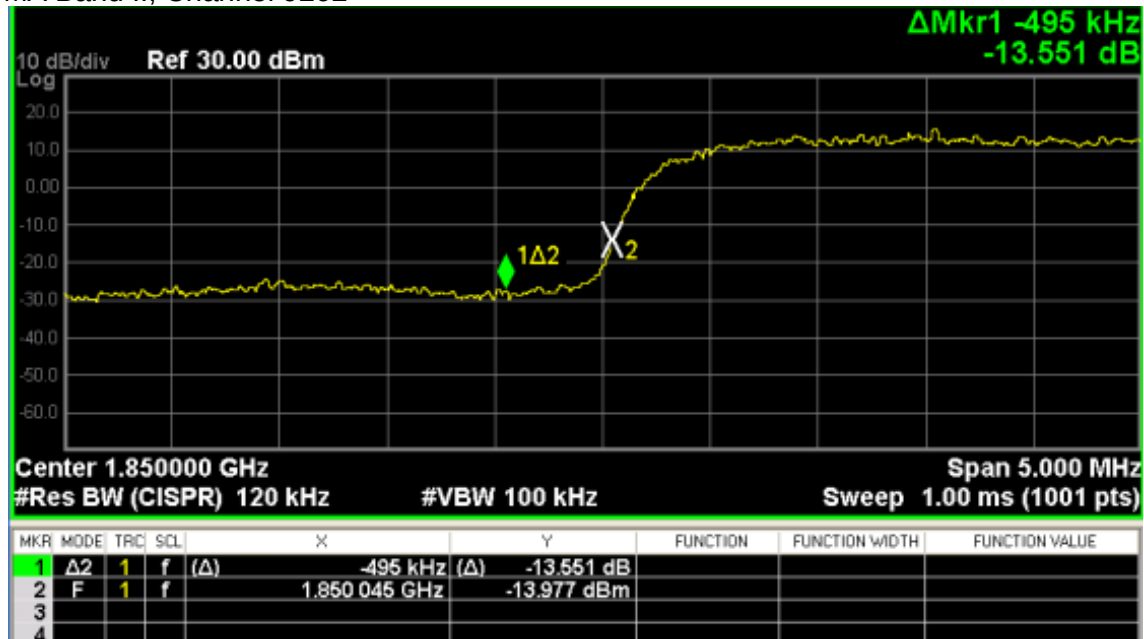

WCDMA Band II, Channel 9538

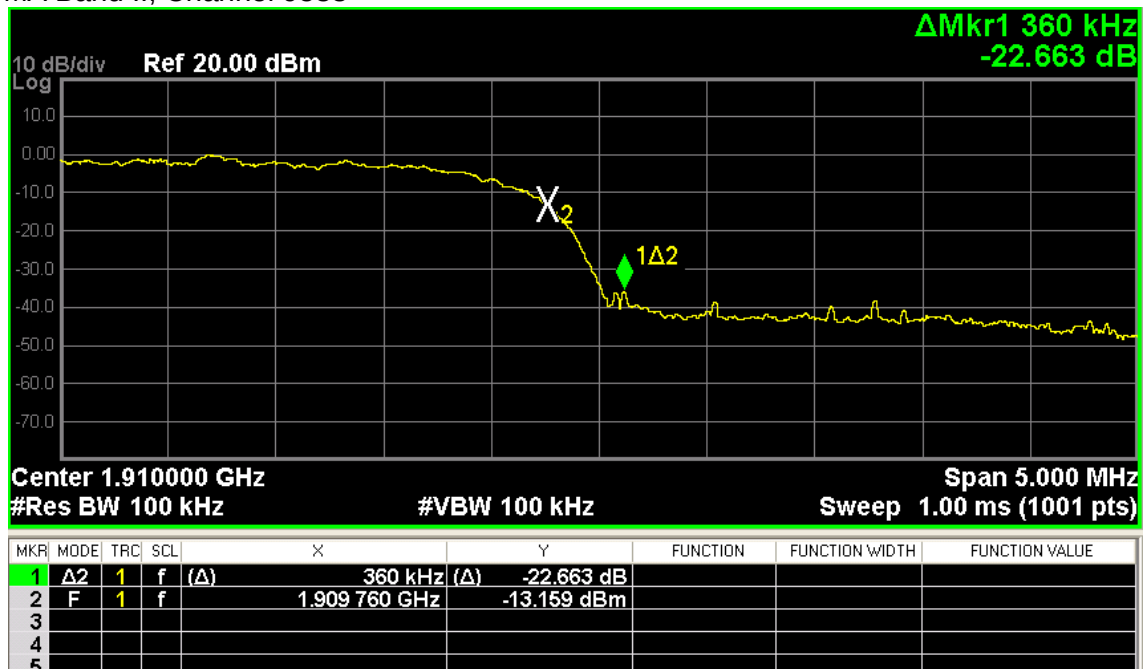


6. Spurious Emission

6.1. Test Equipment


Instrument	Manufacturer	Model	Serial No.	Cali. Due Date
Spectrum Analyzer	Agilent	N9038A	MY51210142	2014.07.27
Radio Communication Tester	Agilent	E5515C	GB46581718	2014.10.24
Signal Generator	Agilent	N5183A	MY50140938	2014.10.07
Preamplifier	CEM	EM30180	3008A0245	2014.03.01
DC Power Supply	Agilent	6612C	MY43002989	2014.03.04
Loop Antenna	Schwarzbeck	FMZB1519	1519-020	2014/03/27
Bilog Antenna	Schwarzbeck	VULB9160	9160-3316	2014.07.19
VHF-UHF-Biconical Antenna	Schwarzbeck	VUBA9117	9117-263	2014.07.19
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-942	2014.07.19
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-943	2014.07.19

6.2. Test Setup


Conducted Spurious Emission Measurement:

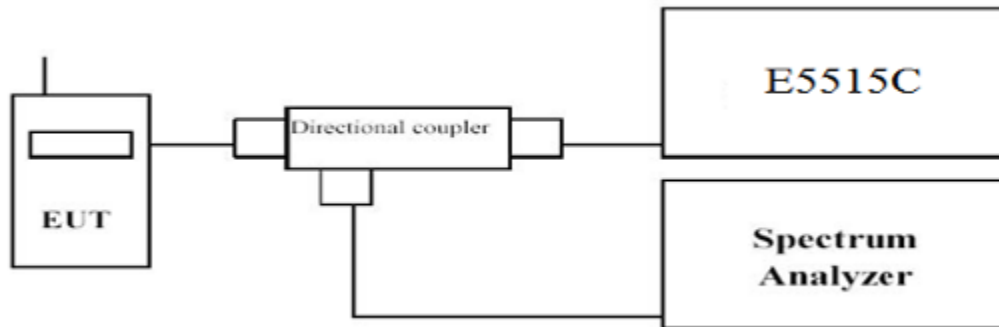


Radiated Spurious Measurement: below 30MHz

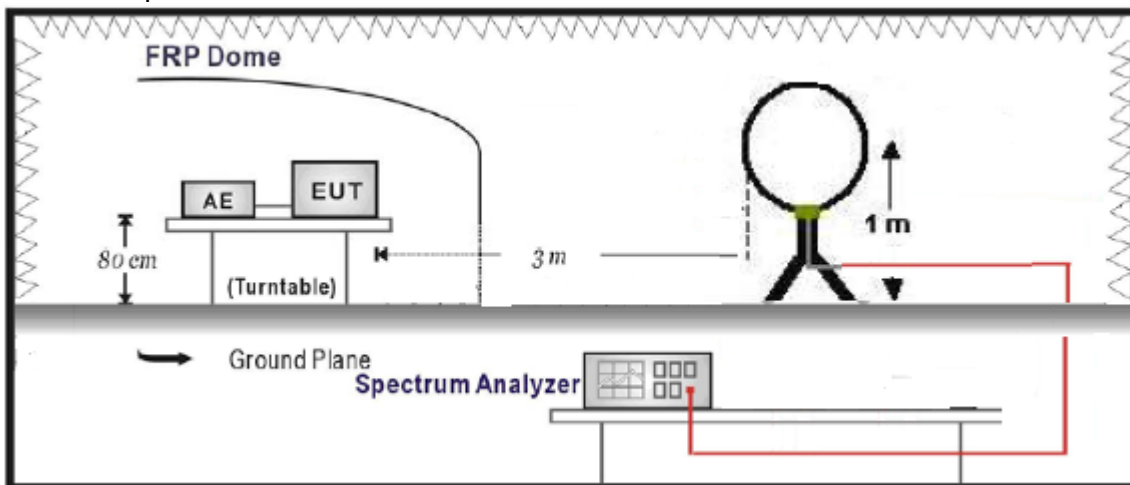

Radiated Spurious Measurement: 30MHz to 1GHz

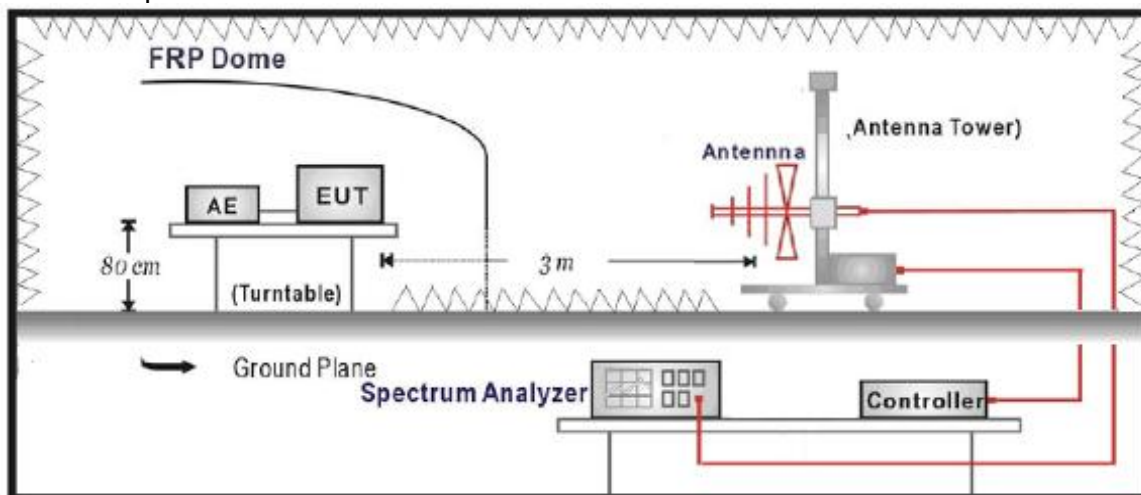

Radiated Spurious Measurement: above 1GHz

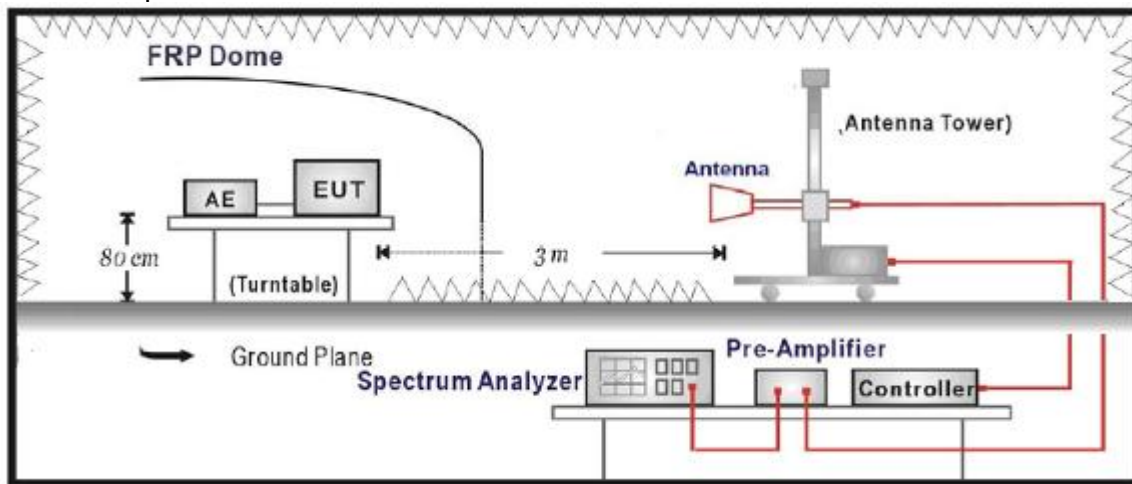

6.3. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

6.4. Test Procedure

Conducted Spurious Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and E5515C by a Directional Couple.
- EUT Communicate with E5515C, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set at 1 MHz, sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

Radiated Spurious Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum

signal level is detected by the measuring receiver.

- f. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. The frequency range was checked up to 10th harmonic.
- r. Test site anechoic chamber refer to ANSI C63.4: 2009


6.5. Uncertainty

The measurement uncertainty is defined as 3.2 dB for Radiated Power Measurement.


6.6. Test Result



Conducted Spurious Measurement:

GSM850 (GSM Link), Channel 189

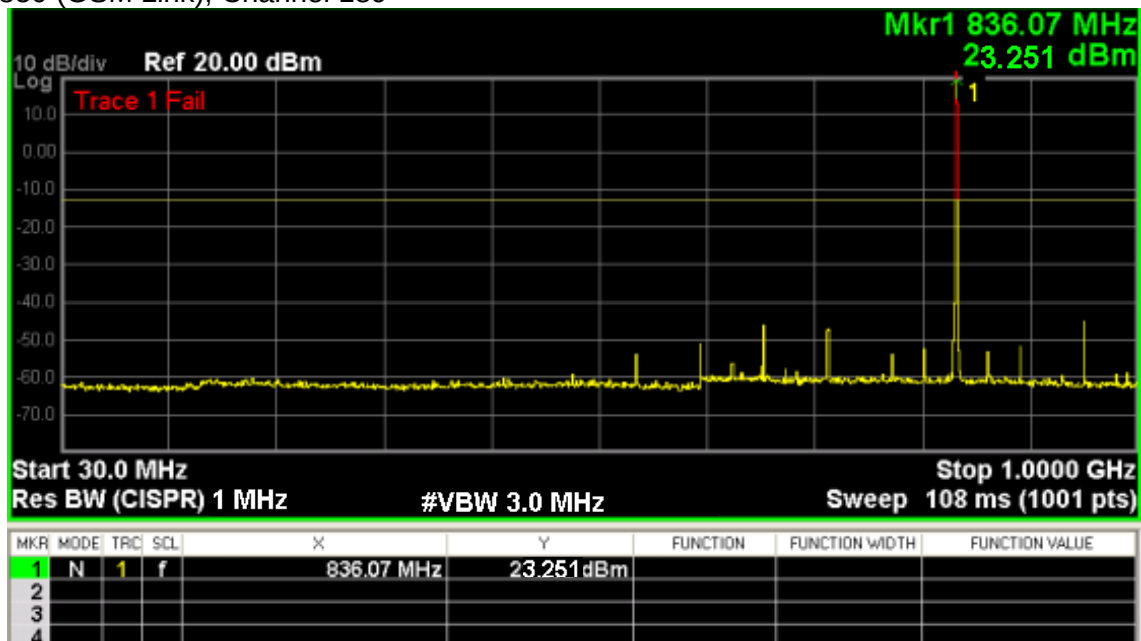


Note: The signal at point 1 is carrier

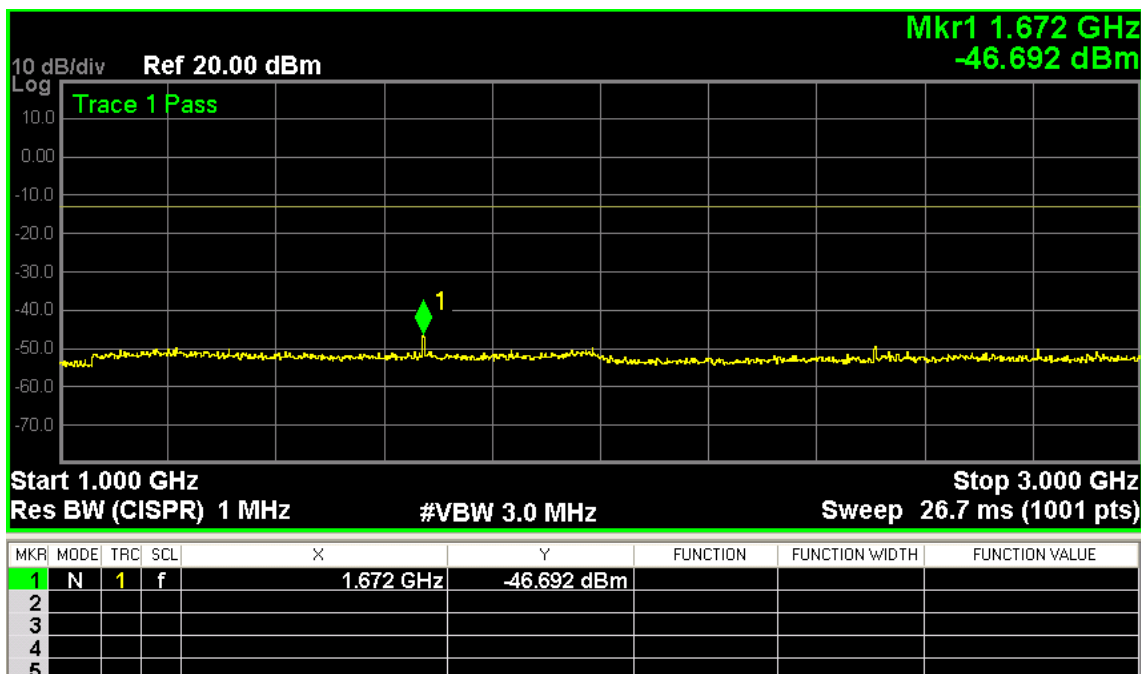


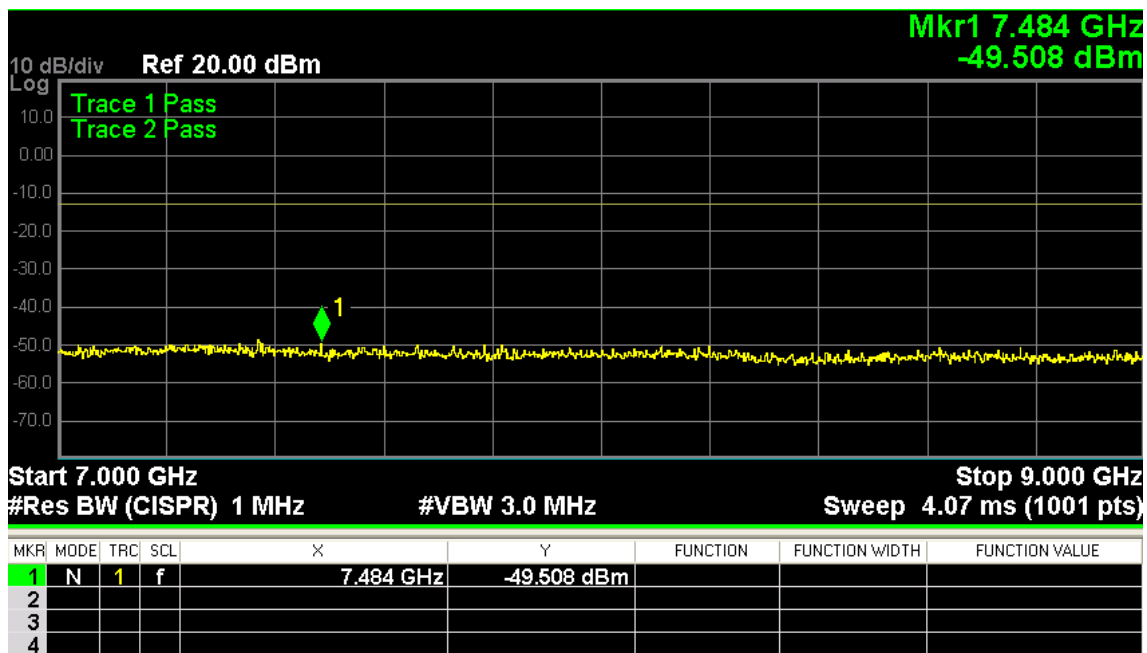
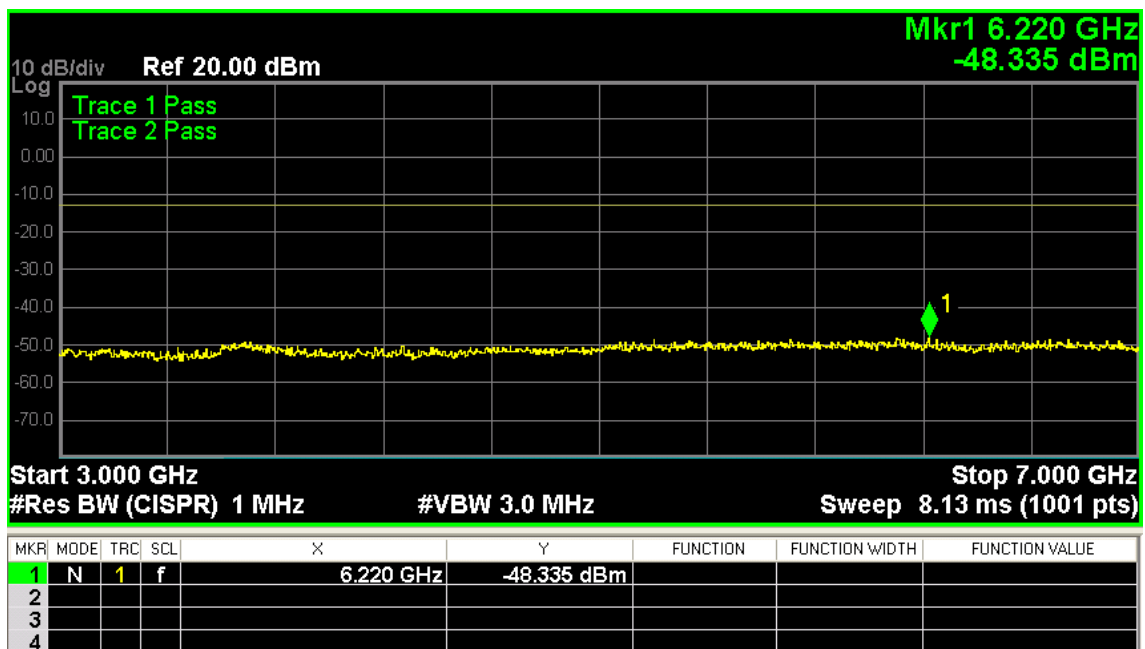


GSM850 (GPRS 8 Link), Channel 189


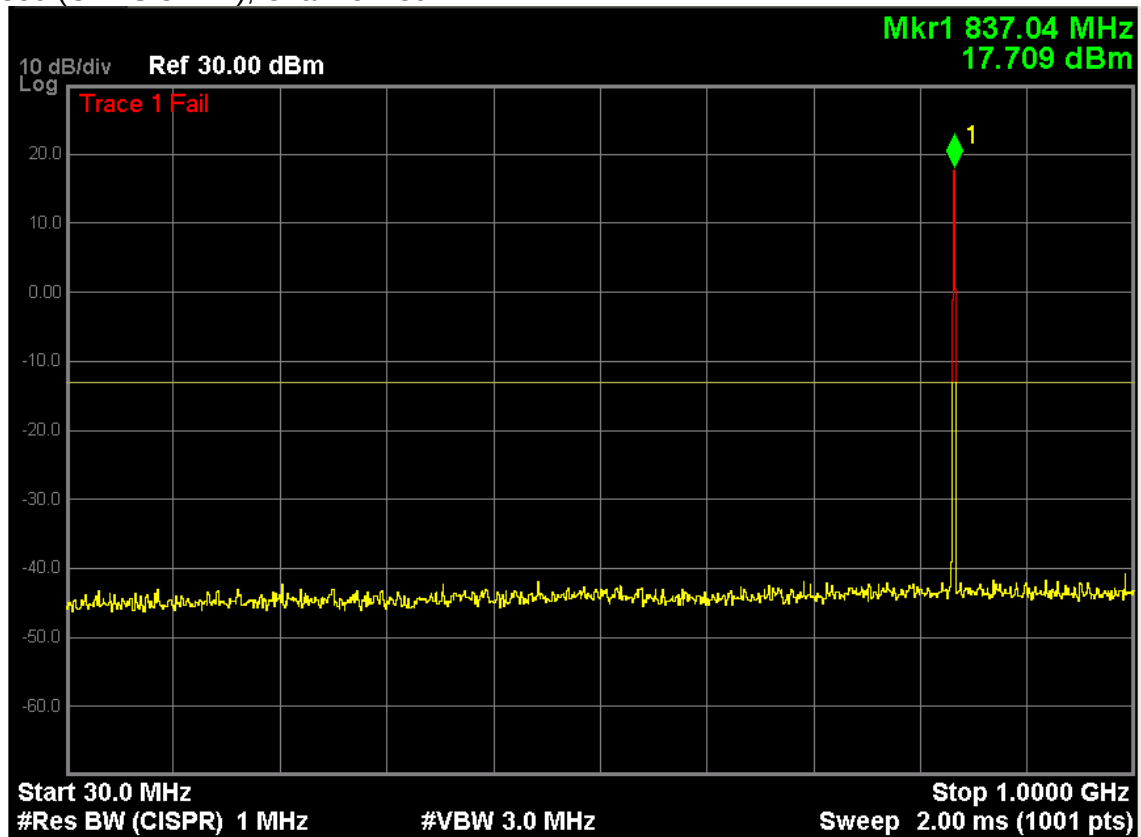


Note: The signal at point 1 is carrier


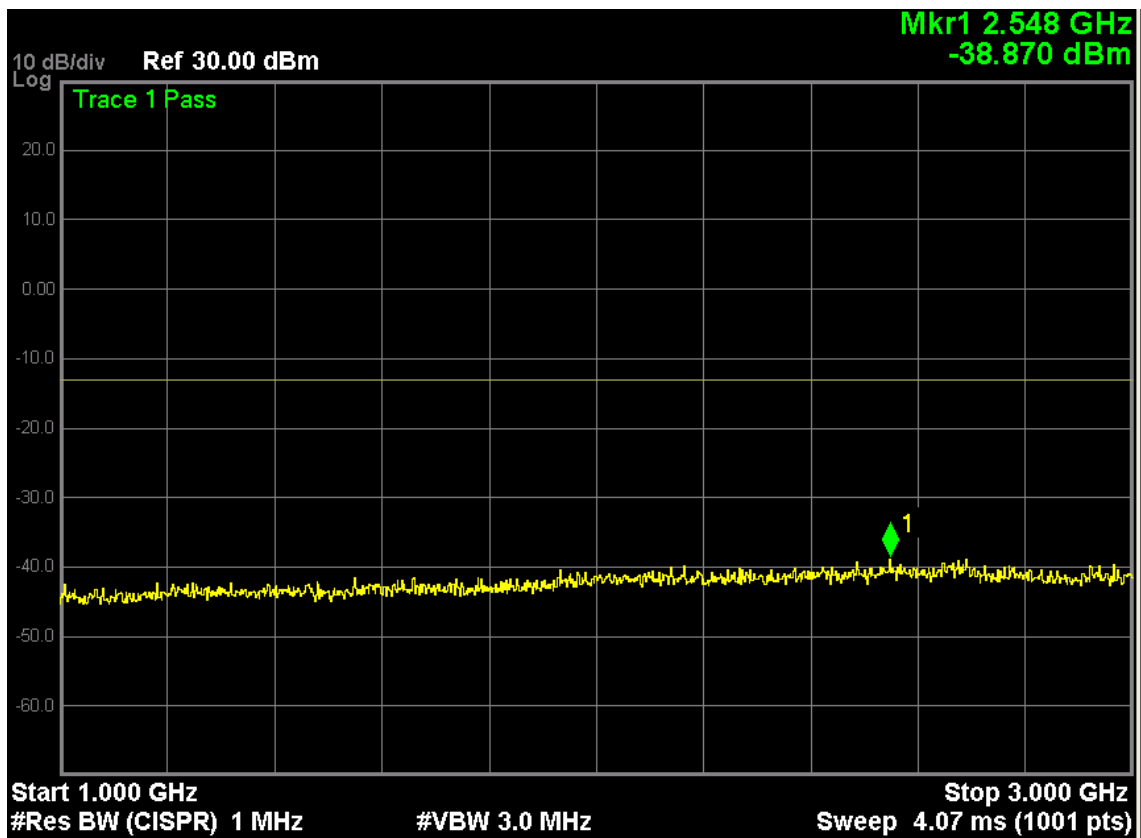


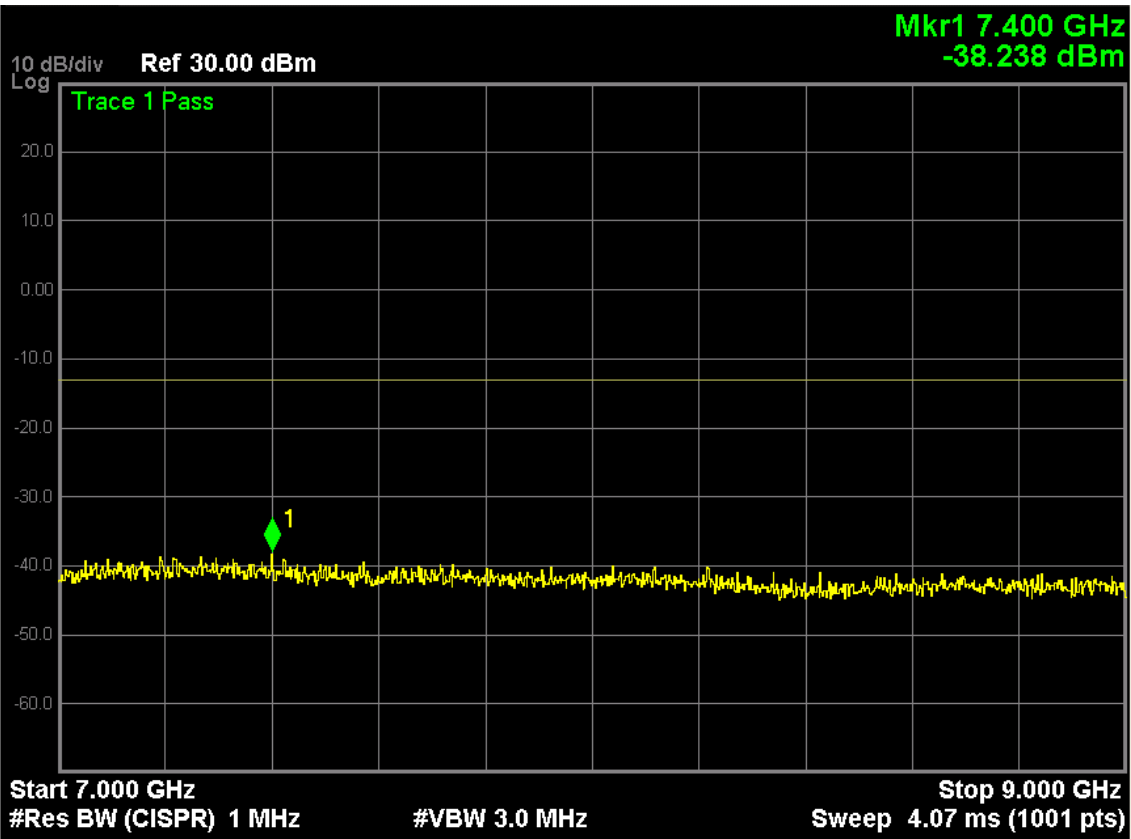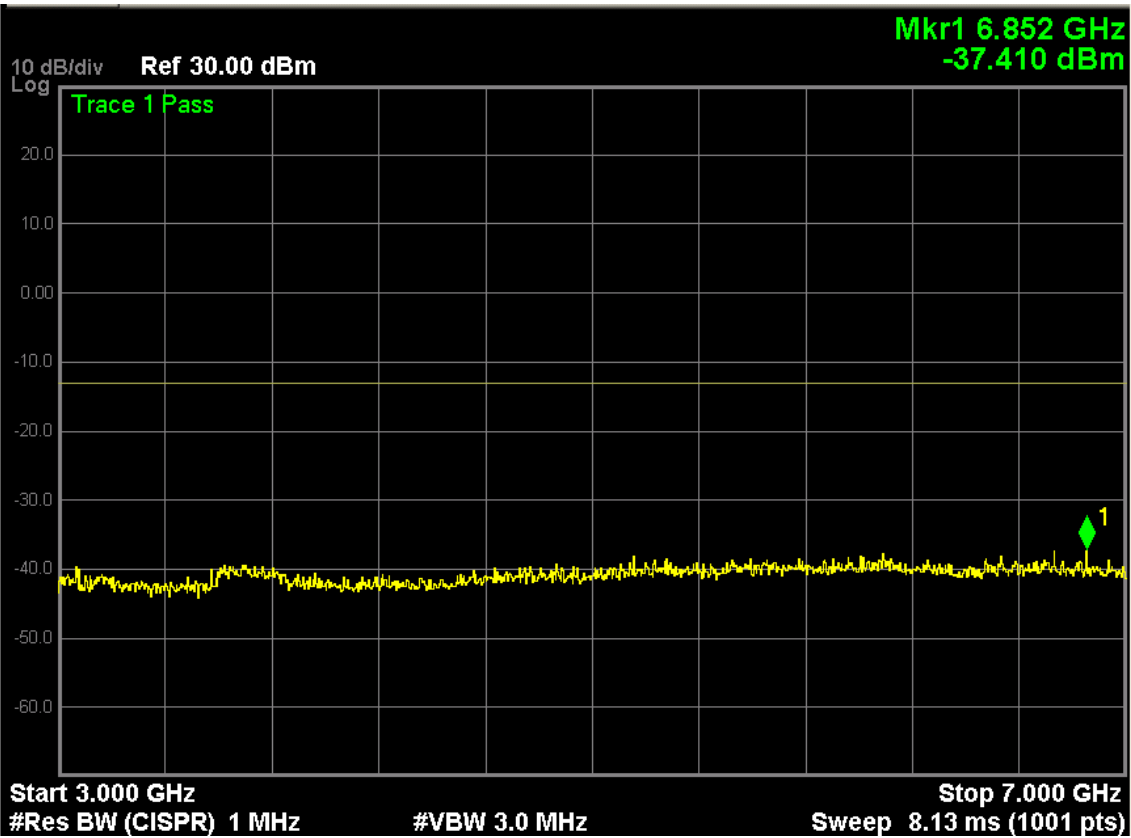


GSM 1900 (GSM Link), Channel 661

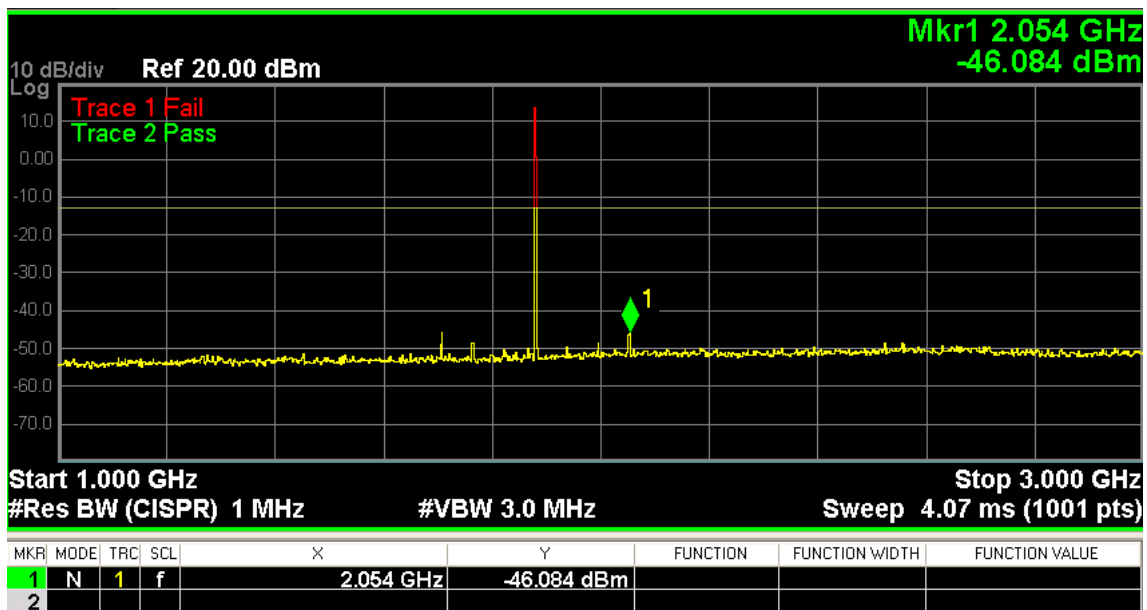
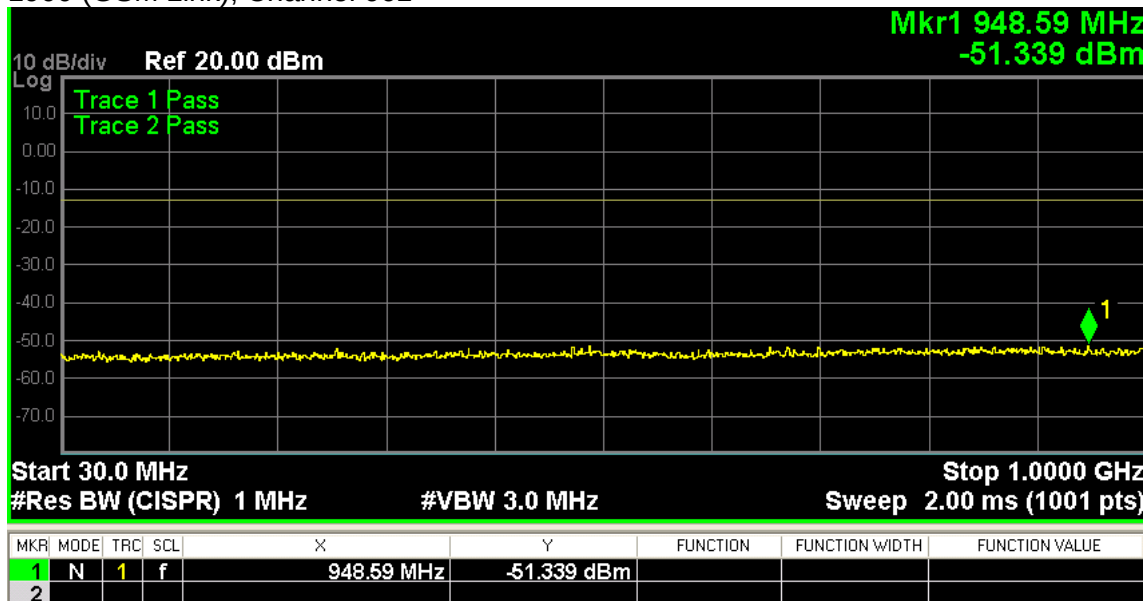


Note: The signal at left of point 1 is carrier

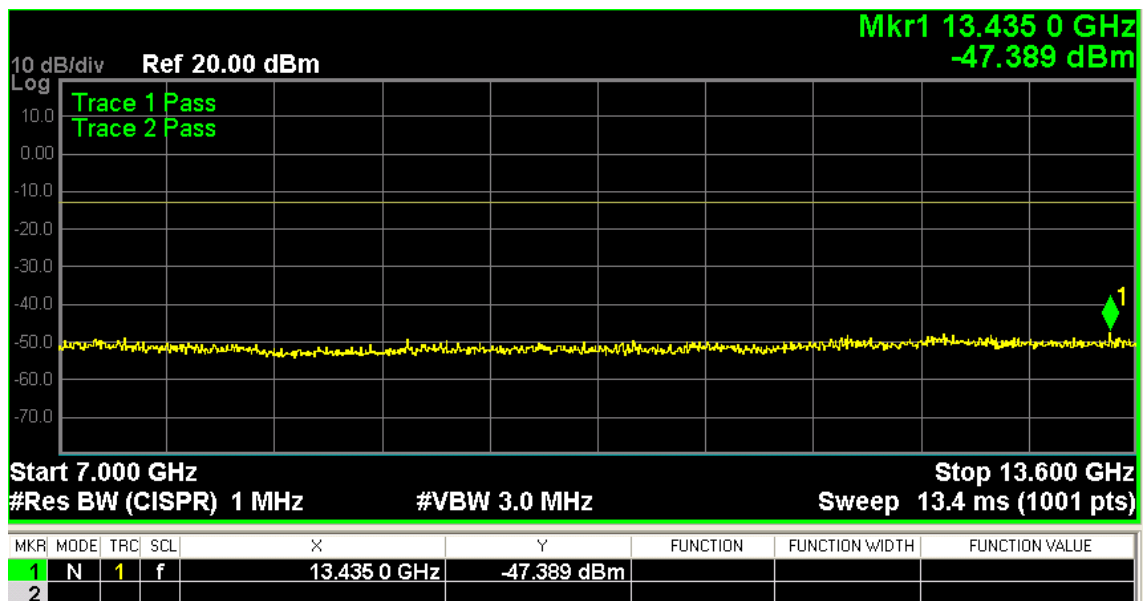
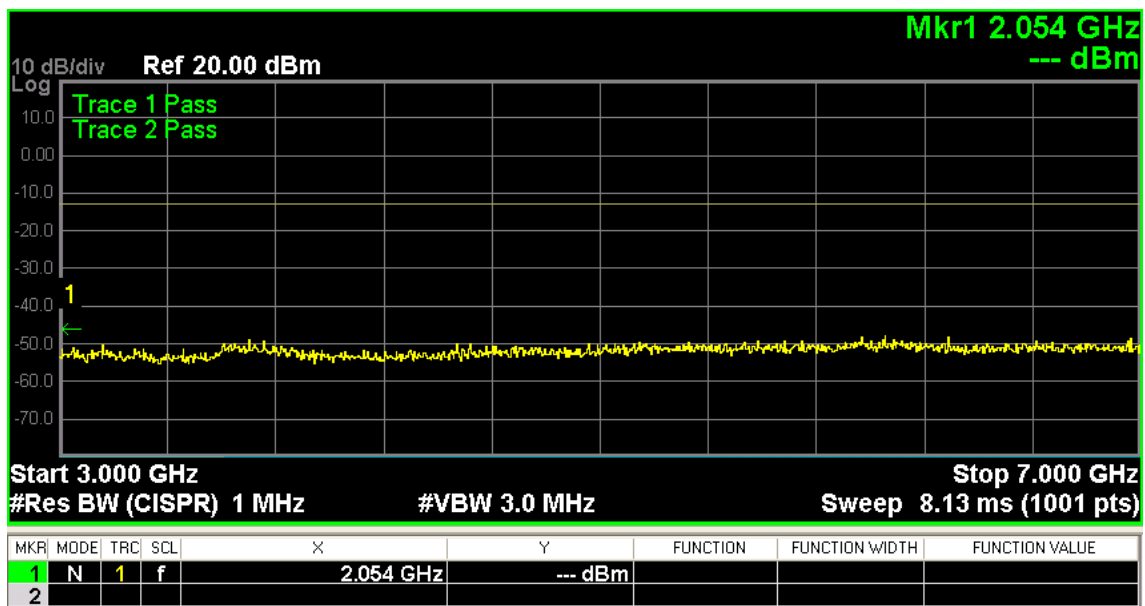


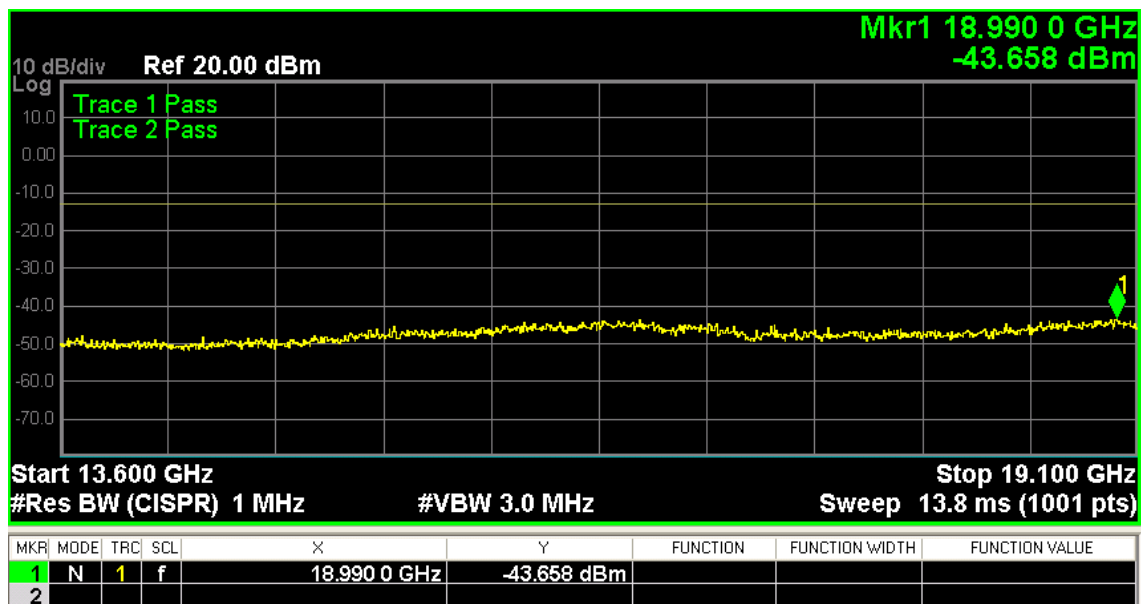


GSM 1900 (GPRS 8 Link), Channel 661:

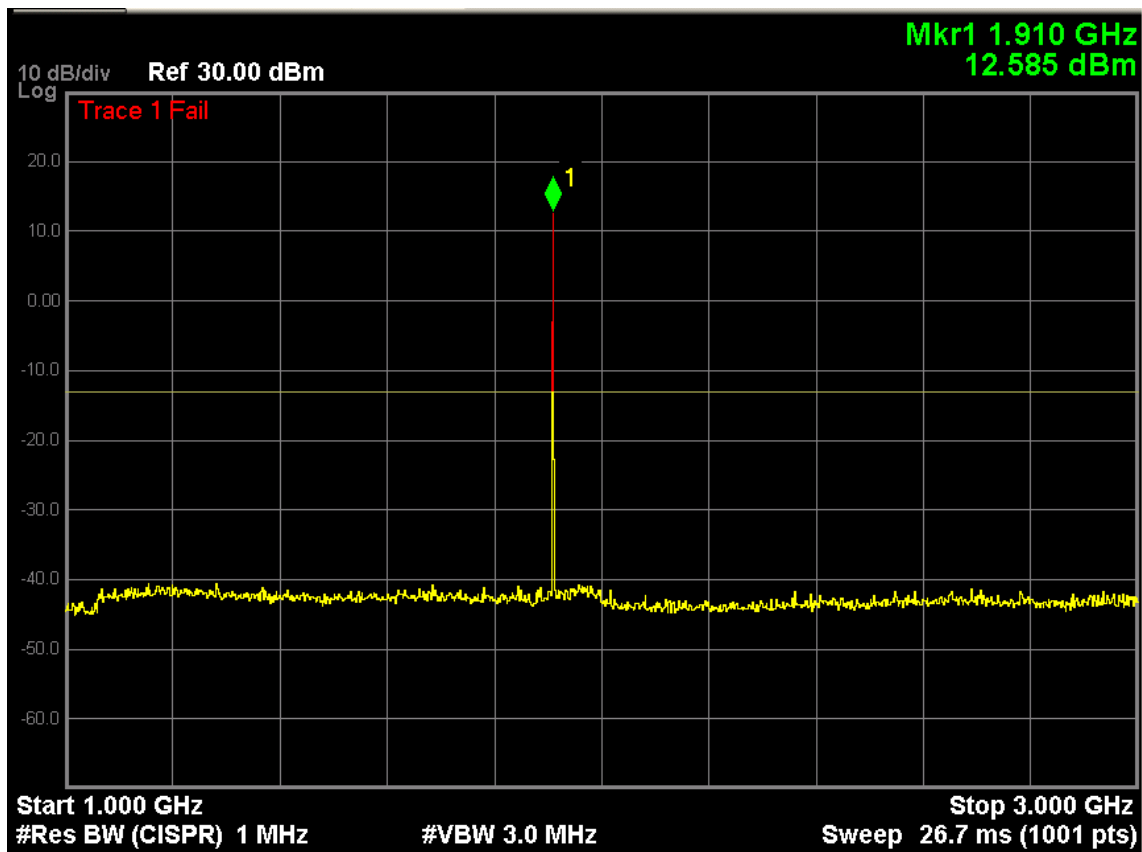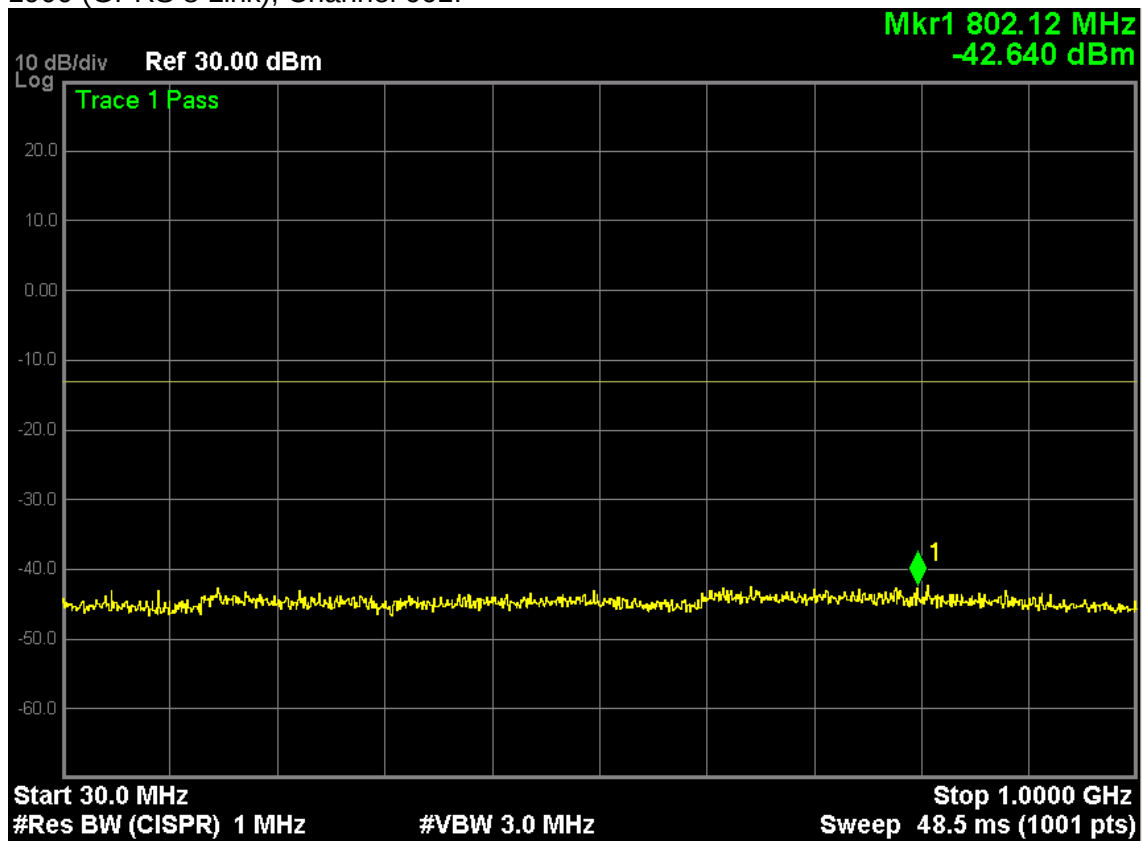


Note: The signal at point 1 is carrier

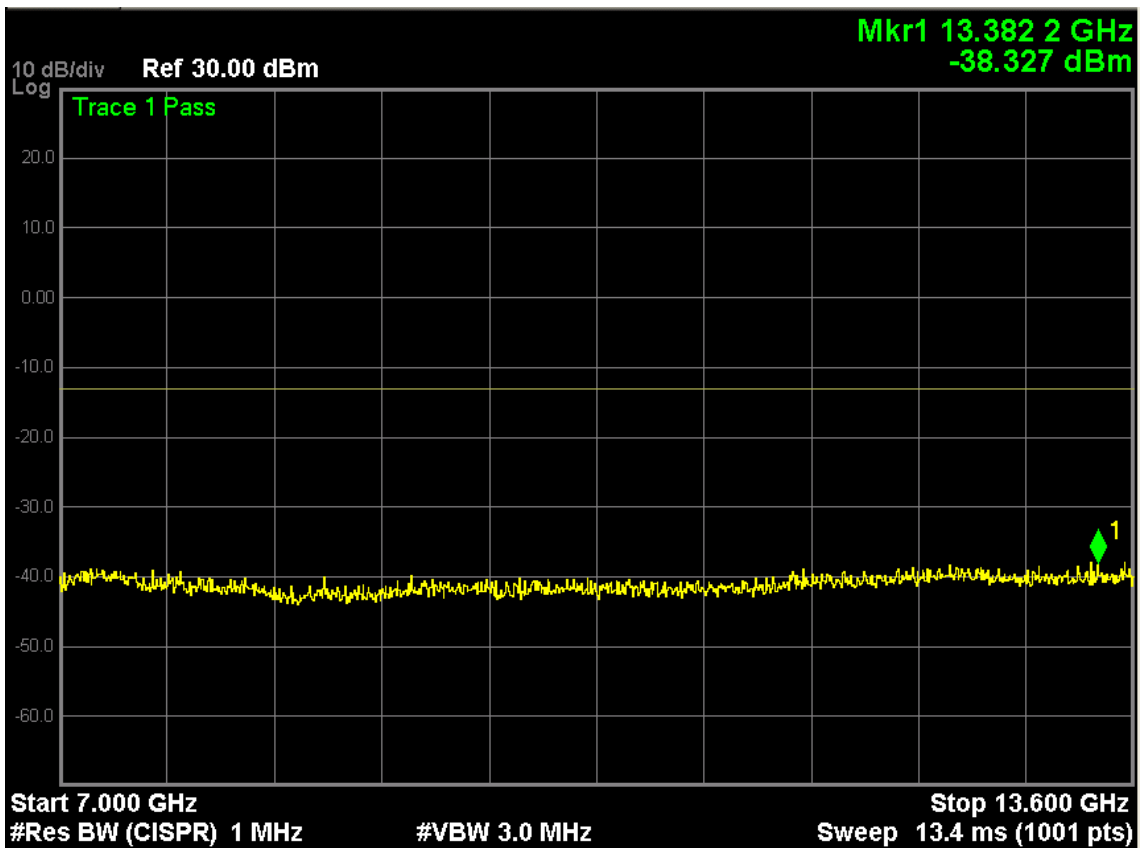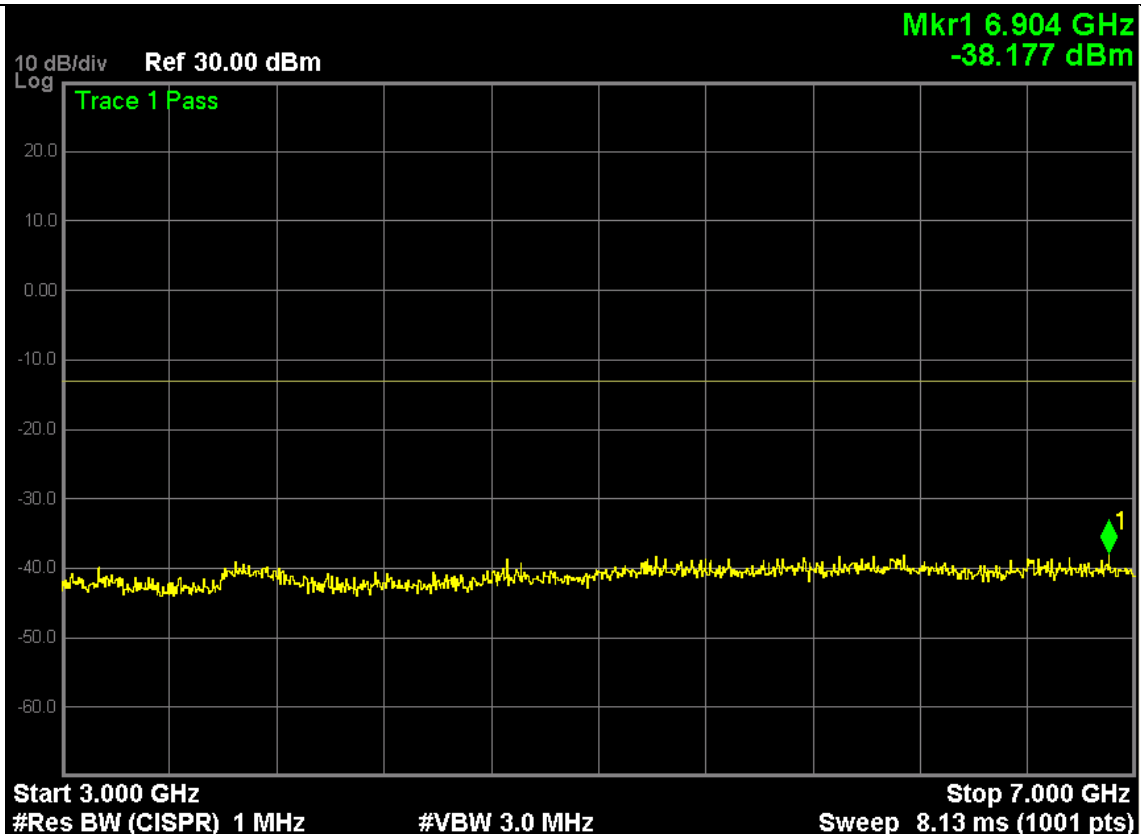



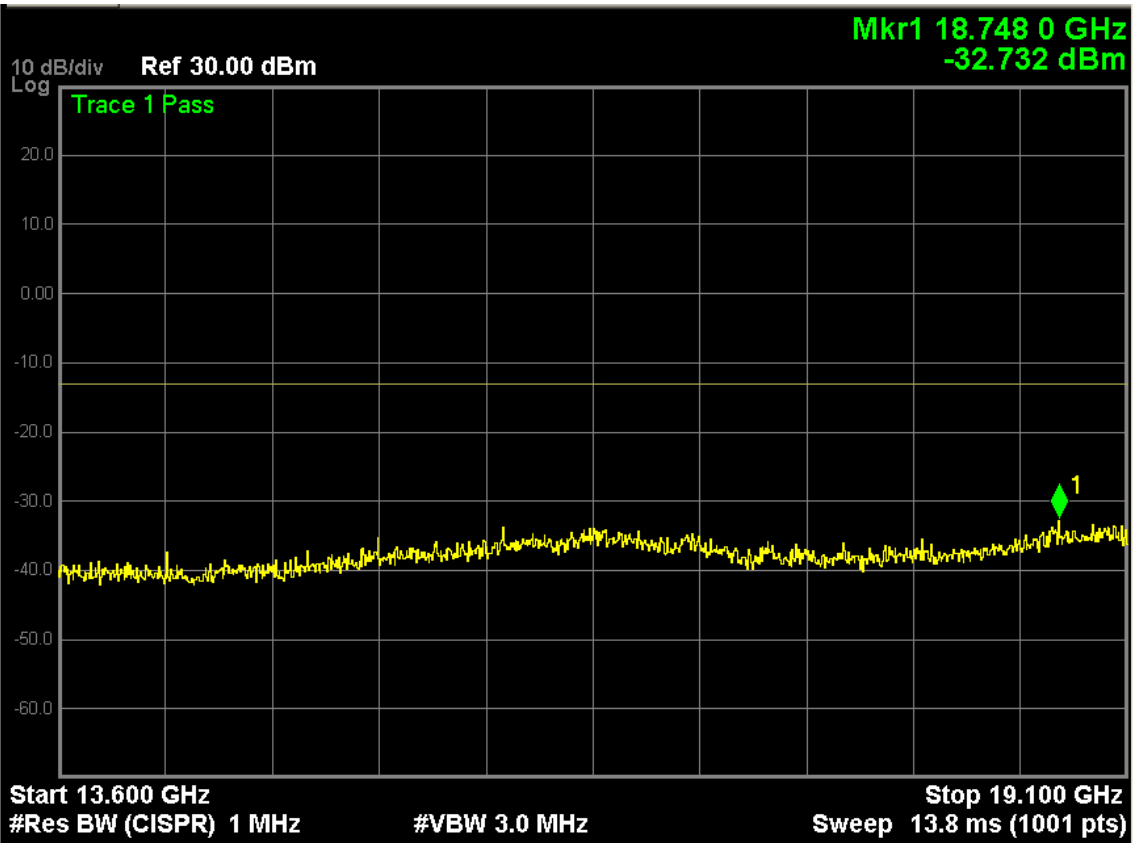


WCDMA Band V, Channel 4182:


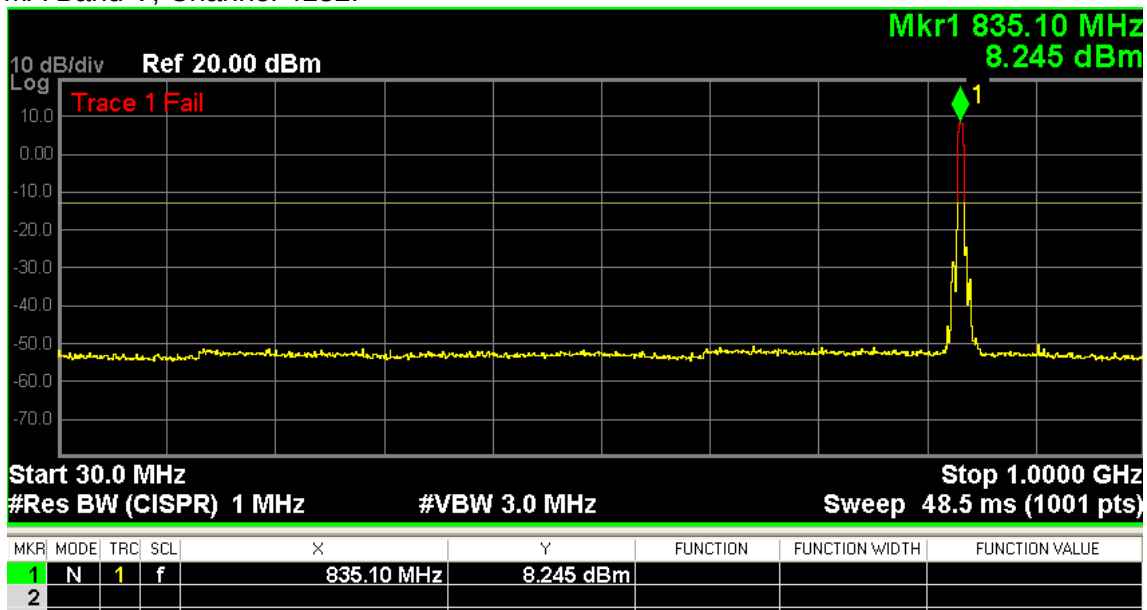


Note: The signal at point 1 is carrier


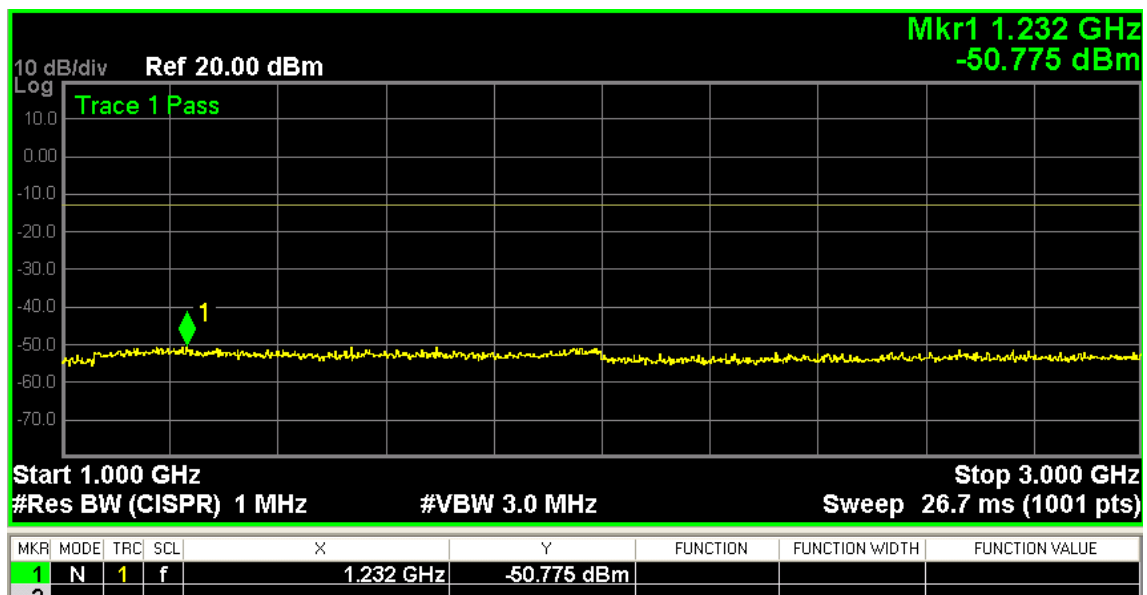


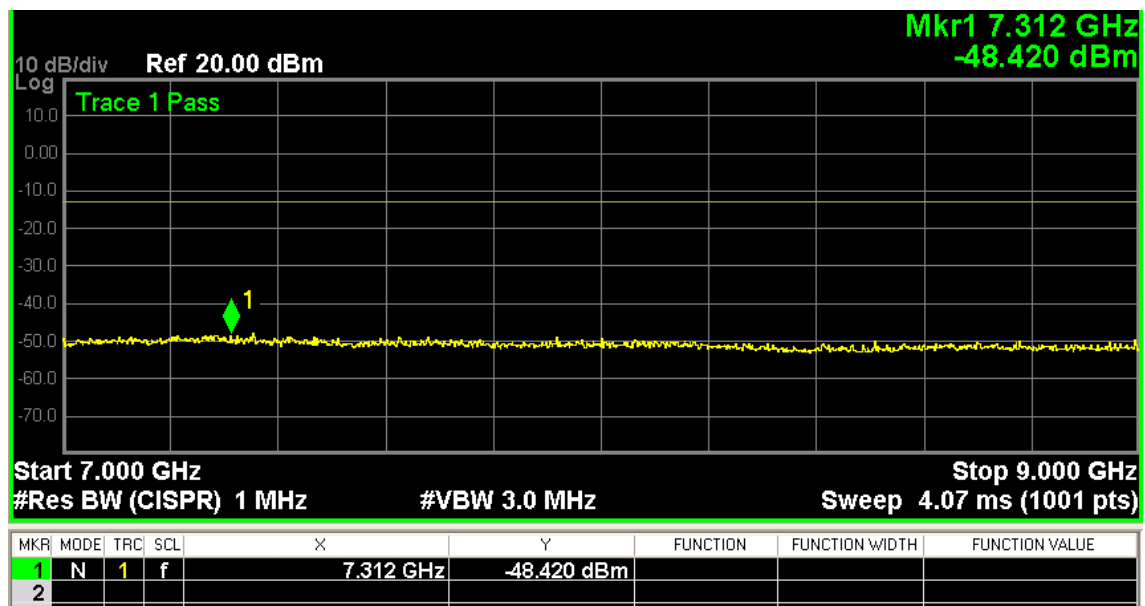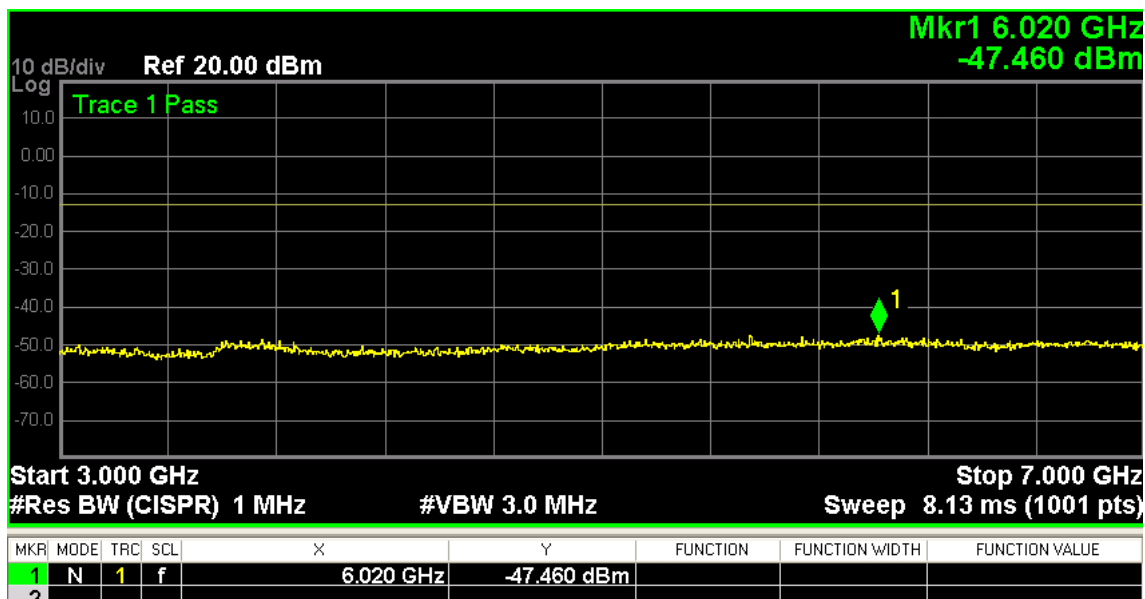


WCDMA Band II, Channel 9400:

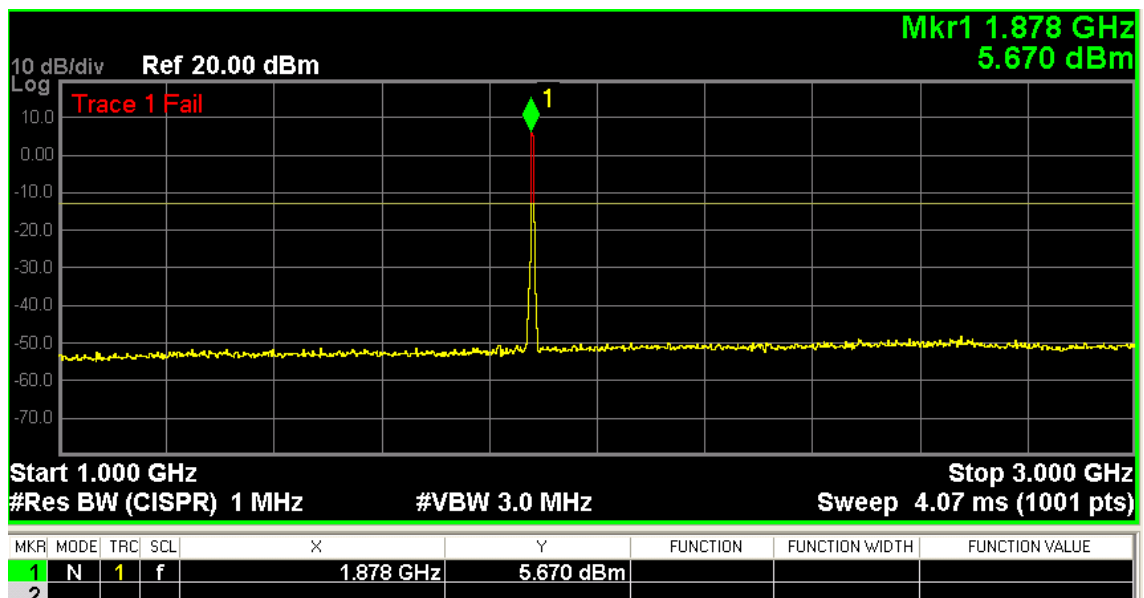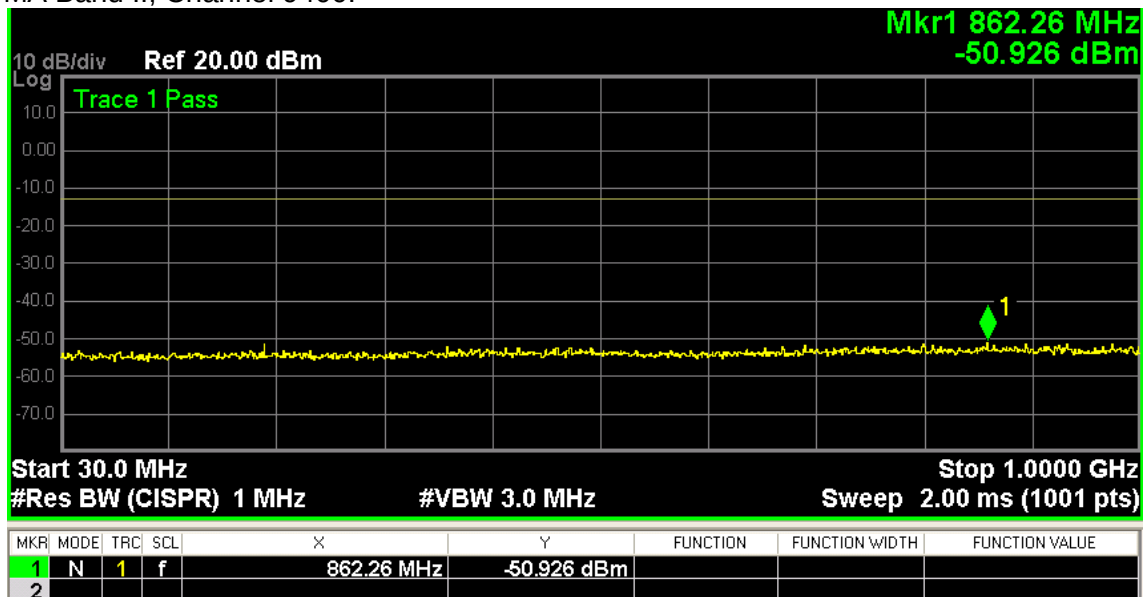

Note: The signal at point 1 is carrier

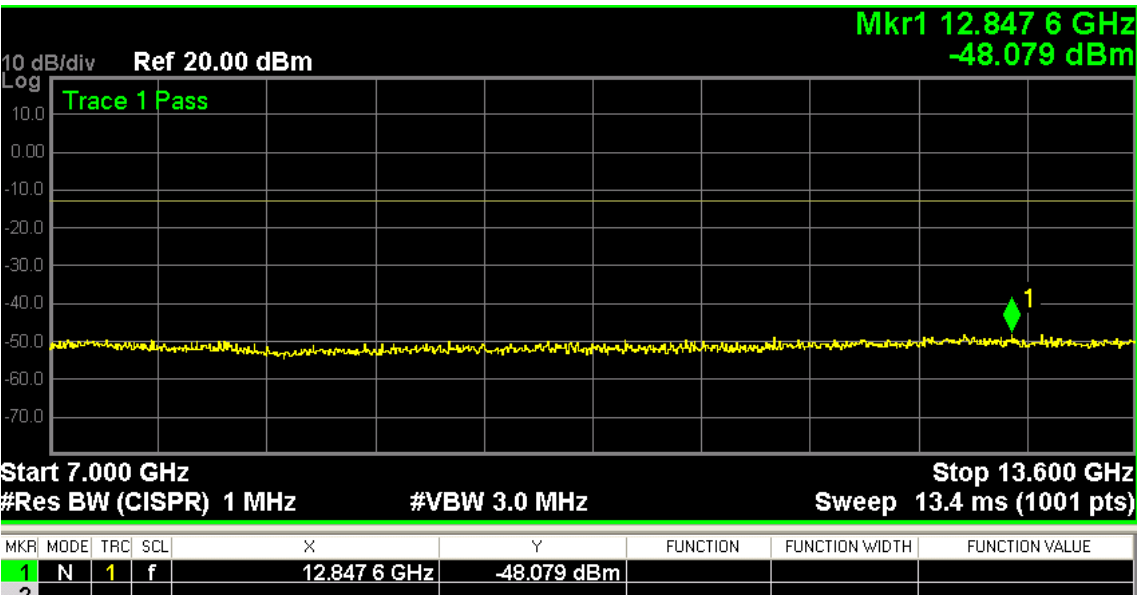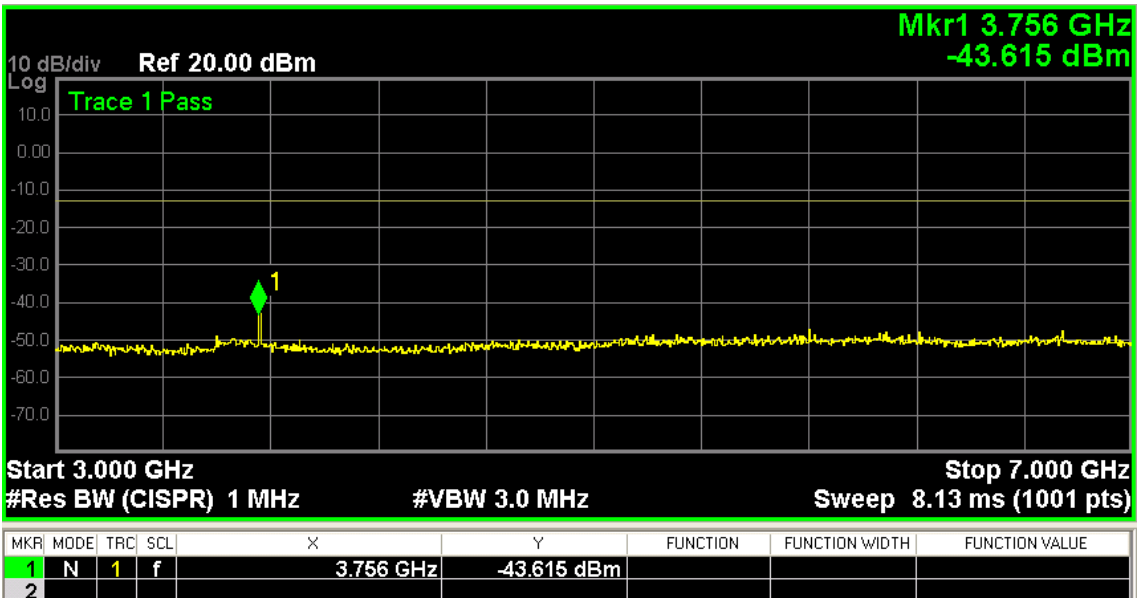

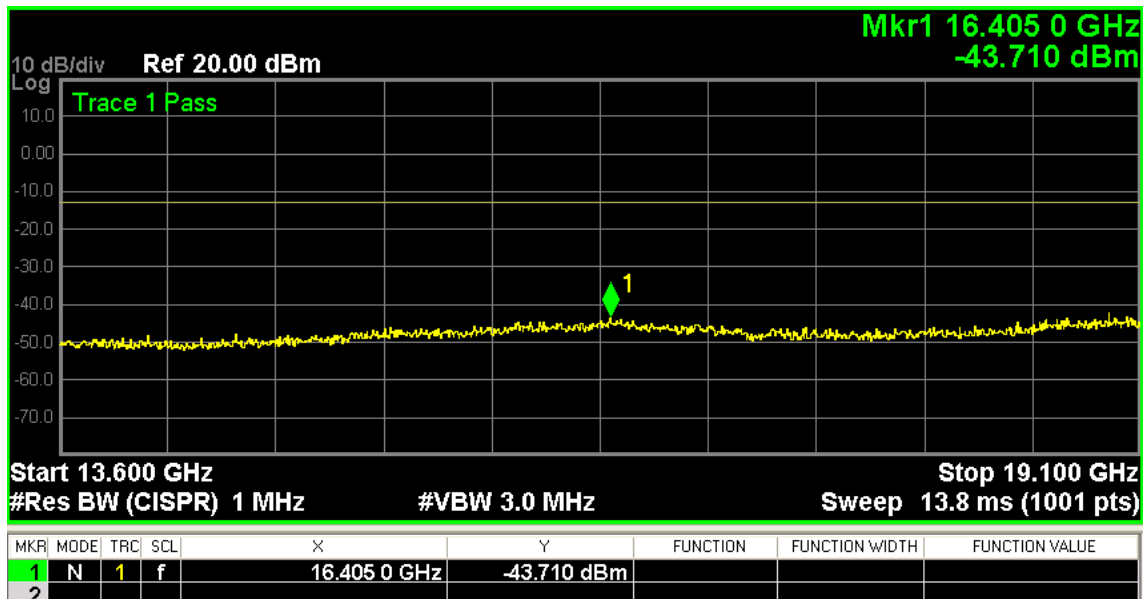

Radiated Spurious Measurement:

9KHz to 30MHz

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line, and that was not reported per 2.1057 (c).

Above 30MHz

GSM850 (GSM Link), 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189 (836.40MHz)							
32.91	H	-72.36	0.71	-12.95	-86.02	-13.00	-73.02
952.47	H	-83.33	4.16	3.75	-83.74	-13.00	-70.74
32.91	V	-62.55	0.70	-12.95	-76.20	-13.00	-63.20
952.47	V	-78.73	4.16	3.75	-79.14	-13.00	-66.14

GSM850 (GSM Link), Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189 (836.40MHz)							
1680.00	H	-47.12	6.00	7.25	-45.87	-13.00	-32.87
3346.00	H	-48.08	8.48	10.45	-46.11	-13.00	-33.11
1680.00	V	-44.34	6.00	7.25	-48.55	-13.00	-35.55
3346.00	V	-52.24	8.48	10.45	-39.89	-13.00	-26.89

GSM850 (GPRS 8 Link), 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189 (836.40MHz)							
30.00	H	-72.67	0.67	-13.55	-86.89	-13.00	-73.89
952.47	H	-82.69	4.16	3.75	-83.10	-13.00	-70.10
30.00	V	-61.94	0.68	-13.55	-76.17	-13.00	-63.17
952.47	V	-78.59	4.16	3.75	-79.00	-13.00	-66.00

GSM850 (GPRS 8 Link), Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189 (836.40MHz)							
1680.0	H	-47.24	6.00	7.25	-45.99	-13.00	-32.99
3346.0	H	-48.88	8.48	10.45	-46.91	-13.00	-33.91
1680.0	V	-43.65	6.00	7.25	-42.40	-13.00	-29.40
3346.0	V	-51.51	7.36	10.45	-48.42	-13.00	-35.42

GSM 1900 (GSM Link), 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 661 (1880.00MHz)							
30.0	H	-72.85	0.67	-13.55	-87.07	-13.00	-74.07
30.0	V	-61.74	0.68	-13.55	-75.97	-13.00	-62.97

GSM 1900 (GSM Link), Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 661 (1880.00MHz)							
1187.0	H	-48.47	4.96	4.35	-49.08	-13.00	-36.08
2054.0	H	-40.68	6.69	8.25	-39.12	-13.00	-26.12
1187.0	V	-45.83	4.96	4.35	-46.44	-13.00	-33.44
1714.0	V	-43.23	6.04	8.25	-41.02	-13.00	-28.02

GSM1900 (GPRS 8 Link), 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 661 (1880.00MHz)							
31.94	H	-71.96	0.70	13.55	-59.11	-13.00	-46.11
31.94	V	-59.55	0.70	13.55	-46.70	-13.00	-33.70

GSM1900 (GPRS 8 Link), Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 661 (1880.00MHz)							
1187.0	H	-46.08	4.96	5.35	-45.69	-13.00	-32.69
2428.0	H	-52.36	7.29	8.45	-51.20	-13.00	-38.20
1187.0	V	-46.37	4.96	5.35	-45.98	-13.00	-32.98
2428.0	V	-53.28	7.29	8.45	-52.12	-13.00	-39.12

WCDMA Band V 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 4182 (836.40MHz)							
88.20	H	-66.53	1.09	-1.05	-68.67	-13.00	-55.67
88.20	V	-90.91	1.09	-1.05	-93.05	-13.00	-80.05

WCDMA Band V Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 4182 (836.40MHz)							
1669.75	H	-44.94	5.95	7.25	-43.64	-13.00	-30.64
2504.00	H	-56.80	7.43	8.45	-55.65	-13.00	-42.65
1669.75	V	-58.84	5.95	7.25	-57.54	-13.00	-44.54
2504.00	V	-59.22	7.43	8.45	-58.20	-13.00	-45.20

WCDMA Band II 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 1412 (1732.4MHz)							
998.06	H	-103.13	4.35	22.15	-85.33	-13.00	-72.33
31.94	V	-78.49	0.70	-13.55	-92.74	-13.00	-79.74

WCDMA Band II Above 1GHz


Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 1412 (1732.4MHz)							
1881.25	H	-43.94	6.19	8.25	-41.88	-13.00	-28.88
3761.25	H	-44.51	8.95	10.45	-43.01	-13.00	-30.01
1881.25	V	-35.18	6.19	8.25	-33.12	-13.00	-20.12
3761.25	V	-45.96	8.95	10.45	-44.46	-13.00	-31.46

7. Frequency Stability Under Temperature & Voltage Variations

7.1. Test Equipment

Instrument	Manufacturer	Model	Serial No.	Cali. Due Date
Spectrum Analyzer	Agilent	N9038A	MY51210142	2014.07.27
Radio Communication Tester	Agilent	E5515C	GB46581718	2014.10.24
DC Power Supply	Agilent	6612C	MY43002989	2014.03.04
DC Power Supply	ITECH	IT5612	01600210661201014	2014.11.15
Temperature Chamber	WEISS	DU/20/40	58226017340050	2014.12.03

7.2. Test Setup

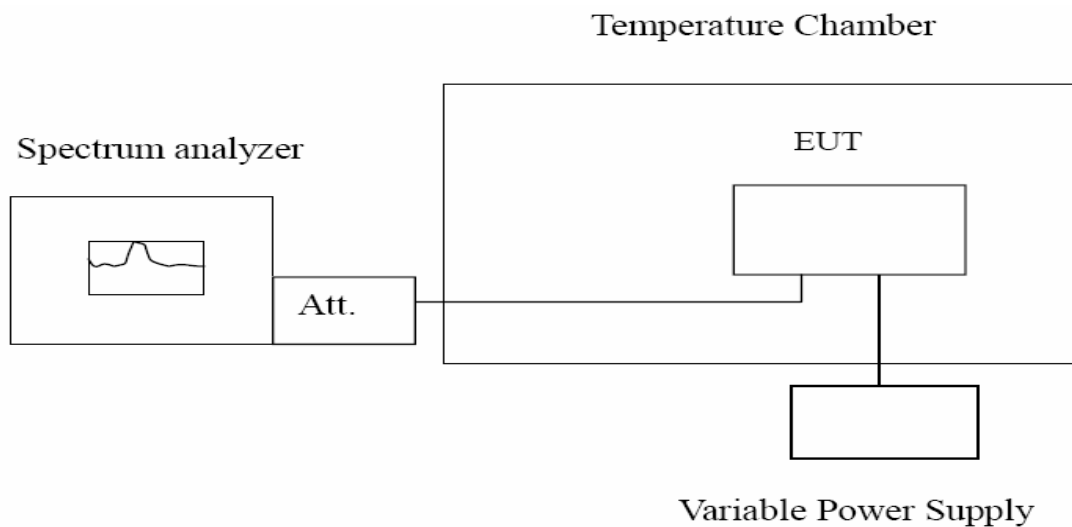

7.3. Limit

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Limit	< 2.5 ppm
-------	-----------

7.4. Test Procedure

Frequency Stability Under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure

EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.5. Uncertainty

The measurement uncertainty is defined as ± 10 Hz.

7.6. Test Result

GSM850 (GSM Link):

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)	Result
-30	N/A	N/A	N/A	PASS
-20	836.40	-21.0	± 2091	
-10	836.40	-20.0	± 2091	
0	836.40	-10.0	± 2091	
10	836.40	-15.0	± 2091	
20	836.40	-20.0	± 2091	
30	836.40	-31.0	± 2091	
40	836.40	-22.0	± 2091	
50	836.40	-40.0	± 2091	

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)	Result
3.64	836.40	-16.51	± 2091	PASS
3.8	836.40	-21.22	± 2091	
4.2	836.40	-32.40	± 2091	

Notes: The manufacture declared that the EUT could work between voltages 3.64V~4.2 V, and this EUT could normally work under the condition from -20°C to 60°C, otherwise this EUT will shut down and not transmit.

GSM850 (GPRS 8 Link):

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)	Result
-30	N/A	N/A	N/A	PASS
-20	836.40	-29.5	±2091	
-10	836.40	-23.3	±2091	
0	836.40	-16.3	±2091	
10	836.40	-17.7	±2091	
20	836.40	-19.3	±2091	
30	836.40	-31.2	±2091	
40	836.40	-36.5	±2091	
50	836.40	-41.2	±2091	

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)	Result
3.64	836.40	-15.3	±2091	PASS
3.8	836.40	-20.2	±2091	
4.2	836.40	-30.2	±2091	

Notes: the manufacture declared that the EUT could work between voltages 3.64V~4.2 V, and this EUT could normally work under the condition from -20°C to 60°C, otherwise this EUT will shut down and not transmit.

GSM 1900 (GSM Link):

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)	Result
-30	N/A	N/A	N/A	PASS
-20	1880.00	-30.26	± 4700	
-10	1880.00	-22.22	± 4700	
0	1880.00	-24.41	± 4700	
10	1880.00	-20.24	± 4700	
20	1880.00	-36.25	± 4700	
30	1880.00	-43.27	± 4700	
40	1880.00	-54.23	± 4700	
50	1880.00	-51.22	± 4700	

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)	Result
3.64	1880.00	-13.19	± 4700	PASS
3.8	1880.00	-16.25	± 4700	
4.2	1880.00	-25.30	± 4700	

Notes: the manufacture declared that the EUT could work between voltages 3.64V~4.2 V, and this EUT could normally work under the condition from -20°C to 60°C, otherwise this EUT will shut down and not transmit.

GSM1900 (GPRS 8 Link):

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)	Result
-30	N/A	N/A	N/A	PASS
-20	1880.00	-33.61	± 4700	
-10	1880.00	-20.23	± 4700	
0	1880.00	-22.46	± 4700	
10	1880.00	-25.25	± 4700	
20	1880.00	-31.22	± 4700	
30	1880.00	-40.72	± 4700	
40	1880.00	-50.61	± 4700	
50	1880.00	-49.09	± 4700	

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)	Result
3.64	1880.00	-21.50	± 4700	PASS
3.8	1880.00	-20.25	± 4700	
4.2	1880.00	-23.30	± 4700	

Notes: the manufacture declared that the EUT could work between voltages 3.64V~4.2 V, and this EUT could normally work under the condition from -20°C to 60°C, otherwise this EUT will shut down and not transmit.

WCDMA Band V:

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)	Result
-30	N/A	N/A	N/A	PASS
-20	836.40	11.21	±2091	
-10	836.40	-13.12	±2091	
0	836.40	-12.25	±2091	
10	836.40	-14.80	±2091	
20	836.40	-16.32	±2091	
30	836.40	15.22	±2091	
40	836.40	16.21	±2091	
50	836.40	21.20	±2091	

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)	Result
3.64	836.40	20.24	±2091	PASS
3.8	836.40	15.11	±2091	
4.2	836.40	20.31	±2091	

Notes: the manufacture declared that the EUT could work between voltages 3.64V~4.2 V, and this EUT could normally work under the condition from -20°C to 60°C, otherwise this EUT will shut down and not transmit.

WCDMA Band II:

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)	Result
-30	N/A	N/A	N/A	PASS
-20	1880.00	16.35	±4700	
-10	1880.00	-15.32	±4700	
0	1880.00	-18.21	±4700	
10	1880.00	-15.36	±4700	
20	1880.00	-11.45	±4700	
30	1880.00	-12.54	±4700	
40	1880.00	14.22	±4700	
50	1880.00	20.55	±4700	

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)	Result
3.64	1880.00	18.29	±4700	PASS
3.8	1880.00	-16.41	±4700	
4.2	1880.00	22.58	±4700	

Notes: the manufacture declared that the EUT could work between voltages 3.64V~4.2 V, and this EUT could normally work under the condition from -20℃ to 60℃, otherwise this EUT will shut down and not transmit.

8.Attachment

PHOTOGRAPHS OF TEST SETUP

Please refer to the file named “NZI802168_Part22&24 Setup Photos”.

PHOTOGRAPHS OF EUT

Please refer to the two files named “NZI802168_EUT External Photos” and “NZI802168_EUT Internal Photos”.

----End of the report----