

SAR TEST REPORT

Report No.: SET2013-07611
Product: MobileMapper 20
Model No.: MobileMapper 20
Brand Name: SPECTRA Precision
FCC ID: NZI802168
IC ID: 9288A-802168
Applicant: Trimble France S.A.S.
Address: Z.A.C. de La Fleuriaye, CD 60433, 44474 Carquefou
Cedex, France
Issued by: CCIC-SET
Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan
District, Shenzhen, 518055, P. R. China
Tel: 86 755 26627338 **Fax:** 86 755 26627238
Mail: manager@ccic-set.com **Website:** <http://www.ccic-set.com>



This test report consists of **124** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

Test Report

Product.....: MobileMapper 20
Model No.: MobileMapper 20
Brand Name.....: SPECTRA Precision
FCC ID.....: NZI802168

IC ID.....: 9288A-802168
Applicant.....: Trimble France S.A.S.
Applicant Address.....: Z.A.C. de La Fleuriaye, CD 60433, 44474 Carquefou
Cedex, France

Manufacturer.....: Trimble France S.A.S.
Manufacturer Address.....: Z.A.C. de La Fleuriaye, CD 60433, 44474 Carquefou
Cedex, France

Rating 5Vdc 1000mA(Charger) or 3.7V 3000mAh(Battery)

Test Standards.....: IEEE Std. 1528-2013, 47CFR § 2.1093

RSS-102 Issue 4 March 2010


Test Result.....: Pass

Tested by

 Sep. 6. 2013

Signature, Date

Reviewed by.....:

 Sep. 6. 2013

Signature, Date

Approved by.....:



Signature, Date

Contents

- 1. GENERAL CONDITIONS**
- 2. ADMINISTRATIVE DATA**
 - 2.1. Identification of the Responsible Testing Laboratory
 - 2.2. Identification of the Responsible Testing Location(s)
 - 2.3. Organization Item
 - 2.4. Identification of Applicant
 - 2.5. Identification of Manufacture
- 3. EQUIPMENT UNDER TEST (EUT)**
- 4. OPERATIONAL CONDITIONS DURING TEST**
 - 4.1. Introduction
 - 4.2. SAR Definition
 - 4.3. Phantoms
 - 4.4. Device Holder
 - 4.5. Probe Specification
- 5. OPERATIONAL CONDITIONS DURING TEST**
 - 5.1. Schematic Test Configuration
 - 5.2. SAR Measurement System
 - 5.3. Equipments and results of validation testing
 - 5.4. SAR measurement procedure
 - 5.5. Antennas position and test position
- 6. CHARACTERISTICS OF THE TEST**
 - 6.1. Applicable Limit Regulations
 - 6.2. Applicable Measurement Standards
- 7. LABORATORY ENVIRONMENT**
- 8. TEST RESULTS**
 - 8.1. Summary of Measurement Results
 - 8.2. Conclusion
- 9. MEASUREMENT UNCERTAINTY**
- 10. MAIN TEST INSTRUMENTS**

This Test Report consists of the following Annexes:

Annex A: Test Layout

Annex B: Sample Photographs

Annex C: System Performance Check Data

Annex D: Calibration Certificate of Probe and Dipoles

1. GENERAL CONDITIONS

1.1 This report only refers to the item that has undergone the test.

1.2 This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities.

1.3 This document is only valid if complete; no partial reproduction can be made without written approval of CCIC-SET

1.4 This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of CCIC-SET and the Accreditation Bodies, if it applies.

2. Administrative Date

2.1. Identification of the Responsible Testing Laboratory

Company Name: CCIC-SET

Department: EMC & RF Department

Address: Electronic Testing Building, Shahe Road, Nanshan District,
ShenZhen, P. R. China

Telephone: +86-755-26629676

Fax: +86-755-26627238

Responsible Test Lab Managers: Mr. Wu Li'an

2.2. Identification of the Responsible Testing Location(s)

Company Name: CCIC-SET

Address: Electronic Testing Building, Shahe Road, Nanshan District,
Shenzhen, P. R. China

2.3. Organization Item

CCIC-SET Report No.: SET2013-05214

CCIC-SET Project Leader: Mr. Li Sixiong

CCIC-SET Responsible for accreditation scope: Mr. Wu Li'an

Start of Testing: 2013-11-26

End of Testing: 2013-11-27

2.4. Identification of Applicant

Company Name: Trimble France S.A.S.

Address: Z.A.C. de La Fleuriaye, CD 60433, 44474 Carquefou Cedex,
France

2.5. Identification of Manufacture

Company Name: Trimble France S.A.S.

Address: Z.A.C. de La Fleuriaye, CD 60433, 44474 Carquefou Cedex,
France

Notes: This data is based on the information by the applicant.

3. General Information

3.1. Description Of Equipment Under Test (EUT)

Sample Name:	MobileMapper 20	
Type Name:	MobileMapper 20	
Brand Name:	SPECTRA Precision	
Mobile phone capability	Class B	
Dual Transfer Mode (DTM) per 3GPP 51.010	Not supported	
Simultaneous transmission	3G can transmit simultaneously with WLAN 3G can transmit simultaneously with Bluetooth 3G can transmit simultaneously with Bluetooth and WLAN WLAN transmit simultaneously with Bluetooth	
General description:	Support Band and Frequency Range	GSM 850MHz: 824.2MHz -848.8MHz GSM 1900MHz: 1850.2MHz-1909.8MHz WCDMA/HSPA Band V: 826.4MHz-846.6MHz WCDMA/HSPA Band II: 1852.4MHz-1907.6MHz WLAN 2.4GHz: 2412MHz-2472MHz Bluetooth: 2402MHz-2480MHz
	Development Stage	Identical Prototype
	Accessories	Power Supply
	Battery type	MG-4LH
	Battery specification	3000mAh 3.7V
	Antenna type	PIFA Antenna
	Modulation mode	GMSK, QPSK, BPSK , DSSS, OFDM, GFSK/π/4-DQPSK/8-DPSK

NOTE:

- The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
- This device supports GPRS operation up to class12 (max.uplink:4,max.downlink:4,total timeslots:5).

4 Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

where σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4.3 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SATIMO. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.




SAM Twin Phantom

4.4 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SATIMO as an integral part of the COMOSAR test system.

The device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

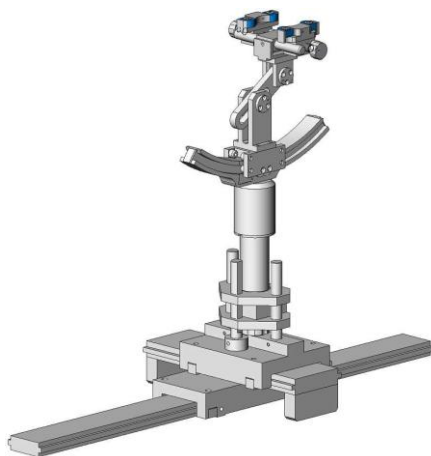

Device holder

4.5 Probe Specification




Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	700 MHz to 3 GHz; Linearity: ± 0.5 dB (700 MHz to 3 GHz)
Directivity	± 0.25 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	$1.5 \mu\text{W/g}$ to 100 mW/g ; Linearity: ± 0.5 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 5 mm (Body: 8 mm) Distance from probe tip to dipole centers: <2.7 mm
Application	General dosimetry up to 3 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones
Compatibility	COMOSAR

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

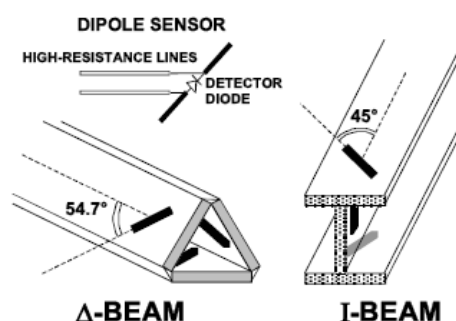

5 OPERATIONAL CONDITIONS DURING TEST

5.1 Schematic Test Configuration

During SAR test, EUT was operating in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The Absolute Radio Frequency Channel Number (ARFCN) was allocated to 128, 189 and 251 respectively in the case of GSM 850MHz, or to 512, 661 and 809 respectively in the case of PCS 1900MHz, or to 4357, 4400 and 4458 respectively in the case of WCCDMA 850MHz, or to 1537, 1637 and 1738 respectively in the case of WCDMA 1700 MHz, or to 9662, 9800 and 9938 respectively in the case of WCDMA 1900 MHz. The EUT was commanded to operate at maximum transmitting power.

The EUT should use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link was used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point should be lower than the output power level of the handset by at least 35 dB

5.2 SAR Measurement System

The SAR measurement system being used is the DASY4 system, the system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan centred at that point to determine volume averaged SAR level.

5.2.1 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness Power drifts in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Table 1: Recommended Dielectric Performance of Tissue

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (Nacl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (s/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Table 2 Recommended Tissue Dielectric Parameters

Frequency (MHz)	Head Tissue		Body Tissue	
	ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

5.2.2 Simulant liquids

For measurements against the phantom head, the “cheek” and “tilt” position on both the left hand and the right hand sides of the phantom. For body-worn measurements, the EUT was tested against flat phantom representing the user body. The EUT was put on in the belt holder. Simulant liquids that are used for testing at frequencies of GSM 850MHz, GSM 1900MHz, WCDMA 850MHz, WCDMA 1900MHz and Wi-Fi 2.4GHz, which are made mainly of sugar, salt and water solutions may be left in the phantoms.

Table 3: Dielectric Performance of Head Tissue Simulating Liquid

Temperature: 23.2°C; Humidity: 64%;					
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)	Deviation (%)	
Target value	835MHz	41.5	0.90	ϵ	σ
Validation value (September 28th, 2013)	835MHz	41.28	0.94	-0.5	4.4
Target value	1900MHz	40.0	1.40	--	--
Validation value (September 28th, 2013)	1900MHz	39.88	1.42	-0.3	1.4
Target value	2450MHz	39.2	1.80	--	--
Validation value (September 28th, 2013)	2450MHz	38.96	1.79	-0.5	-0.6

Table 4: Dielectric Performance of Body Tissue Simulating Liquid

Temperature: 23.2°C; Humidity: 64%;					
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)	Deviation (%)	
Target value	835MHz	55.2	0.97	ϵ	σ
Validation value (September 29th, 2013)	835MHz	55.38	0.99	0.3	2.1
Target value	1900MHz	53.3	1.52	--	--
Validation value (September 29th, 2013)	1900MHz	53.67	1.53	0.7	0.7
Target value	2450MHz	52.7	1.95	--	--
Validation value (September 29th, 2013)	2450MHz	52.68	1.97	-0.0	1.0

Table 5: Dielectric Performance of Tissue Simulating Liquid at test channel

Band	Channel	Frequency (MHz)	Permittivity ϵ		Conductivity σ (S/m)	
			Head	Body	Head	Body
GSM 850	128	824.2	41.94	0.92	55.96	0.97
	189	836.4	41.28	0.94	55.38	0.99
	251	848.8	40.92	0.95	55.12	1.01
GSM 1900	512	1850.2	41.25	1.36	54.25	1.46
	661	1880.0	40.84	1.39	53.98	1.49
	810	1909.8	39.72	1.42	53.43	1.51
WCDMA 850	4132	826.4	41.94	0.92	55.96	0.97
	4182	836.4	41.28	0.94	55.38	0.99
	4182	846.6	40.92	0.95	55.12	1.01
WCDMA 1900	9262	1852.4	41.25	1.36	54.25	1.46
	9400	1880.0	40.84	1.39	53.98	1.49
	9538	1907.6	39.72	1.42	53.43	1.51
WLAN	1	2412	39.47	1.78	52.95	1.94
	7	2442	39.12	1.79	52.70	1.97
	13	2472	38.84	1.81	52.33	2.02



Fig. 1 Configuration of body tissue


5.2.3 Equipments and results of validation testing

Important equipments :

Equipment description	Manufacturer/Model	Identification No.
SAR Probe	SATIMO	SN_0913_EP169
Phantom	SATIMO	SN_0913_SAM97
Liquid	SATIMO	-
Dipole	SATIMO-SID835	SN_0913_DIP0G835-217
Dipole	SATIMO-SID18ip1e1010.08r k Analyzere the 2450 MHz bandoperation mode. following table, for more information, please refer the RF test report00	SN_0913_DIP1G800-216
Dipole	SATIMO-SID1900	SN_0913_DIP1G900-218
Dipole	SATIMO-SID2450	SN_0913_DIP2G450-220
Vector Network Analyzer	Rohde & Schwarz - ZVB8	1145.1010.08
Amplifier	Nucletudes	143060
Power Meter	Rohde & Schwarz - NRVS	1020.1809.02
Multimeter	Keithley - 2000	4014020

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The following procedure, recommended for performing validation tests using box phantoms is based on the procedures described in the draft IEEE standard P1528. Setup according to the setup diagram below :

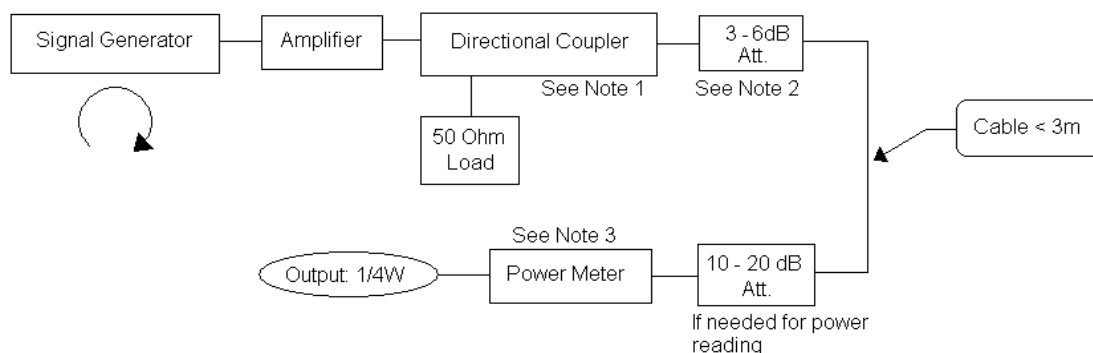

With the SG and Amp and with directional coupler in place, set up the source signal at the relevant frequency and use a power meter to measure the power at the end of the SMA cable that you intend to connect to the balanced dipole. Adjust the SG to make this, say, 0.25W (24 dBm). If this level is too high to read directly with the power meter sensor, insert

a calibrated attenuator (e.g. 10 or 20 dB) and make a suitable correction to the power meter reading.

Note 1: In this method, the directional coupler is used for monitoring rather than setting the exact feed power level. If, however, the directional coupler is used for power measurement, you should check the frequency range and power rating of the coupler and measure the coupling factor (referred to output) at the test frequency using a VNA.

Note 2: Remember that the use of a 3dB attenuator (as shown in Figure 8.1 of P1528) means that you need an RF amplifier of 2 times greater power for the same feed power. The other issue is the cable length. You might get up to 1dB of loss per meter of cable, so the cable length after the coupler needs to be quite short.

Note 3: For the validation testing done using CW signals, most power meters are suitable. However, if you are measuring the output of a modulated signal from either a signal generator or a handset, you must ensure that the power meter correctly reads the modulated signals.

The measured 1-gram averaged SAR values of the device against the phantom are provided in Tables 5 and Table 6. The humidity and ambient temperature of test facility were 64% and 23.2°C respectively. The body phantom were full of the body tissue simulating liquid. The EUT was supplied with full-charged battery for each measurement.

The distance between the back of the EUT and the bottom of the flat phantom is 10 mm (taking into account of the IEEE 1528-2013 and the place of the antenna).

Table 7: Head Liquid Verification Results (1g)

Frequency	Duty cycle	Target value (W/kg)	Test value (W/kg)		Deviation (%)
			250 mW	1W	
835MHz (September 28th, 2013)	1:1	9.56	2.47	9.88	3.3
1900MHz (September 28th, 2013)	1:1	39.7	9.79	39.16	-1.4
2450MHz (September 28th, 2013)	1:1	52.4	13.16	52.64	0.5

Note: Target value was referring to the required value in the calibration certificate of reference dipole.


Note: All SAR values are normalized to 1W forward power.

Table 8: Body Liquid Verification Results (1g)

Frequency	Duty cycle	Target value (W/kg)	Test value (W/kg)		Deviation (%)
			250 mW	1W	
835MHz (September 29th, 2013)	1:1	9.92	2.43	9.76	-0.6
1900MHz (September 29th, 2013)	1:1	40.29	9.99	39.96	-0.8
2450MHz (September 29th, 2013)	1:1	51.99	13.12	52.48	0.9

5.2.4 SAR measurement procedure

The SAR test against the head phantom was carried out as follow:

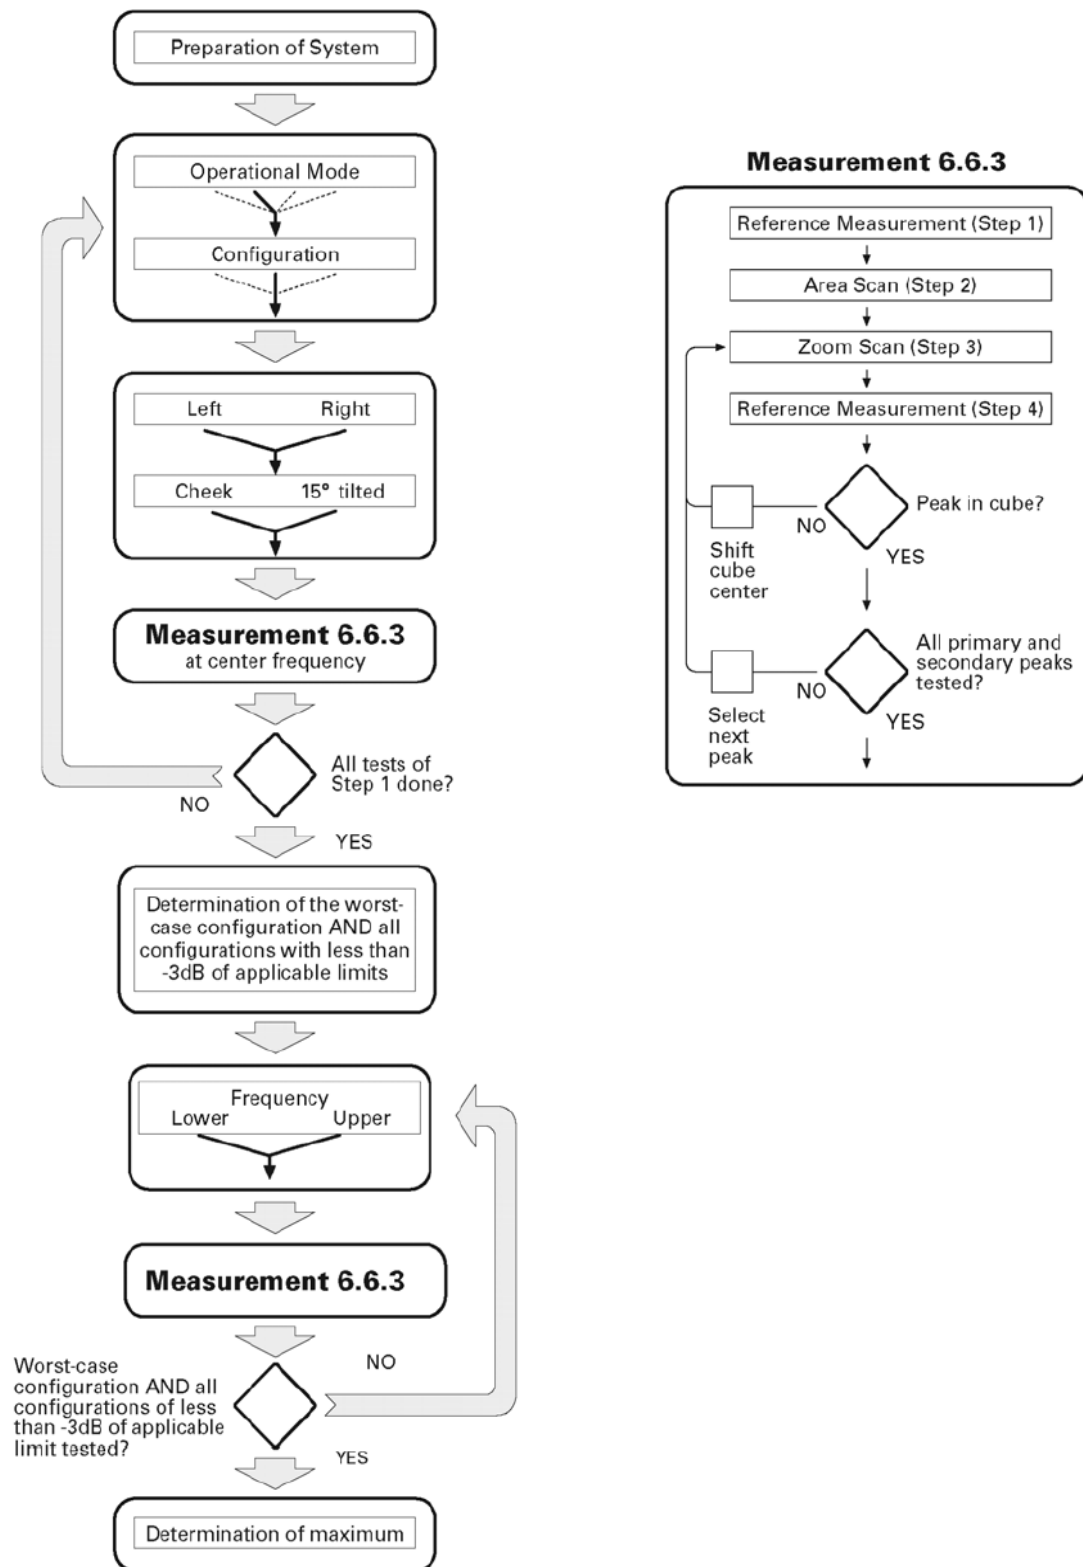

Establish a call with the maximum output power with a base station simulator, the connection between the EUT and the base station simulator is established via air interface.


After an area scan has been done at a fixed distance of 8mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

Above is the scanning procedure flow chart and table from the IEEE1528-2013 standard. This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behaviour are tested.

For body-worn measurement, the EUT was tested under two position: face upward and back upward.

5.2.5 Transmitting antenna information

There are four antennas (GSM/WCDMA antenna, WLAN antenna, BT antenna and GPS antenna) inside the EUT, the former three antennas are the transmitting source, and they are a type of PIFA antenna, the following picture shows the position of the antennas.

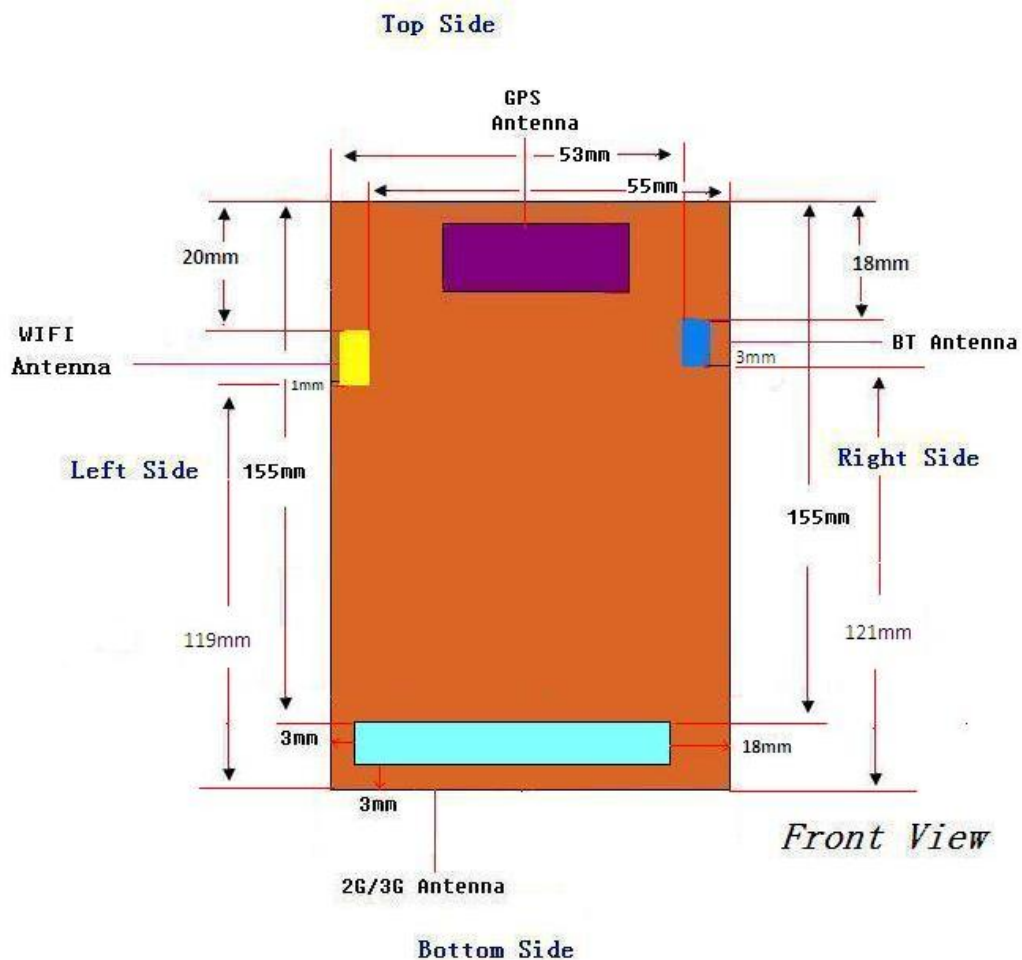

Note: The GPS antenna is charged for receive, the SAR result would not be affected by them.

Antennas	Wireless Interface
WWAN Antenna <Tx / Rx>	GSM 1900/850 UMTS Band II/V
Bluetooth Antenna <Tx / Rx>	Bluetooth
WLAN Antenna <Tx / Rx>	WLAN 2.4GHz Band

6 CHARACTERISTICS OF THE TEST

6.1 Applicable Limit Regulations

47CFR § 2.1093- Radiofrequency Radiation Exposure Evaluation: Portable Devices;

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz;

RSS-102–2010: Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands)

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

6.2 Applicable Measurement Standards

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this is in accordance with the following standards:

FCC 47 CFR Part2 (2.1093)

ANSI/IEEE C95.1-1999

IEEE 1528-2013

FCC KDB 865664 D01 v01r01

FCC KDB 447498 D01 v05r01

FCC KDB 648474 D04 v01r01

FCC KDB 248227 D01 v01r02

FCC KDB 941225 D03 v01

FCC KDB 941225 D04 v01

7 LABORATORY ENVIRONMENT

7.1 The Ambient Conditions during SAR Test

Temperature	Min. = 15 ° C, Max. = 30 ° C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

7.2 Test Configuration

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30dB smaller than output power of EUT.

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool, and the transmission duty factor was monitored on the spectrum analyzer with zero-span setting

Duty factor observed as below:

WLAN 2.4GHz 802.11b, 1Mbps:97.5%

For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

8. Conducted RF Output Power

8.1 GSM Conducted Power

Band		Burst Average Power (dBm)			Frame-Average Power (dBm)		
GSM850	TX Channel	128	189	251	128	189	251
	Frequency(MHz)	824.2	836.4	848.8	824.2	836.4	848.8
	GSM (GMSK, 1 Tx slot) CS1	32.21	32.18	32.01	23.21	23.18	23.01
	GPRS(GMSK, 1 Tx slot) CS1	32.84	32.80	33.30	23.84	23.80	24.30
	GPRS(GMSK, 2 Tx slot) CS1	29.64	29.53	29.83	23.64	23.53	23.83
	GPRS(GMSK, 3 Tx slot) CS1	24.65	24.56	24.45	20.39	20.30	20.19
	GPRS(GMSK, 4 Tx slot) CS1	23.43	23.54	23.58	20.43	20.54	20.58
GSM1900	TX Channel	512	661	810	512	661	810
	Frequency(MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
	GSM (GMSK, 1 Tx slot) CS1	29.04	28.89	28.45	20.04	19.89	19.45
	GPRS(GMSK, 1 Tx slot) CS1	29.63	29.45	29.01	20.63	20.45	20.01
	GPRS(GMSK, 2 Tx slot) CS1	26.84	26.52	26.59	20.84	20.52	20.59
	GPRS(GMSK, 3 Tx slot) CS1	23.78	23.67	23.54	19.52	19.41	19.28
	GPRS(GMSK, 4 Tx slot) CS1	21.64	22.19	21.74	18.64	19.19	18.74

Note:

1. Per KDB 447498 D01 v05r01, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. CS1 coding scheme was used in GPRS output power measurements and SAR Testing, as a condition where GMSK, modulation was ensured. Investigation has shown that CS1-CS4 settings do not have any impact on the output levels in the GPRS modes.

8.2 HSPA Conducted Power

3GPP Release Version	Mode	3GPP 34.121 Subtest	Band V			MPR [dB]
			4132	4183	4233	
99	WCDMA	12.2 kbps RMC	22.65	22.23	23.36	-
		12.2 kbps AMR	22.73	23.12	22.63	-
5	HSDPA	Subtest 1	22.46	22.16	22.59	0
		Subtest 2	22.62	22.51	22.62	0
		Subtest 3	21.54	21.43	22.03	0.5
		Subtest 4	21.58	21.49	21.31	0.5

3GPP Release Version	Mode	3GPP 34.121 Subtest	Band II			MPR [dB]
			9296	9400	9538	
99	WCDMA	12.2 kbps RMC	21.31	20.72	20.97	-
		12.2 kbps AMR	22.14	22.12	21.24	-
5	HSDPA	Subtest 1	21.38	21.86	22.09	0
		Subtest 2	21.41	21.78	22.11	0
		Subtest 3	21.21	21.67	22.11	0.5
		Subtest 4	21.28	21.79	21.86	0.5

Note:

1. WCDMA SAR was tested under RMC 12.2kbps with HSPA Inactive per KDB Publication 941225 D01.HSPA SAR was not requires since the average output power of the HSPA subtests was not more than 0.25dB higher than the RMC level and SAR was less than 1.2W/kg.
2. It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2dB more than specified by 3GPP,but also as low as 0dB according to the chipset implementation in this model.

8.3 WLAN 2.4GHz Band Conducted Power

802.11b Average Power (dBm)					
Channel	Frequency (MHz)	Data Rate(bps)			
		1M bps	2M bps	5.5M bps	11M bps
CH 01	2412	18.71	18.55	18.56	18.84
CH 06	2437	18.95	18.31	18.78	18.69
CH 13	2472	18.54	18.63	18.54	18.83

802.11g Average Power (dBm)									
Channel	Frequency (MHz)	Data Rate(bps)							
		6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 01	2412	18.98	19.04	18.58	19.02	18.98	18.85	19.02	18.79
CH 06	2437	19.01	19.06	18.72	18.67	18.78	18.82	18.78	19.11
CH 13	2472	18.77	18.88	29.11	19.01	18.72	18.76	18.65	19.06

Note:

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at lowest data rate
3. Per KDB 248227 D01 v01r02, 11g output power is less than 1/4dB higher than 11b mode. Thus the SAR can be excluded.

Bluetooth Conducted Power

Bluetooth Average Power (dBm)										
Channel	Frequency (MHz)	Data Rate								
		DH1	DH3	DH5	2DH1	2DH3	2DH5	3DH1	3DH3	3 DH5
CH 0	2402	0.62	0.58	0.54	0.32	0.77	0.66	0.45	0.75	1.23
CH 39	2441	0.06	0.08	0.11	0.21	0.45	0.43	0.47	0.34	0.42
CH 78	2480	0.09	0.11	0.23	0.25	0.57	0.65	0.67	0.64	0.79

Note:

1. Per KDB 447498 D01v05r01, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances $\leq 50\text{mm}$ are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f} \text{ (GHz)}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$

(1) f(GHz) is the RF channel transmit frequency in GHz

(2) Power and distance are round to the nearest mW and mm before calculation

(3) The result is rounded to one decimal place for comparison

(4) If the test separation distance(antenna-user) is $< 5\text{mm}$, 5mm is used for excluded SAR calculation

Bluetooth Max Power (dBm)	mW	Test Distance (mm)	Frequency(GHz)	Exclusion Thresholds
4	2.51	0	2.402	0.778

2. Per KDB 447498 D01v05r01 exclusion thresholds is $0.778 < 3.0$, RF exposure evaluation is not required.

9. SAR DATA SUMMARY

General Note:

- Per KDB 447498 D01v05r01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power(mW)/EUT RF power(mW), where tune-up limit is the maximum rated power among all production units.
 - For SAR testing of WLAN signal with non-100% duty cycle , the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - For WWAN: Reported SAR(W/kg)=Measured SAR(W/kg)*Tune-up Scaling Factor
 - For WLAN: Reported SAR(W/kg)=Measured SAR(W/kg)*Duty Cycle scaling factor * Tune-up scaling factor
- Per KDB 447498 D01v05r01, for each exposure position, if the highest output channel reported SAR $\leq$ 0.8W/kg, other channels SAR testing is not necessary.
- For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
- Body-worn SAR testing was performed at 10mm separation, and this distance is determined by the handset manufacturer that there will be body-worn accessories with the required minimum separation.
- Per KDB 648474 D04v01r01,when the reported SAR for a body-worn accessory measured without a headset connected to the handset is $\leq$ 1.2W/kg, SAR testing with a headset connected to the handset is not required.
- Per KDB 865664 D01V01r01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq$ 0.8W/Kg

9.1 Standalone Head SAR DATA

GSM SAR DATA:

Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
GSM850	GMSK 1 Tx slot	Right Cheek	128	824.2	32.21	33.5	1.35	0.142	0.192
GSM850	GMSK 1 Tx slot	Right Tilted	128	824.2	32.21	33.5	1.35	0.071	0.096
GSM850	GMSK 1 Tx slot	Left Cheek	128	824.2	32.21	33.5	1.35	0.167	0.225
GSM850	GMSK 1 Tx slot	Left Tilted	128	824.2	32.21	33.5	1.35	0.078	0.105

Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
GSM1900	GMSK 1 Tx slot	Right Cheek	512	1850.2	29.04	30.5	1.40	0.064	0.090
GSM1900	GMSK 1 Tx slot	Right Tilted	512	1850.2	29.04	30.5	1.40	0.062	0.087
GSM1900	GMSK 1 Tx slot	Left Cheek	512	1850.2	29.04	30.5	1.40	0.054	0.076
GSM1900	GMSK 1 Tx slot	Left Tilted	512	1850.2	29.04	30.5	1.40	0.047	0.066

WCDMA SAR DATA:

Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WCDMA Band V	12.2 kbps RMC	Right Cheek	4233	846.6	23.36	25	1.46	0.195	0.285
WCDMA Band V	12.2 kbps RMC	Right Tilted	4233	846.6	23.36	25	1.46	0.147	0.215
WCDMA Band V	12.2 kbps RMC	Left Cheek	4233	846.6	23.36	25	1.46	0.146	0.213
WCDMA Band V	12.2 kbps RMC	Left Tilted	4233	846.6	23.36	25	1.46	0.101	0.147

Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WCDMA Band II	12.2 kbps RMC	Right Cheek	9262	1852.4	21.31	25	2.34	0.087	0.204
WCDMA Band II	12.2 kbps RMC	Right Tilted	9262	1852.4	21.31	25	2.34	0.065	0.152
WCDMA Band II	12.2 kbps RMC	Left Cheek	9262	1852.4	21.31	25	2.34	0.076	0.178
WCDMA Band II	12.2 kbps RMC	Left Tilted	9262	1852.4	21.31	25	2.34	0.047	0.110

Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WCDMA Band II	12.2 kbps ARM with a 3.4 kbps SRB	Right Cheek	9262	1852.4	22.14	25	1.93	0.074	0.143
WCDMA Band II	12.2 kbps ARM with a 3.4 kbps SRB	Right Tilted	9262	1852.4	22.14	25	1.93	0.061	0.118
WCDMA Band II	12.2 kbps ARM with a 3.4 kbps SRB	Left Cheek	9262	1852.4	22.14	25	1.93	0.058	0.112
WCDMA Band II	12.2 kbps ARM with a 3.4 kbps SRB	Left Tilted	9262	1852.4	22.14	25	1.93	0.052	0.101

WLAN SAR DATA:

Band	Mode	Test Position	Ch	Freq. MHz	Average Power (dBm)	Tune-up Limit dBm	Scaling Factor	Duty Cycle %	Duty Cycle compensate	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WLAN 2.4GHz	802.11b 1Mbps	Right Cheek	6	2437	18.78	20	1.32	97.5	1.026	0.064	0.087
		Right Tilted	6	2437	18.78	20	1.32	97.5	1.026	0.065	0.088
		Left Cheek	6	2437	18.78	20	1.32	97.5	1.026	0.111	0.150
		Left Tilted	6	2437	18.78	20	1.32	97.5	1.026	0.076	0.103

9.2 Standalone Body Worn SAR DATA

GSM SAR DATA:

Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
GSM850	GMSK 1Tx slot	Back	1	128	824.2	32.21	33.5	1.35	0.510	0.689
GSM850	GMSK 1Tx slot	Front	1	128	824.2	32.21	33.5	1.35	0.268	0.362
GSM850	GMSK 1Tx slot	Left Side	1	128	824.2	32.21	33.5	1.35	0.052	0.070
GSM850	GMSK 1Tx slot	Right Side	1	128	824.2	32.21	33.5	1.35	0.052	0.070
GSM850	GMSK 1Tx slot	Bottom Side	1	128	824.2	32.21	33.5	1.35	0.023	0.031
GPRS850	GMSK 1Tx slot	Back	1	251	848.8	32.84	33.5	1.16	0.317	0.368
GPRS850	GMSK 1Tx slot	Front	1	251	848.8	32.84	33.5	1.16	0.161	0.187
GPRS850	GMSK 1Tx slot	Left Side	1	251	848.8	32.84	33.5	1.16	0.039	0.045
GPRS850	GMSK 1Tx slot	Right Side	1	251	848.8	32.84	33.5	1.16	0.094	0.109
GPRS850	GMSK 1Tx slot	Bottom Side	1	251	848.8	32.84	33.5	1.16	0.118	0.137

Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
GSM1900	GMSK 1Tx slot	Back	1	512	1850.2	29.04	30.5	1.40	0.225	0.315
GSM1900	GMSK 1Tx slot	Front	1	512	1850.2	29.04	30.5	1.40	0.057	0.080
GSM1900	GMSK 1Tx slot	Left Side	1	512	1850.2	29.04	30.5	1.40	0.075	0.033
GSM1900	GMSK 1Tx slot	Right Side	1	512	1850.2	29.04	30.5	1.40	0.024	0.033
GSM1900	GMSK 1Tx slot	Bottom Side	1	512	1850.2	29.04	30.5	1.40	0.052	0.073
GPRS1900	GMSK 2Tx slot	Back	1	512	1850.2	26.84	28.5	1.47	0.247	0.363
GPRS1900	GMSK 2Tx slot	Front	1	512	1850.2	26.84	28.5	1.47	0.091	0.134
GPRS1900	GMSK 2Tx slot	Left Side	1	512	1850.2	26.84	28.5	1.47	0.046	0.068
GPRS1900	GMSK 2Tx slot	Right Side	1	512	1850.2	26.84	28.5	1.47	0.049	0.072
GPRS1900	GMSK 2Tx slot	Bottom Side	1	512	1850.2	26.84	28.5	1.47	0.074	0.109

WCDMA SAR DATA:

Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WCDMA Band V	12.2 kbps RMC	Back	1	4233	846.6	23.36	25	1.46	0.250	0.365
WCDMA Band V	12.2 kbps RMC	Front	1	4233	846.6	23.36	25	1.46	0.139	0.203
WCDMA Band V	12.2 kbps RMC	Left Side	1	4233	846.6	23.36	25	1.46	0.053	0.077
WCDMA Band V	12.2 kbps RMC	Right Side	1	4233	846.6	23.36	25	1.46	0.046	0.067
WCDMA Band V	12.2 kbps RMC	Bottom Side	1	4233	846.6	23.36	25	1.46	0.022	0.032

Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WCDMA Band II	12.2 kbps RMC	Back	1	9262	1852.4	22.31	25	1.86	0.246	0.458
WCDMA Band II	12.2 kbps RMC	Front	1	9262	1852.4	22.31	25	1.86	0.102	0.190
WCDMA Band II	12.2 kbps RMC	Left Side	1	9262	1852.4	22.31	25	1.86	0.036	0.067
WCDMA Band II	12.2 kbps RMC	Right Side	1	9262	1852.4	22.31	25	1.86	0.022	0.012
WCDMA Band II	12.2 kbps RMC	Bottom Side	1	9262	1852.4	22.31	25	1.86	0.051	0.095

WLAN SAR DATA:


Band	Mode	Test Position	Ch	Freq. MHz	Average Power (dBm)	Tune-up Limit dBm	Scaling Factor	Duty Cycle %	Duty Cycle compensate	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WLAN 2.4GHz	802.11b 1Mbps	Front	6	2437	18.78	20	1.32	97.5	1.026	0.032	0.043
		Back	6	2437	18.78	20	1.32	97.5	1.026	0.049	0.066
		Top Side	6	2437	18.78	20	1.32	97.5	1.026	0.026	0.035
		Left Side	6	2437	18.78	20	1.32	97.5	1.026	0.042	0.057

9.3 Highest SAR Plots

Standalone Head

GSM850 GMSK(1 Tx slot) Left Cheek Channel128:

Frequency (MHz)	824.200012
Relative permittivity (real part)	41.550823
Relative permittivity (imaginary part)	19.649035
Conductivity (S/m)	0.899707
Variation (%)	-2.890000

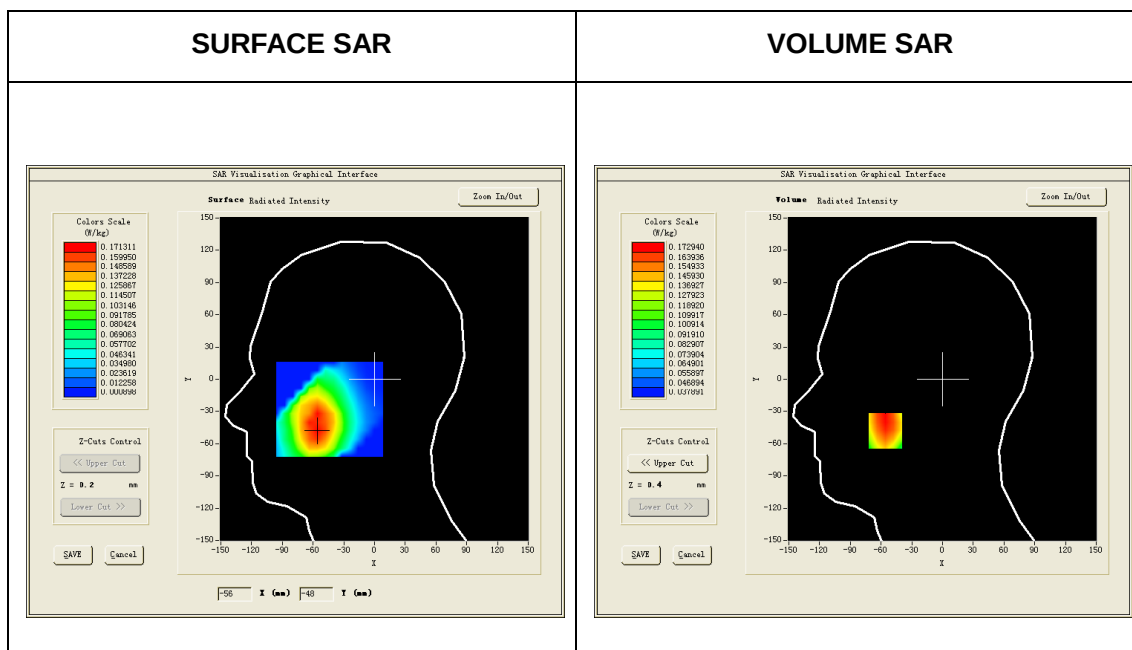


Maximum location: X=-56.00, Y=-48.00

SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.125788
SAR 1g (W/Kg)	0.167120

GSM1900 GMSK(1 Tx slot) Right Cheek Channel512:

Frequency (MHz)	1850.200024
Relative permittivity (real part)	40.000000
Relative permittivity (imaginary part)	13.627040
Conductivity (S/m)	1.400860
Variation (%)	-0.340000

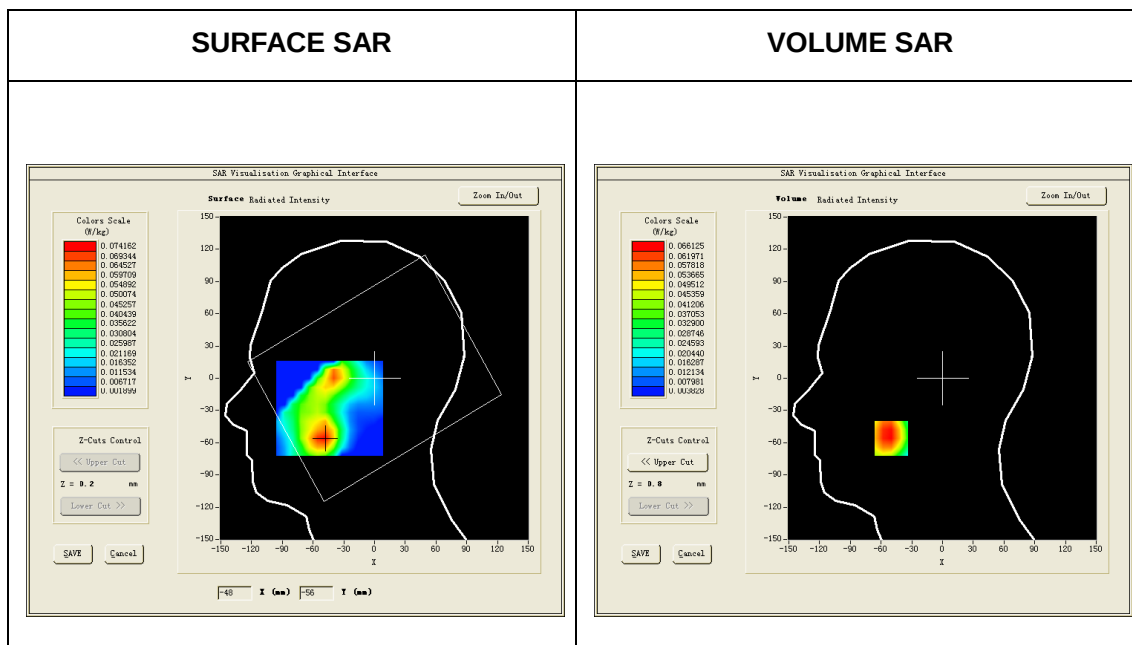


Maximum location: X=-50.00, Y=-56.00

SAR Peak: 0.09 W/kg

SAR 10g (W/Kg)	0.041024
SAR 1g (W/Kg)	0.064068

WCDMA Band V 12.2 kbps RMC Right Cheek Channel4233:

Frequency (MHz)	846.600000
Relative permittivity (real part)	41.500000
Relative permittivity (imaginary part)	19.400000
Conductivity (S/m)	0.960300
Variation (%)	-2.670000

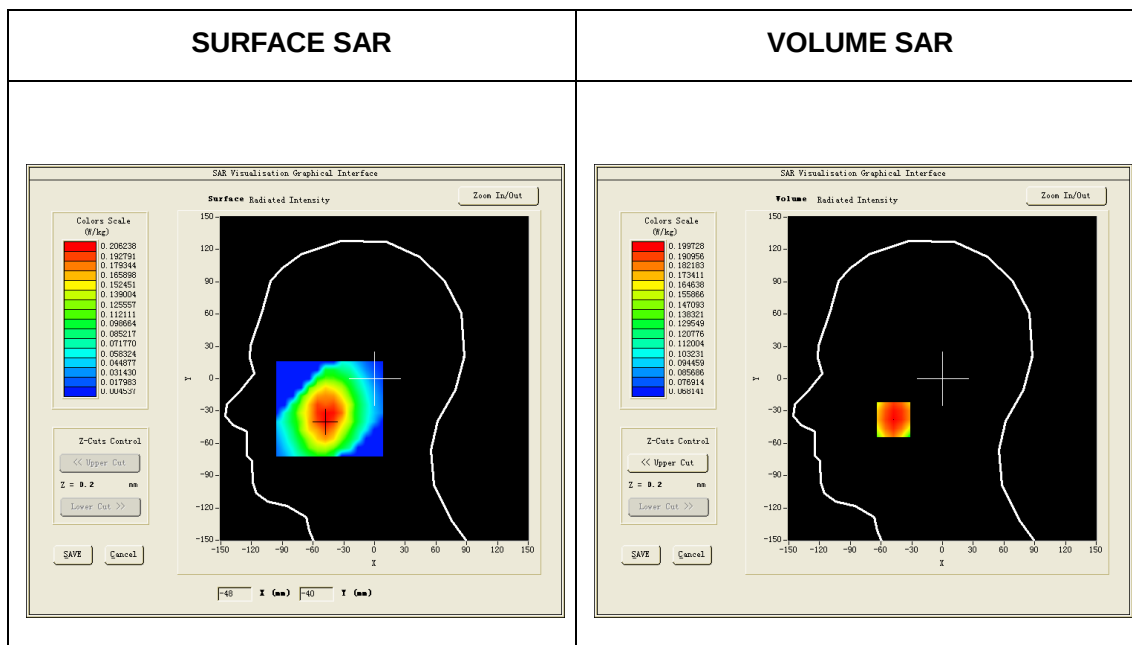


Maximum location: X=-48.00, Y=-38.00

SAR Peak: 0.23 W/kg

SAR 10g (W/Kg)	0.157859
SAR 1g (W/Kg)	0.194711

WCDMA Band II 12.2 kbps RMC Right Cheek Channel9262:

Frequency (MHz)	1852.400000
Relative permittivity (real part)	40.000000
Relative permittivity (imaginary part)	13.615200
Conductivity (S/m)	1.400853
Variation (%)	-1.370000

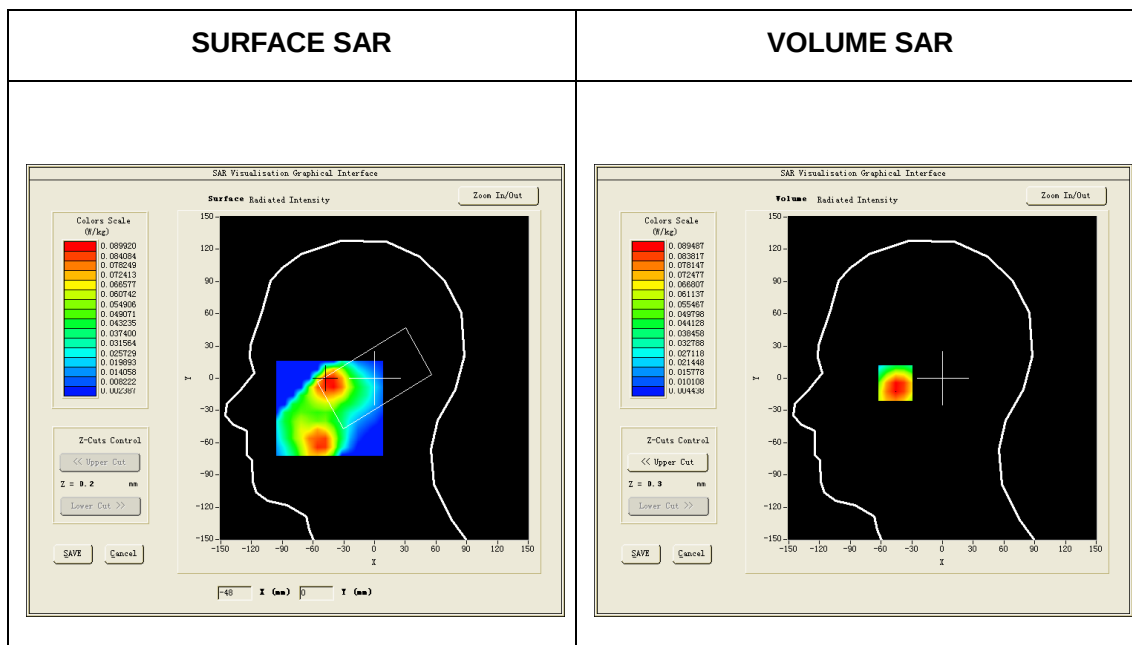


Maximum location: X=-46.00, Y=-2.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.055327
SAR 1g (W/Kg)	0.087037

WCDMA Band II 12.2 kbps ARM Right Cheek Channel9262:

Frequency (MHz)	1852.400000
Relative permittivity (real part)	40.000000
Relative permittivity (imaginary part)	13.615200
Conductivity (S/m)	1.400853
Variation (%)	-1.370000

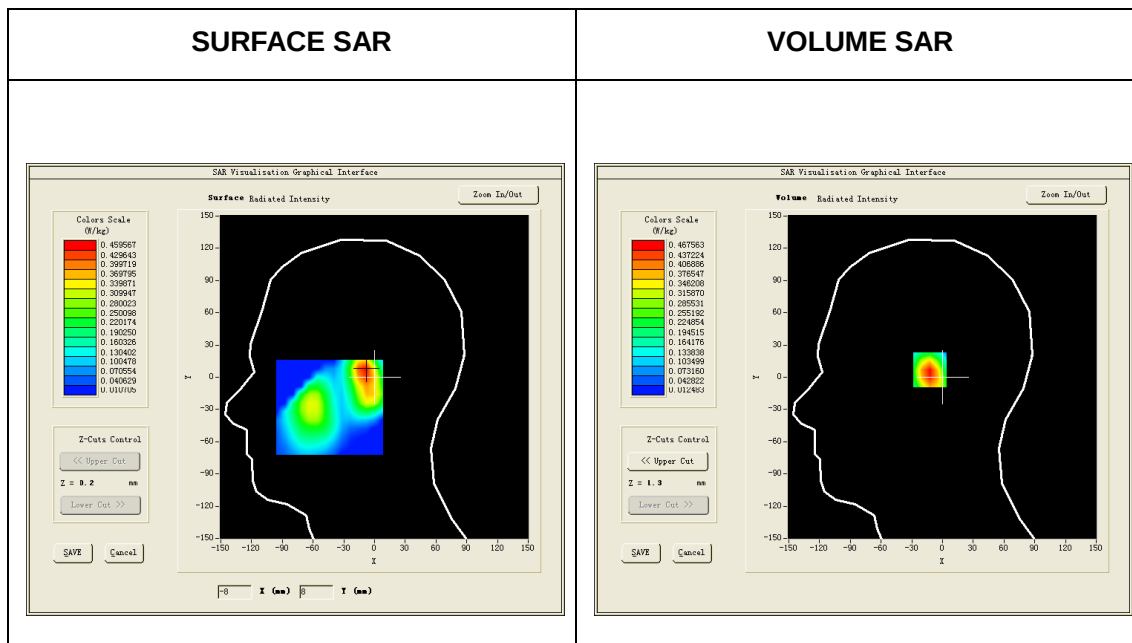


Maximum location: X=-9.00, Y=7.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.053211
SAR 1g (W/Kg)	0.074015

WLAN 2.4GHz 802.11b Left Cheek Channel6:

Frequency (MHz)	2437.000000
Relative permittivity (real part)	39.226002
Relative permittivity (imaginary part)	13.207000
Conductivity (S/m)	1.788081
Variation (%)	1.250000

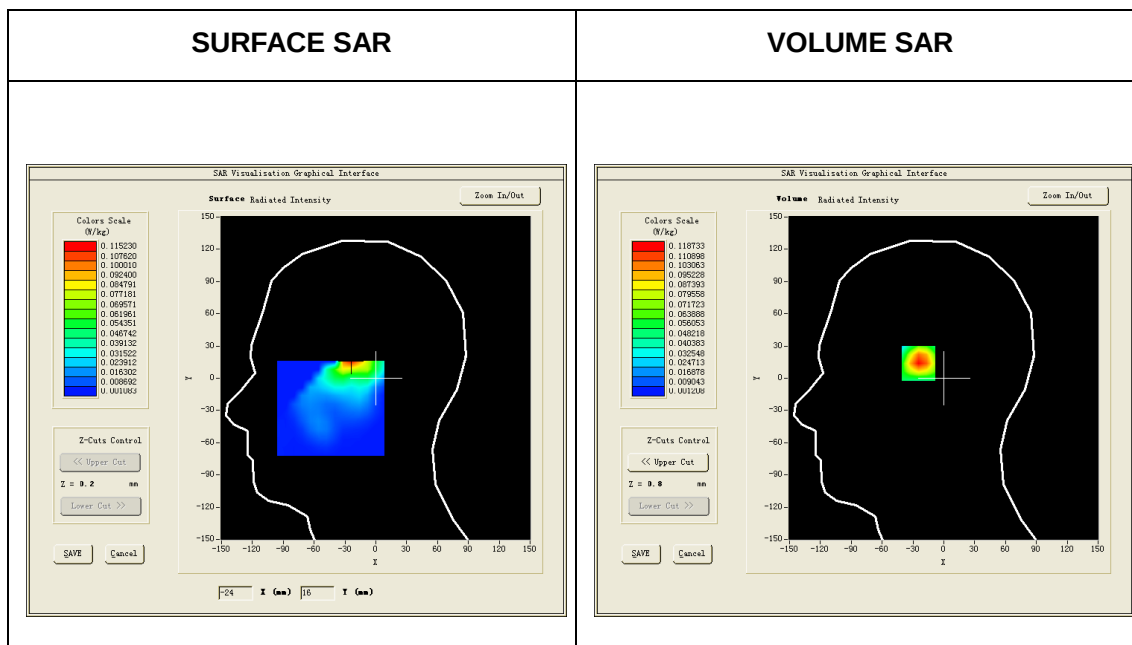

Maximum location: X=-24.00, Y=16.00


SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.054016
SAR 1g (W/Kg)	0.111155

Standalone Body Worn

GSM850 GMSK(1 Tx slot) Back 1cm Channel128:

Frequency (MHz)	824.200012
Relative permittivity (real part)	55.242077
Relative permittivity (imaginary part)	21.378187
Conductivity (S/m)	0.978883
Variation (%)	-0.240000

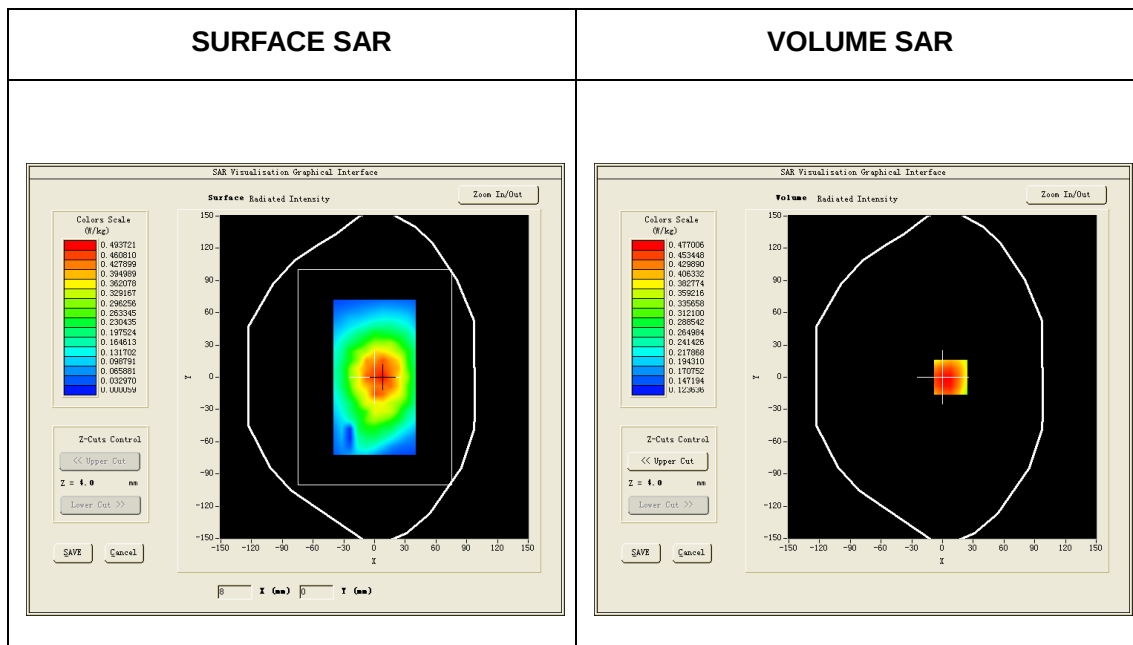


Maximum location: X=8.00, Y=0.00

SAR Peak: 0.65 W/kg

SAR 10g (W/Kg)	0.377757
SAR 1g (W/Kg)	0.509939

GPRS1900 GMSK(2 Tx slot) Back 1cm Channel512:

Frequency (MHz)	1850.400024
Relative permittivity (real part)	40.000000
Relative permittivity (imaginary part)	13.627040
Conductivity (S/m)	1.400860
Variation (%)	-0.980000

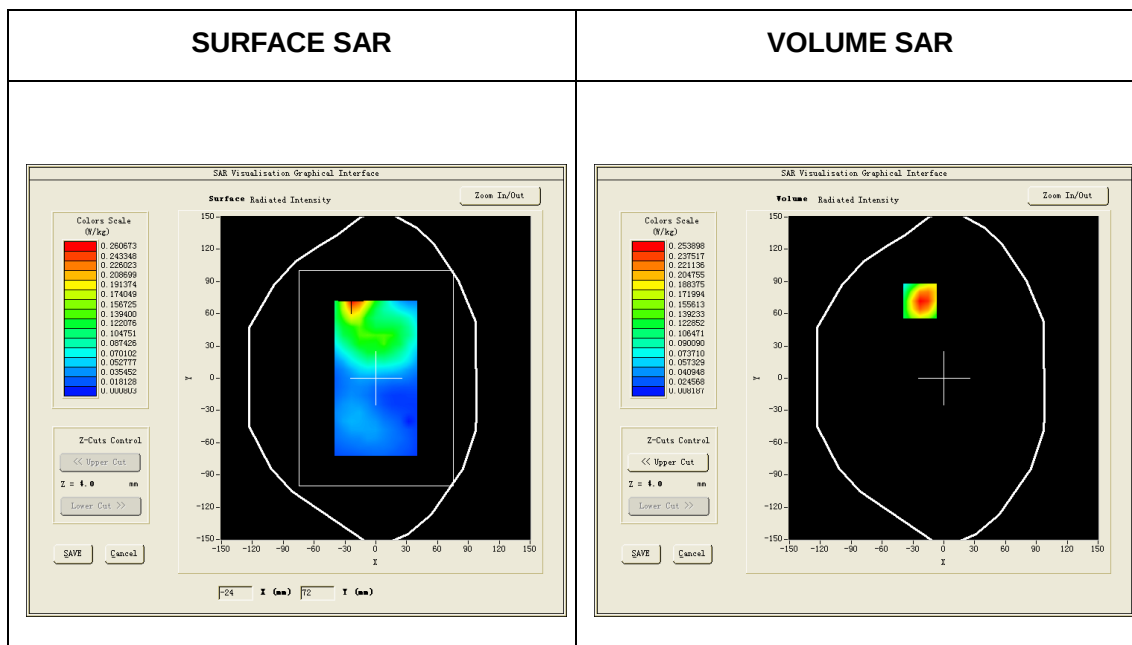


Maximum location: X=-23.00, Y=72.00

SAR Peak: 0.39 W/kg

SAR 10g (W/Kg)	0.137719
SAR 1g (W/Kg)	0.246750

WCDMA Band V 12.2 kbps RMC Back 1cm Channel4233:

Frequency (MHz)	846.600000
Relative permittivity (real part)	55.061539
Relative permittivity (imaginary part)	20.972307
Conductivity (S/m)	1.025313
Variation (%)	-3.550000

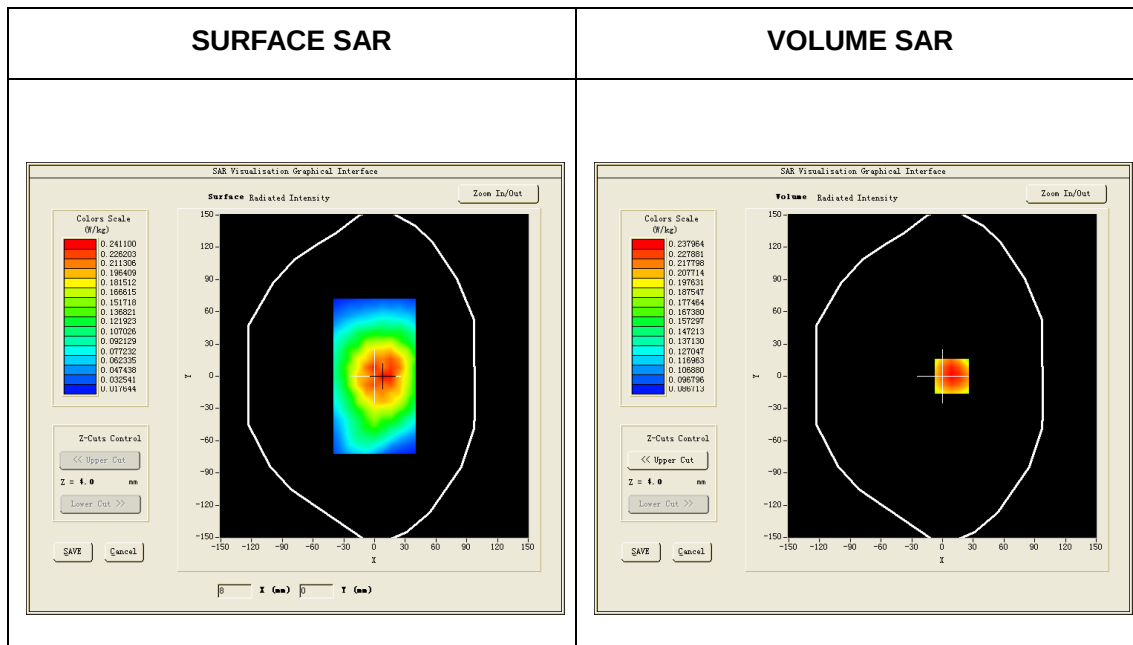


Maximum location: X=9.00, Y=0.00

SAR Peak: 0.31 W/kg

SAR 10g (W/Kg)	0.195583
SAR 1g (W/Kg)	0.249691

WCDMA Band II 12.2 kbps RMC Back 1cm Channel9262:

Frequency (MHz)	1852.000000
Relative permittivity (real part)	53.299999
Relative permittivity (imaginary part)	14.784000
Conductivity (S/m)	1.521109
Variation (%)	-0.570000

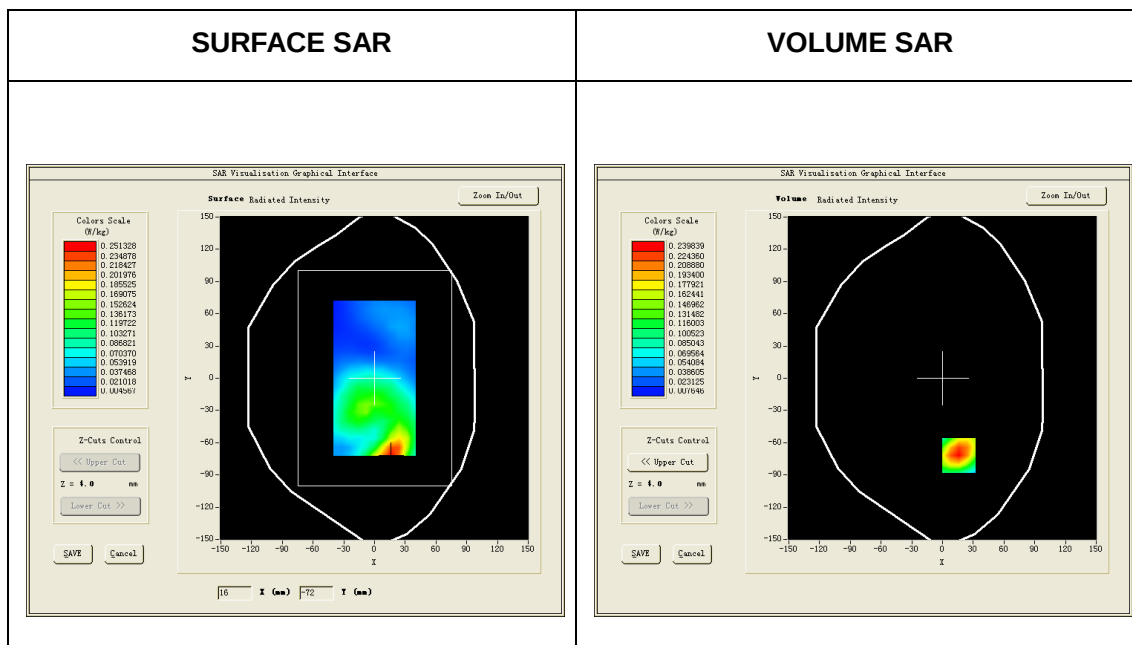


Maximum location: X=16.00, Y=-72.00

SAR Peak: 0.36 W/kg

SAR 10g (W/Kg)	0.144283
SAR 1g (W/Kg)	0.246108

WLAN 2.4GHz 802.11b Back Channel6:

Frequency (MHz)	2437.000000
Relative permittivity (real part)	52.717335
Relative permittivity (imaginary part)	14.311222
Conductivity (S/m)	1.937580
Variation (%)	0.670000

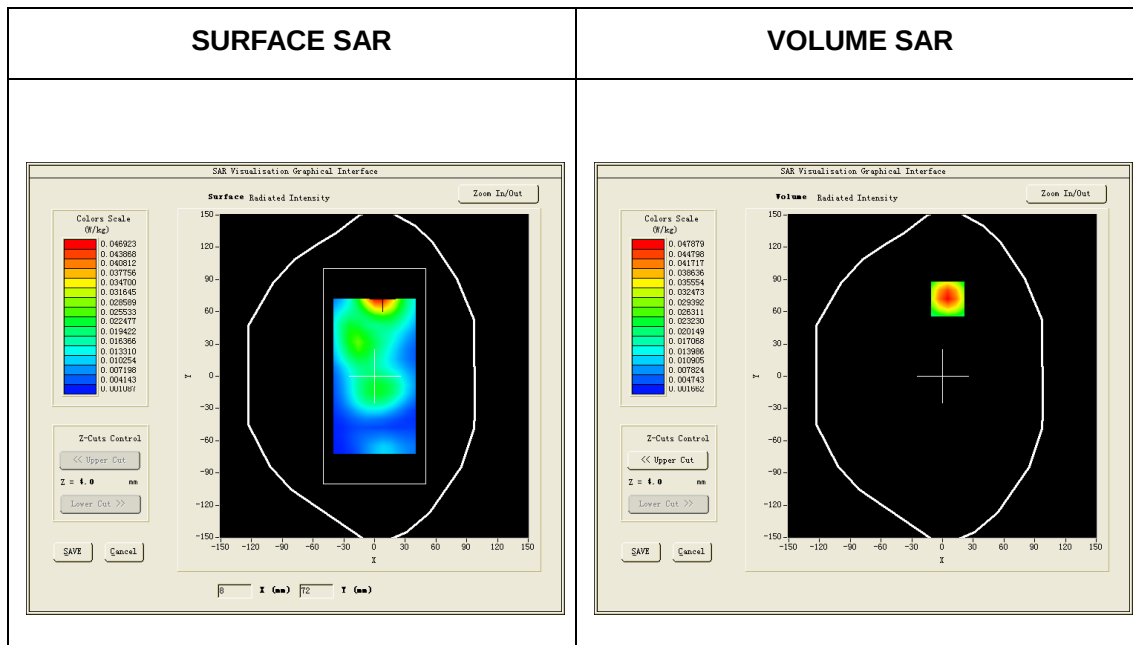

Maximum location: X=5.00, Y=72.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.026636
SAR 1g (W/Kg)	0.048817

10 Simultaneous Transmission Analysis

The test mode as follows:

Simultaneous Transmission Configurations	Portable Handset Exposure positions	
	Head	Body-worn
GSM + WLAN 2.4GHz	Yes	Yes
GSM + Bluetooth	Yes	Yes
WCDMA + WLAN 2.4GHz	Yes	Yes
WCDMA + Bluetooth	Yes	Yes
Bluetooth + WLAN 2.4GHz	Yes	Yes
GSM + Bluetooth + WLAN 2.4GHz	Yes	Yes
WCDMA + Bluetooth + WLAN 2.4GHz	Yes	Yes

Note:

1. WLAN 2.4GHz and Bluetooth use the two different antennas respectively.
2. EUT will choose either GSM or WCDMA according to the network signal condition; therefore, they will not transmit simultaneously.
3. The reported SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v05r01, simultaneous transmission SAR is compliant if,
 - a) Scalar SAR summation $< 1.6\text{W/kg}$.
 - b) $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1 - x2)^2 + (y1 - y2)^2 + (z1 - z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary
 - c) Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6\text{W/kg}$
5. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r01 based on the formula below.
 - a) $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} \text{ (GHz)/x}] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

- b) When the minimum test separation distance is $< 5\text{mm}$, the distance is used 5mm to determine SAR test exclusion.
- c) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is $> 50\text{ mm}$.
- d) If the test separation distance (antenna-user) is $< 5\text{mm}$, 5mm is used for excluded SAR calculation.

Bluetooth			
Tune-up Maximum Power(dBm)	Exposure Position	Head	Body Worn
	Test separation (mm)	0	10
4	Estimated SAR (W/Kg)	0.104	0.052

10.1 Head SAR Simultaneous Transmission Analysis

WWAN + WLAN 2.4GHz

Test Position	WWAN		WLAN 2.4GHz	Summed SAR (W/kg)	SPLSR ≤ 0.04
	Band	1g SAR (W/kg)	1g SAR (W/kg)		
Right Cheek	GSM850	0.192	0.088	0.280	
	GSM1900	0.090	0.088	0.178	
	WCDMA Band V	0.285	0.088	0.373	
	WCDMA Band II	0.162	0.088	0.250	
Right Tilted	GSM850	0.096	0.089	0.185	
	GSM1900	0.087	0.089	0.176	
	WCDMA Band V	0.215	0.089	0.304	
	WCDMA Band II	0.121	0.089	0.210	
Left Cheek	GSM850	0.225	0.151	0.376	
	GSM1900	0.076	0.151	0.227	
	WCDMA Band V	0.213	0.151	0.364	
	WCDMA Band II	0.141	0.151	0.292	
Left Tilted	GSM850	0.105	0.104	0.209	
	GSM1900	0.066	0.104	0.170	
	WCDMA Band V	0.147	0.104	0.251	
	WCDMA Band II	0.087	0.104	0.191	

WWAN + Bluetooth

Test Position	WWAN		Bluetooth	Summed SAR (W/kg)	SPLSR ≤ 0.04
	Band	1g SAR (W/kg)	1g SAR (W/kg)		
Right Cheek	GSM850	0.192	0.104	0.296	
	GSM1900	0.090	0.104	0.194	
	WCDMA Band V	0.285	0.104	0.389	
	WCDMA Band II	0.162	0.104	0.266	
Right Tilted	GSM850	0.096	0.104	0.200	
	GSM1900	0.087	0.104	0.191	
	WCDMA Band V	0.215	0.104	0.319	
	WCDMA Band II	0.121	0.104	0.225	
Left Cheek	GSM850	0.225	0.104	0.329	
	GSM1900	0.076	0.104	0.180	
	WCDMA Band V	0.213	0.104	0.317	
	WCDMA Band II	0.141	0.104	0.245	
Left Tilted	GSM850	0.105	0.104	0.209	
	GSM1900	0.066	0.104	0.170	
	WCDMA Band V	0.147	0.104	0.251	
	WCDMA Band II	0.087	0.104	0.191	

WLAN + Bluetooth

Test Position	WLAN	Bluetooth	Summed SAR (W/kg)	SPLSR ≤ 0.04
	1g SAR (W/kg)	1g SAR (W/kg)		
Right Cheek	0.088	0.104	0.192	
Right Tilted	0.089	0.104	0.193	
Left Cheek	0.151	0.104	0.255	
Left Tilted	0.104	0.104	0.208	

WWAN + Bluetooth + WLAN 2.4GHz

Test Position	WWAN		Bluetooth	WLAN	Summed SAR (W/kg)	SPLSR ≤ 0.04
	Band	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
Right Cheek	GSM850	0.192	0.104	0.088	0.384	
	GSM1900	0.090	0.104	0.088	0.282	
	WCDMA Band V	0.285	0.104	0.088	0.477	
	WCDMA Band II	0.162	0.104	0.088	0.354	
Right Tilted	GSM850	0.096	0.104	0.089	0.289	
	GSM1900	0.087	0.104	0.089	0.280	
	WCDMA Band V	0.215	0.104	0.089	0.408	
	WCDMA Band II	0.121	0.104	0.089	0.314	
Left Cheek	GSM850	0.225	0.104	0.151	0.480	
	GSM1900	0.076	0.104	0.151	0.331	
	WCDMA Band V	0.213	0.104	0.151	0.468	
	WCDMA Band II	0.141	0.104	0.151	0.396	
Left Tilted	GSM850	0.105	0.104	0.104	0.313	
	GSM1900	0.066	0.104	0.104	0.274	
	WCDMA Band V	0.147	0.104	0.104	0.355	
	WCDMA Band II	0.087	0.104	0.104	0.295	

10.2 Body Worn SAR Simultaneous Transmission Analysis

WWAN + WLAN 2.4GHz

Test Position	WWAN		WLAN 2.4GHz	Summed SAR (W/kg)	SPLSR ≤ 0.04
	Band	1g SAR (W/kg)	1g SAR (W/kg)		
Front	GSM850	0.362	0.043	0.405	
	GSM1900	0.080	0.043	0.123	
	GPRS850	0.174	0.043	0.217	
	GPRS1900	0.134	0.043	0.177	
	WCDMA Band V	0.203	0.043	0.246	
	WCDMA Band II	0.190	0.043	0.233	
Back	GSM850	0.689	0.066	0.755	
	GSM1900	0.315	0.066	0.381	
	GPRS850	0.342	0.066	0.408	
	GPRS1900	0.363	0.066	0.429	
	WCDMA Band V	0.365	0.066	0.431	
	WCDMA Band II	0.458	0.066	0.524	
Left Side	GSM850	0.070	0.057	0.127	
	GSM1900	0.033	0.057	0.090	
	GPRS850	0.042	0.057	0.099	
	GPRS1900	0.068	0.057	0.125	
	WCDMA Band V	0.077	0.057	0.134	
	WCDMA Band II	0.067	0.057	0.124	
Right Side	GSM850	0.070		0.070	
	GSM1900	0.033		0.033	
	GPRS850	0.013		0.013	
	GPRS1900	0.072		0.072	
	WCDMA Band V	0.067		0.067	
	WCDMA Band II	0.012		0.012	
Bottom Side	GSM850	0.031		0.031	
	GSM1900	0.073		0.073	
	GPRS850	0.127		0.127	
	GPRS1900	0.109		0.109	
	WCDMA Band V	0.032		0.032	
	WCDMA Band II	0.095		0.095	

WWAN + Bluetooth

Test Position	WWAN		Bluetooth	Summed SAR (W/kg)	SPLSR ≤ 0.04
	Band	1g SAR (W/kg)	1g SAR (W/kg)		
Front	GSM850	0.362	0.052	0.414	
	GSM1900	0.080	0.052	0.132	
	GPRS850	0.174	0.052	0.226	
	GPRS1900	0.134	0.052	0.186	
	WCDMA Band V	0.203	0.052	0.255	
	WCDMA Band II	0.190	0.052	0.242	
Back	GSM850	0.689	0.052	0.741	
	GSM1900	0.315	0.052	0.367	
	GPRS850	0.342	0.052	0.394	
	GPRS1900	0.363	0.052	0.415	
	WCDMA Band V	0.365	0.052	0.417	
	WCDMA Band II	0.458	0.052	0.510	
Left Side	GSM850	0.070	0.052	0.122	
	GSM1900	0.033	0.052	0.085	
	GPRS850	0.042	0.052	0.094	
	GPRS1900	0.068	0.052	0.120	
	WCDMA Band V	0.077	0.052	0.129	
	WCDMA Band II	0.067	0.052	0.119	
Right Side	GSM850	0.070		0.070	
	GSM1900	0.033		0.033	
	GPRS850	0.013		0.013	
	GPRS1900	0.072		0.072	
	WCDMA Band V	0.067		0.067	
	WCDMA Band II	0.012		0.012	
Bottom Side	GSM850	0.031		0.031	
	GSM1900	0.073		0.073	
	GPRS850	0.127		0.127	
	GPRS1900	0.109		0.109	
	WCDMA Band V	0.032		0.032	
	WCDMA Band II	0.095		0.095	

WLAN + Bluetooth

Test Position	WLAN	Bluetooth	Summed SAR (W/kg)	SPLSR ≤ 0.04
	1g SAR (W/kg)	1g SAR (W/kg)		
Front	0.043	0.052	0.095	
Back	0.066	0.052	0.118	
Left Side	0.035	0.052	0.087	

WWAN + WLAN 2.4GHz + Bluetooth

Test Position	WWAN		WLAN 2.4GHz	Bluetooth	Summed SAR (W/kg)	SPLSR ≤ 0.04
	Band	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
Front	GSM850	0.362	0.043	0.052	0.457	
	GSM1900	0.080	0.043	0.052	0.175	
	GPRS850	0.174	0.043	0.052	0.269	
	GPRS1900	0.134	0.043	0.052	0.229	
	WCDMA Band V	0.203	0.043	0.052	0.298	
	WCDMA Band II	0.190	0.043	0.052	0.285	
Back	GSM850	0.689	0.066	0.052	0.807	
	GSM1900	0.315	0.066	0.052	0.433	
	GPRS850	0.342	0.066	0.052	0.460	
	GPRS1900	0.363	0.066	0.052	0.481	
	WCDMA Band V	0.365	0.066	0.052	0.483	
	WCDMA Band II	0.458	0.066	0.052	0.576	
Left Side	GSM850	0.070	0.057	0.052	0.179	
	GSM1900	0.033	0.057	0.052	0.142	
	GPRS850	0.042	0.057	0.052	0.151	
	GPRS1900	0.068	0.057	0.052	0.177	
	WCDMA Band V	0.077	0.057	0.052	0.186	
	WCDMA Band II	0.067	0.057	0.052	0.176	
Right Side	GSM850	0.070			0.070	
	GSM1900	0.033			0.033	
	GPRS850	0.013			0.013	
	GPRS1900	0.072			0.072	
	WCDMA Band V	0.067			0.067	
	WCDMA Band II	0.012			0.012	
Bottom Side	GSM850	0.031			0.031	
	GSM1900	0.073			0.073	
	GPRS850	0.127			0.127	
	GPRS1900	0.109			0.109	
	WCDMA Band V	0.032			0.032	
	WCDMA Band II	0.095			0.095	

We can get that the maximum scalar SAR summation value is 0.807W/Kg according to the analysis from above data, it less than 1.6W/Kg, so simultaneous transmission SAR is compliant per KDB 447498 D01v05r01.

11 Measurement Uncertainty

Table 23: Measurement Uncertainty according to IEEE 1528

No.	Uncertainty Component	Type	Uncertainty Value (%)	Probability Distribution	k	ci	Standard Uncertainty (%) $u_i(\%)$	Degree of freedom ν_{eff} or ν_i
Measurement System								
1	—Probe Calibration	B	6	N	1	1	3.5	∞
2	—Axial isotropy	B	4.7	R	1.732	1	2.7	∞
3	—Hemispherical Isotropy	B	9.4	R	1.732	1	5.4	∞
4	—Boundary Effect	B	11.0	R	1.732	1	6.4	∞
5	—Linearity	B	4.7	R	1.732	1	2.7	∞
6	—System Detection Limits	B	1.0	R	1.732	1	0.6	∞
7	—Readout Electronics	B	1.0	N	1	1	1.00	∞
8	—Response Time	B	0.00	R	1.732	1	0.00	∞
9	—Integration Time	B	0.00	R	1.732	1	0.00	∞
10	—RF Ambient Conditions	B	3.0	R	1.732	1	1.73	∞
11	—Probe Position Mechanical tolerance	B	0.4	R	1.732	1	0.2	∞
12	—Probe Position with respect to Phantom Shell	B	2.9	R	1.732	1	1.7	∞
13	—Extrapolation, Interpolation and Integration Algorithms for Max. SAR evaluation	B	3.9	R	1.732	1	2.3	∞

	Uncertainties of the DUT							
14	— Position of the DUT	A	4.8	N	1	1	4.8	5
15	— Holder of the DUT	A	7.1	N	1	1	7.1	5
16	— Output Power Variation — SAR drift measurement	B	5.0	R	1.732	1	2.9	∞
	Phantom and Tissue Parameters							
17	— Phantom Uncertainty(shape and thickness tolerances)	B	1.0	R	1.732	1	0.6	∞
18	— Liquid Conductivity Target — tolerance	B	5.0	R	1.732	0.6	1.7	∞
19	— Liquid Conductivity — measurement Uncertainty)	B	0.23	N	1	1	0.23	9
20	— Liquid Permittivity Target tolerance	B	5.0	R	1.732	0.6	1.7	∞
21	— Liquid Permittivity — measurement uncertainty	B	0.46	N	1	1	0.46	∞
Combined Standard Uncertainty				RSS			12.92	35.15
Expanded uncertainty (Confidence interval of 95 %)				K=2			25.84	

Table 24: Measurement Uncertainty for Body Worn Test according to IEC 62209-2

No.	Uncertainty Component	Type	Uncertainty Value (%)	Probability Distribution	k	ci	Standard Uncertainty (%) $u_i(\%)$	Degree of freedom v_{eff} or v_i
Measurement System								
1	—Probe Calibration	B	6	N	1	1	3.5	∞
2	—Isotropy	B	14.1	R	1.732	1	4.1	∞
3	—Hemispherical Isotropy	B	9.4	R	1.732	1	5.4	∞
4	—Boundary Effect	B	11.0	R	1.732	1	6.4	∞
5	—Linearity	B	4.7	R	1.732	1	2.7	∞
6	—System Detection Limits	B	1.0	R	1.732	1	0.6	∞
7	—Readout Electronics	B	1.0	N	1	1	1.00	∞
8	—Response Time	B	0.00	R	1.732	1	0.00	∞
9	—Integration Time	B	0.00	R	1.732	1	0.00	∞
10	—RF Ambient Conditions	B	3.0	R	1.732	1	1.73	∞
11	—Probe Position Mechanical tolerance	B	0.4	R	1.732	1	0.2	∞
12	—Probe Position with respect to Phantom Shell	B	2.9	R	1.732	1	1.7	∞
13	—Post-processing	B	5.0	R	1.732	1	2.9	∞
14	—Probe modulation response	B	0.4	R	1.732	1	0.2	∞

	Uncertainties of the DUT							
15	— Position of the DUT	A	4.8	N	1	1	4.8	5
16	— Holder of the DUT	A	7.1	N	1	1	7.1	5
17	— Power Scaling	B	1.0	R	1.732	1	0.6	∞
18	— Output Power Variation — SAR drift measurement	B	5.0	R	1.732	1	2.9	∞
	Phantom and Tissue Parameters							
19	— Phantom Uncertainty(shape and thickness tolerances)	B	1.0	R	1.732	1	0.6	∞
20	— Liquid Conductivity Target — tolerance	B	5.0	R	1.732	0.6	1.7	∞
21	— Liquid Conductivity — measurement Uncertainty)	B	0.23	N	1	1	0.23	9
22	— Liquid Permittivity Target tolerance	B	5.0	R	1.732	0.6	1.7	∞
23	— Liquid Permittivity — measurement uncertainty	B	0.46	N	1	1	0.46	∞
24	— liquid temperature uncertainty	B	1	N	1	1	1	∞
Combined Standard Uncertainty				RSS			13.12	44.15
Expanded uncertainty (Confidence interval of 95 %)				K=2			26.24	

11 MAIN TEST INSTRUMENTS

No	EQUIPMENT	TYPE	Series No.	Due Date
1	System Simulator	E5515C	GB 47200710	2014-02-23
2	SAR Probe	SATIMO	SN_0913_EP169	2014/04/05
3	Dipole	SID835	SN_0913_DIP0G900-217	2014/04/05
4	Dipole	SID18iple101 0.08rk Analyzere the 2450 MHz bandoperatio n mode. following table, for more information, please refer the RF test report00	SN_0913_DIP1G800-216	2014/04/05
4	Dipole	SID19iple101 0.08rk Analyzere the 2450 MHz bandoperatio n mode. following table, for more information, please refer the RF test report00	SN_0913_DIP1G900-218	2014/04/05
5	Dipole	SID2450	SN_0913_DIP2G450-220	2014/04/05
6	Vector Network Analyzer	ZVB8	1145.1010.08	2014/06/13
7	Amplifier	Nucletudes	143060	2014/04/05
8	Power Meter	NRVS	1020.1809.02	2014/06/13
9	Multimeter	Keithley-2000	4014020	2014/04/05

ANNEX A

of

CCIC-SET

CONFORMANCE TEST REPORT FOR

HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SET2013-05214

Yulong Computer Telecommunication Scientific (Shenzhen) Co. LTD

MobileMapper 20

Type Name: MobileMapper 20

Hardware Version: E750W_V0.3

Software Version: V1.12

TEST LAYOUT

This Annex consists of 4 pages

Date of Report: 2013-12-24



Fig.1 COMO SAR Test System

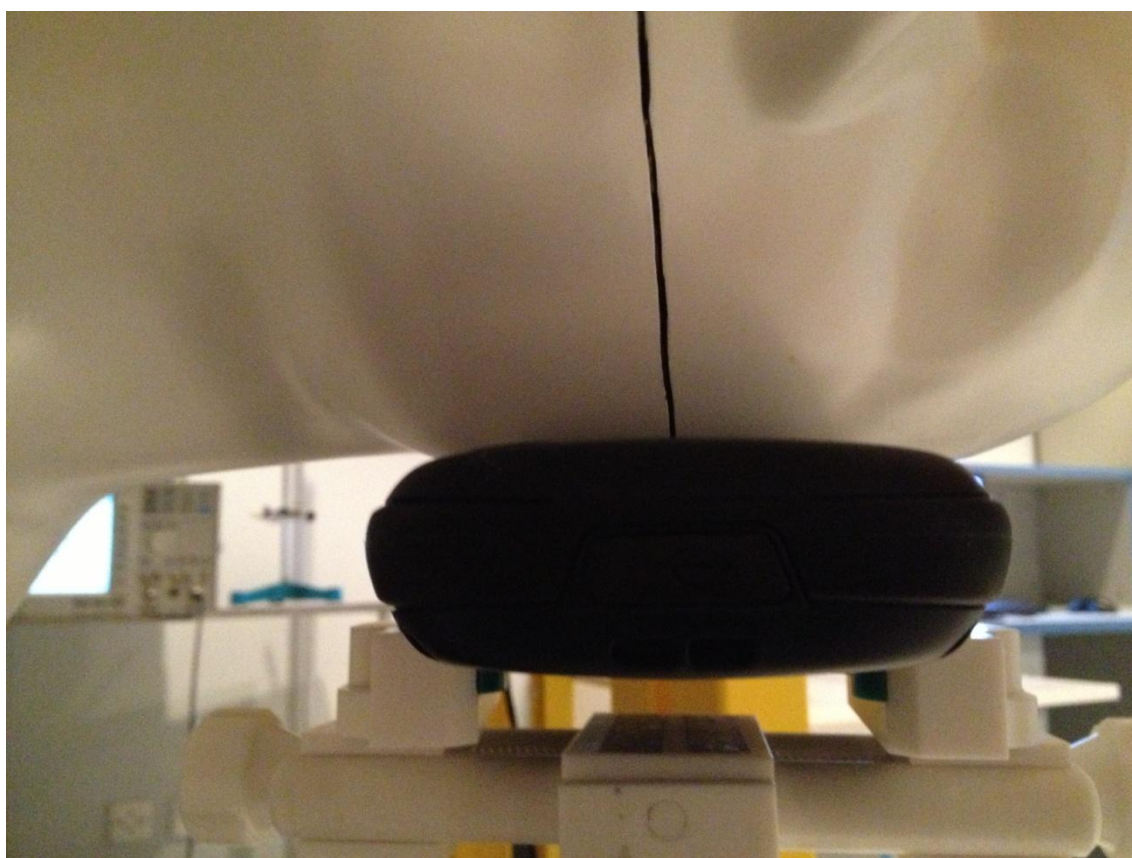


Fig.2 Left Cheek



Fig.3 Left Tilt

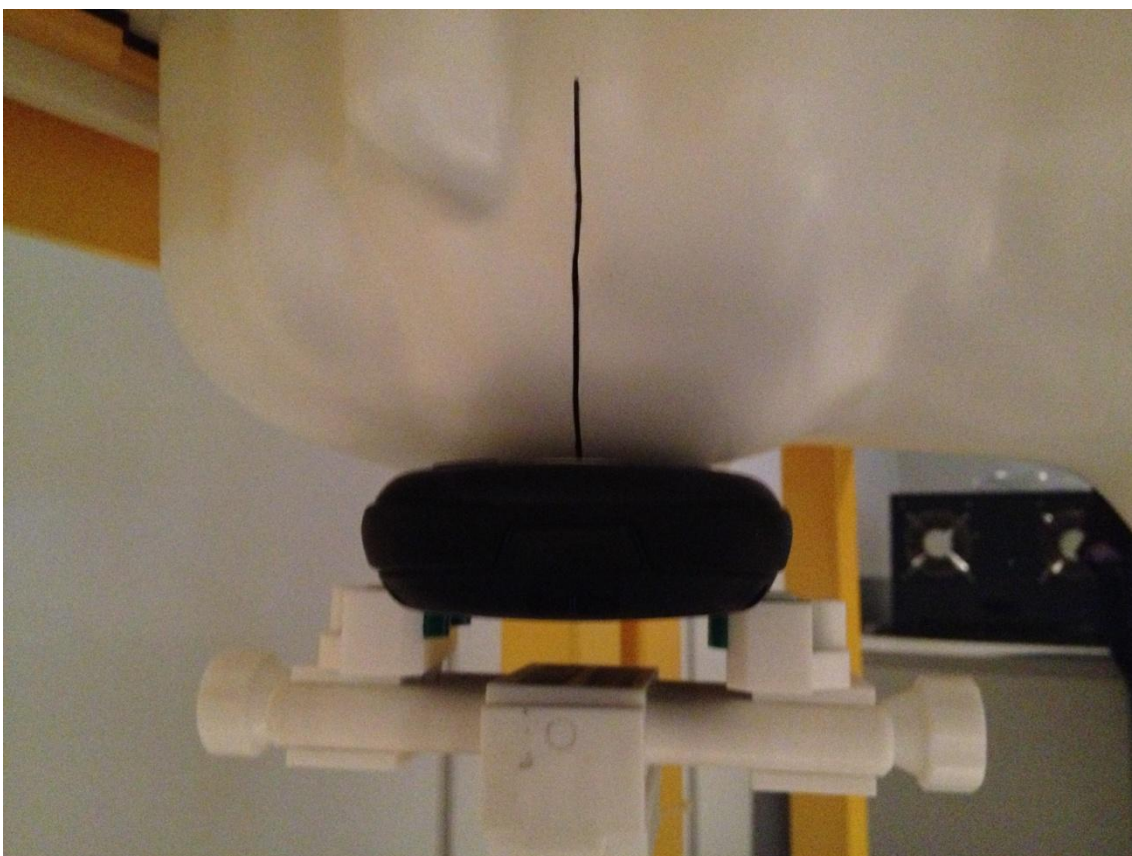


Fig.4 Right Cheek



Fig.5 Right Tilt



Fig.6 Body Position (Face Upward)



Fig.7 Body Position (Back Upward)



Fig.8 Body Position (Top Side)



Fig.9 Body Position (Bottom Side)



Fig.10 Body Position (Right Side)

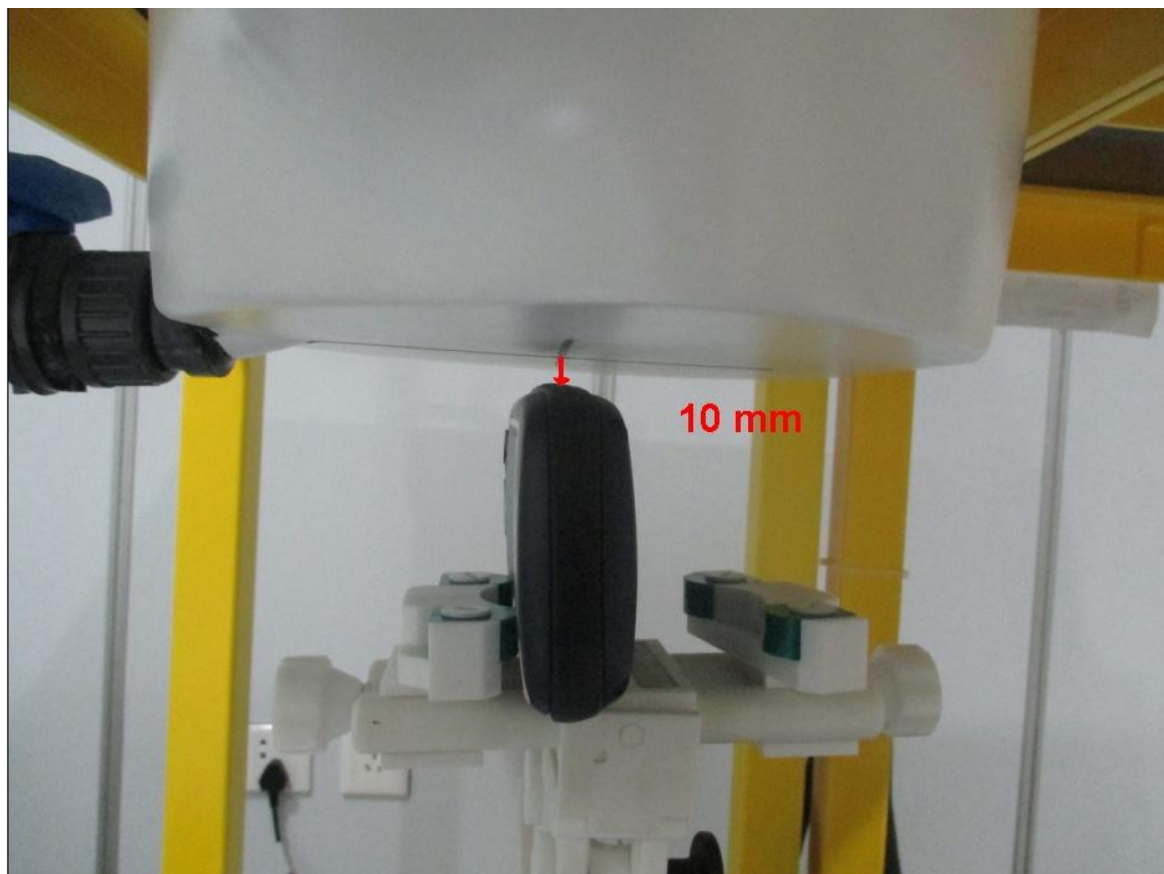


Fig.11 Body Position (Left Side)

ANNEX B

of

CCIC-SET

CONFORMANCE TEST REPORT FOR

HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SET2013-05214

MobileMapper 20

Type Name: MobileMapper 20

Hardware Version: E750W_V0.3

Software Version: V1.12

Sample Photographs

This Annex consists of 5 pages

Date of Report: 2013-12-04

1. Appearance



Appearance and size (obverse)



Appearance and size (reverse)

3. Inside




4. Battery





4. Adapter



5. Position of antennas

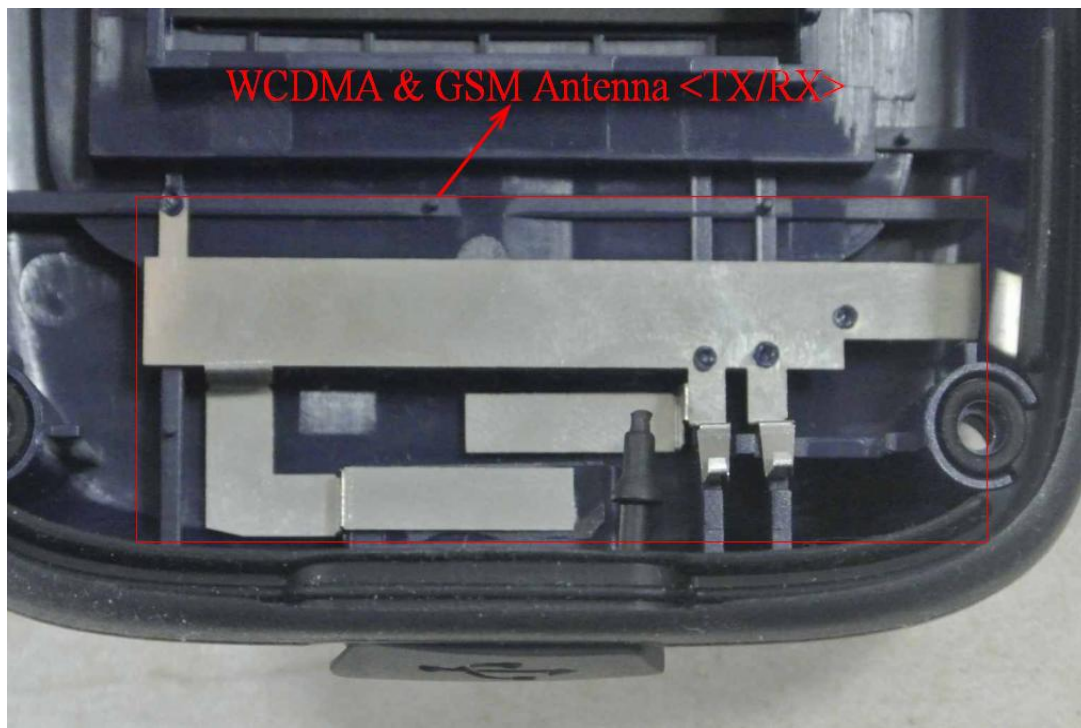

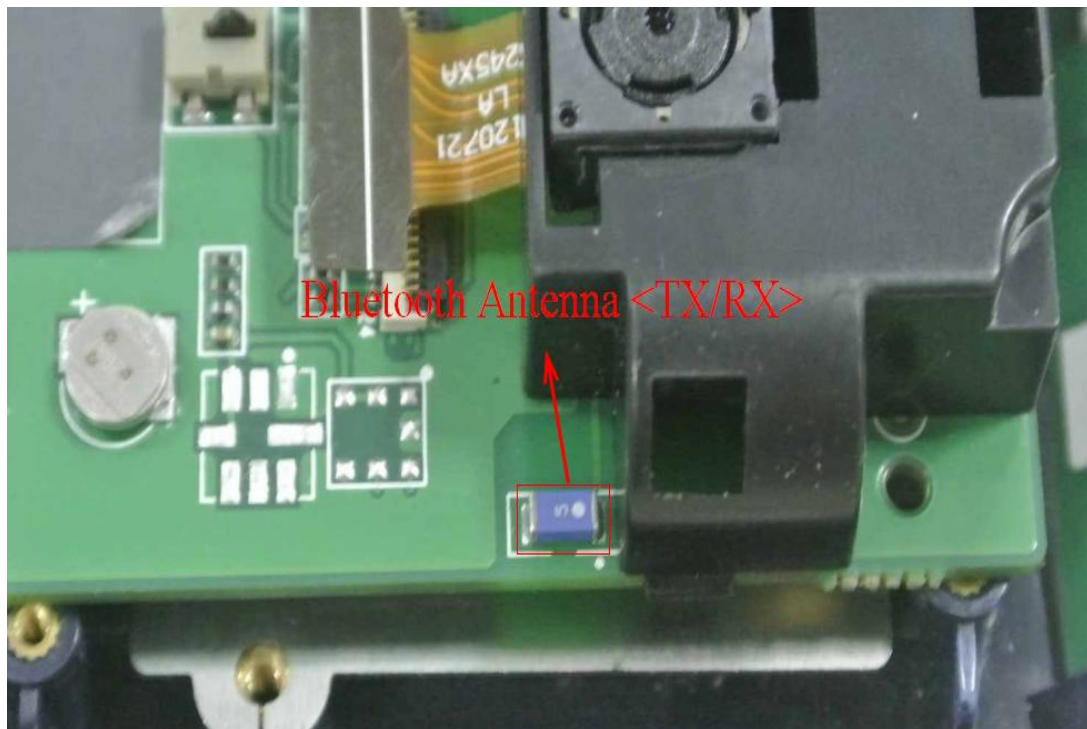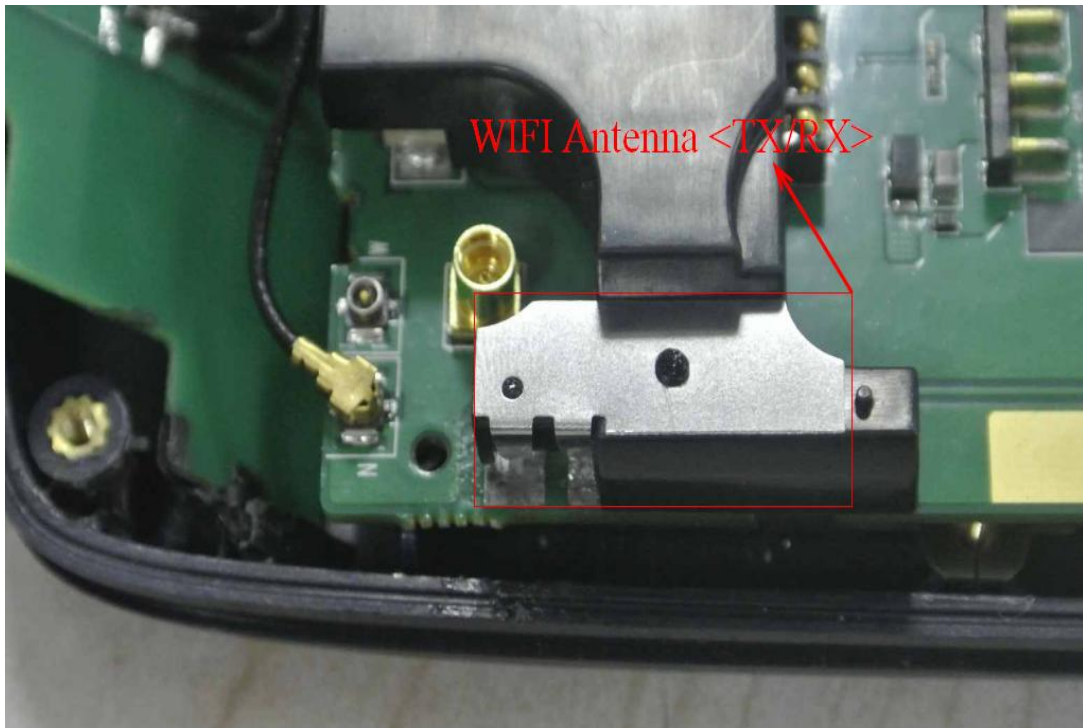

ANNEX C

of

CCIC-SET

CONFORMANCE TEST REPORT FOR

HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SET2013-05214

MobileMapper 20

Type Name: MobileMapper 20

Hardware Version: E750W_V0.3

Software Version: V1.12

System Performance Check Data

This Annex consists of 12 pages

Date of Report: 2013-12-24

System Performance Check (Head, 835MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 9/28/2013

Measurement duration: 12 minutes 57 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Dipole
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	835.000000
Relative permittivity (real part)	41.28
Relative permittivity	15.07
Conductivity (S/m)	0.94
Power drift (%)	-0.160000
Crest factor:	1:1

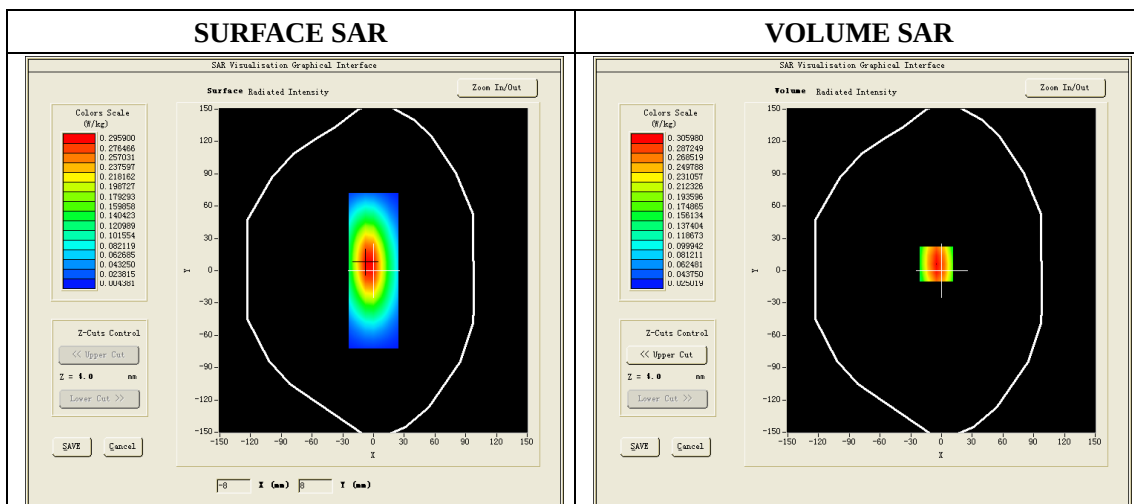




Maximum location: X=-5.00, Y=6.00

SAR 10g (W/Kg)	1.801556
SAR 1g (W/Kg)	2.469344

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5212	1.6625	1.1452	0.8068	0.5876	0.4154

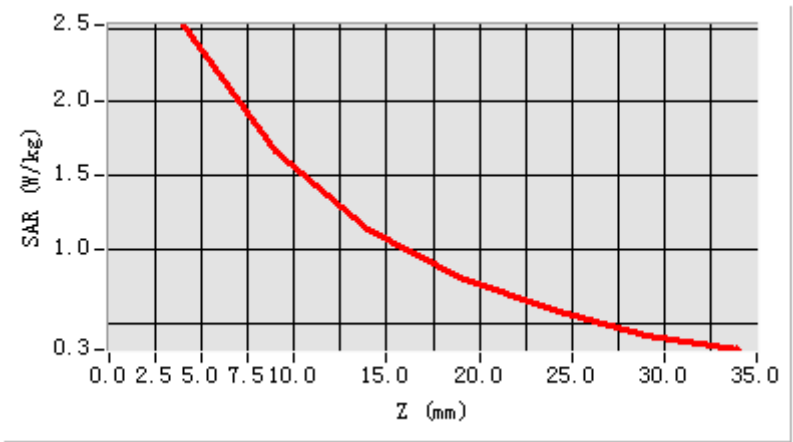

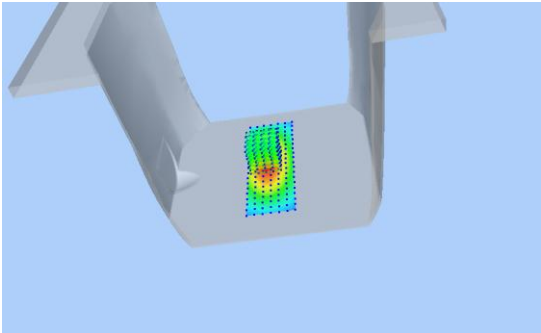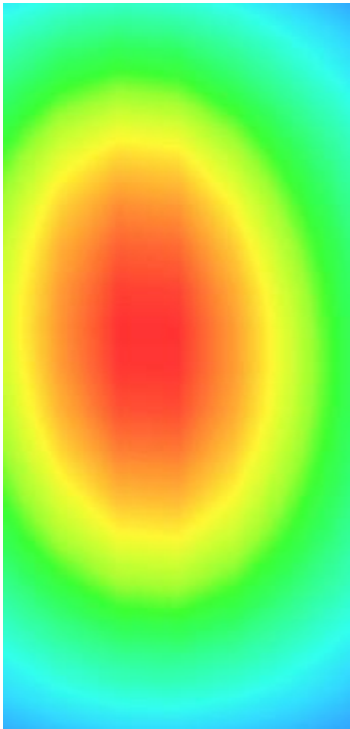3D scene shot	Hot spot position
	

System Performance Check (Head, 1900MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 9/28/2013

Measurement duration: 14 minutes 51 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Dipole
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	39.88
Relative permittivity	15.07
Conductivity (S/m)	1.42
Power drift (%)	-0.420000
Crest factor:	1:1

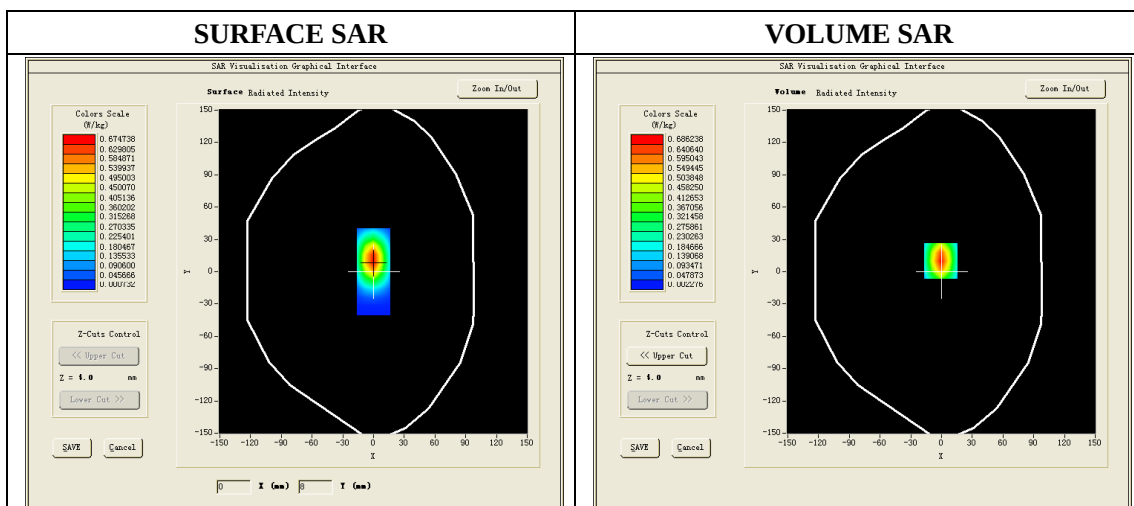




Maximum location: X=0.00, Y=8.00

SAR 10g (W/Kg)	5.156024
SAR 1g (W/Kg)	9.789668

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.6419	6.0043	3.7297	2.2606	1.5119	0.9792

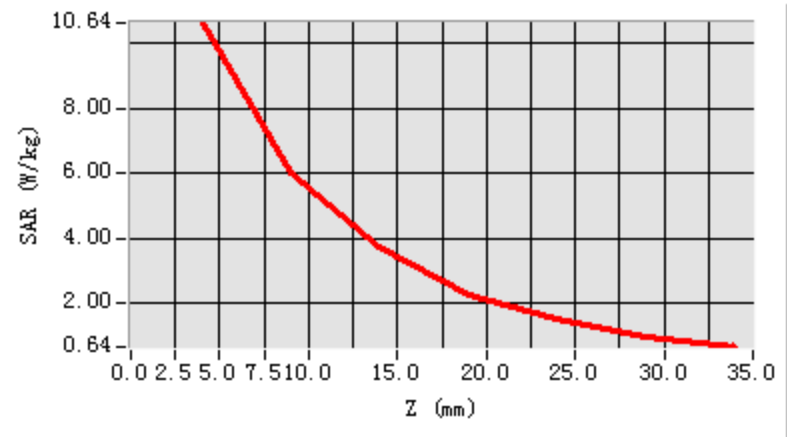

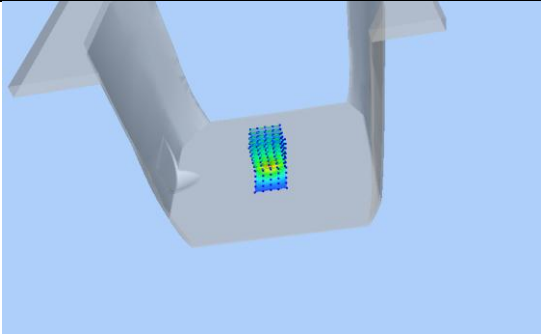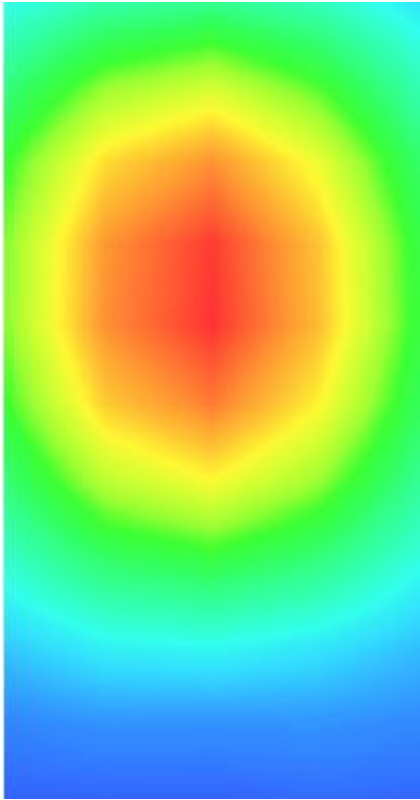3D scene shot	Hot spot position
	

System Performance Check (Head, 2450MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 9/28/2013

Measurement duration: 15 minutes 24 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Dipole
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR



Frequency (MHz)	2450.000000
Relative permittivity (real part)	38.96
Relative permittivity	13.19
Conductivity (S/m)	1.79
Power Drift (%)	0.160000
Crest factor:	1:1

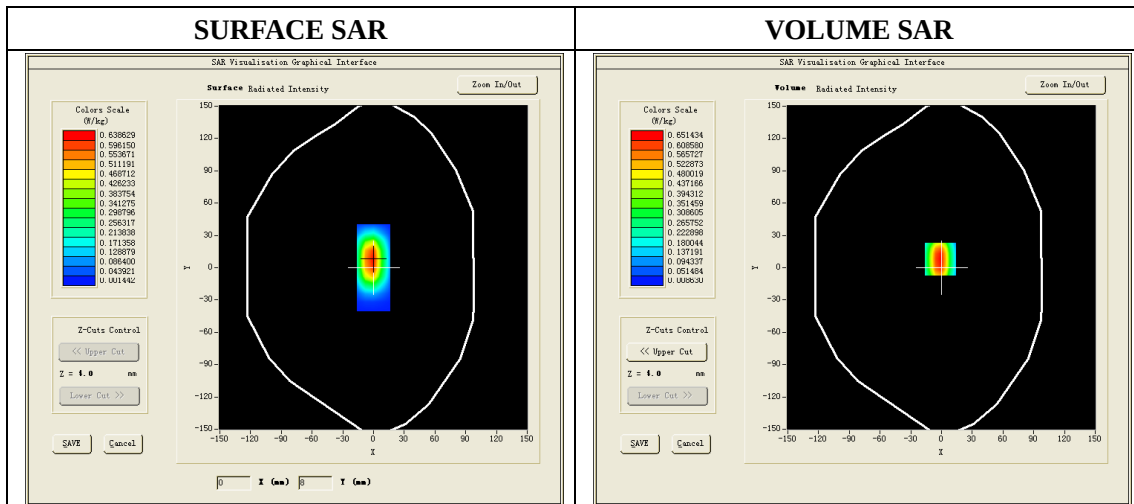

Maximum location: X=0.00, Y=8.00

SAR 10g (W/Kg)	5.914682
SAR 1g (W/Kg)	13.160218

Z Axis Scan

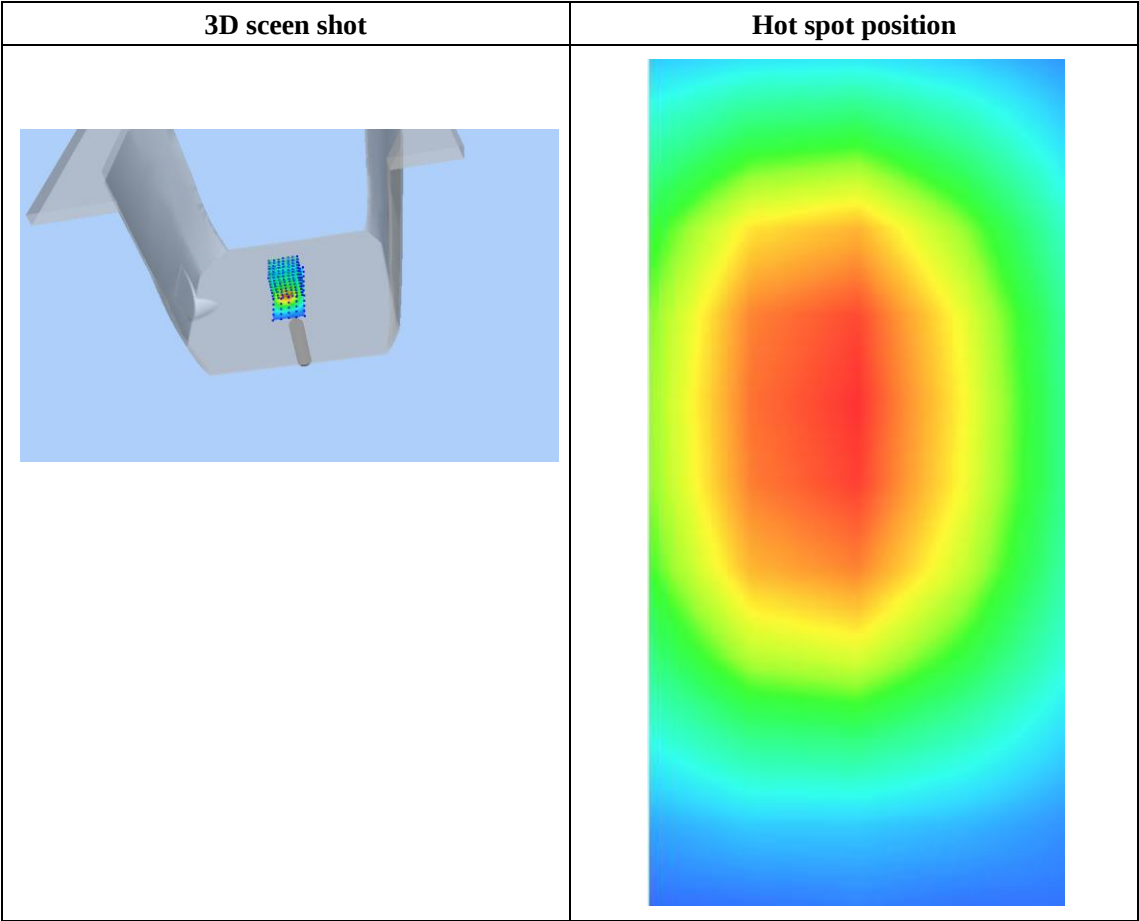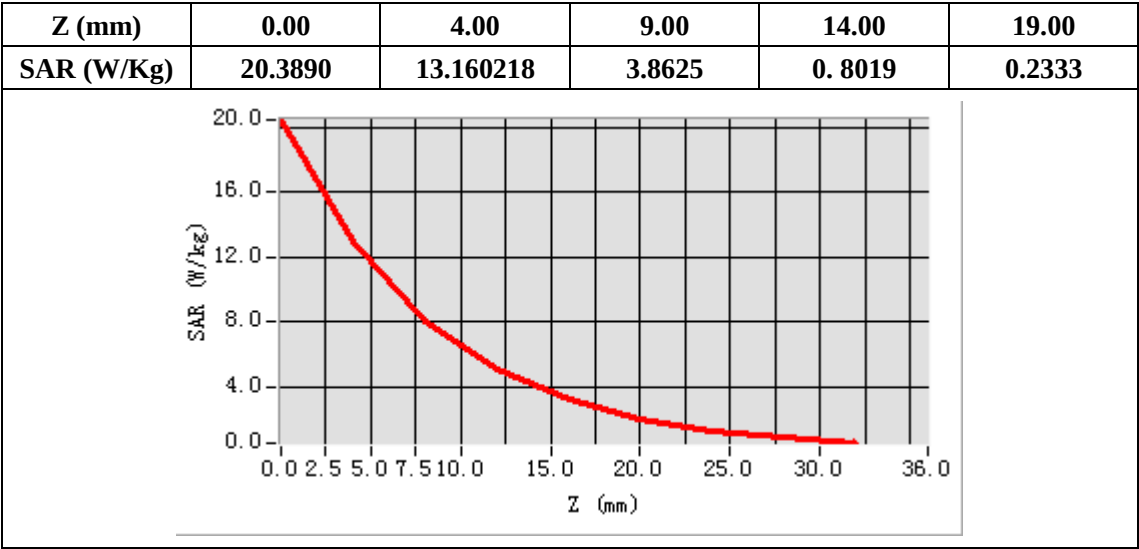

System Performance Check (Body, 835MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 9/29/2013

Measurement duration: 13 minutes 12 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Dipole
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	835.000000
Relative permittivity (real part)	55.38
Relative permittivity	21.72
Conductivity (S/m)	0.99
Power drift (%)	0.120000
Crest factor:	1:1

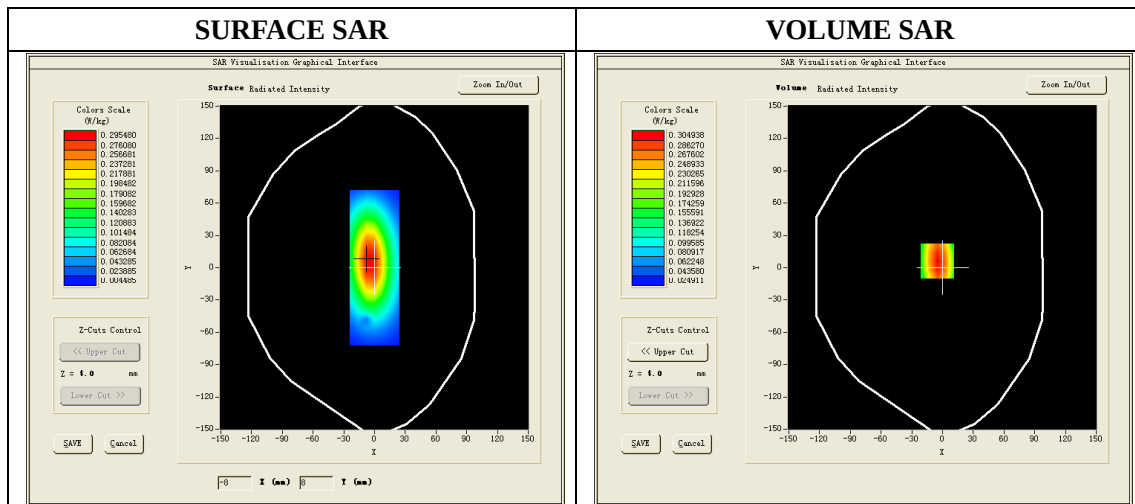




Maximum location: X=-8.00, Y=8.00

SAR 10g (W/Kg)	1.743219
SAR 1g (W/Kg)	2.430218

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5209	1.6629	1.1437	0.8075	0.5889	0.4143

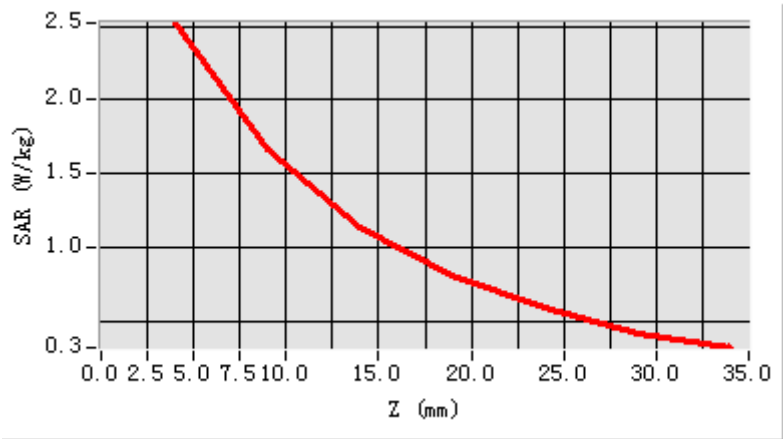

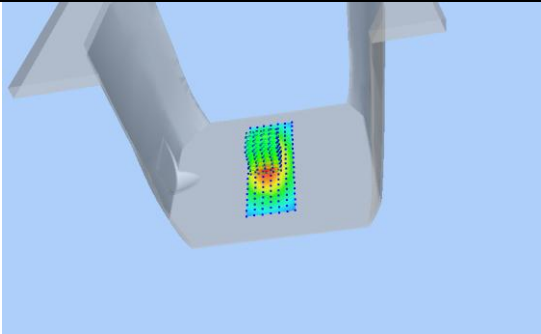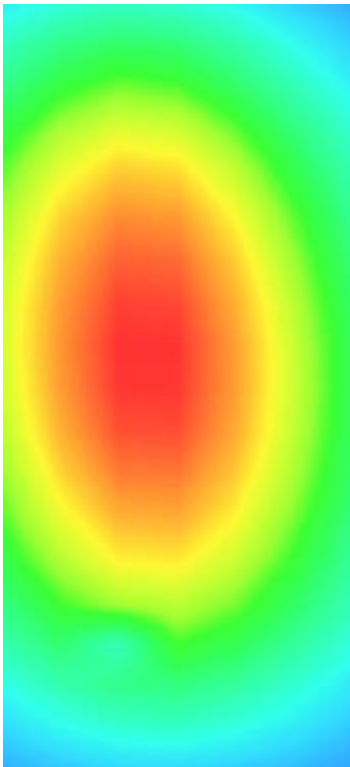3D scene shot	Hot spot position
	

System Performance Check (Body, 1900MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 9/29/2013

Measurement duration: 14 minutes 12 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Dipole
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR



Frequency (MHz)	1900.000000
Relative permittivity (real part)	53.67
Relative permittivity	13.02
Conductivity (S/m)	1.51
Power Drift (%)	0.220000
Crest factor:	1:1

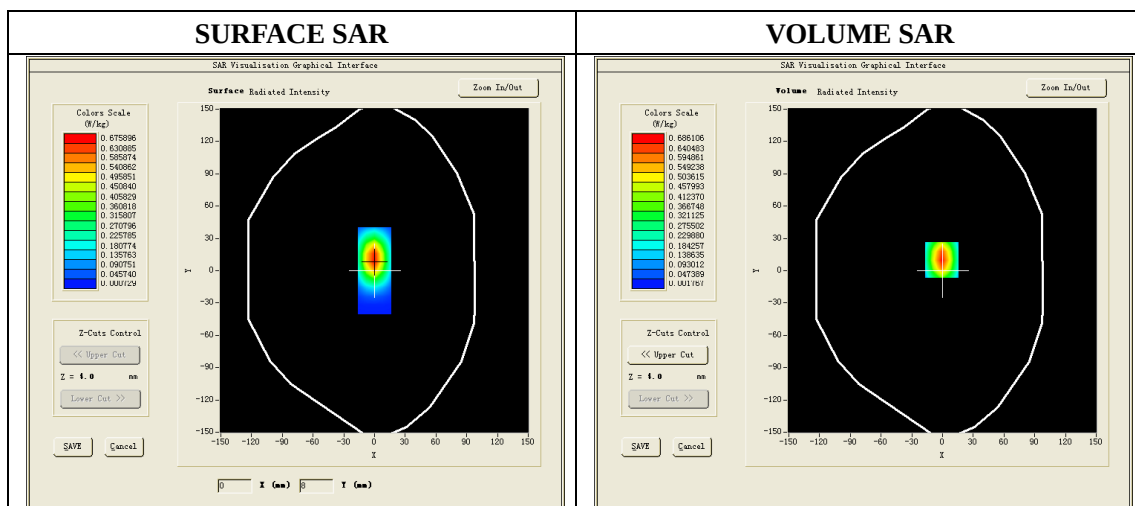

Maximum location: X=0.00, Y=8.00

SAR 10g (W/Kg)	5.201543
SAR 1g (W/Kg)	9.986241

Z Axis Scan

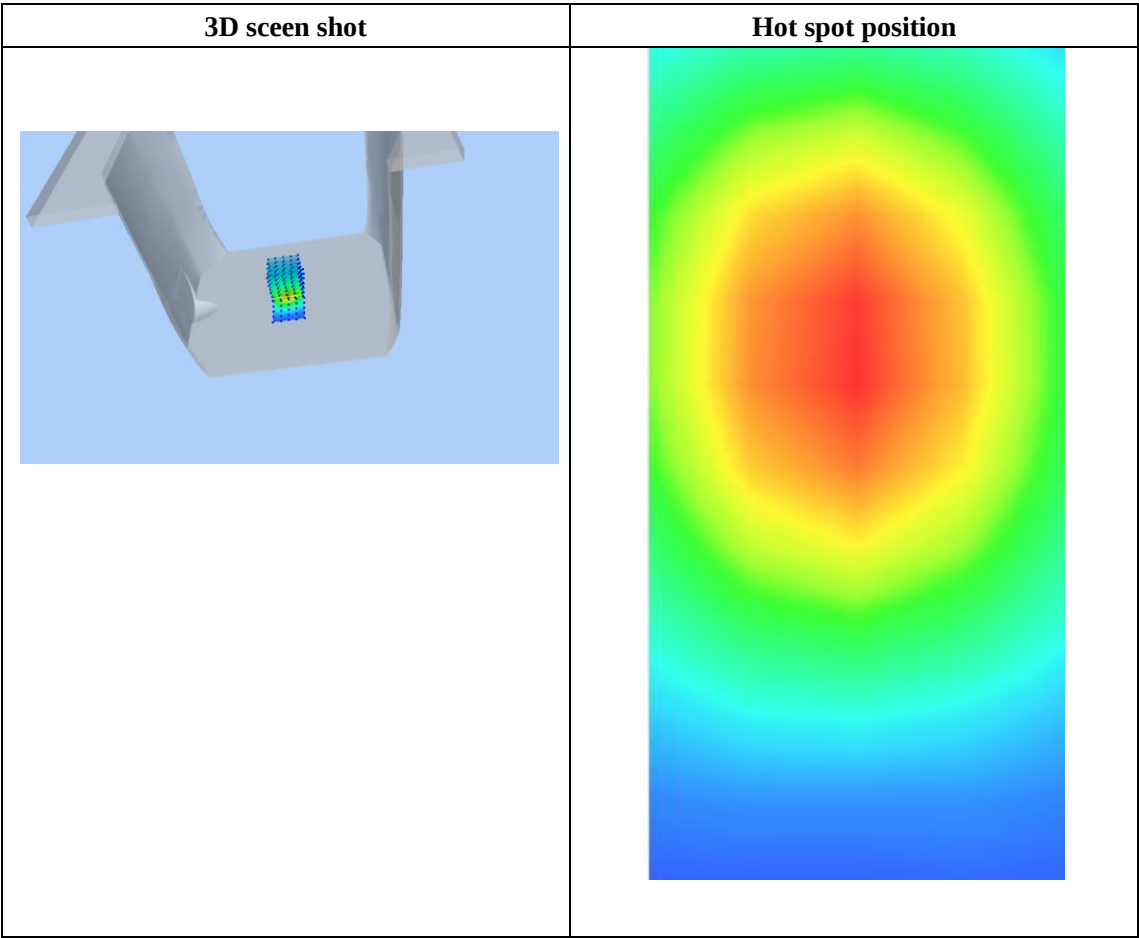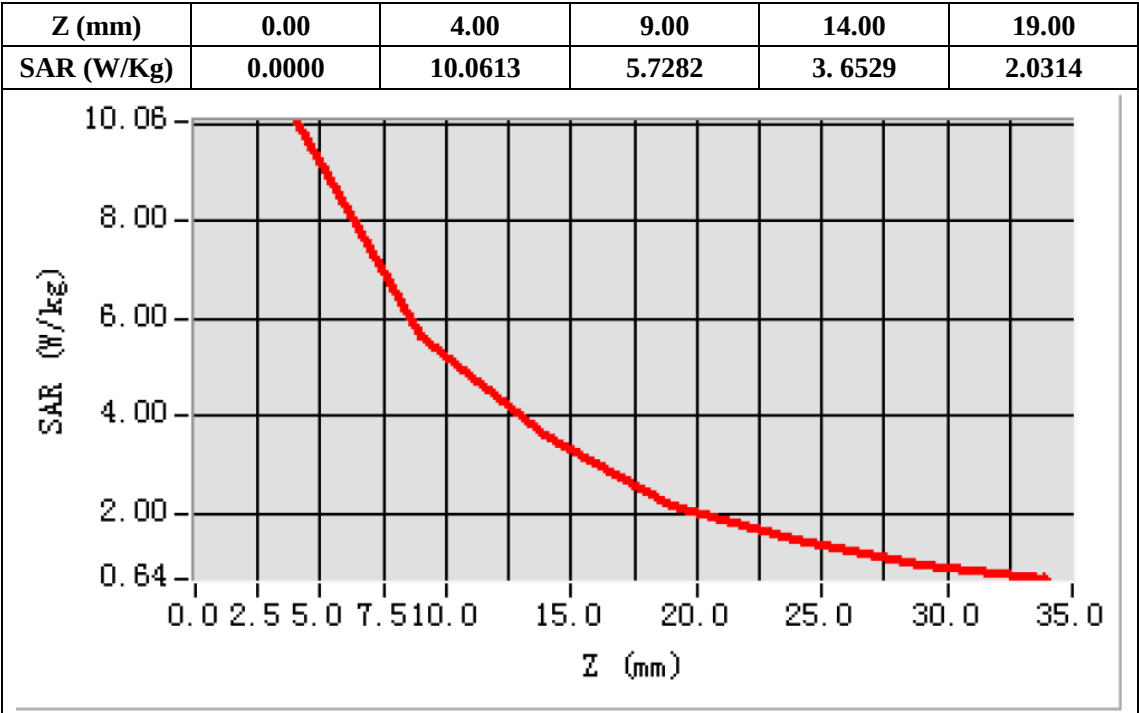

System Performance Check (Body, 2450MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 9/2/2013

Measurement duration: 13 minutes 21 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Dipole
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.68
Relative permittivity	13.02
Conductivity (S/m)	1.97
Power Drift (%)	-0.070000
Crest factor:	1:1

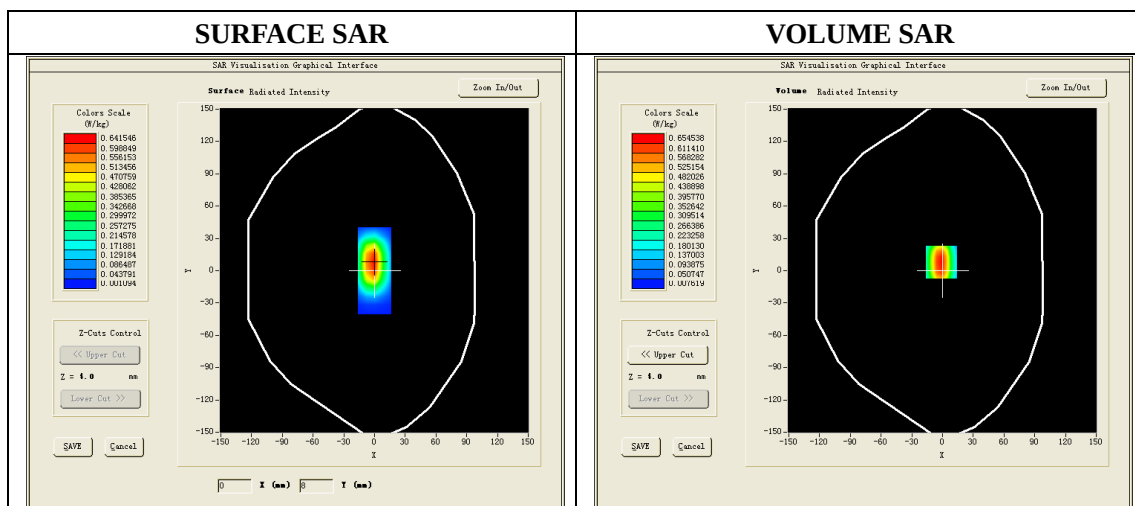

Maximum location: X=0.00, Y=8.00

SAR 10g (W/Kg)	5.951243
SAR 1g (W/Kg)	13.119628

Z Axis Scan

